BROWNFIELDS ASSESSMENT REPORT & RECEPTOR SURVEY

FORTRESS WOOD PRODUCTS II
1 METALS DRIVE
GREENSBORO, GUILFORD COUNTY, NORTH CAROLINA
BROWNFIELDS PROJECT NO. 28063-24-041

ECS PROJECT NO. 49:24413-C

PREPARED FOR
RIVERSIDE CONSTRUCTION MATERIALS, INC.

AUGUST 4, 2025
REVISION NO. 1.0 – JANUARY 13, 2026
REVISION NO. 2.0 – MARCH 27, 2026
REVISION NO. 3.0 – MAY 15, 2026

Report Certification

I, Joseph P. Nestor, P.G. a Licensed Geologist for ECS Southeast, LLC (*NC Registered Geologist Firm C- 553*), do certify that the information contained herein is correct and accurate to the best of my knowledge.

Joseph P. Nestor, P.G.
NC License No. 1027

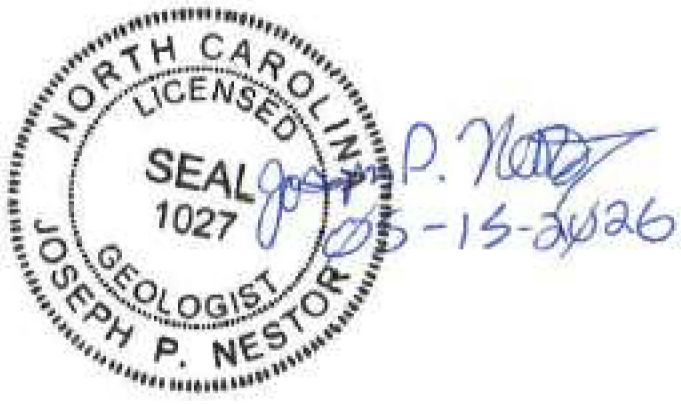

August 4, 2025
Revision No. 1.0 – January 13, 2026
Revision No. 2.0 – March 27, 2026
Revision No. 3.0 – May 15, 2026

Brownfields Property Management Unit
NC Department of Environmental Quality
Division of Waste Management
Brownfields Redevelopment Section
ATTN: Ms. Lauren Fleming

Reference: Brownfields Assessment Report & Receptor Survey
Fortress Wood Products II
1 Metals Drive
Greensboro, Guilford County, North Carolina
Brownfields Project ID: 28063-24-041
ECS Project No. 49:24413-C

Dear Ms. Fleming:

ECS Southeast, LLC (ECS) has prepared this Brownfields Assessment Report & Receptor Survey detailing the results of the soil and groundwater samples collected at the subject site and to identify potential receptors in the site area. These activities were conducted, and this report was prepared in general accordance with the approved Brownfields Assessment Scope Approval Package, Revision 2 dated May 23, 2025, and approved by the Brownfields Program on June 26, 2025. This report was developed at the request of the North Carolina Department of Environmental Quality (NCDEQ) – Brownfields Redevelopment Section (BRS). If you have any questions concerning this report or this project, please contact us.

Sincerely,
ECS SOUTHEAST, LLC

Emery Lovekamp
Environmental Staff Project Manager
704-525-5152
elovekamp@ecslimited.com

Joseph P. Nestor, P.G., P.E.
Environmental Principal
704-525-5152
jnestor@ecslimited.com

Christopher D. Orrell, P.G.
Associate Principal
704-525-5152
correll@ecslimited.com
NC Corporate Geology License #C-553

TABLE OF CONTENTS

1.0 PROJECT INFORMATION....1
2.0 PREVIOUS INVESTIGATIONS....3
3.0 OBJECTIVE OF THE ASSESSMENT....3
4.0 FIELD ACTIVITIES....4
4.1 Monitoring Well Permits....4
4.2 Utility Locate....5
4.3 Soil Samples....5
4.4 Groundwater Samples....7
4.5 Surface Water Samples....10
4.6 Sediment Samples....11
4.7 Soil Vapor Samples....11
5.0 RESULTS....14
5.1 Soil Sample Analysis....14
5.2 Groundwater Sample Analysis....15
5.3 Surface Water Sample Analysis....17
5.4 Sediment Sample Analysis....19
5.5 Soil Vapor Sample Analysis....19
5.6 NCDEQ Risk Calculator Results....20
5.7 Brownfields Receptor Survey....20
5.8 Investigative Derived Waste....20
6.0 CONCLUSIONS....20
7.0 DEVIATIONS FROM APPROVED SCOPE....23

Brownfields Assessment Report & Receptor Survey
Fortress Wood Products II
1 Metals Drive
Greensboro, Guilford County, North Carolina
Brownfields Project Number 28063-24-041
ECS Project No. 49:24413-C
August 4, 2025
Revision No. 1.0 – January 13, 2026
Revision No. 2.0 – March 27, 2026
Revision No. 3.0 – May 15, 2026

FIGURES

Figure 1	USGS Topographic Map
Figure 2	Site Aerial Map
Figure 3	Soil Sampling Location Map
Figure 4	Groundwater Sampling Location Map
Figure 5	Groundwater Flow Direction Map
Figure 6	Additional Sampling Location Map

TABLES

Table 1	Collected Samples and Associated Analyses
Table 2	Monitoring Well Construction Details and Groundwater Elevation Data
Table 3	Summary of Soil Analytical Data
Table 4	Summary of TCLP Soil Analytical Data
Table 5	Summary of PFAS Soil Analytical Data
Table 6	Summary of Groundwater Analytical Data
Table 7	Summary of PFAS Groundwater Analytical Data
Table 8	Summary of Surface Water Analytical Data
Table 9	Summary of PFAS Surface Water Analytical Data
Table 10	Summary of Sediment Analytical Data
Table 11	Summary of PFAS Sediment Analytical Data
Table 12	Summary of Soil Vapor Analytical Data

APPENDICES

Appendix A	Guilford County Water Supply Well Abandonment Letter
Appendix B	Photo Documentation
Appendix C	Well Permit Information, Boring Logs, & Well Construction Records
Appendix D	Sample Location & Monitoring Well Survey Data
Appendix E	Field Sampling Notes & Groundwater Purge Logs
Appendix F	Laboratory Analytical Reports & Chains-of-Custody Forms
Appendix G	NCDEQ Risk Calculator Output & Input
Appendix H	Brownfields Receptor Survey Form & Figures

1.0 PROJECT INFORMATION

The subject property is located at 1 Metals Drive, 5818 West Gate City Boulevard, and 5820 West Gate City Boulevard in Greensboro, Guilford County, North Carolina 27407 (**Figures 1 & 2**). According to the Online GIS website, the subject property is identified as Parcel Identification Numbers (PINs) 7832344616, 7832349605, and 7832348548, consists of 18.71 acres, and is owned Metals Drive Cement LLC. The subject property was previously owned by The Lestor Group, Inc. and purchased by Metals Drive Cement LLC in January 2026. Based on the available information, the subject property consists of grass-covered areas, gravel-covered lots, and wooded land.

ECS Southeast, LLC (ECS) reviewed a Limited Soil and Groundwater Assessment Report completed by Progress Environmental Inc (Progress) dated April 20, 2011 (Progress Project No. 101117.001). On March 2, 2011, Progress advanced nineteen soil borings (SB1 through SB16 and BG-1 through BG-3) to maximum depths of 15 feet below ground surface (ft-bgs) in selected areas throughout the facility in an effort to determine if soil and/or groundwater impacts exist at the subject property due to historic and/or current operations of the site. The soil samples collected were analyzed for Volatile Organic Compounds (VOCs), Semi-Volatile Organic Compounds (SVOCs), and/or the eight metals regulated under the Resource Conservation and Recovery Act (RCRA-8 Metals), and copper. Additionally, one soil sample (SB11-5) was analyzed for total petroleum hydrocarbons (TPH). Results of the soil analysis identified the following:

- Arsenic, barium, cadmium, chromium, lead, mercury, silver and/or copper were detected in thirteen of the twenty-six soil samples collected greater than their respective Soil-to-Groundwater Maximum Soil Contaminant Concentrations (MSCCs) established by the North Carolina Underground Storage Tank (UST) Section and/or Inactive Hazardous Sites Branch (IHSB) Soil Remediation Goals (SRGs).
- Total chromium was detected in five soil samples collected from 5 feet below ground surface (ft-bgs) greater than its Soil-to-Groundwater MSCC; however, the detected concentrations were considered to be naturally occurring.
- Arsenic and cadmium were detected in SB4-5 at concentrations greater than their respective IHSB SRGs.
- TPH oil and grease was detected in soil sample SB11-5 at a concentration greater than the Action Level established by the North Carolina UST Section.
- Benzo(a)anthracene was detected in soil sample SB11-5 at a concentration greater than the Soil-to-Groundwater MSCC.

In addition to the soil borings, Progress advanced three groundwater borings (GW-1 through GW-3) to a maximum depth of 35 ft-bgs. Groundwater samples were collected from GW-1 and GW-3 and analyzed for VOCs, SVOCs including isopropyl ether (IPE), methyl tert-butyl ether (MTBE), and base neutral extractable compounds listed on the EPA Method 625 target list (625BN). A groundwater sample was unable to be collected from GW-2 due to insufficient water volume. Results of the groundwater analysis did not identify targeted compounds at concentrations above the laboratory quantification limits.

Based on the previous assessment activities and the results obtained, the site was entered into the North Carolina Brownfields Program (NCBP) on June 19, 2023, and assigned the Brownfields Project Number 27001-23-041 under the name Fortress Wood Products.

As part of the due diligence efforts for Riverside Construction Materials, Inc., ECS completed a Phase I Environmental Site Assessment (Phase I ESA) on December 24, 2024 (ECS Project No. 49:24413-A). During the completion of the Phase I ESA, ECS identified an approximate 1,500-square foot office building located on the eastern portion of the subject property reportedly constructed between 1959 and 1964. The office building located on the eastern portion of the subject property was vacant and dilapidated. A concrete pad and elevated rail area, apparently associated with a former wood treatment building, was observed in the western portion of the subject property. A dilapidated structure, consistent with a former above ground storage tank (AST) pad, was observed in the eastern portion of the subject property. An outbuilding containing an apparent water AST was observed in the western portion of the subject property. A concrete pad, used for vehicle storage associated with the southern adjoining storage facility, was located in the southern portion of the subject property. Additionally, outbuildings, dilapidated vehicles, and equipment associated with Avery Body & Trim Shop were located in the southern portion of the subject property. A former railroad spur was observed in the northeastern portion of the subject property and a railroad runs through the northernmost portion of the subject property. A water supply well was observed in the central portion of the subject property and a structure consistent with an additional well house was observed in the northeastern portion of the subject property. On December 12, 2025, Riverside Construction Materials, Inc provided ECS with a letter from the Guilford County Environmental Health Division Water Quality Section (dated December 11, 2025) stating the water supply well and suspected water supply well had been properly abandoned in accordance with Guilford County Well Rules (Permit #25-11-WAHC-00035). The Guilford County Environmental Health Division Water Quality Section abandonment letter is included as **Appendix A**.

The findings of the Phase I ESA identified the following Recognized Environmental Conditions (RECs) in connection with the subject property:

- The historic use of the subject property as an apparent metal scrap yard and smelting facility from the mid-1950s to 1985, the apparent resulting soil contamination, the potential for per- and polyfluoroalkyl (PFAS) impacts, and the potential for buried debris piles were considered to be a REC.
- ECS considered the potential for impacts resulting from the historic use of the subject property as a wood treatment facility from 1985 to 2014 to be a REC.
- ECS considered the potential for impacts to the subject property from the historic operation of the former eastern adjoining furniture finishing facility for at least 48 years to be a REC.
- ECS considered the potential for impacts to the subject property, the current and historic operation of the southeastern adjoining automotive repair facility, currently Owensby (Trailer-Hitch-Center), for approximately 54 years to be an REC.

- ECS considered the potential for impacts to the subject property and the current and historic operation of the southeastern adjoining automotive repair facility, currently Avery Body & Trim Shop, for approximately 34 years to be a REC.

Based on the results of the Phase I ESA and as the site is currently in the NCBP, an updated Brownfields Property Application (BPA) was submitted to the North Carolina Department of Environmental Quality (NCDEQ) Brownfields Redevelopment Section (BRS) on January 7, 2025. The site was assigned the Brownfields Project Number 28063-24-041 under the updated BPA and name of Fortress Wood Products II. A Brownfields Assessment Work Plan (ECS Project No. 49:24413) was submitted to the BRS on March 5, 2025.

Based on the results of the previous site assessments, the proposed redevelopment plans, and at the client's request, ECS has prepared this Brownfields Assessment Services & Receptor Survey Report. The data referenced in this report was collected solely for Riverside Construction Materials' site redevelopment activities regulated by the NCBRS.

2.0 PREVIOUS INVESTIGATIONS

As discussed above, ECS and others have previously conducted environmental assessments at the site. Previous assessment activities conducted on the various parcels include the following:

- Limited Soil and Groundwater Assessment Report prepared by Progress and dated April 20, 2011 (Progress Project No. 101117.001). The assessment activities are described above in Section 1.0.
- Phase I ESA prepared by ECS and dated December 24, 2024 (ECS Project No. 49:24413-A). The assessment activities are described above in Section 1.0.

3.0 OBJECTIVE OF THE ASSESSMENT

On April 30, 2025, a project kick-off meeting with BRS was conducted to discuss the objective of the assessment. At that time, preliminary redevelopment plans did not include the construction of enclosed buildings and stream delineation had not been completed at that time. The objective of this Brownfields assessment was to conduct the following sampling activities:

- The advancement of 75 soil borings to varying depths and collection of up to 35 soil samples (including duplicates) for laboratory analysis.
- The installation and collection of a groundwater sample from each of the ten permanent monitoring wells and one duplicate sample for laboratory analysis.
- Completion of a Brownfields Receptor Survey.

At the time of the project kick-off meeting, preliminary redevelopment plans did not include the construction of enclosed buildings. On October 13, 2025, BRS provided ECS with assessment

recommendations based on updated redevelopment plans that included the construction of three new slab enclosed buildings. In addition, a stream was identified in the southern portion of the subject property and depicted in the redevelopment plans. The following additional sampling activities were conducted:

- The collection of three surface water and sediment samples and two duplicate samples for laboratory analysis.
- The installation and collection of a soil vapor sample from each of the three soil vapor points and one duplicate for laboratory analysis.

The soil samples collected were submitted for various laboratory analyses depending on the area in which they were collected including VOCs by EPA Method 8260, SVOCs by EPA Method 8270, Priority Pollutant Metals by EPA Method 6020/7471, hexavalent chromium by EPA Method 7199, polychlorinated biphenyls (PCBs) by EPA Method 8082, and per- and polyfluoroalkyl substances (PFAS) by EPA Method 1633.

The groundwater samples collected were submitted for various laboratory analysis depending on the area in which they were collected including VOCs by EPA Method 8260, SVOCs by EPA Method 8270, Priority Pollutant Metals by EPA Method 6020/7470, and PFAS by EPA Method 1633.

The surface water samples collected were submitted for laboratory analysis of VOCs by EPA Method 8260, SVOCs by EPA Method 8270, Priority Pollutant Metals by EPA Method 6020/7470, PFAS by EPA Method 1633, and hardness by Standard Method 2340. The sediment samples collected were submitted for laboratory analysis of VOCs by EPA Method 8260, SVOCs by EPA Method 8270, Priority Pollutant Metals by EPA Method 6020/7470, hexavalent chromium by EPA Method 7199, and PFAS by EPA Method 1633. The soil vapor samples collected were submitted for laboratory analysis of VOCs by EPA Method TO-15.

The sampling activities were conducted in general accordance with the Brownfields Assessment Scope Approval Package, Revision 2.0 dated May 23, 2025, and approved by the Brownfields Program on June 26, 2025. The additional assessment activities, surface water, sediment, and soil vapor sampling, were included in the revised Environmental Management Plan (EMP) dated December 4, 2025. **Table 1** provides a summary of the sampling and analysis plan for this assessment which was included in the approved Brownfields Assessment Scope Approval Package (the "Approved Scope"). Photo documentation of field activities is included in **Appendix B**.

4.0 FIELD ACTIVITIES

4.1 Monitoring Well Permit

Prior to conducting drilling activities, ECS obtained a monitoring well permit dated May 30, 2025 from the NCDEQ. In addition, ECS obtained well construction permits from Guilford County dated June 6, 2025. The NCDEQ well permit and Guilford County well permit information is included as **Appendix C**.

4.2 Utility Locate

Prior to commencing with field activities, ECS contacted North Carolina One-Call to locate/mark public utilities at the site. Required separation distances between subsurface activities and marked utilities (typically 30-inches) were maintained during the field activities. In addition, ECS contracted with KCI Subsurface Utility Engineering (KCI) to further clear the boring areas of potential conflicts with private utilities.

4.3 Soil Samples

Number and Sample Location

In general accordance with the Approved Scope, on June 2 through June 4, 2025, ECS requested its subcontracted drilling firm, Quantex Drilling, to advance soil borings using a Direct Push Technology (DPT) capable drill rig and hand auger. Drilling operations were performed under the supervision of a North Carolina Certified Well Contractor (NCCWC) employed by Quantex Drilling as discussed below:

- The subject property was subdivided into fourteen (14) approximately equal size sections, or "cells" (B-1 through B-14) and five soil borings were advanced in each cell for a total of seventy soil borings. The soil borings were advanced up to 5 feet below grade (ft bg) using a DPT capable track-mounted drill rig equipped with a macro-core continuous core sampler; however, soil samples were collected to a maximum depth of 2 ft bg. Boring locations in densely vegetated areas which were inaccessible by the drill rig were collected using a decontaminated, stainless-steel hand auger.
- In addition to the five-point composite soil samples, ECS collected five grab samples, B-1-A, B-4-C, B-4-D, B-5-C, and B-8-B in the locations of the former Progress soil boring locations, SB-14, SB-11, SB-10, SB-4, and SB-8, respectively.
- ECS collected three (3) grab samples (BG-1 through BG-3) from the wooded area in the southwestern portion of the site for the purpose of background analysis of priority pollutant metals. In addition, soil sample WC-1 was collected for waste characterization purposes from observed fill material in the wooded area in the southwestern portion of the site.

- One soil sample was collected in the area of the downed transformer identified during the Phase I ESA completed by ECS. The soil boring locations are shown on **Figure 3**. Boring logs for each soil boring are included in **Appendix C**.

Sample Collection

The five-point composite soil samples (cells B-1 through B-14) were collected using the DPT drill rig or hand auger over the length of the boring in approximately 1-foot intervals and screened in the field by placing a portion into a resealable container and measuring for volatile organic vapors using a photoionization detector (PID). The remaining soil from each interval was placed directly into a separate resealable plastic bag and set aside in a cooler on ice for potential sampling/compositing purposes. The soil samples to be submitted to the laboratory for analysis were collected from separate soils rather than those which were allowed to volatilize for the collection of PID readings.

A grab soil sample was collected from the 1-2 foot interval exhibiting the highest PID reading (with the exception of 0-1 feet) from the five soil borings within each cell, totaling fourteen grab soil samples (one grab soil sample per cell). If elevated PID readings were not noted within a particular cell, a grab sample was collected over the 1-2 feet interval from a boring within that cell selected at random.

The soils collected from the 0-2 feet interval from the five borings within each cell were composited into one composite sample per cell, for a total of fourteen composite soil samples. The samples collected as grab samples and the composite samples were from the soil set aside in the cooler on ice, and not the soil used for PID screening activities.

The five grab soil samples identified as B-1-A, B-4-C, B-4-D, B-5-C, and B-8-B were collected at the termination depth of the soil borings at approximately 1 ft bg. Additional grab soil samples were collected at the termination depth of the soil borings at approximately 2 ft bg using a DPT drill rig or hand auger, based on accessibility. Following soil boring activities, the horizontal and vertical position of each boring location was surveyed by Lawrence Associates. The survey data is provided in **Appendix D**. Copies of the field sampling notes are included in **Appendix E**.

ECS returned to the site on July 9, 2025, to collect additional composite samples from cells B-1, B-3, B-6, and B-12 following review of the priority pollutant metals analytical results for cell samples B-1 through B-14. ECS received approval from the BRS via email correspondence on July 8, 2025, to collect additional composite samples B-1-TCLP, B-3-TCLP, B-6-TCLP, and B-12-TCLP, for laboratory analysis for RCRA-8 Metals by EPA Method 6010/7470 following sample extraction by the Toxicity Characteristic Leaching Procedure (TCLP) (TCLP RCRA 8-Metals). The five-point composite samples B-1-TCLP, B-3-TCLP, B-6-TCLP, and B-12-TCLP were collected using a decontaminated stainless-steel hand auger using the aforementioned methodologies from the previous boring locations completed on June 2 through June 4, 2025. Copies of the field sampling notes are included in **Appendix E**.

Soil sampling activities were performed in general conformance with industry standards and the USEPA Region 4 Laboratory Services & Applied Science Division (LSASD) guidance on soil sampling (Document ID: LSASDPROC-300-R5 dated April 22, 2023). Additionally, due to the ubiquitous nature of PFAS in the environment, the collection of PFAS soil samples was performed in general conformance with the ITRC PFAS Fact Sheet, Sampling Precautions and Laboratory Analytical Methods for PFAS (dated September 2023).

Sample Analysis

Following sample collection, the sample containers were placed on ice in a cooler and maintained under chain-of-custody (COC) protocol and delivered to Pace Analytical Services (Pace), a North Carolina certified laboratory based in Huntersville, North Carolina. The soil samples collected were submitted to the laboratory for the following analyses:

- B-1 through B-14 (grab) – VOCs by EPA Method 8260
- B-1 through B-14 (composite) – SVOCs by EPA Method 8270, Priority Pollutant Metals by EPA Method 6020/7471, hexavalent chromium by EPA Method 7199, and PFAS by EPA Method 1633
- B-1-A, B-4-C, B-4-D, B-5-C, & B-8-B – Priority Pollutant Metals by EPA Method 6020/7471 and TCLP RCRA 8-Metals by EPA Method 6010/7470.
- BG-1 through BG-3 and WC-1 – Priority Pollutant Metals by EPA Method 6020/7471
- TX-1 – PCBs (Aroclors & Congeners) by EPA Method 8082
- B-1-TCLP, B-3-TCLP, B-6-TCLP, and B-12-TCLP (composite) – TCLP RCRA 8-Metals by EPA Method 6010/7470

The laboratory reporting limits were reported at or below the applicable NCDEQ Preliminary Soil Remediation Goals (PSRGs) for protection of groundwater and industrial/commercial soil to the extent technically feasible. Additionally, concentrations detected below the laboratory reporting limit and above the laboratory method detection limit were flagged by the laboratory with a J-flag qualifier, indicating the reported concentrations were estimates. Copies of the COCs are included in **Appendix F**.

For quality assurance/quality control (QA/AC) purposes, duplicate soil sample B-DUP was collected from the same location as soil sample B-8. A duplicate sample was also collected from the same record sample at TX-1 and the B-6-TCLP sample collected on July 9, 2025. The duplicate soil samples were analyzed for the same compounds as the record samples. In addition, PFAS field blanks were collected on June 2 through June 4, 2025.

4.4 Groundwater Samples

Number and Sample Location

In accordance with the Approved Scope, ECS requested Quantex Drilling to construct ten (10) permanent groundwater monitoring wells at the site using a track-mounted solid stem auger drill rig. Dilling operations and well construction activities were performed under the supervision of a NCCWC employed by Quantex Drilling. One monitoring well (identified as GW-5) was completed in the vicinity of the observed debris pile located on the western portion of the subject property. Two monitoring wells were completed along the former railroad spur, which crosscuts the property from the north to the south-central portion of the site. These monitoring wells were identified as GW-3 and GW-4. Additionally, GW-3 was utilized to assess potential impacts to groundwater from the former wood treatment operations. One monitoring well was installed in the vicinity of the observed floor drain in the former wood treatment building. This monitoring well was identified as GW-10. Three monitoring wells were installed along the northeastern and eastern property boundary in an effort to assess the identified REC (former furniture finishing facility) on the adjoining property to the east. These monitoring wells were identified as GW-1, GW-2, and GW-7. One monitoring well was installed along the southeastern property boundary in an effort to assess the identified REC at the adjoining property to the southeast (Owensby [Trailer-Hitch-Center]). This monitoring well was identified as GW-6. Two monitoring wells were installed along the southern property boundary in an effort to assess the identified REC at the adjoining property to the south (Avery Body & Trim Shop). These monitoring wells were identified as GW-8 and GW-9. Monitoring wells GW-2 through GW-4 were installed on June 5, 2025, monitoring wells GW-1, GW-5, GW-6, and GW-7 were installed on June 6, 2025, and monitoring wells GW-8, GW-9, & GW-10 were installed on June 9, 2025, via a drill rig using solid stem augers.

The monitoring wells were installed to depths ranging from 15 ft bg to 25 ft bg with varying lengths of well screen. Each monitoring well was constructed of flush-threaded, Schedule 40 two-inch diameter, poly vinyl chloride (PVC) pipe material including a section of well screen (10 feet minimum), installed to intersect the water table surface as estimated during drilling and a PVC riser connected to the top of the screen extending to the ground surface. Filter sand was placed from the bottom of each boring to approximately 2 feet above the well screen with approximately 3 feet of bentonite above the filter sand. Approximately 1 foot of bentonite was used in monitoring wells GW-8 and GW-9 due to screen depth extending to 3 ft bg. Grout was placed above the bentonite seal in the remaining annular space of the boring to ground surface. Each monitoring well was finished with a flush mount pad and provided with a locking watertight expandable well plug and keyed padlock. Following the installation of the monitoring wells, the horizontal and vertical position of each monitoring well was surveyed by Lawrence Associates. The monitoring well locations are shown on **Figure 4**. The survey data is included in **Appendix D**. The elevations and construction details of each temporary monitoring well are included in **Table 2**. Boring logs for each monitoring well including well construction details are included in **Appendix C**. Well construction records for the monitoring wells are also included in **Appendix C**.

Based upon the surveyed elevations of the top-of-casing of each monitoring well and the depth to water measurements measured on June 10, 2025, groundwater beneath the site flowed approximately to the west as shown on **Figure 5**.

Sample Collection

After a minimum of 24 hours following completion of the well installations, each monitoring well was developed by pumping until water produced was visibly free of sediment and pH, temperature, and specific conductivity had generally stabilized. After allowing the monitoring wells (GW-1 through GW-10) to stabilize for at least 24 hours after well development activities, ECS collected a depth to water measurement from each monitoring well via an electronic water level meter accurate to 0.01 feet to determine the groundwater elevation and inferred groundwater flow direction across the site. ECS attempted to maintain a drawdown in each well to less than 0.3 feet during low-flow sampling and water quality measurements were collected and recorded. Water quality measurements were made using a flowthrough cell at intervals approximately three to five minutes apart. Measured parameters included turbidity, temperature, specific conductance, pH, oxidation-reduction potential, and dissolved oxygen. Groundwater samples were collected using a peristaltic pump with new dedicated disposable tubing once each well had generally stabilized. High density polyethylene (HDPE) tubing was used at each monitoring well during sample collection. Samples were collected from monitoring wells GW-1, GW-2 and GW-7 on June 10, 2025, from monitoring wells GW-3 through GW-6 and GW-10 on June 11, 2025, and from monitoring wells GW-8 & GW-9 on June 12, 2025. The low-flow purge logs are included in **Appendix E**.

Groundwater sampling activities were performed in general conformance with industry standards and LSASD guidance on groundwater sampling (Document ID: LSASDPROC-301-R7 dated March 20, 2025). The monitoring wells were sampled using low-flow sampling techniques in general conformance with USEPA Low Stress/Low Flow Purging and Sampling Procedure for the Collection of Groundwater Samples from Monitoring Wells (Revised September 19, 2017). Additionally, due to the ubiquitous nature of PFAS in the environment, the collection and analysis of PFAS samples were conducted in general conformance with the following guidance documents:

- USOD EDQW 2017, Revision 1.2, Bottle Selection and other Sampling Considerations When Sampling for Per and Poly-Fluoroalkyl Substances;
- ITRC PFAS Fact Sheet, September 2023, Sampling Precautions and Laboratory Analytical Methods for Per- and Polyfluoroalkyl Substances (PFAS);
- ECS Southeast, LLC, May 2023, SOP No. 13, Revision No. 0, Standard Operating Procedure – Preparation for Sampling, Analysis, & Assessment of Per- and Polyfluoroalkyl Substances (PFAS).

Sample Analysis

Following sample collection, the sample containers were placed on ice in a cooler and maintained under COC protocol and delivered to Pace. As previously stated, groundwater samples were submitted for laboratory analysis of VOCs by EPA Method 8260, SVOCs by EPA Method 8270, and Priority Pollutant Metals by EPA Method 6020/7470. In addition, groundwater samples GW-1 through GW-5, GW-7, and GW-10 were also submitted for laboratory analysis of PFAS by EPA Method 1633. The laboratory reporting limits were reported at or below the current North Carolina 2L Groundwater Quality Standards (NC2LGWQS) and the Non-Residential Groundwater Screening Levels (GWSL) for Vapor Intrusion (VI) to the extent technically feasible. Additionally, concentrations detected below the laboratory reporting limit and above the laboratory method detection limit were flagged by the laboratory with a J-flag qualifier, indicating the reported concentrations were estimates. Copies of the COCs are included in **Appendix F**.

For QA/QC purposes, a duplicate groundwater sample DUP-1 was collected from monitoring well GW-7 and submitted for the same analyses as the record sample. Equipment blanks were collected each day of groundwater sampling and analyzed for VOCs by EPA Method 8260, SVOCs by EPA Method 8270, priority pollutant metals by EPA Method 6020/7470, and PFAS by EPA Method 1633. In addition, PFAS field blanks were collected on June 10 and June 11, 2025. VOC trip blanks were analyzed with each cooler containing VOC groundwater samples.

4.5 Surface Water Samples

Number and Sample Location

In accordance with the Approved Scope and revised EMP, on December 5, 2025, ECS collected three (3) surface water samples from an up-gradient, mid-stream, and down-gradient location along the onsite stream in the southern portion of the subject property. Surface water sampling was conducted in general accordance with the EPA Region IV Field Branches Quality System and Technical Procedures. The down-gradient sample location was identified as SW-1, the mid-stream sample location was identified as SW-2, and the up-gradient location was identified as SW-3. The surface water sample locations are shown on **Figure 6**.

Sample Collection

The three surface water samples, identified as SW-1 through SW-3 were collected in general accordance with the EPA Region IV Field Branches Quality System and Technical Procedures. This included direct dipping of the sample containers into the stream while the sampler was wearing new, disposable nitrile gloves at each sample location. Following sampling activities, the horizontal and vertical position of each surface water sample location was recorded by ECS using a handheld GPS unit with submeter accuracy. The survey data is provided in **Appendix D**. Copies of the field sampling notes are included in **Appendix E**.

Surface water sampling activities were performed in general conformance with industry standards and LSASD guidance on surface water sampling (Document ID: LSASDPROC-201-R6 dated April 22, 2023).

Sample Analysis

Following sample collection, the sample containers were placed on ice in a cooler and maintained under COC protocol and delivered to Pace. Surface water samples were submitted for laboratory analysis of VOCs by EPA Method 8260, SVOCs by EPA Method 8270, Priority Pollutant Metals by EPA Method 6020/7470, PFAS by EPA Method 1633, and hardness by Standard Method 2340. The laboratory reporting limits were reported at or below the applicable North Carolina 2B Surface Water Standards (NC2BSWS) to the extent technically feasible. Additionally, concentrations detected below the laboratory reporting limit and above the laboratory method detection limit were flagged by the laboratory with a J-flag qualifier, indicating the reported concentrations were estimates. Copies of the COCs are included in **Appendix F**.

For QA/QC purposes, a duplicate surface water sample SW-DUP was collected from sample location SW-3 and submitted for the same analyses as the record sample. In addition, a PFAS field blank was collected on December 5, 2025. A VOC trip blank was analyzed with each cooler containing VOC surface water samples.

4.6 Sediment Samples

Number and Sample Location

In accordance with the Approved Scope and revised EMP, on December 5, 2025, ECS collected three (3) sediment samples from an up-gradient, mid-stream, and down-gradient location along the onsite stream in the southern portion of the subject property. The sediment sample locations were co-located with the surface water sample locations. Sediment sampling was conducted in general accordance with the EPA Region IV Field Branches Quality System and Technical Procedures. The down-gradient sample location was identified as SS-1, the mid-stream sample location was identified as SS-2, and the up-gradient location was identified as SS-3. The sediment sample locations are shown on **Figure 6**.

Sample Collection

The three sediment samples, identified as SS-1 through SS-3, were collected in general accordance with the EPA Region IV Field Branches Quality System and Technical Procedures. This included using a decontaminated shovel while the sampler was wearing new, disposable nitrile gloves at each sample location. Following sampling activities, the horizontal and vertical position of each surface water sample location was recorded by ECS using a handheld GPS unit with submeter accuracy. The survey data is provided in **Appendix D**. Copies of the field sampling notes are included in **Appendix E**.

Sample Analysis

Following sample collection, the sample containers were placed on ice in a cooler and maintained under COC protocol and delivered to Pace. Sediment samples were submitted for laboratory analysis of VOCs by EPA Method 8260, SVOCs by EPA Method 8270, Priority Pollutant Metals by EPA Method 6020/7470, hexavalent chromium by EPA Method 7199, and PFAS by EPA Method 1633. The laboratory reporting limits were reported at or below the current NCDEQ Industrial/Commercial PSRG to the extent technically feasible. Additionally, concentrations detected below the laboratory reporting limit and above the laboratory method detection limit were flagged by the laboratory with a J-flag qualifier, indicating the reported concentrations were estimates. Copies of the COCs are included in **Appendix F**.

For QA/QC purposes, a duplicate sediment sample SS-DUP was collected from sample location SS-3 and submitted for the same analyses as the record sample. In addition, a PFAS equipment blank and field blank was collected on December 5, 2025.

4.7 Soil Vapor Samples

Number and Sample Location

In accordance with the Approved Scope and revised EMP, on December 4, 2025, ECS installed three (3) temporary soil vapor sampling points for the collection of soil vapor samples from within the footprints of the proposed new slab enclosed buildings. The soil vapor sampling locations were identified as SV-1 through SV-3 and are shown on **Figure 6**. The proposed enclosed building locations are also shown on **Figure 6**.

Sample Collection

The soil vapor sampling points were constructed by advancing an approximate 3.25-inch diameter boring to approximately 6 ft bg using a decontaminated stainless-steel hand auger. An approximate half-inch diameter by six-inch long stainless-steel vapor implant was connected to approximately 6.5 feet of Teflon lined tubing. The implant and tubing were installed in the boring with the implant positioned near the bottom of each boring. The annular space around and approximately six inches above the vapor implant was backfilled with clean filter sand and granular bentonite was placed in the remaining annular space to the ground surface. Deionized water was poured onto the bentonite in one-foot lifts and then allowed to hydrate. The soil vapor sampling points were allowed to stabilize for a minimum of 24-hours prior to sampling.

Prior to sample collection, a shut-in test was performed on the Summa canister and flow regulator utilized at each sampling location. A capped flow regulator was attached to each Summa canister, and the canister valve was opened to allow the system to equilibrate with the vacuum inside the cannister. The canister

valve was then closed, and the vacuum gauge was monitored for approximately 5 minutes to observe pressure changes while attached to the Summa canister. Pressure changes were not observed, and the shut-in test was considered successful at each sampling location.

Prior to sample collection, a helium shroud leak test was performed to confirm the integrity of the bentonite seal at each sampling location. A plastic container used as a shroud was placed and sealed over each sample point, sample train, flow regulator, and Summa canister. The tubing from the vapor implant was connected to one of three ports on a 3-way valve. Tubing was connected between the second port on the 3-way valve and the Summa canister flow regulator. Tubing was connected to the third port on the 3-way valve and routed through the shroud wall using small diameter holes to a second 3-way valve located outside of the shroud. A syringe was connected to the second port on the 3-way valve located outside of the shroud. Tubing connected to a Tedlar® bag was connected to the third port on the 3-way valve located outside of the shroud. During the helium leak testing, the first 3-way valve was adjusted to allow vapor flow between the vapor implant and the second 3-way valve located outside of the shroud

After the tubing and other devices were connected as described above, the shroud was flooded with laboratory-grade helium gas from a compressed gas tank. The helium gas concentration inside the shroud was measured with a Dielectric MGD 2002 Helium Detector by inserting the sample probe of the instrument into the shroud through a small diameter hole. After the shroud had been flooded with helium gas, the syringe was utilized to purge a minimum of three volumes of vapor from the sample train (including tubing, vapor implant, and annular space around the vapor implant) at each sampling location. During purging of the sample train, the vapors were pulled into the syringe, the 3-way valve was closed to the sample train, and the vapors were then pushed into the Tedlar® bag. The tubing and devices used for helium shroud testing represent a closed system that utilizes valves to prevent backflow of helium or vapors into the sample train at each sampling location. Below is a diagram of the layout of tubing and the various devices used during the helium shroud leak testing:

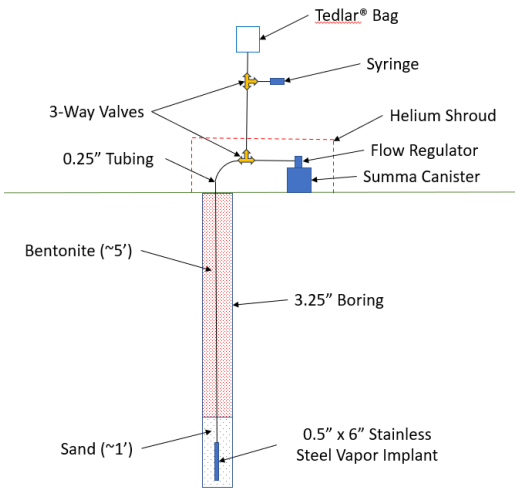

Once the vapors were collected in the Tedlar® bag, the Tedlar® bag was removed, and the helium detector was utilized to measure the helium within the Tedlar® bag. If the vapor inside the Tedlar® bag contained less than 10 percent of the concentration inside the shroud, the sampling train was considered tight and not leaking and the test was considered acceptable. For this event the helium leak tests were acceptable at each sampling location and additional corrective steps were not necessary. Once the sampling train passed leak testing, the first 3-way valve was adjusted to permit flow from the vapor implant to the flow regulator and Summa canister. Following sampling activities, the horizontal and vertical position of each soil vapor sample location was recorded by ECS using a handheld GPS unit with submeter accuracy. The survey data is provided in **Appendix D**. Copies of the field sampling notes are included in **Appendix E**.

Soil vapor samples were collected in general conformance with industry standards, Version 2 of the Division of Waste Management (DWM) NCDEQ Vapor Intrusion Guidance (dated March 2018), the NCDEQ BRS Vapor Intrusion Assessment Work Plan & Report Checklist (dated May 2024), and the ITRC Vapor Intrusion Pathway guidance document (dated January 2007).

Sample Analysis

ECS obtained one-liter batch certified Summa canisters paired with 200 milliliters per minute (mL/min) flow regulators from Pace. Although the Laboratory Certification branch of NCDEQ does not certify laboratories for analysis of air, Pace is certified by the Louisiana Department of Environmental Quality to perform the analysis of air samples for VOCs by EPA Method TO-15. In addition, Pace follows National Environmental Laboratory Accreditation Conference (NELAC) standards and participates in the National Environmental Laboratory Accreditation Program (NELAP). Following sample collection, the Summa canisters were submitted to Pace for laboratory analysis of VOCs by EPA Method TO-15. The laboratory reporting limits were reported at or below the current NCDEQ Vapor Intrusion Screening Levels (VISLs) for Non-Residential exposure settings to the extent technically feasible. Additionally, concentrations detected below the laboratory reporting limit and above the laboratory method detection limit were flagged by the laboratory with a J-flag qualifier, indicating the reported concentrations were estimates. For QA/QC purposes, a duplicate soil gas sample SV-DUP was collected from sample location SV-1 and submitted for the same analyses as the record sample. Copies of the COCs are included in **Appendix F**.

5.0 RESULTS

5.1 Soil Sample Analysis

Review of the VOC laboratory analytical results indicated concentrations of benzene in soil sample B-6 and concentrations of tetrachloroethene (also known as perchloroethylene or PCE) in soil samples B-6, B-8, and B-DUP that were greater than their respective Protection of Groundwater PSRGs, but less than their respective Industrial/Commercial PSRGs. Additional VOCs were detected in soil samples B-1, B-3, B-5, B-6, B-12, and B-DUP at concentrations greater than the laboratory method detection limits, but less than their respective PSRGs. SVOCs were detected in soil samples B-3, B-4, and B-5 at concentrations greater than the laboratory method detection limits but less than their respective PSRGs.

Review of the Priority Pollutant Metals laboratory analysis results indicated that arsenic was detected at concentrations greater than its Industrial/Commercial PSRG in soil samples B-1, B-3, B-4, B-4-C, B-4-D, B-5-C, B-6, B-14, B-DUP and WC-1. Concentrations of arsenic detected in soil samples B-1, B-3, B-4, B-4-D, B-5-C, and B-14 were also greater than its Protection of Groundwater PSRG. Cadmium was detected at concentrations greater than its Protection of Groundwater PSRG but less than its Industrial/Commercial PSRG in soil samples B-1, B-3, B-4-C, B-4-D, and B-6. Hexavalent chromium was detected at a concentration greater than its Protection of Groundwater PSRG but less than its Industrial/Commercial PSRG in soil sample B-9. Copper was detected at a concentration greater than its Protection of Groundwater PSRG but less than its Industrial/Commercial PSRG in soil sample B-4-D. Lead was detected at concentrations greater than its Protection of Groundwater PSRG in soil samples B-1, B-3, B-4-C, B-4-D, and B-6. The concentration of lead detected in soil sample B-4-D was also greater than the Industrial/Commercial PSRG. Selenium was detected at concentrations greater than its Protection of Groundwater PSRG but less than its Industrial/Commercial PSRG in soil samples B-3, B-4, and B-9. Zinc was detected at concentrations greater than its Protection of Groundwater PSRG but less than its Industrial/Commercial PSRG in soil samples B-1, B-3, B-4-D, and B-6. Additional metals were detected at concentrations greater than the laboratory method detection limits, but less than their respective PSRGs in each of the samples submitted for Priority Pollutant Metals.

PCBs were not detected at concentrations greater than the laboratory method detection limits in soil samples TX-1 and TX-DUP. A summary of the soil sample analytical data is included as **Table 3.**

Review of the TCLP RCRA 8-Metals laboratory analysis results indicated concentrations of TCLP RCRA 8-Metals greater than the laboratory method detection limits but less than their respective EPA Title 40 Maximum Concentration of Contaminants (MCCs) for Toxicity Characteristic in soil samples B-1-TCLP, B-3-TCLP, B-6-TCLP, B-12-TCLP, B-1-A, B-4-C, B-4-D, B-5-C, and B-8-B. A summary of the TCLP RCRA 8-Metals soil sample analytical data is included as **Table 4.**

Review of the PFAS laboratory analytical results indicated concentrations of perfluorooctane sulfonic acid (PFOS) greater than its respective Protection of Groundwater PSRG but less than its respective Industrial/Commercial PSRG in soil samples B-1-P, B-3-P, B-6-P, B-8-P, B-10-P, B-11-P, B-13-P, and B-DUP. Perfluorooctanoic acid (PFOA) was detected at concentrations greater than its respective Protection of Groundwater and Industrial/Commercial PSRGs in soil samples B-1-P, B-11-P, B-13-P, B-14-P, and B-DUP. Additional PFAS compounds were detected in soil sample B-1-P at concentrations greater than the laboratory method detection limits but less than their respective PSRGs. A summary of the PFAS soil sample analytical data is included as **Table 5.**

Quality Control

Laboratory results of duplicate soil sample B-DUP that was collected as a duplicate of soil sample B-8, and submitted for the same analyzes as the associated record sample were similar to those detected in the

record sample. Three field blank samples, FB-1-P through FB-3-P, were collected on each day of PFAS sampling and submitted for PFAS analysis. PFAS compounds were not detected at concentrations greater than the laboratory method detection limits in field blanks FB-1-P, FB-2-P, and FB-3-P.

A Level II QA/QC package was requested from the laboratory for each set of submitted samples. A summary of the soil sample analytical data is included as **Table 3**, a summary of the TCLP RCRA 8-Metals soil sample analytical data is included as **Table 4,** a summary of PFAS soil sample analytical data is included as **Table 5**, and the laboratory reports are included in **Appendix F**.

5.2 Groundwater Sample Analysis

Review of the VOC laboratory analytical results indicated concentrations of PCE greater than its NC2LGWQS but less than its Non-Residential VI GWSL in the sample collected from monitoring well GW-10. Additional VOCs were detected at concentrations greater than the laboratory method detection limits but less than their respective NC2LGWQS and Non-Residential VI GWSL in samples collected from monitoring wells GW-5, GW-6, and GW-10.

Review of the SVOC laboratory analytical results indicated concentrations of di-n-butylphthalate greater than the laboratory method detection limit but less than its respective NC2LGWQS in the DUP-1 groundwater sample collected from monitoring well GW-7.

Review of the Priority Pollutant Metals laboratory analytical results indicated concentrations of cadmium greater than its respective NC2LGWQS in the sample collected from monitoring well GW-2. Chromium was detected at concentrations greater than its respective NC2LGWQS in the sample collected from monitoring well GW-7 and duplicate sample DUP-1, also collected from monitoring well GW-7. Additional metals were detected in each of the samples submitted for Priority Pollutant Metals analysis at concentrations greater than the laboratory method detection limits, but less than their respective NC2LGWQS. A summary of the groundwater sample analytical data is included as **Table 6.**

Review of the PFAS laboratory analytical results indicated concentrations of PFOS and PFOA greater than their respective NC2LGWQS in groundwater samples GW-1-P, GW-2-P, GW-3-P, GW-5-P, and GW-10-P. For non-naturally occurring substances for which numeric groundwater standards have not been established, detections above the laboratory reporting limit (RL) are considered to be a violation of the North Carolina Groundwater Standards per 15A NCAC 02L. 0202. Perfluorobutane sulfonic acid (PFBS) was detected at concentrations greater than its respective laboratory RL in groundwater samples GW-2-P through GW-5-P and DUP-2-P. Perfluorohexanoic acid (PFHxA) was detected at concentrations greater than its respective laboratory RL in groundwater samples GW-3-P and GW-5-P. Perfluorobutanoic acid (PFBA) was detected at a concentration greater than its respective laboratory RL in groundwater sample GW-5-P. Perfluoropentanoic acid (PFPeA) was detected at a concentration greater than its respective laboratory RL in groundwater sample GW-5-P. Perfluoropentane sulfonic acid (PFPeS) was detected at a concentration greater than its respective laboratory RL in groundwater sample GW-5-P.

Perfluoroheptanoic acid (PFHpA) was detected at concentrations greater than its respective laboratory RL in groundwater samples GW-2-P, GW-3-P, and GW-5-P. Perfluorohexane sulfonic acid (PFHxS) was detected at concentrations greater than its respective laboratory RL in groundwater samples GW-2-P, GW-3-P, and GW-5-P.

Additional PFAS compounds were detected at concentrations greater than the laboratory method detection limits but less than their respective laboratory RLs in groundwater samples GW-1-P through GW-4-P and GW-10-P. However, estimated concentrations (J-flag qualifier) are not considered to be a violation of the NC2LGWQS. A summary of the PFAS groundwater sample analytical data is included as **Table 7.**

Quality Control

Laboratory results of duplicate groundwater sample DUP-1 that was collected as a duplicate of groundwater sample GW-7, and submitted for the same analyzes as the associated record sample were similar to those detected in the record sample. Three trip blank samples, TB-1 through TB-3, were also analyzed by the laboratory for VOCs. Compounds were not detected in the trip blank samples at concentrations greater than laboratory method detection limits.

Three equipment blanks, EB-1 through EB-3, were submitted and analyzed for VOCs, SVOCs, and Priority Pollutant Metals. The equipment blanks were collected by pouring laboratory-supplied deionized water over the probe end of the electronic water level meter and capturing the water in laboratory-supplied sample containers. Review of the equipment blank analytical results indicated concentrations of chloroform greater than the laboratory method detection limit but less than its respective NC2LGWQS in equipment blank samples EB-1 and EB-2. Additionally, chromium was detected at a concentration greater than the laboratory method detection limit but less than its respective NC2LGWQS in equipment blank sample EB-3.

Laboratory results of duplicate groundwater samples DUP-1-P and DUP-2-P that were collected as duplicates of groundwater samples GW-7-P and GW-4-P, respectively, were similar to those detected in the record samples. DUP-1-P and DUP-2-P were collected and submitted for PFAS analysis on each day of PFAS groundwater sampling. In addition, two field blank samples, FB-4-P and FB-5-P, were collected on each day of PFAS groundwater sampling. PFAS compounds were not detected at concentrations greater than the laboratory method detection limits in field blanks FB-4-P and FB-5-P.

Two equipment blanks, EB-1-P and EB-2-P, were submitted and analyzed for PFAS on each day of PFAS groundwater sampling. The equipment blanks were collected by pouring laboratory-supplied PFAS-free deionized water over the probe end of the electronic water level meter and capturing the water in laboratory-supplied sample containers. Review of the equipment blank analytical results indicated concentrations of PFOA greater than its respective IMAC in equipment blank sample EB-2-P. PFOS was detected at a concentration greater than its laboratory method detection limit but below its respective

IMAC in equipment blank sample EB-2-P. Equipment blank sample EB-2-P was collected on June 11, 2025, the same day as groundwater samples GW-3-P, GW-4-P, GW-5-P, and GW-10-P. Due to PFOA and additional PFAS compounds detected in groundwater samples GW-3-P, GW-4-P, GW-5-P, and GW-10-P at higher concentrations than equipment blank sample EB-2-P, ECS does not believe the PFAS concentrations detected in EB-2-P to present a QA/QC concern. PFAS compounds were not detected in equipment blank sample EB-1-P greater than laboratory method detection limits.

A Level II QA/QC package was requested from and performed by the laboratory for each set of submitted samples. A summary of the groundwater analytical data is included in **Table 6**, a summary of the PFAS groundwater analytical data is summarized in **Table 7** and laboratory reports are included as **Appendix F**.

5.3 Surface Water Sample Analysis

VOCs and SVOCs were not detected at concentrations greater than the laboratory method detection limits in surface water samples SW-1 through SW-3 and SW-DUP. The NC2BSWS for hardness-dependent metals was calculated using the currently available NCDEQ spreadsheet dated November 1, 2023, which provides embedded calculations for this purpose. Review of the Priority Pollutant Metals laboratory analysis results indicated that copper was detected at a concentration greater than its calculated NC2BSWS in surface water samples SW-2, SW-3, and SW-DUP. Lead was detected at a concentration greater than its calculated NC2BSWS in surface water samples SW-3 and SW-DUP. Additional metals were detected at concentrations greater than the laboratory method detection limits, but less than their respective NC2BSWS in surface water samples SW-1 through SW-3 and SW-DUP. The surface water samples were also analyzed for hardness which was used to calculate the NC2BSWS for select metals. A summary of the surface water sample analytical data is included as **Table 8.**

NCDEQ surface water standards are not currently established for PFAS compounds. Review of the PFAS laboratory analytical results indicated concentrations of PFOS and PFOA greater than their respective laboratory reporting limits. PFBS was detected at a concentration greater than its respective laboratory RL in surface water samples SW-1-P through SW-3-P and SW-DUP-P. PFHxA was detected at a concentration greater than its respective laboratory RL in surface water samples SW-1-P through SW-3-P and SW-DUP-P. PFPeA was detected at a concentration greater than its respective laboratory RL in surface water samples SW-1-P through SW-3-P and SW-DUP-P. PFBA was detected at a concentration greater than its respective laboratory RL in surface water samples SW-2-P, SW-3-P, and SW-DUP-P. PFHpA was detected at a concentration greater than its respective laboratory RL in surface water samples SW-2-P, SW-3-P, and SW-DUP-P. PFHxS and perfluorononanoic acid (PFNA) were detected at a concentrations greater than their respective laboratory RL in surface water sample SW-2-P.

Additional PFAS compounds were detected at concentrations greater than the laboratory method detection limits but less than their respective laboratory RLs in surface water samples SW-1-P through SW-3-P and SW-DUP-P. A summary of the PFAS surface water sample analytical data is included as **Table 9.**

Quality Control

Laboratory results of duplicate surface water samples SW-DUP and SW-DUP-P that were collected as duplicates of surface water samples SW-3 and SW-3-P, respectively, and submitted for the same analyzes as the associated record sample were similar to those detected in the record sample. One trip blank sample, TB-4, was also analyzed by the laboratory for VOCs. Compounds were not detected in the trip blank sample at concentrations greater than laboratory method detection limits. One field blank sample (FB-6-P) and one equipment blank sample (EB-3-P) were collected on the day of PFAS sediment and surface water sampling. PFAS compounds were not detected at concentrations greater than the laboratory method detection limits in field blank FB-6-P and equipment blank EB-3-P.

A Level II QA/QC package was requested from and performed by the laboratory for each set of submitted samples. A summary of the surface water analytical data is included in **Table 8**, a summary of the PFAS surface water analytical data is summarized in **Table 9** and the laboratory reports are included as **Appendix F**.

5.4 Sediment Sample Analysis

VOCs and SVOCs were not detected at concentrations greater than the laboratory method detection limits with the exception of p-Isopropyltoluene in sediment sample SS-2 which does not have an established Industrial/Commercial PSRG. Review of the Priority Pollutant Metals laboratory analysis results indicated that arsenic was detected at a concentration greater than its Industrial/Commercial PSRG in sediment sample SS-1. Additional metals were detected at concentrations greater than the laboratory method detection limits, but less than their respective Industrial/Commercial PSRG in sediment samples SS-1 through SS-3 and SS-DUP. A summary of the sediment sample analytical data is included as **Table 10.**

Review of the PFAS laboratory analytical results indicated estimated concentrations of PFOA greater than its respective Industrial/Commercial PSRG in sediment samples SS-3-P and SS-DUP-P. PFOS was detected at concentrations greater than the laboratory method detection limits but less than its respective Industrial/Commercial PSRG in sediment samples SS-3-P and SS-DUP-P. PFAS compounds were not detected at concentrations greater than the laboratory method detection limits in sediment samples SS-1-P and SS-2-P. A summary of the PFAS sediment sample analytical data is included as **Table 11.**

Quality Control

Laboratory results of duplicate sediment samples SS-DUP and SS-DUP-P that were collected as duplicates of sediment samples SS-3 and SS-3-P, respectively, and submitted for the same analyzes as the associated record sample were similar to those detected in the record sample.

A Level II QA/QC package was requested from and performed by the laboratory for each set of submitted samples. A summary of the sediment analytical data is included in **Table 10**, a summary of the PFAS sediment analytical data is summarized in **Table 11** and the laboratory reports are included as **Appendix F**.

5.5 Soil Vapor Sample Analysis

Review of the VOC laboratory analytical results indicated that a total of thirty-four (34) VOCs were detected in soil gas samples. VOC laboratory analytical results indicated a concentration of vinyl chloride greater than its respective Non-Residential VISL in the SV-2 soil vapor sample. Additional VOCs were detected at concentrations greater than the laboratory method detection limits but less than their respective Non-Residential VISL in soil vapor samples SV-1 through SV-3 and SV-DUP. A summary of the soil vapor sample analytical data is included as **Table 12.**

Quality Control

Laboratory results of duplicate soil vapor sample SV-DUP that was collected as a duplicate of soil vapor sample SV-1, and submitted for the same analyzes as the associated record sample were similar to those detected in the record sample.

A Level II QA/QC package was requested from and performed by the laboratory for the set of submitted samples. A summary of the soil vapor analytical data is included in **Table 12** and the laboratory report is included as **Appendix F**.

5.6 NCDEQ Risk Calculator Results

Due to the exceedances noted above, ECS input the highest detection concentration of each target analyte detected in the soil, groundwater, surface water, and soil vapor samples in order to represent "worst case" conditions into the January 2025 NCDEQ Risk Calculator. The TCLP soil and sediment analytical data are not applicable with the Risk Calculator. The input and output from the Risk Calculator are included in **Appendix G**. The Risk Calculator indicated unacceptable risk for the following scenarios:

- Direct contact with water via groundwater use for the Non-Residential Worker scenario;
- Direct contact with soil for the Construction Worker and Recreator/Trespasser scenarios; and
- Direct contact with surface water for the Recreator/Trespasser scenario.

5.7 Brownfields Receptor Survey

ECS performed a Brownfields Receptor Survey. The results of the Brownfields Receptor Survey identified multiple water supply wells and potential irrigation wells within approximately 1,500 feet to the east and

southeast of the subject property. A figure indicating the approximate location of water supply wells is included in **Appendix H**. The subject property is provided water from a municipal source (City of Greensboro). A sewer connection does not currently exist. One ephemeral stream and one wetland area were previously identified in the southern portion of the subject property. Underground utilities including storm water, water, natural gas, and telephone/cable were observed along the southeastern property boundary (5818 and 5820 West Gate City Boulevard). The Brownfields Receptor Survey form is also included in **Appendix H**.

5.8 Investigative Derived Waste

Derived Waste (IDW) generated from the soil borings (i.e., soil cuttings) were thinly spread onsite in the vicinity of the boring location. IDW generated during the installation and sampling of the monitoring wells and soil vapor points (i.e., soil cuttings, development water, and purge water) was placed onsite in the vicinity of the monitoring well and soil vapor point locations.

6.0 CONCLUSIONS

Based on the results of the sampling presented above, as well as the receptor survey conducted for the site, ECS has the following overall conclusions:

- PCE was detected in soil samples B-6, B-8, and B-DUP at concentrations greater than its respective Protection of Groundwater PSRG, but less than its respective Industrial/Commercial PSRG. Benzene was detected in soil sample B-6 at a concentration greater than its respective Protection of Groundwater PSRG, but less than its respective Industrial/Commercial PSRG. Arsenic was detected in soil samples B-1, B-3, B-4, B-4-C, B-4-D, B-5-C, B-6, B-14, B-DUP and WC-1 at concentrations greater than its Protection of Groundwater and Industrial/Commercial PSRGs. Cadmium was detected in soil samples B-1, B-3, B-4-C, B-4-D, and B-6 at concentrations greater than its Protection of Groundwater PSRG but less than its Industrial/Commercial PSRG. Hexavalent chromium was detected in soil sample B-9 at a concentration greater than its Protection of Groundwater PSRG but less than its Industrial/Commercial PSRG. Copper was detected in soil sample B-4-D at a concentration greater than its Protection of Groundwater PSRG but less than its Industrial/Commercial PSRG. Lead was detected in soil sample B-4-D at a concentration greater than its Protection of Groundwater and Industrial/Commercial PSRG. Lead was also detected in soil samples B-1, B-3, B-4-C, and B-6 at concentrations greater than its than its Protection of Groundwater PSRG but below its Industrial/Commercial PSRG. Selenium was detected in soil samples B-3, B-4, and B-9 at concentrations greater than its Protection of Groundwater PSRG but less than its Industrial/Commercial PSRG. Zinc was detected in soil samples B-1, B-3, B-4-D, and B-6 at concentrations greater than its Protection of Groundwater PSRG but less than its Industrial/Commercial PSRG.
- PFOS was detected in soil samples B-1-P, B-3-P, B-6-P, B-8-P, B-10-P, B-11-P, B-13-P, and B-DUP at concentrations greater than its respective Protection of Groundwater PSRG but less than its

respective Industrial/Commercial PSRG. PFOA was detected in soil samples B-1-P, B-11-P, B-13-P, B-14-P, and B-DUP at concentrations greater than its respective Protection of Groundwater and Industrial/Commercial PSRGs. Additional constituents of concern were not detected in the soil samples at concentrations greater than their respective Protection of Groundwater and Industrial/Commercial PSRGs (if established).

- PCE was detected in groundwater sample GW-10 at a concentration greater than its NC2LGWQS but less than its Non-Residential VI GWSL. Cadmium was detected in groundwater sample GW-2 greater than its respective NC2LGWQS. Chromium was detected in groundwater samples GW-7 and DUP-1 at concentrations greater than its respective NC2LGWQS. Additional constituents of concern were not detected in the groundwater samples at concentrations greater than their respective NC2LGWQS and Non-Residential VI GWSL (if established).
- PFOS was detected in groundwater samples GW-1-P, GW-2-P, GW-3-P, GW-5-P, and GW-10-P at a concentration greater than its respective NC2LGWQS. PFOA was detected in groundwater samples GW-1-P, GW-2-P, GW-3-P, GW-5-P, and GW-10-P at a concentration greater than its respective NC2LGWQS. For non-naturally occurring substances for which numeric groundwater standards have not been established, detections above the laboratory RL are considered to be a violation of the North Carolina Groundwater Standards per 15A NCAC 02L. 0202. PFBS was detected in groundwater samples GW-2-P through GW-5-P and DUP-2-P at a concentration greater than its respective laboratory RL. PFHxA was detected in groundwater samples GW-3-P and GW-5-P at a concentration greater than its respective laboratory RL. PFBA, PFPeA, and PFPeS were detected in groundwater sample GW-5-P at concentrations greater than their respective laboratory RL. PFHpA and PFHxS were detected in groundwater samples GW-2-P, GW-3-P, and GW-5-P at concentrations greater than their respective laboratory RLs. Additional PFAS compounds were detected at concentrations greater than the laboratory method detection limits but less than their respective laboratory RLs in groundwater samples GW-1-P through GW-4-P and GW-10-P. However, estimated concentrations (J-flag qualifier) are not considered to be a violation of the NC2LGWQS.
- Copper was detected in surface water samples SW-2, SW-3, and SW-DUP at a concentration greater than its calculated NC2BSWS. Lead was detected in surface water samples SW-3 and SW-DUP at a concentration greater than its calculated NC2BSWS. Additional constituents of concern were not detected in the surface water samples at concentrations greater than their respective NC2LGWQS (if established).
- PFOA, PFOS, PFBS, PFHxA, and PFPeA were detected in surface water samples SW-1-P through SW-3-P and SW-DUP-P at concentrations greater than their respective laboratory RL. PFBA and PFHpA were detected in surface water samples SW-2-P, SW-3-P, and SW-DUP-P at concentrations greater than their respective laboratory RL. PFHxS and PFNA were detected in surface water sample SW-2-P at a concentration greater than their respective laboratory RL.
- Arsenic was detected in sediment sample SS-1 at a concentration greater than its Industrial/Commercial PSRG. PFOA was detected in sediment samples SS-3-P and SS-DUP-P greater than its respective Industrial/Commercial PSRG. Additional constituents of concern were not detected in the sediment samples at concentrations greater than their respective

Industrial/Commercial PSRG (if established).

- Vinyl chloride was detected in soil vapor sample SV-2 at a concentration greater than its respective Non-Residential VISL. Additional constituents of concern were not detected in the soil vapor samples at concentrations greater than their respective Non-Residential VISL (if established).
- The results of the NCDEQ Risk Calculator indicated unacceptable risk for direct contact with water via groundwater use for the Non-Residential Worker scenario, direct contact with soil for the Construction Worker and Recreator/Trespasser scenarios, and direct contact with surface water for the Recreator/Trespasser scenario.
- Based on the results of the Brownfields Receptor Survey, there are multiple water supply wells and irrigation wells located within 1,500 feet and east to southeast of the subject property. The site is provided water from the City of Greensboro and a sewer connection does not currently exist. Various wetland areas and one stream totaling approximately 1,054 feet were identified on the subject property.
- Based upon the surveyed elevations of the top-of-casing of each monitoring well and the depth to water measurements measured on June 10, 2025, groundwater beneath the site flowed approximately to the west

7.0 DEVIATIONS FROM APPROVED SCOPE

In accordance with the Approved Scope, ECS planned to collect five (5) background soil samples from the wooded area in the southwestern portion of the site for the purpose of background analysis of Priority Pollutant Metals. However, due to access issues caused by dense vegetation, ECS collected three (3) background samples (BG-1 through BG-3) for background analysis of Priority Pollutant Metals. In addition, ECS collected soil sample WC-1 from observed fill material in the wooded area in the southwestern portion of the site. Soil sample WC-1 was collected for waste characterization purposes and submitted to the laboratory for analysis of Priority Pollutant Metals.

On July 9, 2025, ECS mobilized to the site to collect additional composite samples from cells B-1, B-3, B-6, and B-12 following review of the priority pollutant metals analytical results for cell samples B-1 through B-14. ECS received approval from the BRS via email correspondence on July 8, 2025, to collect additional composite samples B-1-TCLP, B-3-TCLP, B-6-TCLP, and B-12-TCLP, for laboratory analysis of TCLP RCRA 8-Metals. The five-point composite samples B-1-TCLP, B-3-TCLP, B-6-TCLP, and B-12-TCLP were collected using a decontaminated stainless-steel hand auger using the aforementioned methodologies from the previous boring locations completed on June 2 through June 4, 2025. In addition, duplicate sample DUP-TCLP was collected from composite sample B-6-TCLP.

FIGURES

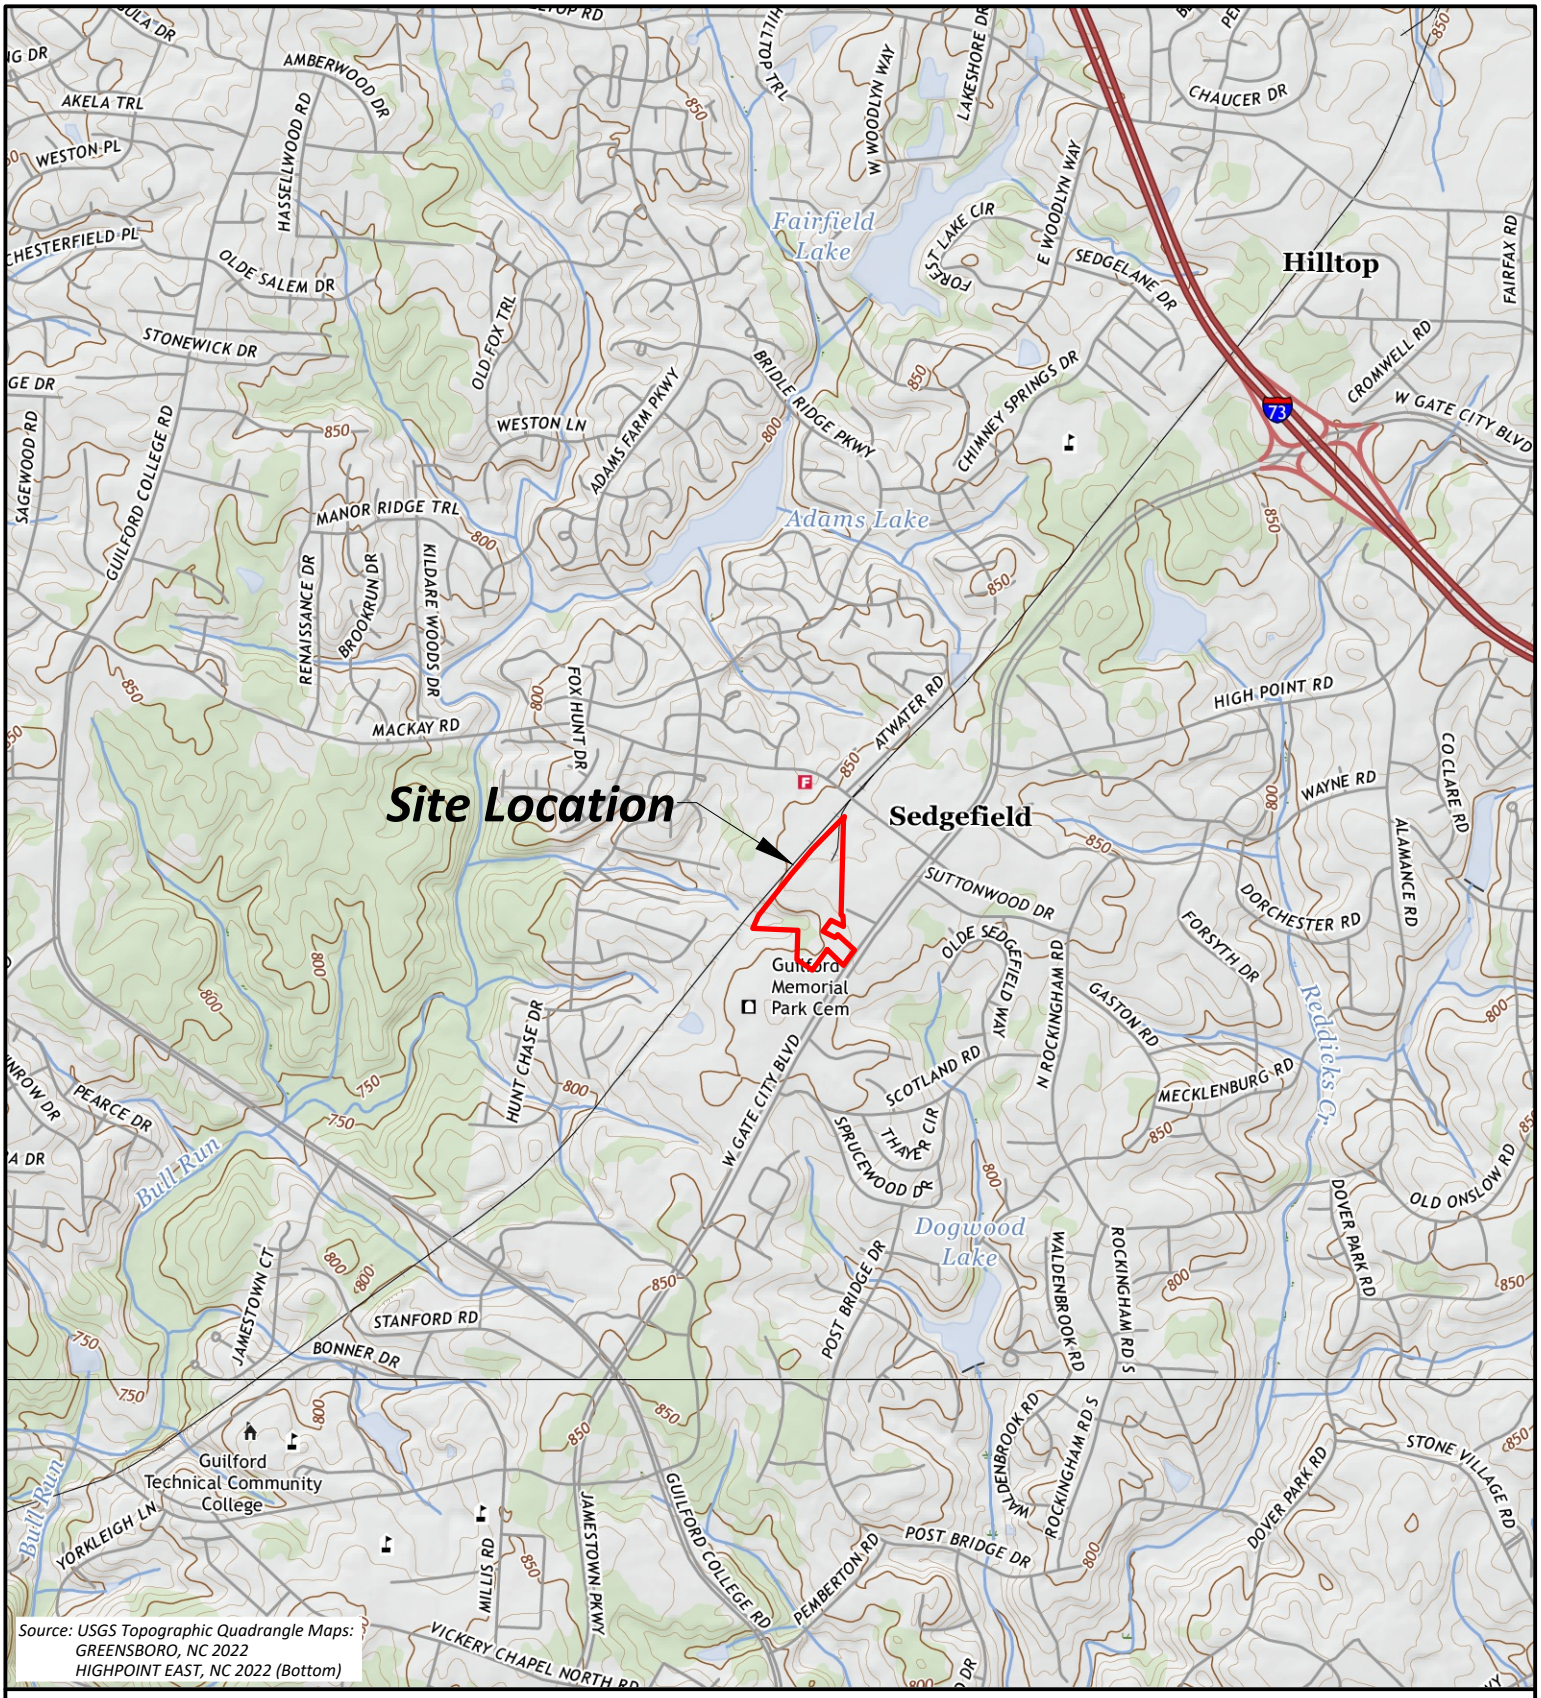

N

Scale

0 1000 2000

1 inch = 2000 ft.

Figure 1
USGS Topographic Map

Fortress Wood Products II
1 Metals Drive
Greensboro, Guilford County, NC 27407

NC Brownfields ID No. 28063-24-041
ECS Project No. 49:24413-C

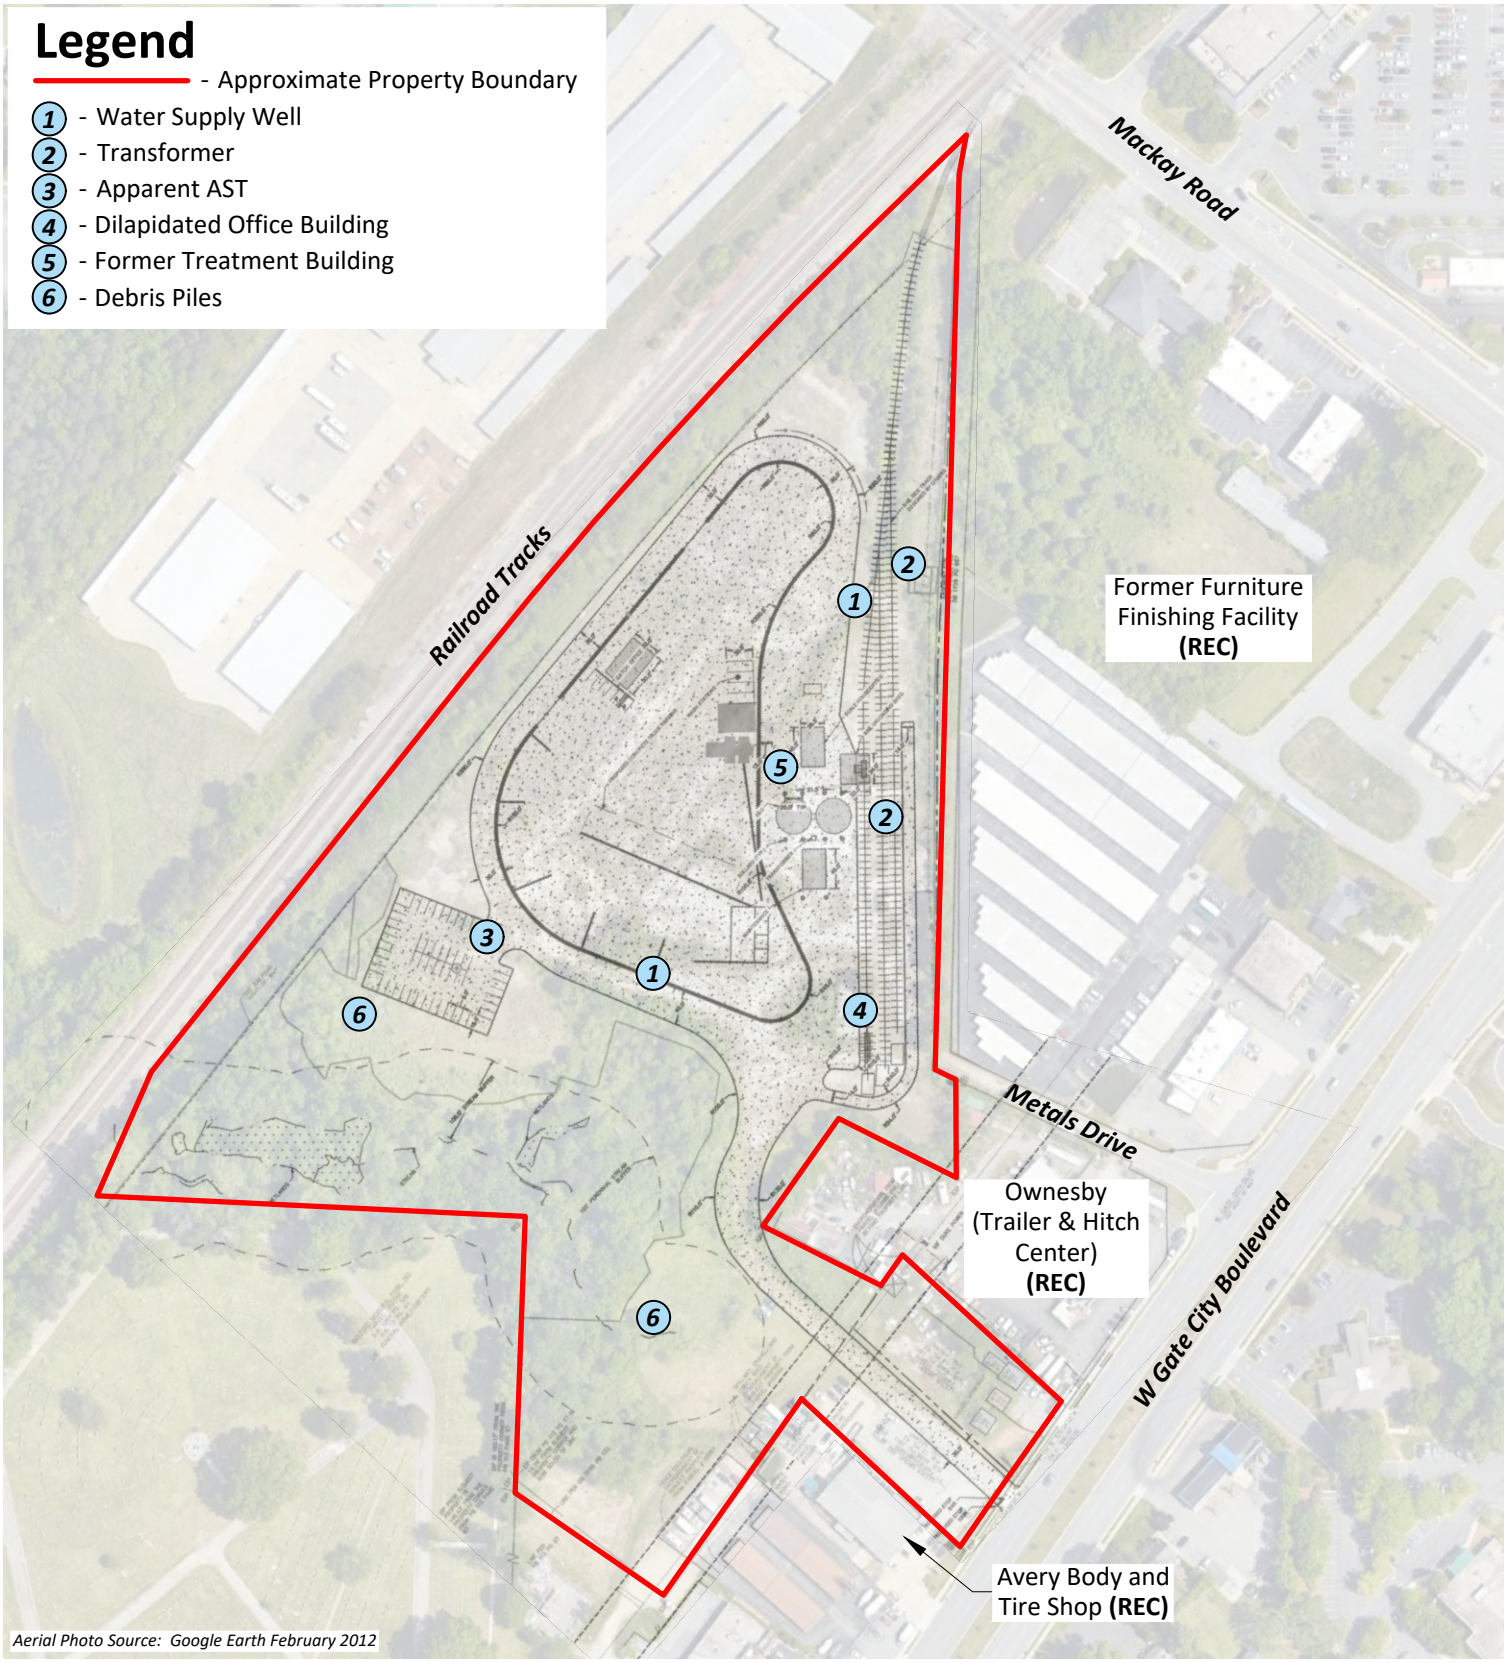

N

Scale

0 110 220

1 inch = 220 ft.

Figure 2
Site Aerial Map

Fortress Wood Products II
1 Metals Drive
Greensboro, Guilford County, NC 27407

NC Brownfields ID No. 28063-24-041
ECS Project No. 49:24413-C

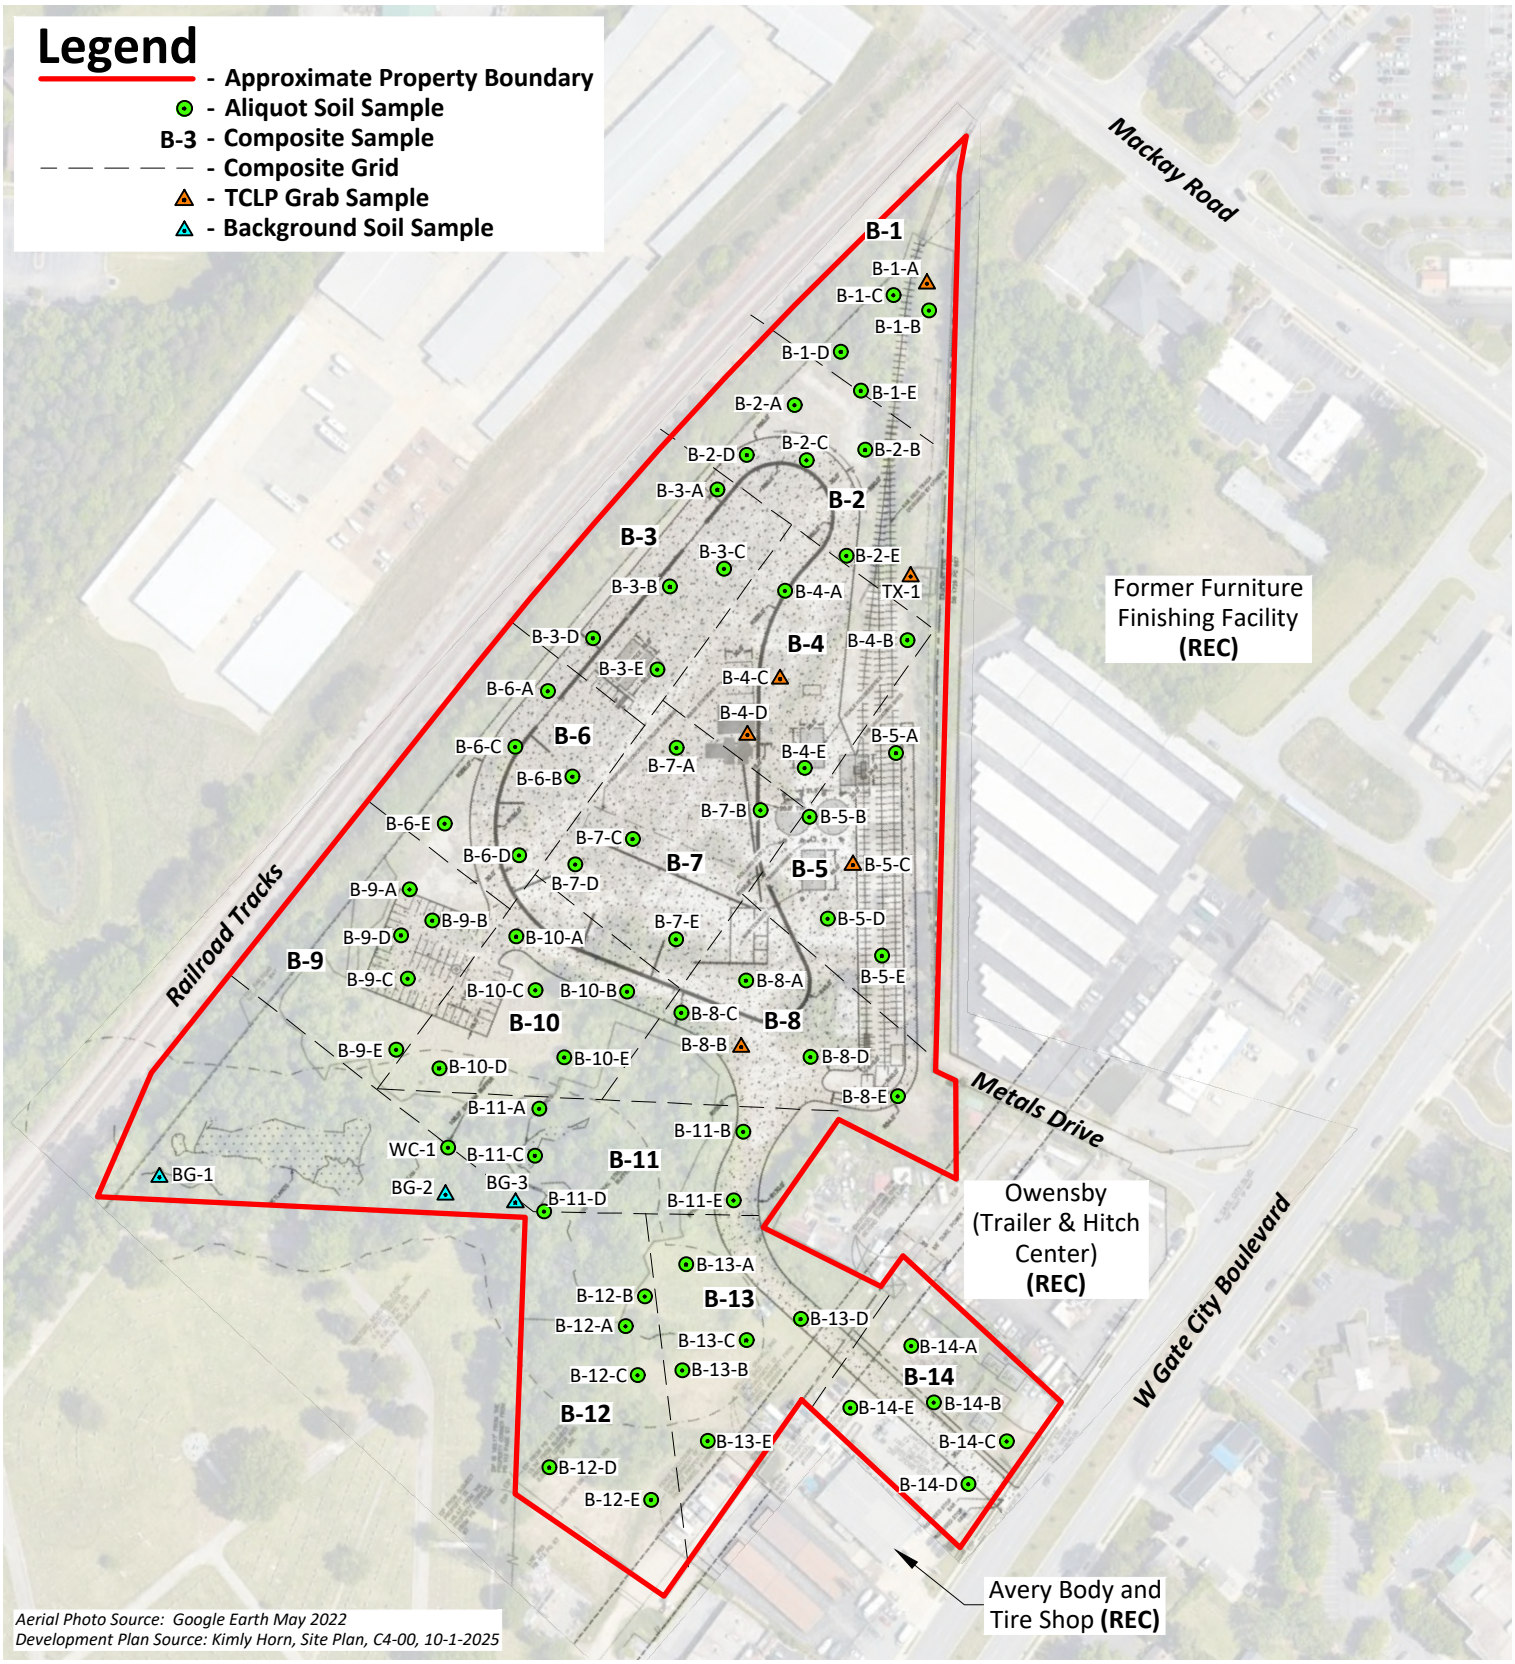



Figure 3
Soil Sampling Location Map

Fortress Wood Products II
1 Metals Drive
Greensboro, Guilford County, NC 27407

NC Brownfields ID No. 28063-24-041
ECS Project No. 49:24413-C

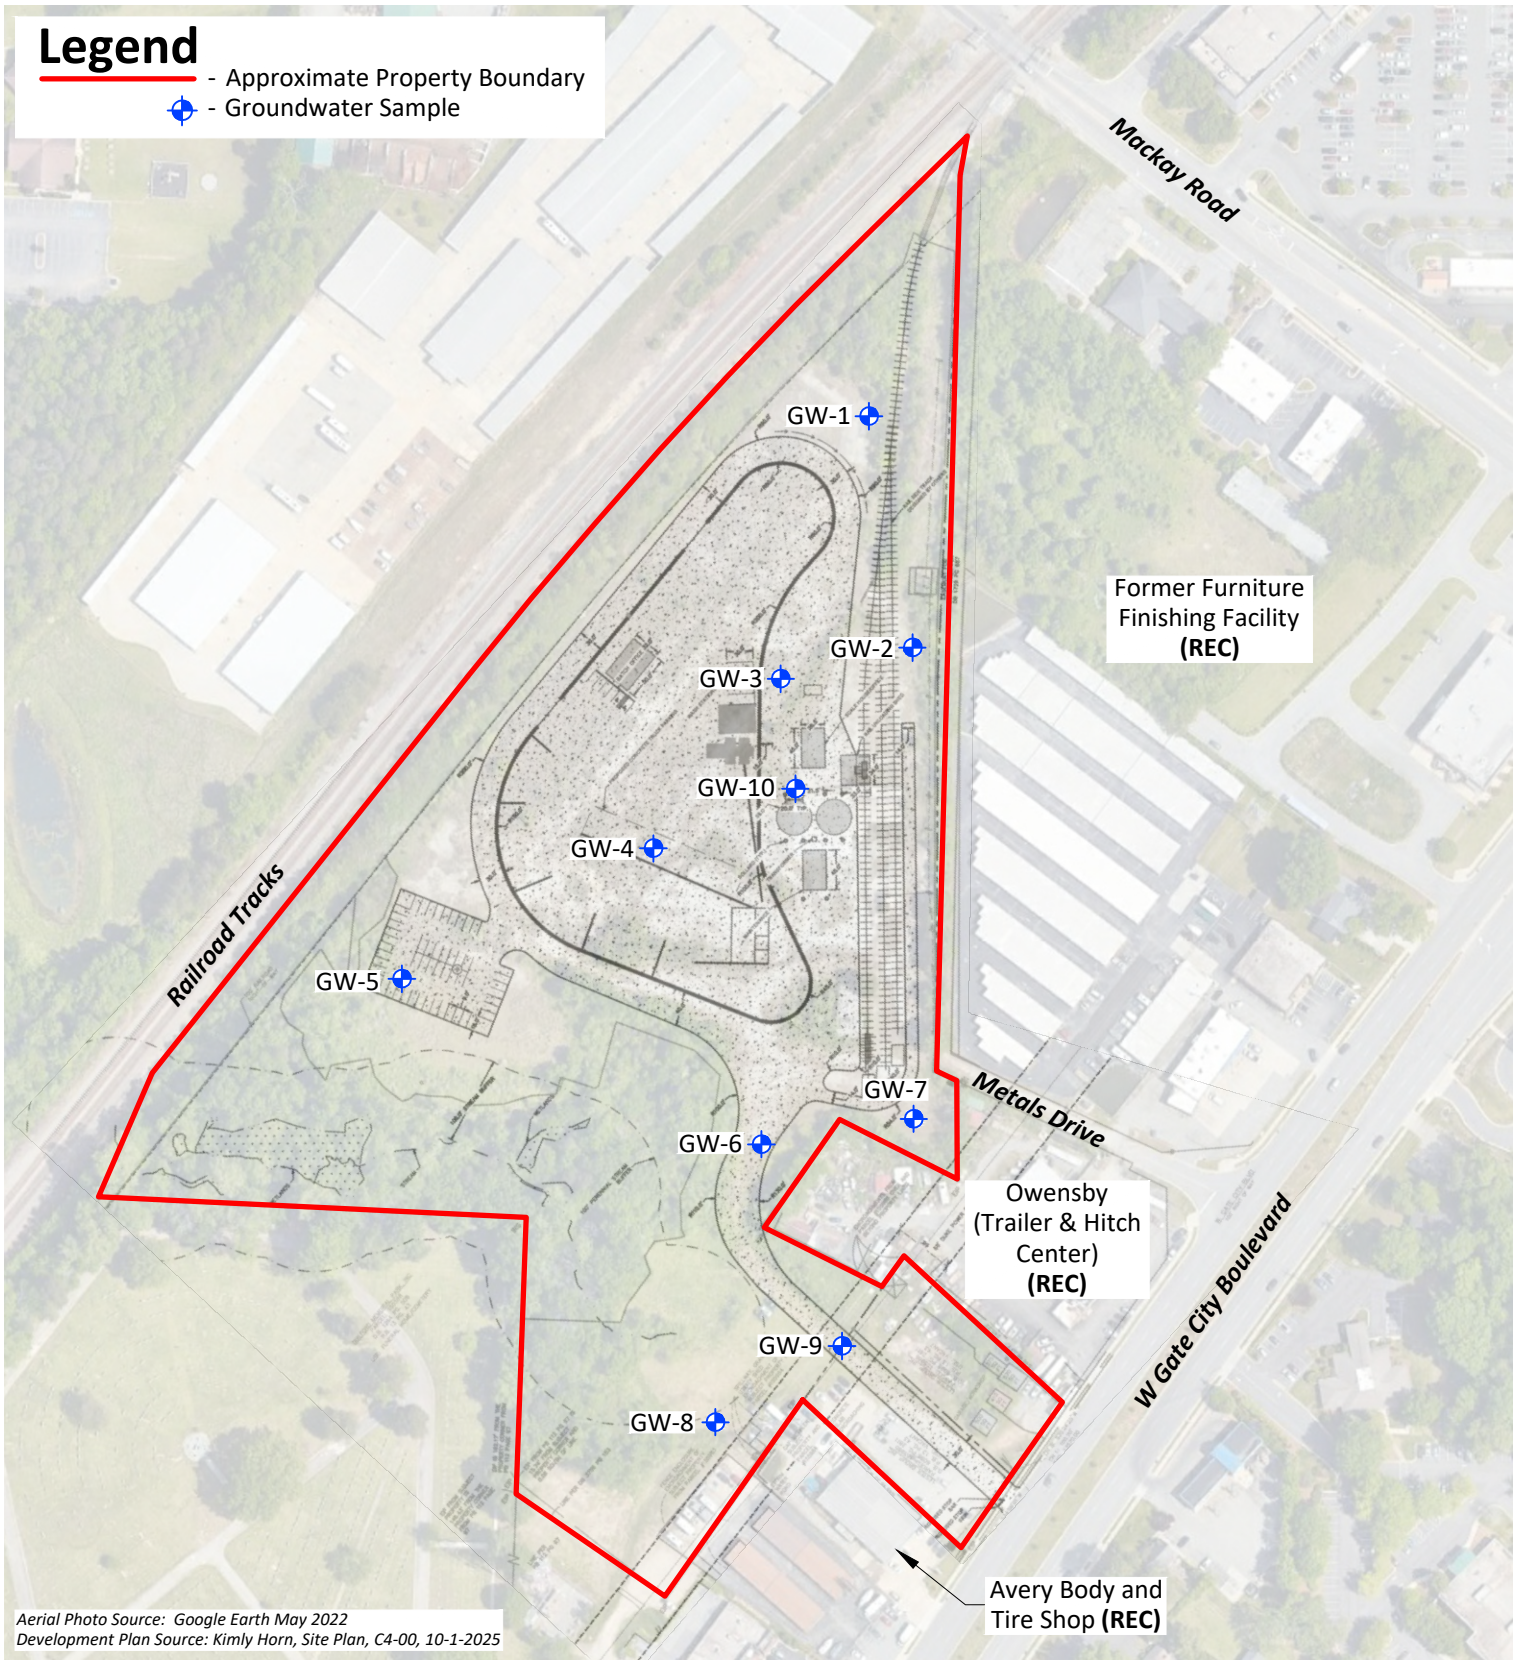

N

Scale

0 110 220

1 inch = 220 ft.

Figure 4
Groundwater Sampling Location Map

Fortress Wood Products II
1 Metals Drive
Greensboro, Guilford County, NC 27407

NC Brownfields ID No. 28063-24-041
ECS Project No. 49:24413-C

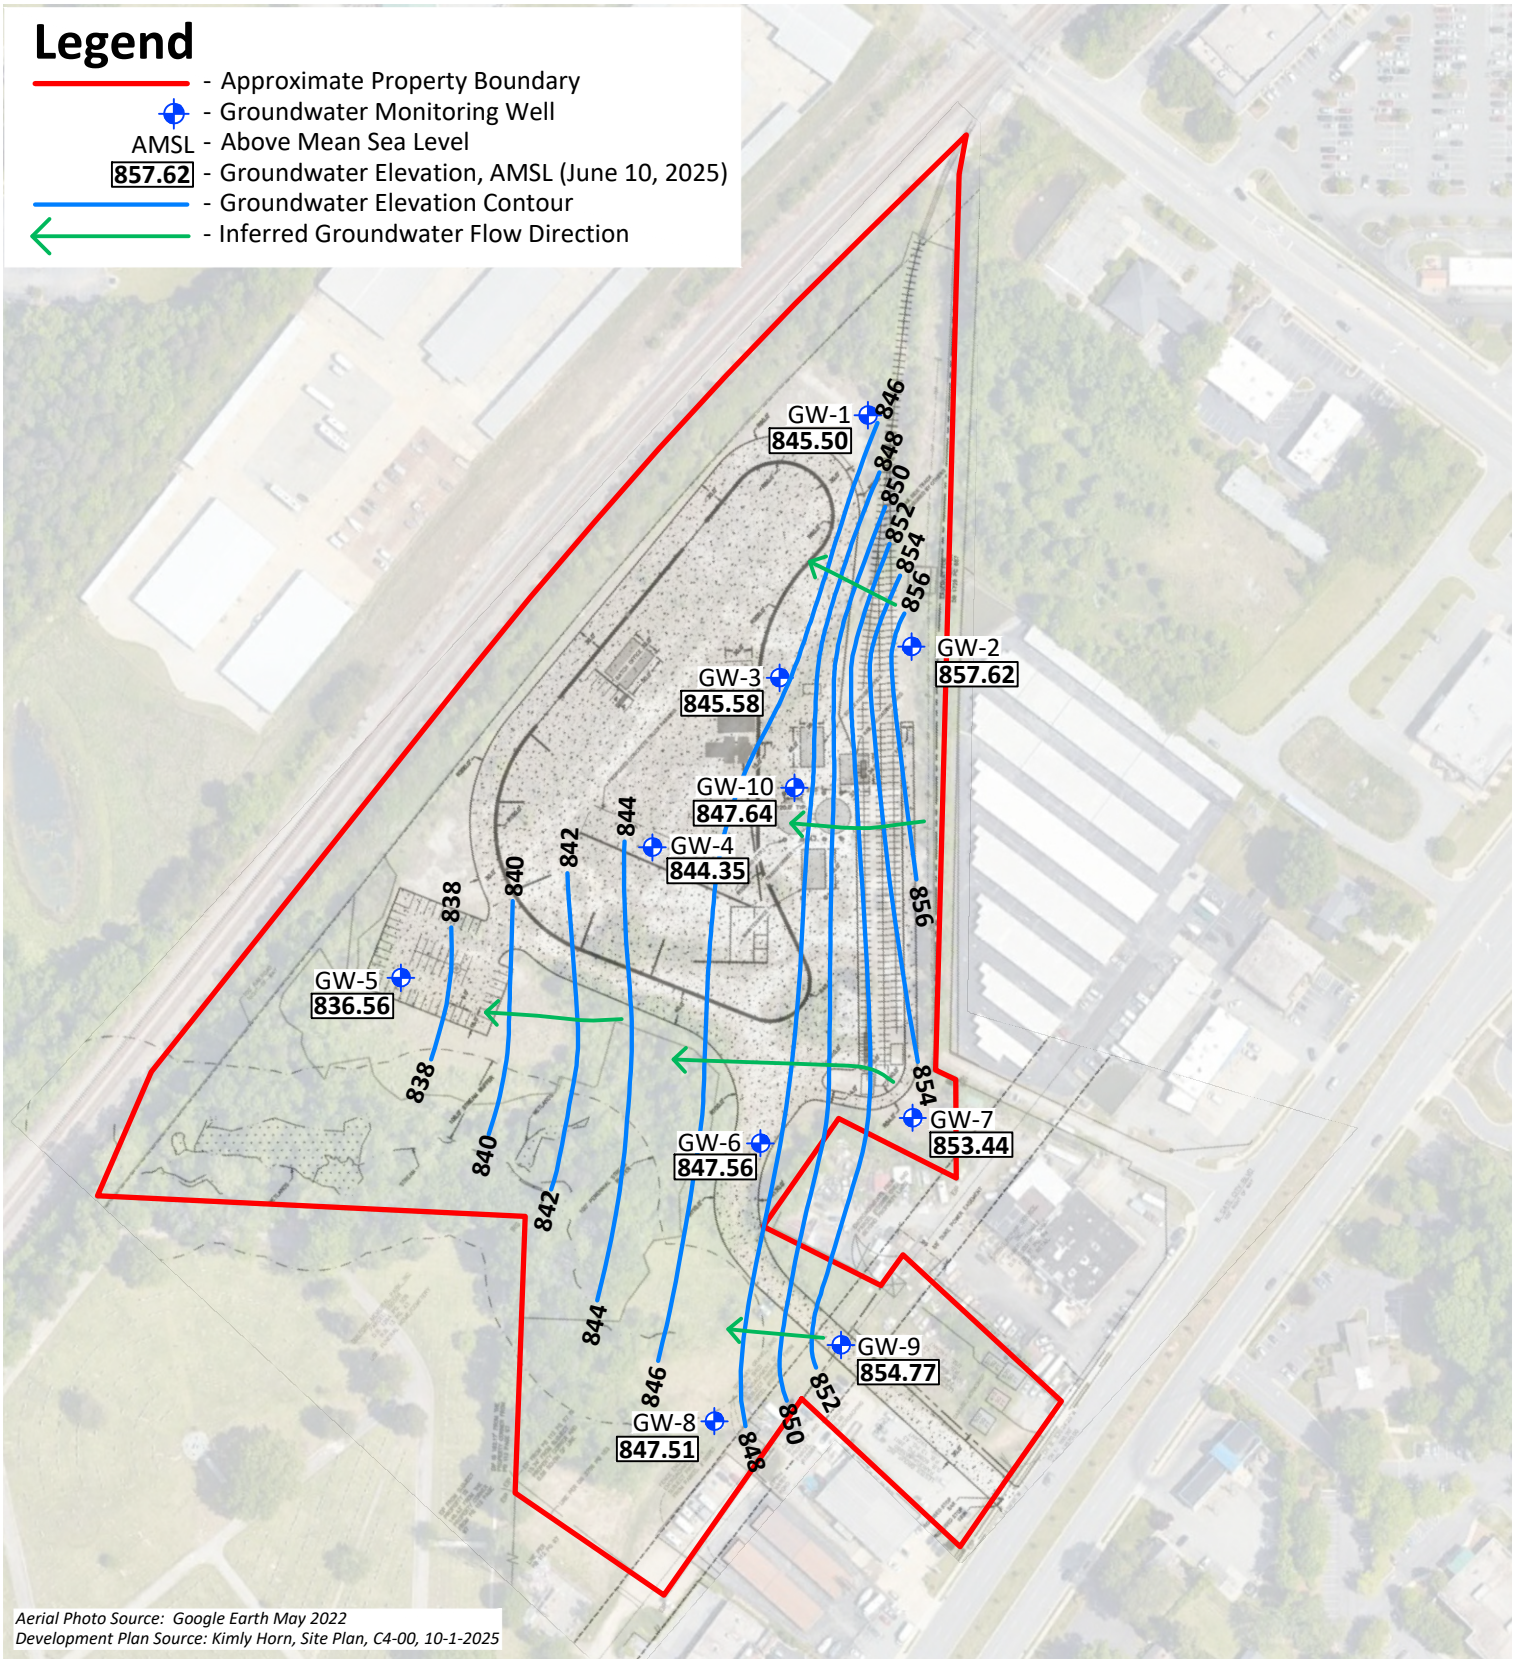

Figure 5
Groundwater Flow Direction Map

Scale
0 110 220
1 inch = 220 ft.

Fortress Wood Products II
1 Metals Drive
Greensboro, Guilford County, NC 27407

NC Brownfields ID No. 28063-24-041
ECS Project No. 49:24413-C

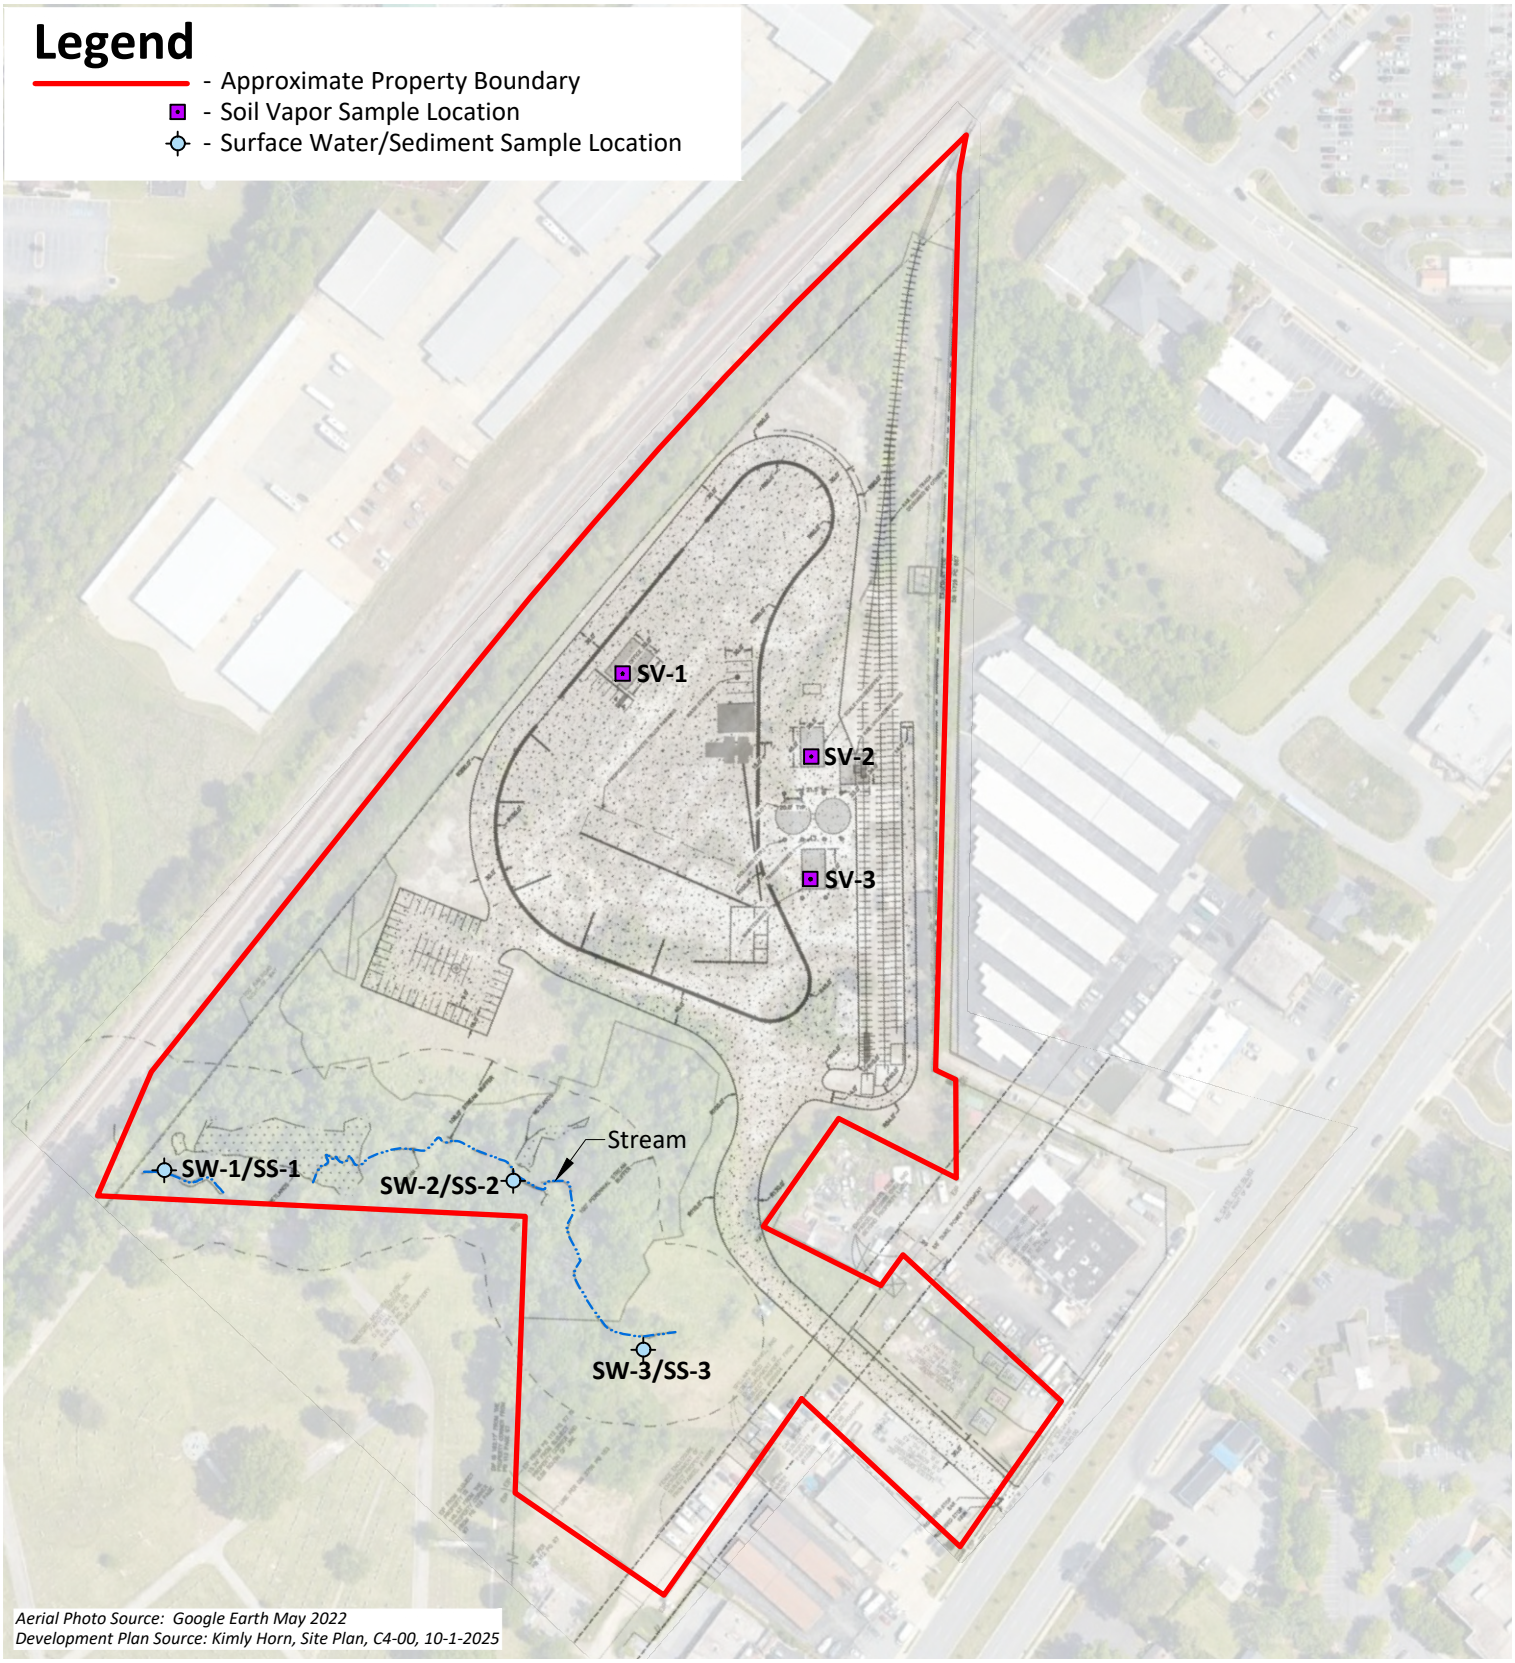

N

Scale

0 110 220

1 inch = 220 ft.

Figure 6
Additional Sampling Location Map

Fortress Wood Products II
1 Metals Drive
Greensboro, Guilford County, NC 27407

NC Brownfields ID No. 28063-24-041
ECS Project No. 49:24413-C

TABLES

TABLE 1: COLLECTED SAMPLES AND ASSOCIATED ANALYSES
Fortress Wood Products II - Brownfields Assessment
1 Metals Drive
Greensboro, Guilford County, North Carolina
Brownfields Project ID: 28063-24-041
ECS Project No. 49:24413-C

Sample Media	Estimated Sample Depth	Laboratory Analysis / Analytical Method	Target Area
Soil	**Ft-bg**	**Soil Samples**	**Sample Location**
B-1-D, B-2-B, B-3-E, B-4-E, B-5-D, B-6-A, B-7-C, B-8-A, B-9-D, B-10-E, B-11-C, B-12-A, B-13-D, B-14-A & B-DUP (Grab)	1-2	VOCs / EPA Method 8260	Future/Potential Development Areas at the Subject Property
B-1, B-2, B-3, B-4, B-5, B-6, B-7, B-8, B-9, B-10, B-11, B-12, B-13, B-14 & B-DUP (Composite)*	2	SVOCs / EPA Method 8270 Priority Pollutant Metals / EPA Method 6020/7471 Chromium VI / EPA Method 7199 PFAS / EPA Method 1633	Future/Potential Development Areas at the Subject Property
B-1-TCLP, B-3-TCLP, B-6-TCLP, B-12-TCLP, & DUP-TCLP (Composite)*	2	TCLP RCRA 8 Metals / EPA Method 6010/7470	Future/Potential Development Areas at the Subject Property
B-4-C, B-4-D, B-5-C, & B-8-B	1	Priority Pollutant Metals / EPA Method 6020/7471 TCLP RCRA 8 Metals / EPA Method 6010/7470	Former SB-11, SB-10, SB-4, and SB-8
B-1-A	1	TCLP RCRA 8 Metals / EPA Method 6010/7470	Former SB-14
BG-1, BG-2, & BG-3 (Background)	2	Priority Pollutant Metals / EPA Method 6020/7471	Wooded Area Outside of Future/Potential Development Plans
WC-1	2	Priority Pollutant Metals / EPA Method 6020/7471	Wooded Area Outside of Future/Potential Development Plans
TX-1 & TX-DUP	2	PCBs (Aroclors & Congeners) / EPA Method 8082	Transformer Observed in Northeastern Portion of Subject Property
Groundwater	**Ft-bg**	**Groundwater Samples**	**Sample Location**
GW-1, GW-2, GW-7, & GW-DUP**	NA	VOCs & SVOCs / EPA Method 8260 & 8270 Priority Pollutant Metals / EPA Method 6020/7470 PFAS / EPA Method 1633	East Property Boundary / Former Furniture Finishing Facility (REC)
GW-3 & GW-4			Railroad Tracks/Former Wood Treatment
GW-5			Debris Pile
GW-10			Floor Drain in Former Wood Treatment Building
GW-6		VOCs & SVOCs / EPA Method 8260 & 8270 Priority Pollutant Metals / EPA Method 6020/7470	Southeast Property Boundary / Owensby (Trailer & Hitch Center) (REC)
GW-8 & GW-9			South Property Boundary / Avery Body and Tire Shop (REC)
Surface Water	**Ft-bg**	**Surface Water Samples**	**Sample Location**
SW-1, SW-2, SW-3, & SW-DUP**	NA	VOCs & SVOCs / EPA Method 8260 & 8270 Priority Pollutant Metals / EPA Method 6020/7470 PFAS / EPA Method 1633 Hardness / Standard Method 2340	Along Stream in Southern Portion of Property (up-gradient, mid-stream, & down-gradient)
Sediment	**Ft-bg**	**Sediment Samples**	**Sample Location**
SS-1, SS-2, SS-3, & SS-DUP	1	VOCs & SVOCs / EPA Method 8260 & 8270 Priority Pollutant Metals / EPA Method 6020/7471 Chromium VI / EPA Method 7199 PFAS / EPA Method 1633	Along Stream in Southern Portion of Property (up-gradient, mid-stream, & down-gradient)
Soil Vapor	**Ft-bg**	**Sediment Samples**	**Sample Location**
SV-1, SV-2, SV-3, & SV-DUP	6	VOCs / EPA Method TO-15	Future Enclosed Buildings with New Slab

Notes:
Ft-bg = Feet below grade
NA = Not Applicable
VOCs = Volatile Organic Compounds
SVOCs = Semi-Volatile Organic Compounds
PFAS = Per- and Polyfluoroalkyl Substances
Chromium VI = Hexavalent Chromium
DUP = Duplicate Sample
WC-1 collected for waste characterization in an area of observed fill material
PFAS samples were submitted on separate chain-of-custodies and noted with *-P*
QA/QC samples included various equipment and field blanks
* = Composite Samples consisted of five-point composite samples
** = VOC trip blanks were analyzed with each cooler/shipment of groundwater and surface water VOC analyses

TABLE 2: MONITORING WELL CONSTRUCTION DETAILS AND GROUNDWATER ELEVATION DATA

Fortress Wood Products II - Brownfields Assessment
1 Metals Drive
Greensboro, Guilford County, North Carolina
Brownfields Project ID No. 28063-24-041
ECS Project No. 49:24413-C

Well ID	Installation Date	Well Diameter (in)	Casing Depth (ft bg)	Screen Interval (x to y ft bgs)	Total Depth (ft bgs)	Top-of-Casing Elevation (ft AMSL)	Date of Measurement	Depth to Water (ft BTOC)	Groundwater Elevation (ft AMSL)
GW-1	06/06/25	2.0	10	10 to 25	25	860.03	06/10/25	14.53	845.50
GW-2	06/05/25	2.0	8	8 to 18	18	860.97	06/10/25	3.35	857.62
GW-3	06/05/25	2.0	10	10 to 25	25	860.26	06/10/25	14.68	845.58
GW-4	06/05/25	2.0	9	9 to 24	24	861.24	06/10/25	16.89	844.35
GW-5	06/06/25	2.0	10	10 to 25	25	858.77	06/10/25	22.21	836.56
GW-6	06/06/25	2.0	10	10 to 25	25	857.79	06/10/25	10.23	847.56
GW-7	06/06/25	2.0	10	10 to 25	25	861.27	06/10/25	7.83	853.44
GW-8	06/09/25	2.0	3	3 to 15	15	848.57	06/10/25	1.06	847.51
GW-9	06/09/25	2.0	3	3 to 15	15	856.26	06/10/25	1.49	854.77
GW-10	06/09/25	2.0	10	10 to 25	25	865.44	06/10/25	17.80	847.64

Notes:

Top-of-casing elevations surveyed by Lawrence Associates on 06/10/25
in = inches
ft bg = feet below grade
ft AMSL = feet above mean sea level
ft BTOC = feet below top-of-casing

TABLE 3: SUMMARY OF SOIL ANALYTICAL DATA
Fortress Wood Products II – Brownfields Assessment Services
1 Metals Drive
Greensboro, Guilford County, North Carolina
Brownfields Project ID No. 28063-24-041
ECS Project No. 49:22413-C

Sample ID	B-1	B-2	B-3	B-4	B-4-C	B-4-D	B-5	B-5-C	B-6	B-7	B-8	B-8-B	B-9	B-10	B-11	B-12	B-13	B-14	B-DUP	BG-1	BG-2	BG-3	WC-1	TX-1	TX-DUP	Protection of Groundwater PSRG	Industrial/ Commercial PSRG
Sample Depth (ft bg)	0-2	0-2	0-2	0-2	0-1	0-1	0-2	0-1	0-2	0-2	0-2	0-1	0-2	0-2	0-2	0-2	0-2	0-2	1-2	1-2	1-2	1-2	1-2	1-2	1-2		
Sample Type	Comp	Comp	Comp	Comp	Grab	Grab	Comp	Grab	Comp	Comp	Comp	Grab	Comp	Comp	Comp	Comp	Comp	Comp	Comp	Grab	Grab	Grab	Grab	Grab	Grab		
Collection Date	6/4/25	6/3/25	6/3/25	6/3/25	6/3/25	6/3/25	6/3/25	6/3/25	6/3/25	6/2/25	6/2/25	6/2/25	6/3/25	6/3/25	6/4/25	6/2/25	6/2/25	6/2/25	6/2/25	6/4/25	6/4/25	6/4/25	6/11/25	6/10/25	6/10/25		
VOCs by EPA 8260																											
Benzene	<0.0026	<0.0024	<0.0032	<0.0024	NA	NA	<0.0023	NA	**0.011**	<0.0024	<0.0021	NA	<0.0032	<0.0019	<0.0028	<0.0039	<0.0028	<0.0028	<0.0024	NA	NA	NA	NA	NA	NA	0.01	5.4
2-Butanone (MEK)	<0.031	<0.029	0.13 J	<0.029	NA	NA	<0.28	NA	<0.034	<0.029	<0.025	NA	<0.039	<0.023	<0.034	<0.047	<0.033	<0.034	<0.029	NA	NA	NA	NA	NA	NA	17	40,000
n-Butylbenzene	0.0049 J	<0.0038	<0.0050	<0.0038	NA	NA	<0.0037	NA	0.0055 J	<0.0039	<0.0033	NA	<0.0051	<0.0031	<0.0045	<0.0062	<0.0044	<0.0044	<0.0038	NA	NA	NA	NA	NA	NA	4.5	12,000
Chloroethane	<0.0050	<0.0047	<0.0062	<0.0046	NA	NA	0.0052 J	NA	<0.0055	<0.0047	<0.0040	NA	<0.0063	<0.0037	<0.0055	0.0077 J	<0.0053	<0.0054	<0.0046	NA	NA	NA	NA	NA	NA	17	4,800
Chloromethane	<0.0054	<0.0051	<0.0067	<0.0050	NA	NA	<0.0049	NA	<0.0060	<0.0051	<0.0043	NA	<0.0068	<0.0041	<0.0060	<0.0083	<0.0058	<0.0059	0.0056 J	NA	NA	NA	NA	NA	NA	0.015	99
Ethylbenzene	0.021	<0.0028	<0.0037	<0.0028	NA	NA	<0.0027	NA	0.018	<0.0028	<0.0024	NA	<0.0038	<0.0023	<0.0033	<0.0046	<0.0032	<0.0033	<0.0028	NA	NA	NA	NA	NA	NA	13	27
Isopropylbenzene (Cumene)	<0.0022	<0.0021	<0.0027	<0.0020	NA	NA	<0.0020	NA	0.0060 J	<0.0021	<0.0018	NA	<0.0028	<0.0017	<0.0024	<0.0034	<0.0023	<0.0024	<0.0020	NA	NA	NA	NA	NA	NA	2.3	2,100
p-Isopropyltoluene	0.0038 J	<0.0030	<0.0039	<0.0029	NA	NA	<0.0029	NA	<0.0035	<0.0030	<0.0025	NA	<0.0040	<0.0024	<0.0035	<0.0049	<0.0034	<0.0035	<0.0029	NA	NA	NA	NA	NA	NA	NE	NE
Methylene Chloride	<0.018	<0.017	<0.022	<0.016	NA	NA	<0.016	NA	<0.020	<0.017	<0.014	NA	<0.022	<0.013	<0.019	<0.027	<0.019	<0.019	<0.016	NA	NA	NA	NA	NA	NA	0.025	650
Naphthalene	0.019	<0.0032	<0.0042	<0.0031	NA	NA	<0.0031	NA	0.039	<0.0032	<0.0027	NA	<0.0043	<0.0026	<0.0037	<0.0052	<0.0036	<0.0037	<0.0032	NA	NA	NA	NA	NA	NA	0.39	8.8
Tetrachloroethene	<0.0020	<0.0019	<0.0025	<0.0019	NA	NA	<0.0018	NA	**0.011**	<0.0019	**0.025**	NA	<0.0026	<0.0015	<0.0022	<0.0031	<0.0022	<0.0022	**0.020**	NA	NA	NA	NA	NA	NA	0.0063	82
Toluene	0.049	<0.0042	<0.0055	<0.0041	NA	NA	<0.0040	NA	0.028	<0.0042	<0.0036	NA	<0.0056	<0.0033	<0.0049	<0.0068	<0.0048	<0.0048	<0.0041	NA	NA	NA	NA	NA	NA	8.3	9,700
1,2,4-Trimethylbenzene	0.028	<0.0036	<0.0047	<0.0035	NA	NA	<0.0034	NA	0.050	<0.0036	<0.0031	NA	<0.0048	<0.0029	<0.0042	<0.0059	<0.0041	<0.0042	<0.0036	NA	NA	NA	NA	NA	NA	12	370
1,3,5-Trimethylbenzene	0.029	<0.0020	<0.0027	<0.0020	NA	NA	<0.0019	NA	0.023	<0.0021	<0.0017	NA	<0.0027	<0.0016	<0.0024	<0.0033	<0.0023	<0.0042	<0.0020	NA	NA	NA	NA	NA	NA	11	320
Xylene (total)	0.18	<0.0034	<0.0046	<0.0034	NA	NA	<0.0033	NA	0.090	<0.0035	<0.0029	NA	<0.0046	<0.0028	<0.0040	<0.0056	<0.0039	<0.0040	<0.0034	NA	NA	NA	NA	NA	NA	9.9	530
m&p-Xylene	0.11	<0.0041	<0.0055	<0.0041	NA	NA	<0.0040	NA	0.061	<0.0042	<0.0035	NA	<0.0056	<0.0033	<0.0049	<0.0068	<0.0047	<0.0048	<0.0041	NA	NA	NA	NA	NA	NA	9.8	500
o-Xylene	0.066	<0.0027	<0.0035	<0.0026	NA	NA	<0.0026	NA	0.028	<0.0027	<0.0023	NA	<0.0036	<0.0021	<0.0031	<0.0044	<0.0031	<0.0031	<0.0026	NA	NA	NA	NA	NA	NA	9.8	590
SVOCs by EPA 8270																											
Benzo(b)fluoranthene	<0.13	<0.14	<0.15	0.15 J	NA	NA	0.17 J	NA	<0.13	<0.13	<0.12	NA	<0.16	<0.13	<0.14	<0.17	<0.15	<0.14	<0.12	NA	NA	NA	NA	NA	NA	1.2	21
Fluoranthene	<0.13	<0.14	0.16 J	0.14 J	NA	NA	0.20 J	NA	<0.13	<0.14	<0.12	NA	<0.16	<0.13	<0.14	<0.17	<0.15	<0.14	<0.12	NA	NA	NA	NA	NA	NA	670	6,000
Phenanthrene	<0.12	<0.13	<0.15	<0.11	NA	NA	0.29 J	NA	<0.13	<0.13	<0.12	NA	<0.15	<0.12	<0.14	<0.16	<0.14	<0.14	<0.12	NA	NA	NA	NA	NA	NA	NE	NE
Pyrene	<0.15	<0.17	<0.19	0.14 J	NA	NA	0.25 J	NA	<0.16	<0.16	<0.15	NA	<0.19	<0.15	<0.17	<0.20	<0.18	<0.17	<0.15	NA	NA	NA	NA	NA	NA	440	4,500
PPL Metals by EPA 6020/7471/7199																											
Antimony	<0.65	<0.66	<0.74	<0.58	<7.1	**25.4**	<0.74	<0.57	<0.72	<0.72	<0.67	<0.54	<0.89	<0.70	<0.74	<0.86	<0.61	<0.75	<0.67	<0.78	<0.73	<0.68	0.322 J	NA	NA	0.90	93
Arsenic	**18.7**	1.7	**4.4**	**6.3**	3.9	**10.4**	1.9	**93.8**	3.6	<0.22	2.1	1.0 J	2.9	1.6	2.40	<0.26	1.2	**6.8**	**4.6**	2.7	2.6	1.50	**39.9**	NA	NA	5.80	3.00
Beryllium	0.26	0.33	0.49	0.47	0.30	0.28	0.32	<0.064	0.19	0.27	0.25	0.13	0.82	0.25	0.30	0.41	0.65	0.22	0.20	0.34	0.26	0.30	0.464 J	NA	NA	63	470
Cadmium	**5.6**	<0.033	**5.2**	0.37	**5.6**	**13.2**	0.38	0.34	**5.7**	<0.036	0.16	<0.027	<0.044	<0.035	<0.037	<0.043	<0.030	<0.038	1.2	<0.039	<0.036	<0.034	0.381 J	NA	NA	3.0	20
Chromium	63.2	32.1	60.1	42.7	45.7	184	43.4	101	29.7	35.8	69.3	16.2	76.4	69.0	42.7	264	54.8	27.7	45.3	23.6	28.0	40.1	91.7	NA	NA	NE	NE
Hexavalent Chromium	<0.19	1.3	0.72 J	<0.17	NA	NA	1.6	NA	0.81 J	0.47 J	<0.18	NA	**3.9**	0.94 J	0.27J	1.5 J	1.30 J	1.4	<0.19	NA	NA	NA	NA	NA	NA	3.8	20
Trivalent Chromium	63.01	30.8	59.4	42.5	NA	NA	41.8	NA	28.9	35.33	69.12	NA	72.5	68.06	42.43	262.5	53.5	26.3	45.1	NA	NA	NA	NA	NA	NA	360,000	3,100,000
Copper	254	42.5	103	52.1	199	**826**	88.5	110	148	54.1	23.1	25.3	73.2	52.8	31.8	82.7	76.0	18.5	62.1	14.3	23.4	28.7	83.7	NA	NA	700	9,300
Lead	**468**	23.6	**427**	17.6	**439**	**2,070**	35.1	20.5	**331**	2.2	14.6	1.1	4.8	8.8	8.7	<0.60	8.4	42.3	58.1	19.2	22.9	8.7	32.3	NA	NA	270	800
Nickel	44.3	15.8	51.6	19.7	45.0	91.0	19.3	11.4	33.1	27.8	6.0	10.1	51.5	15.9	14.9	33.5	43.9	5.9	16.0	7.7	9.3	14.8	24.2	NA	NA	130	4,600
Selenium	<0.64	1.3	**2.1**	**2.2**	1.4	<0.70	<0.73	<0.56	<0.71	1.5	<0.66	<0.53	**7.6**	<0.69	<0.73	<0.85	<0.60	<0.74	<0.66	<0.77	<0.72	<0.68	0.414 J	NA	NA	2.1	1,200
Silver	0.18	<0.048	<0.054	<0.043	0.30	**5.1**	<0.054	<0.042	0.40	<0.053	<0.049	<0.039	<0.065	<0.051	<0.054	<0.063	<0.044	<0.055	<0.049	<0.057	<0.053	<0.050	<0.115	NA	NA	3.4	1,200
Zinc	**1,230**	<9.9	**1,940**	109	1,150	**2,790**	209	85.2	**1,260**	<10.8	<10.1	38.4 J	72.1	<10.5	<11.1	<12.8	<9.1	<11.3	255	<11.7	<10.9	<10.3	120	NA	NA	1,200	70,000
Thallium	<0.22	<0.22	<0.25	<0.20	<0.24	<0.24	<0.25	<0.19	<0.24	<0.24	<0.23	<0.18	<0.30	<0.24	<0.25	<0.29	<0.20	<0.25	<0.23	<0.26	<0.25	<0.23	0.142 J	<0.25	<0.25	2.8	2.3
Mercury	0.26	<0.0049	0.076	0.27	0.76	1.4	0.048	0.030	0.15	<0.0044	0.038	<0.0040	0.015	0.040	0.022	0.037	0.018	0.061	0.12	0.030	0.043	0.020	0.0623	NA	NA	NE	70
PCBs by EPA 8082																											
Targeted Compounds	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	BMDL	BMDL	-	-

Notes:
Results presented in milligrams per Kilogram (mg/Kg)
Compounds not shown were not detected
ft bg = feet below grade
VOC samples were collected as grab samples from the 1-2 foot interval at one boring location within each sampling cell.
B-DUP collected from sample B-8
TX-DUP collected from TX-1
WC-1 collected for waste characterization purposes
J = Value shown is an estimated value. The J values are detected concentrations greater than the method detection limit and less than the laboratory reporting limit
<0.00 = Below the laboratory method detection limit
BMDL = Below laboratory method detection limits
NA = Not Analyzed
NE = No Established Standard
Trivalent chromium concentrations were calculated by subtracting hexavalent chromium concentrations from total chromium concentrations. For purposes of calculation, J-flagged concentrations were assumed to be actual concentrations.
VOCs = Volatile Organic Compounds
SVOCs = Semi-Volatile Organic Compounds
PPL = Priority Pollutant
PCBs = Polychlorinated Biphenyls
PSRG = NCDEQ Preliminary Soil Remediation Goals, January 2025

VALUE	= concentration is greater than the laboratory method detection limits
VALUE	= concentration is greater than the Protection of Groundwater PSRG
VALUE	= concentration is greater than the Industrial/Commercial PSRG
VALUE	= concentration was selected for input into the NCDEQ Risk Calculator to represent "worst case" conditions at the subject property

TABLE 4: SUMMARY OF TCLP SOIL ANALYTICAL DATA
Fortress Wood Products II – Brownfields Assessment
1 Metals Drive
Greensboro, Guilford County, North Carolina
Brownfields Project ID No. 28063-24-041
ECS Project No. 49:22413-C

Sample ID	B-1-TCLP	B-3-TCLP	B-6-TCLP	B-12-TCLP	DUP-TCLP	B-1-A	B-4-C	B-4-D	B-5-C	B-8-B	EPA Title 40 MCCs for Toxicity Characteristic
Sample Depth (ft bg)	0-2	0-2	0-2	0-2	0-2	0-1	0-1	0-1	0-1	0-1	
Sample Type	Comp	Comp	Comp	Comp	Comp	Grab	Grab	Grab	Grab	Grab	
Collection Date	7/9/25	7/9/25	7/9/25	7/9/25	7/9/25	6/4/25	7/9/25	7/9/25	7/9/25	7/9/25	
TCLP RCRA 8 Metals by EPA Method 6010/7470											
Arsenic	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	0.12	<0.10	5
Barium	1.5	2.3	0.62	0.48	0.52	1.9	0.55	0.55	0.86	0.57	100
Cadmium	0.084	0.071	<0.010	<0.010	<0.010	0.072	<0.010	<0.010	<0.010	<0.010	1
Chromium	<0.050	<0.050	<0.050	<0.050	<0.050	<0.050	<0.050	<0.050	<0.050	<0.050	5
Lead	1.2	1.6	<0.10	<0.10	<0.10	0.33	<0.10	0.22	0.65	<0.10	5
Selenium	<0.15	<0.15	<0.15	<0.15	<0.15	<0.15	<0.15	<0.15	<0.15	<0.15	1
Silver	<0.050	<0.050	<0.050	<0.050	<0.050	<0.050	<0.050	<0.050	<0.050	<0.050	5
Mercury	0.0020	0.0021	0.0020	<0.0020	0.0020	<0.0020	<0.0020	<0.0020	<0.0020	0.0027	0.2

Notes:
Results presented in milligrams per liter (mg/L)
TCLP = Toxicity Characteristic Leaching Procedure
RCRA = Resource Conservation and Recovery Act
ft bg = feet below grade
DUP-TCLP collected from B-6-TCLP
<0.00 = Below the laboratory reporting limit
MCCs = Maximum Concentration of Contaminants
Analytical results compared to the EPA Title 40, Chapter I, Subchapter I, Part 261, Subpart C MCCs for the Toxicity Characteristic
VALUE = concentration is greater than the laboratory method detection limits

TABLE 5: SUMMARY OF PFAS SOIL ANALYTICAL DATA
Fortress Wood Products II – Brownfields Assessment
1 Metals Drive
Greensboro, Guilford County, North Carolina
Brownfields Project ID No. 28063-24-041
ECS Project No. 49:22413-C

Sample ID	B-1-P	B-2-P	B-3-P	B-4-P	B-5-P	B-6-P	B-7-P	B-8-P	B-9-P	B-10-P	B-11-P	B-12-P	B-13-P	B-14-P	B-DUP	FB-1-P	FB-2-P	FB-3-P	Protection of Groundwater PSRG	Industrial/ Commercial PSRG
Sample Depth (ft bg)	0-2	0-2	0-2	0-2	0-2	0-2	0-2	0-2	0-2	0-2	0-2	0-2	0-2	0-2	0-2	-	-	-		
Collection Date	6/4/25	6/3/25	6/3/25	6/3/25	6/3/25	6/3/25	6/2/25	6/2/25	6/3/25	6/3/25	6/4/25	6/2/25	6/2/25	6/2/25	6/2/25	6/2/25	6/3/25	6/4/25		
PFAS by EPA Method 1633																				
PFDA (perfluorodecanoic acid)	0.000079 J	<0.000047	<0.000046	<0.000046	<0.000047	<0.000046	<0.000046	<0.00047	<0.000046	<0.000047	<0.000047	<0.000047	<0.000046	<0.000046	<0.000046	<0.39	<0.49	<0.48	NE	0.00033
PFDoA (perfluorododecanoic acid)	0.000079 J	<0.000045	<0.000044	<0.000044	<0.000045	<0.000044	<0.000044	<0.000045	<0.000044	<0.000045	<0.000045	<0.000045	<0.000044	<0.000044	<0.000044	<0.49	<0.49	<0.47	NE	8.2
PFNA (perfluorononanoic acid)	0.000073 J	<0.000056	<0.000056	<0.000055	<0.000056	<0.000056	<0.000055	<0.000057	<0.000056	<0.000056	<0.000056	<0.000056	<0.000056	<0.000056	<0.000056	<0.52	<0.52	<0.51	0.00014	0.49
PFOS (perfluorooctane sulfonic acid)	**0.0013**	<0.000040	**0.00040**	<0.000039	<0.000040	**0.00079**	<0.000039	**0.00029**	<0.000040	**0.00021**	**0.00025**	<0.000040	**0.00046**	<0.000039	**0.001**	<0.39	<0.39	<0.38	0.000013	0.016
PFOA (perfluorooctanoic acid)	**0.00018 J**	<0.000050	<0.000050	<0.000049	<0.000050	<0.000050	<0.000049	<0.000051	<0.000050	<0.000050	**0.00011 J**	<0.000050	**0.00021**	**0.00034**	**0.00027**	<0.48	<0.49	<0.47	0.0000000086	0.000078
PFTrDA (perfluorotridecanoic acid)	0.000044 J	<0.000042	<0.000042	<0.000041	<0.000042	<0.000042	<0.000041	<0.000042	<0.000042	<0.000042	<0.000042	<0.000042	<0.000042	<0.000042	<0.000042	<0.45	<0.45	<0.44	NE	NE
PFUnA (perfluoroundecanoic acid)	0.000076 J	<0.000047	<0.000047	<0.000047	<0.000048	<0.000047	<0.000046	<0.000048	<0.000047	<0.000047	<0.000048	<0.000047	<0.000047	<0.000047	<0.000047	<0.35	<0.35	<0.34	NE	49

Notes:
Results presented in milligrams per Kilogram (mg/Kg)
Compounds not shown were not detected
Field blanks collected as FB-1-P, FB-2-P, and FB-3-P; results presented in nanograms per liter (ng/L)
PFAS = Per- and Polyflouroalkyl Substances
PFUnA acronym is synonymous with PFUDA
ft bg = feet below grade
B-DUP collected from sample B-8-P
J = Value shown is an estimated value. The J values are detected concentrations greater than the method detection limit and less than the laboratory reporting limit.
<0.00 = Below the laboratory method detection limit
NE = No Established Standard
PSRG = NCDEQ Preliminary Soil Remediation Goals, January 2025

VALUE	= concentration is greater than the laboratory method detection limits
VALUE	= concentration is greater than the Protection of Groundwater PSRG
VALUE	= concentration is greater than the Industrial/Commercial PSRG
VALUE	= concentration was selected for input into the NCDEQ Risk Calculator to represent "worst case" conditions at the subject property

TABLE 6: SUMMARY OF GROUNDWATER ANALYTICAL DATA
Fortress Wood Products II – Brownfields Assessment
1 Metals Drive
Greensboro, Guilford County, North Carolina
Brownfields Project ID No. 28063-24-041
ECS Project No. 49:22413-C

	Sample ID	GW-1	GW-2	GW-3	GW-4	GW-5	GW-6	GW-7	GW-8	GW-9	GW-10	DUP-1	EB-1	EB-2	EB-3	TB-1	TB-2	TB-3	NC2LGWQS	Non-Residential GWSL for VI
	Collection Date	6/10/25	6/10/25	6/11/25	6/11/25	6/11/25	6/11/25	6/10/25	6/12/25	6/12/25	6/11/25	6/10/25	6/10/25	6/11/25	6/12/25	6/5/25	6/5/25	6/11/25		
VOCs by EPA Method 8260	Bromomethane	<1.7	<1.7	<1.7	<1.7	1.9 J	<1.7	<1.7	<1.7	<1.7	<1.7	<1.7	<1.7	<1.7	<1.7	<1.7	<1.7	<1.7	10	15
	cis-1,2-Dichloroethene	<0.38	<0.38	<0.38	<0.38	1.4	<0.38	<0.38	<0.38	<0.38	<0.38	<0.38	<0.38	<0.38	<0.38	<0.38	<0.38	<0.38	70	210
	Chloroform	<0.43	<0.43	<0.43	<0.43	<0.43	<0.43	<0.43	<0.43	<0.43	<0.43	<0.43	2.0	1.7	<0.43	<0.43	<0.43	<0.43	70	3.6
	Dichlorodifluoromethane	<0.35	<0.35	<0.35	<0.35	<0.35	<0.35	<0.35	<0.35	<0.35	0.64 J	<0.35	<0.35	<0.35	<0.35	<0.35	<0.35	<0.35	1,000	6.2
	Methyl-tert-butyl ether	<0.42	<0.42	<0.42	<0.42	<0.42	1.8	<0.42	<0.42	<0.42	<0.42	<0.42	<0.42	<0.42	<0.42	<0.42	<0.42	<0.42	20	2,000
	Tetrachloroethene	<0.29	<0.29	<0.29	<0.29	<0.29	<0.29	<0.29	<0.29	<0.29	**8.4**	<0.29	<0.29	<0.29	<0.29	<0.29	<0.29	<0.29	0.7	48
SVOCs by EPA Method 8270	Di-n-butylphthalate	<2.2	<2.2	<2.2	<2.2	<2.2	<2.2	<2.2	<2.2	<2.2	<2.2	2.4 J	<2.2	<2.2	<2.2	NA	NA	NA	700	NE
PPL Metals by EPA Methods 6020/7470	Antimony	<0.50	<0.50	<0.310	<0.310	<0.310	<0.310	<0.50	<0.50	<0.50	<0.310	<0.50	<0.50	<0.310	<0.50	NA	NA	NA	1	NE
	Arsenic	<0.50	1.1	0.170 J	<0.120	0.291 J	<0.120	<0.50	<0.50	<0.50	0.616 J	<0.50	<0.50	<0.120	<0.50	NA	NA	NA	10	NE
	Beryllium	0.12	<0.033	<0.200	<0.200	<0.200	<0.200	0.58	<0.033	<0.033	<0.200	0.57	<0.033	<0.200	<0.033	NA	NA	NA	4	NE
	Cadmium	<0.067	**2.4**	<0.120	<0.120	0.362 J	<0.120	<0.067	<0.067	0.22	<0.120	<0.067	<0.067	<0.120	<0.067	NA	NA	NA	2	NE
	Chromium	7.5	1.4	1.64 J	1.53 J	4.53	2.50	**19.5**	8.4	1.1	4.59	**18.3**	<0.50	<0.900	1.3	NA	NA	NA	10	NE
	Copper	6.7	7.2	2.50 J	1.14 J	2.19 J	0.995 J	16.1	2.6	8.8	1.75 J	16.2	<0.42	<0.700	<0.42	NA	NA	NA	1,000	NE
	Lead	<0.22	2.6	<0.500	<0.500	<0.500	<0.500	<0.22	<0.22	1.5	<0.500	<0.22	<0.22	<0.500	<0.22	NA	NA	NA	15	NE
	Nickel	8.0	13.4	6.47	3.80	19.6	16.8	30.9	2.2	2.0	8.64	32.2	<0.26	<0.500	<0.26	NA	NA	NA	100	NE
	Selenium	<0.20	<0.20	<0.250	0.690 J	0.348 J	<0.250	<0.20	<0.20	<0.20	<0.250	<0.20	<0.20	<0.250	<0.20	NA	NA	NA	20	NE
	Silver	<0.028	<0.028	<0.110	<0.110	<0.110	<0.110	<0.028	<0.028	<0.028	<0.110	<0.028	<0.028	<0.110	<0.028	NA	NA	NA	20	NE
	Zinc	<6.7	565	9.32 J	6.69 J	24.4 J	7.42 J	38.2	<6.7	<6.7	8.01 J	39.2	<6.7	<4.00	<6.7	NA	NA	NA	1,000	NE
	Mercury	<0.14	<0.14	<0.0700	<0.0700	<0.0700	<0.0700	<0.14	<0.14	<0.14	<0.0700	<0.14	<0.14	<0.0700	<0.14	NA	NA	NA	1	NE

Notes:
Results presented in micrograms per Liter (µg/L)
Compounds not shown were not detected
DUP-1 collected from sample GW-7
Equipment blanks collected as EB-1, EB-2, and EB-3
J = Value shown is an estimated value. The J values are detected concentrations greater than the method detection limit and less than the laboratory reporting limit.
BMDL = Below laboratory method detection limits
<0.00 = Below the laboratory method detection limit
NA = Not Analyzed
NE = No Established Standard
VOCs = Volatile Organic Compounds
SVOCs = Semi-Volatile Organic Compounds
PPL = Priority Pollutant Metals
NC2LGWQS = North Carolina 2L Groundwater Quality Standards, dated April 2022
Groundwater Screening Level (GWSL) for Vapor Intrusion (VI), dated January 2025
VALUE = concentration is greater than the laboratory method detection limits
VALUE = concentration is greater than the NC2LGWQS
VALUE = This concentration was selected for input into the NCDEQ Risk Calculator to represent "worst case" conditions at the subject property

TABLE 7: SUMMARY OF PFAS GROUNDWATER ANALYTICAL DATA
Fortress Wood Products II – Brownfields Assessment
1 Metals Drive
Greensboro, Guilford County, North Carolina
Brownfields Project ID No. 28063-24-041
ECS Project No. 49:22413-C

Sample ID	GW-1-P	GW-2-P	GW-3-P	GW-4-P	GW-5-P	GW-7-P	GW-10-P	DUP-1-P	DUP-2-P	EB-1-P	EB-2-P	FB-4-P	FB-5-P	NC2LGWQS
Collection Date	6/10/25	6/10/25	6/11/25	6/11/25	6/11/25	6/10/25	6/11/25	6/10/25	6/11/25	6/10/25	6/11/25	6/10/25	6/11/25	
PFAS by EPA Method 1633														
PFBS (perfluorobutane sulfonic acid)	<0.82	**1.8**	**2.2**	**1.7**	**5.0**	<0.40	1.2 J	<0.83	**1.7**	<0.41	<0.40	<0.40	<0.40	NE
PFHxA (perfluorohexanoic acid)	<0.75	1.5 J	**2.0**	<0.37	**28.7**	<0.37	0.86 J	<0.75	<0.37	<0.37	<0.37	<0.37	<0.37	NE
PFBA (perfluorobutanoic acid)	<3.0	5.5 J	4.5 J	<1.5	**23.3**	<1.5	1.9 J	<3.0	<1.5	<1.5	<1.5	<1.5	<1.5	NE
PFHpS (perfluoroheptane sulfonic acid)	<0.91	0.70 J	<0.46	<0.45	<0.45	<0.45	<0.45	<0.92	<0.45	<0.45	<0.45	<0.44	<0.45	NE
PFPeA (perfluoropentanoic acid)	<1.9	<0.99	1.7 J	<0.91	**22.1**	<0.91	<0.92	<1.9	<0.91	<0.92	<0.91	<0.91	<0.92	NE
PFPeS (perfluoropentane sulfonic acid)	<0.74	1.0 J	0.71 J	0.59 J	**5.7**	<0.36	0.41 J	<0.74	0.38 J	<0.37	<0.36	<0.36	<0.36	NE
PFHpA (perfluoroheptanoic acid)	<1.2	**2.7**	**2.4**	<0.59	**27.4**	<0.59	<0.60	<1.2	<0.59	<0.60	<0.59	<0.58	<0.59	NE
PFHxS (perfluorohexane sulfonic acid)	2.9 J	**3.1**	**6.3**	0.48 J	**10.9**	<0.39	0.84 J	<0.81	0.55 J	<0.40	<0.39	<0.39	<0.39	NE
PFNA (perfluorononanoic acid)	<1.0	1.2 J	<0.52	<0.50	<0.50	<0.50	<0.51	<1.0	<0.50	<0.51	<0.50	<0.50	<0.50	NE
PFOS (perfluorooctane sulfonic acid)	**8.7**	**62.1**	**32.4**	0.44 J	**3.3**	<0.38	**1.9**	<0.77	<0.38	<0.38	0.54 J	<0.37	<0.38	0.7
PFOA (perfluorooctanoic acid)	**3.9**	**15.1**	**27.6**	<0.47	**41.6**	<0.47	**2.6**	<0.96	<0.47	<0.47	0.54 J	<0.46	<0.47	0.001

Notes:
Results presented in nanograms per Liter (ng/L)
Compounds not shown were not detected
Field blanks collected as FB-4-P and FB-5-P
Equipment blanks collected as EB-1-P and EB-2-P
PFAS = Per- and Polyflouroalkyl Substances
DUP-1-P collected from sample GW-7-P
DUP-2-P collected from sample GW-4-P
J = Value shown is an estimated value. The J values are detected concentrations greater than the method detection limit and less than the laboratory reporting limit (RL). Estimated concentrations are not considered to be a violation of the NC2LGWQS.
For non-naturally occurring substances for which numeric groundwater standards have not been established, detections above the laboratory RL are considered to be a violation of North Carolina Groundwater Standards per 15A NCAC 02L .0202(c).
<0.00 = Below the laboratory method detection limit
NE = No Established Standard
NC2LGWQS = North Carolina 2L Groundwater Quality Standards dated November 1, 2025

VALUE	= concentration is greater than the laboratory method detection limits
VALUE	= concentration is greater than the NC2LGWQS or laboratory RL for which groundwater standards have not been established
VALUE	= concentration was selected for input into the NCDEQ Risk Calculator to represent "worst case" conditions at the subject property

TABLE 8: SUMMARY OF SURFACE WATER ANALYTICAL DATA

Fortress Wood Products II – Brownfields Assessment
1 Metals Drive
Greensboro, Guilford County, North Carolina
Brownfields Project ID No. 28063-24-041
ECS Project No. 49:22413-C

	Sample ID	SW-1	SW-2	SW-3	SW-DUP	TB-4	SW-1	SW-2	SW-3	SW-DUP
	Collection Date	12/5/25	12/5/25	12/5/25	12/5/25	11/25/25	NCAC 2B Surface Water Standards			
PPL Metals by EPA Methods 6020/7470	Antimony	0.318 J	<0.310	0.364 J	0.364 J	NA	5,300 - Class C Waters			
	Arsenic	0.456 J	0.557 J	0.292 J	0.290 J	NA	10 - Class WS Waters			
	Calcium	20,600	12,100	7,490	7,900	NA	NE			
	Chromium	0.980 J	1.33 J	1.05 J	1.42 J	NA	71.8*	44.27*	23.34*	24.44*
	Copper	3.50 J	**8.30**	**5.89**	**6.21**	NA	8.66*	5.23*	2.68*	2.81*
	Lead	<0.500	0.843 J	**0.764 J**	**1.13 J**	NA	2.41*	1.26*	0.53*	0.56*
	Magnesium	10,900	5,600	1,380	1,470	NA	NE			
	Nickel	1.05 J	1.94 J	1.08 J	1.36 J	NA	50.33*	30.54*	15.77*	16.53*
	Zinc	9.98 J	19.4 J	29.1	29.4	NA	114.32*	69.32*	35.75*	37.49*
Hardness by Standard Method 2340	Hardness	96,200	53,300	24,400	25,800	NA	-	-	-	-
VOCs by EPA Method 8260	Targeted Compounds	BMDL	BMDL	BMDL	BMDL	BMDL	-	-	-	-
SVOCs by EPA Method 8270	Targeted Compounds	BMDL	BMDL	BMDL	BMDL	NA	-	-	-	-

Notes:
Results presented in micrograms per Liter (µg/L)
Compounds not shown were not detected
SW-DUP collected from sample SW-3
J = Value shown is an estimated value. The J values are detected concentrations greater than the method detection limit and less than the laboratory reporting limit.
<0.00 = Below the laboratory method detection limit
BMDL = Below laboratory method detection limits
NA = Not Analyzed
NE = No Established Standard
VOCs = Volatile Organic Compounds
SVOCs = Semi-Volatile Organic Compounds
PPL = Priority Pollutant Metals
* = calculated chronic value based on hardness of the corresponding collected sample

VALUE	= concentration is greater than the laboratory method detection limits
VALUE	= concentration is greater than the calculated chronic NCAC 2B Standard based on the hardness of the corresponding collected sample
VALUE	= This concentration was selected for input into the NCDEQ Risk Calculator to represent "worst case" conditions at the subject property

TABLE 9: SUMMARY OF PFAS SURFACE WATER ANALYTICAL DATA
Fortress Wood Products II – Brownfields Assessment
1 Metals Drive
Greensboro, Guilford County, North Carolina
Brownfields Project ID No. 28063-24-041
ECS Project No. 49:22413-C

Sample ID	SW-1-P	SW-2-P	SW-3-P	SW-DUP-P	EB-3-P	FB-6-P	15A NCAC 2B Surface Water Standards
Collection Date	12/5/25	12/5/25	12/5/25	12/5/25	12/5/25	12/5/25	
PFAS by EPA Method 1633							
PFBS (perfluorobutane sulfonic acid)	**2.8**	**2.7**	**3.4**	**3.2**	<1.2	<1.2	NE
PFHxA (perfluorohexanoic acid)	**3.2**	**9.3**	**5.7**	**5.8**	<0.24	<0.23	NE
PFBA (perfluorobutanoic acid)	<0.95	**17**	**14**	**9.6**	<0.94	<0.93	NE
PFDA (perfluorodecanoic acid)	<0.49	0.70 J	0.51 J	<0.49	<0.49	<0.48	NE
PFPeA (perfluoropentanoic acid)	**3.8**	**12**	**7.5**	**6.9**	<0.44	<0.43	NE
PFHpA (perfluoroheptanoic acid)	1.5 J	**4.0**	**2.0**	**1.9**	<0.32	<0.31	NE
PFHxS (perfluorohexane sulfonic acid)	1.5 J	**1.9**	1.1 J	0.87 J	<0.70	<0.69	NE
PFNA (perfluorononanoic acid)	0.66 J	**1.6**	1.1 J	0.86 J	<0.60	<0.59	NE
PFOS (perfluorooctane sulfonic acid)	**6.0**	**11**	**5.2**	**5.2**	<0.54	<0.53	NE
PFOA (perfluorooctanoic acid)	**5.6**	**13**	**4.1**	**3.7**	<0.73	<0.71	NE

Notes:
Results presented in nanograms per Liter (ng/L)
Compounds not shown were not detected
SW-DUP-P collected from SW-3-P
Equipment blank collected as EB-3-P
Field blank collected as FB-6-P
PFAS = Per- and Polyflouroalkyl Substances
Surface water standards do no exist for PFAS compounds. The surface water analytical data is being compared to the 15A NCAC 2B Surface Water Standards for PFAS.
J = Value shown is an estimated value. The J values are detected concentrations greater than the method detection limit and less than the laboratory reporting limit (RL).
<0.00 = Below the laboratory method detection limit
NE = No Established Standard
15A NCAC 2B Surface Water Standards = North Carolina Administrative Code 2B Surface Water Standards dated November 1, 2025

VALUE	= concentration is greater than the laboratory method detection limits
VALUE	= concentration is greater than the laboratory RL for which surface water standards have not been established
VALUE	= concentration was selected for input into the NCDEQ Risk Calculator to represent "worst case" conditions at the subject property

TABLE 10: SUMMARY OF SEDIMENT ANALYTICAL DATA
Fortress Wood Products II – Brownfields Assessment Services
1 Metals Drive
Greensboro, Guilford County, North Carolina
Brownfields Project ID No. 28063-24-041
ECS Project No. 49:22413-C

Sample ID	SS-1	SS-2	SS-3	SS-DUP	Industrial/Commercial PSRG
Sample Depth (ft bg)	1	1	1	1	
Sample Type	Grab	Grab	Grab	Grab	
Collection Date	12/5/25	12/5/25	12/5/25	12/5/25	
VOCs by EPA 8260					
p-Isopropyltoluene	<0.0037	0.0094	<0.0034	<0.0034	240
PPL Metals by EPA 6020/7471/7199					
Antimony	<0.232	0.232 J	<0.230	<0.207	93
Arsenic	**3.25**	2.90	1.44	0.855	3.00
Beryllium	0.304 J	0.313 J	0.571 J	0.329 J	470
Cadmium	<0.128	<0.125	<0.127	<0.115	20
Chromium	47.2	54.7	64.2	56.6	NE
Hexavalent Chromium	1.9	2.6	1.7	1.0 J	20
Trivalent Chromium	45.3	52.1	62.5	55.6	3,100,000
Copper	15.8	32.5	21.4	19.3	9,300
Lead	5.27	8.27	9.04	7.71	800
Nickel	4.30	5.85	15.6	14.7	4,600
Selenium	0.344 J	0.268 J	0.962	0.806	1,200
Silver	<0.108	<0.105	<0.107	<0.0961	1,200
Zinc	29.4	31.6	18.3	15.1	70,000
Thallium	<0.155	<0.152	<0.155	<0.139	2.3
Mercury	<0.0262	<0.0267	<0.0273	<0.0260	70
SVOCs by EPA 8270					
Targeted Compounds	BMDL	BMDL	BMDL	BMDL	-

Notes:
Results presented in milligrams per Kilogram (mg/Kg)
Compounds not shown were not detected
ft bg = feet below grade
SS-DUP collected from sample SS-3
J = Value shown is an estimated value. The J values are detected concentrations greater than the method detection limit and less than the laboratory reporting limit
<0.00 = Below the laboratory method detection limit
BMDL = Below laboratory method detection limits
NE = No Established Standard
Trivalent chromium concentrations were calculated by subtracting hexavalent chromium concentrations from total chromium concentrations.
For purposes of calculation, J-flagged concentrations were assumed to be actual concentrations.
VOCs = Volatile Organic Compounds
SVOCs = Semi-Volatile Organic Compounds
PPL = Priority Pollutant
PSRG = NCDEQ Preliminary Soil Remediation Goals, January 2025

VALUE	= concentration is greater than the laboratory method detection limits
VALUE	= concentration is greater than the Industrial/Commercial PSRG

TABLE 11: SUMMARY OF PFAS SEDIMENT ANALYTICAL DATA
Fortress Wood Products II – Brownfields Assessment
1 Metals Drive
Greensboro, Guilford County, North Carolina
Brownfields Project ID No. 28063-24-041
ECS Project No. 49:22413-C

Sample ID	SS-1-P	SS-2-P	SS-3-P	SS-DUP-P	Industrial/Commercial PSRG
Sample Depth (ft bg)	0.5	0.5	0.5	0.5	
Collection Date	12/5/25	12/5/25	12/5/25	12/5/25	
PFAS by EPA Method 1633					
PFOS (perfluorooctane sulfonic acid)	<0.000041	<0.000041	0.00017 J	0.00016 J	0.016
PFOA (perfluorooctanoic acid)	<0.000036	<0.000036	**0.000093 J**	**0.00011 J**	0.000078

Notes:
Results presented in milligrams per Kilogram (mg/Kg)
Compounds not shown were not detected
ft bg = feet below grade
SS-DUP-P collected from sample SS-3-P
PFAS = Per- and Polyflouroalkyl Substances
J = Value shown is an estimated value. The J values are detected concentrations greater than the method detection limit and less than the laboratory reporting limit.
<0.00 = Below the laboratory method detection limit
PSRG = NCDEQ Preliminary Soil Remediation Goals, January 2025

VALUE	= concentration is greater than the laboratory method detection limits
VALUE	= concentration is greater than the Industrial/Commercial PSRG

TABLE 12: SUMMARY OF SOIL VAPOR ANALYTICAL DATA
Fortress Wood Products II – Brownfields Assessment
1 Metals Drive
Greensboro, Guilford County, North Carolina
Brownfields Project ID No. 28063-24-041
ECS Project No. 49:22413-C

Sample ID	SV-1	SV-2	SV-3	SV-DUP	Non-Residential VISL
Initial Sample Vacuum Reading (in Hg)	-29	-28	-28	-27	
Final Sample Vacuum Reading (in Hg)	-5	-5	-5	-5	
Collection Date	12/5/25	12/5/25	12/5/25	12/5/25	
VOCs by EPA Method TO-15					
Acetone	9.43	32.6	8.39	9.36	NE
Benzene	4.09	85.6	0.757	3.64	160
2-Butanone	1.21 J	3.72	1.25 J	1.18 J	440,000
Carbon Disulfide	5.82	21.5	2.77	2.59	61,000
Carbon Tetrachloride	0.693 J	<0.470	<0.470	0.549 J	200
Chloroform	3.52	<0.506	<0.506	2.88	53
Chloromethane	0.494	<0.227	<0.227	0.601	7,900
Cyclohexane	1.79	43.0	<0.585	1.62	530,000
Dichlorodifluoromethane	2.94	25.6	851	2.97	8,800
1,1-Dichloroethane	<0.285	1.31	<0.285	<0.285	770
1,1-Dichloroethene	<0.296	11.6	<0.296	<0.296	350
cis-1,2-Dichloroethene	<0.315	106	<0.315	<0.315	3,500
Ethanol	<4.47	5.56	8.20	4.90	NE
Ethylbenzene	1.47	9.15	0.416 J	1.26	490
4-Ethyltoluene	<0.435	7.21	<0.435	<0.435	NE
Heptane	15.3	105	2.49	13.5	35,000
Hexane	24.5	150	3.56	21.7	61,000
2-Hexanone	<0.544	<0.544	<0.544	1.10 J	2,600
Isopropylbenzene	<0.355	4.92	<0.355	<0.355	35,000
Methylene Chloride	1.16	<0.587	0.642 J	1.23	53,000
4-Methyl-2-pentanone	<0.434	<0.434	0.446 J	<0.434	260,000
Styrene	<0.341	<0.341	0.434 J	<0.341	88,000
1,1,1-Trichloroethane	<0.391	<0.391	0.908 J	<0.391	440,000
1,1,2-Trichlorotrifluoroethane	1.46 J	11.2	4.28	1.26 J	440,000
1,2,4-Trimethylbenzene	1.27	25.7	<0.455	1.16	5,300
1,3,5-Trimethylbenzene	0.510 J	10.8	<0.419	0.452 J	5,300
2,2,4-Trimethylpentane	4.67	234	1.44	4.23	NE
Tetrachloroethene	11.3	208	228	10.8	3,500
Trichloroethene	0.424 J	37.1	0.438 J	0.430 J	180
Toluene	8.59	20.7	5.57	7.61	440,000
trans-1,2-Dichloroethene	<0.291	3.62	<0.291	<0.291	3,500
Trichlorofluoromethane	87.7	5.31	40.2	67.4	NE
Vinyl Chloride	<0.211	**1,010**	<0.211	<0.211	280
Total Xylenes	5.25	34.0	1.09 J	4.32	8,800

Notes:
Results presented in micrograms per cubic meter (µg/m3)
Compounds not shown were not detected
in Hg = Inches of mercury
SV-DUP collected from SV-1
VISL = Vapor Intrusion Screening Level
NE = No Established Standard
J = Value shown is an estimated value. The J values are detected concentrations greater than the method detection limit and less than the laboratory reporting limit
<0.00 = Less than the laboratory method reporting limit
Total Xylenes = sum of m,p xylenes and o-xylenes
Concentrations presented in the table are compared to the NCDEQ VISL Calculations, dated January 2025

VALUE	= concentration greater than laboratory method reporting limit
VALUE	= concentration greater than the Non-Residential VISL
VALUE	= concentration selected for input into the NCDEQ Risk Calculator to represent "worst case" conditions at the subject property

APPENDIX A

Guilford County Water Supply Well Abandonment Letter

Environmental Health Division Water Quality Section
400 W Market St.
Greensboro, NC 27401
(336) 641-7613

Permit #: 25-11-WAHC-00035

December 11, 2025

Shaun Brown
PO Box 4991
Martinsville, VA 24115

Ref: 1 METALS DR GREENSBORO, NC 27407

Dear Shaun Brown,

This letter certifies that to the best of my knowledge, the abandonment of the well at the property as referenced above, was abandoned according to the Guilford County Well Rules. The record of construction has been received and the well contractor has certified that all work was done in accordance with the aforementioned rules.

The well permitting, inspecting, and sampling programs and policies of the Guilford County Department of Health and Human Services are designed to document that the aforementioned rules are complied with in order to protect the public health and groundwater resources in Guilford County. Such programs and policies do not guarantee potable water quality or adequate water quantity in any well.

If you have any questions concerning well rules, the record submitted by your contractor, or how to test or treat your water, please do not hesitate to contact us.

Sincerely,

REHS - I

Environmental Health Specialist

CC: Property File

APPENDIX B

Photo Documentation

Photo 1: View facing southeast of Quantex Drilling setup at B-14-D on 6/2/2025.

Photo 2: View facing northeast of KCI conducting private utility locate on 6/2/2025.

PHOTO DOCUMENTATION

Fortress Wood Products II
1 Metals Drive
Greensboro, Guilford County, NC
ECS Project No. 49:24413-C

Photo 3: View facing southeast of Quantex Drilling setup at B-11-B on 6/4/2025.

Photo 4: View facing southeast of Quantex Drilling completing the installation of GW-2 on 6/5/2025.

PHOTO DOCUMENTATION		Fortress Wood Products II 1 Metals Drive Greensboro, Guilford County, NC ECS Project No. 49:24413-C

Photo 5: View facing southwest of Quantex Drilling setup at GW-10 for installation on 6/9/2025.

Photo 6: View facing south of monitoring well development at GW-6 on 6/9/2025.

Photo 7: View of sampling activities following low-flow at GW-7 on 6/10/2025.

Photo 8: View facing northwest of low-flow sampling activities at GW-10 on 6/11/2025.

PHOTO DOCUMENTATION		Fortress Wood Products II 1 Metals Drive Greensboro, Guilford County, NC ECS Project No. 49:24413-C

Photo 9: View facing north of hand auger advancement at WC-1 on 6/11/2025.

Photo 10: View of hand auger advancement in Cell B-3 for TCLP soil sampling on 7/9/2025.

PHOTO DOCUMENTATION		Fortress Wood Products II 1 Metals Drive Greensboro, Guilford County, NC ECS Project No. 49:24413-C

Photo 11: View facing northwest of soil vapor location SV-3 following installation on 12/4/2025.

Photo 12: View facing north of soil vapor location SV-2 during helium leak testing on 12/5/2025.

PHOTO DOCUMENTATION		Fortress Wood Products II 1 Metals Drive Greensboro, Guilford County, NC ECS Project No. 49:24413-C

Photo 13: View of surface water sampling at SW-3 (up-gradient location) on 12/5/2025.

Photo 14: View of sediment sampling at SS-2 (mid-stream location) on 12/5/2025.

APPENDIX C

Well Permit Information, Boring Logs, & Well Construction Records

400 W. Market St. Suite 300
Greensboro, NC 27401

June 6, 2025

Riverside Construction Materials
Attn.: James Graf
355 Newbold Rd
Fairless Hills, PA 19030

SUBJECT: MONITOR WELL CONSTRUCTION
PERMIT #: 2025-06-06-MW10-RW0
GUILFORD COUNTY
INCIDENT NUMBER: N/A
SITE NAME: Fortress Wood Products II

In accordance with your application received on June 3, 2025, we are forwarding herewith Permit # 2025-06-06-MW10-RW0 for the construction of ten (10) monitoring, air injection, air sparging, and/or recovery well.

Henceforth, correspondence and data relating to this well shall be designated as specified in the subject heading.

This Permit will be effective from the date of its issuance and must be renewed annually. Associated with the renewal of the permit is an annual fee. Any additional wells installed at the site in excess of the number permitted above requires that a ***new application be submitted*** so that the permit may be amended to reflect the correct number of wells on the site. **Upon completion of well installation, a well construction record must be completed for *each* well with GPS coordinates for each.** This Permit shall be subject to the conditions and limitations specified therein.

Sincerely,

Megan Cruz

Megan Cruz
Administrative Assistant I
Environmental Health

cc: Permit File

GUILFORD COUNTY

DIVISION OF ENVIRONMENTAL HEALTH

GROUNDWATER MONITORING WELL, AIR INJECTION WELL, AIR SPARGING WELL, AND/OR RECOVERY WELL PERMIT

In accordance with the provisions of the Guilford County Well Rules,

PERMISSION IS HEREBY GRANTED TO

Fortress Wood Products II

FOR THE CONSTRUCTION OF ten (10) monitoring, air injection, air sparging, and/or recovery well located at 1 Metals Drive, Greensboro, North Carolina, in Guilford County. Permission is granted in accordance with the application dated May 30, 2025, and in conformity with the specifications and supporting data, of which are filed with the Guilford County Health Department, Division of Environmental Health, which are considered a part of this Permit.

This Permit is for well construction only and does not waive any provisions or requirements or any other applicable laws or regulations.

Construction of wells under this Permit shall be in compliance with the Guilford County, Well Rules and any other laws and regulations pertaining to well construction.

This Permit will be effective from the date of its issuance until the site assessment and/or remediation has been completed, and shall be subject to other specified conditions, limitations or exceptions as follows:

1. Written permission must be obtained from the property owner prior to construction of the well(s).

2. A permanent identification plate with the date of construction, depth of well, screen interval, and depth of grout, drilling contractor, and his registration number shall be attached to each wellhead or the outer protective steel casing.

3. The well construction completion form(s), GPS coordinates for each well, and all water quality data are to be submitted to the Guilford County Division of Environmental Health, 400 W. Market Street, Suite 300, Greensboro, North Carolina, 27401 to the attention of HERA Program.

4. All laboratory analyses of groundwater samples collected from the permitted well(s) are to be submitted to the Guilford County Division of Environmental Health, 400 W. Market Street, Suite 300, Greensboro, North Carolina, 27401 to the attention of HERA Program.

5. All additional investigative findings in relation to the pollution sources being monitored, as indicated under Item #9 of the permit application, are to be submitted to the Guilford County Division of Environmental Health, 400 W. Market Street, Suite 300, Greensboro, North Carolina, 27401. Please submit all findings to the attention of HERA Program within sixty days (60) of well completion, and quarterly thereafter.

6. The well(s) shall be afforded a means of protection against vandalism, damage, or unauthorized use.

7. When any well is no longer useful for its intended purpose, it shall be abandoned in compliance with the Guilford County Well Rules a well abandonment form should be sent to the Guilford County Division of Environmental Health, 400 W. Market Street, Suite 300, Greensboro, North Carolina, 27401 to the attention of Megan Cruz or via email mcruz@guilfordcountync.gov.

8. If additional wells, not included on original application need to be constructed, a new application must be submitted, so that the Permit may be amended.

Permit issued June 6, 2025
FOR THE GUILFORD COUNTY DIVION OF ENVIRONMENTAL HEALTH

Megan Cruz

Megan Cruz
Environmental Health

By Authority of the Guilford County Division of Environmental Health
Permit # 2025-06-06-MW10-RW0

JOSH STEIN
Governor
D. REID WILSON
Secretary
RICHARD E. ROGERS, JR.
Director

NORTH CAROLINA
Environmental Quality

Delivered electronically via email to: Emery Lovekamp elovekamp@ecslimited.com

May 30, 2025

James Graf
Email: jgraf@silvi.com
Riverside Construction Materials
355 Newbold Road
Fairless Hills, PA 19030

SUBJECT: ***MONITORING WELL CONSTRUCTION***
PERMIT NO. WM0401617
COUNTY: GUILFORD
FILE NAME: 1 METALS DRIVE

Dear Mr. James Graf:

In accordance with your application received on May 29, 2025, we are forwarding herewith:

1. Monitoring Well Construction Permit No. WM0401617 for the construction of ten (10) monitoring wells at 1 Metals Drive, Greensboro, North Carolina in Guilford County.

Henceforth, correspondence and data relating to this well shall be designated as specified in the subject heading above. This Permit will be effective from the date of issuance and shall be subject to the conditions and limitations as specified therein. If you have any questions regarding this permit, please contact me at (336) 776-9800.

Sincerely,

DocuSigned by:
Jennifer F. Graznak
0D2D3CE3F1B7456...

Jennifer F. Graznak
Assistant Regional Supervisor
Water Quality Regional Operations Section
Division of Water Resources, NCDEQ – WSRO

cc: Andrew Palmer apalmer@lestergroup.com

NORTH CAROLINA
DEPARTMENT OF ENVIRONMENTAL QUALITY
DIVISION OF WATER RESOURCES – WATER QUALITY REGIONAL OPERATIONS SECTION

PERMIT FOR THE CONSTRUCTION OF A MONITORING WELL

In accordance with the provisions of Article 7, Chapter 87, North Carolina General Statutes, and other applicable Laws, Rules and Regulations.

PERMISSION IS HEREBY GRANTED TO

Riverside Construction Materials

FOR THE CONSTRUCTION OF A MONITOR WELL SYSTEM consisting of ten (10) monitoring wells owned by Riverside Construction Materials. The wells will be located at 1 Metals Drive in Greensboro, North Carolina in Guilford County. This Permit is issued in accordance with the application received on May 29, 2025 in conformity with specifications and supporting data, all of which are filed with the Department of Environmental Quality and are considered integral parts of this Permit.

This Permit is for **well construction only**, and does not waive any provision or requirement of any other applicable law or regulation. Construction of any well under this Permit shall be in strict compliance with the North Carolina Well Construction Regulations and Standards (15A NCAC 02C .0100), and other State and Local Laws and regulations pertaining to well construction.

If any requirements or limitations specified in this Permit are unacceptable, you have a right to an adjudicatory hearing upon written request within 30 days of receipt of this Permit. The request must be in the form of a written petition conforming to Chapter 150B of the North Carolina General Statutes and filed with the Office of Administrative Hearings, 6714 Mail Service Center, Raleigh, North Carolina 27699-6714. Unless such a demand is made, this Permit is final and binding.

This Permit will be effective for one year from the date of its issuance and shall be subject to other specified conditions, limitations, or exceptions as follows:

1. Issuance of this Permit does not obligate reimbursement from State trust funds, if these wells are being installed as part of an investigation for contamination from an underground storage tank or dry cleaner incident.
2. Issuance of this Permit does not supersede any other agreement, permit, or requirement issued by another agency.
3. The well(s) shall be located and constructed as shown on the attachments submitted as part of the Permit application.
4. Each well shall have a Well Contractor Identification Plate in accordance with 15A NCAC 02C .0108(o).

5. Well construction records (GW-1) for each well shall be submitted to the Division of Water Resources' Information Processing Unit within 30 days of the well completion.
6. When the well is discontinued or abandoned, it shall be abandoned in accordance with 15A NCAC 02C .0113 and a well abandonment record (GW-30) shall be submitted to the Division of Water Resources' Information Processing Unit within 30 days of the well abandonment.
7. The County Health Department may require a county monitoring well construction permit. Please contact the health department for their requirements.

Permit issued the 30th day of May, 2025

FOR THE NORTH CAROLINA ENVIRONMENTAL MANAGEMENT COMMISSION

DocuSigned by:
Jennifer F. Graznak
0D2D3CE3F1B7456...

Jennifer F. Graznak, Assistant Regional Supervisor
Water Quality Regional Operations Section
Division of Water Resources, NCDEQ - WSRO

By Authority of the Environmental Management Commission

Permit No. # WM0401617

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**B-1-A**	**1 OF 1**
PROJECT NAME:	SITE LOCATION:		
Fortress Wood Products II - Brownfields Assessment	**1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE:	LONGITUDE:	STATION:	SURFACE ELEVATION:
36.015928	**-79.899836**		**850.89**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.6	B-1-TCLP (TCLP RCRA)				ML	(ML) CLAYEY SILT - gray brown, moist.
1	850.0							
		0.9					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/04/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/04/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-1-B**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.015842**	LONGITUDE: **-79.899836**	STATION:	SURFACE ELEVATION: **851.72**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		2.2					ML	(ML) CLAYEY SILT - gray, moist.
1								
		0.3					ML	(ML) CLAYEY SILT - gray brown, moist.
	850.0							
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/04/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/04/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-1-C**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.015892**	LONGITUDE: **-79.899975**	STATION:	SURFACE ELEVATION: **853.96**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		11.8					ML	(ML) SANDY SILT - gray brown, moist.
1								
		0.8					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/04/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/04/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-1-D**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.015711**	LONGITUDE: **-79.900175**	STATION:	SURFACE ELEVATION: **856.89**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		10.8					ML	(ML) SILTY SAND - gray brown, moist.
1								
		11.9	B-1-D (VOCs)				ML	As above.
	855.0							
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/04/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/04/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-1-E**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.015592**	LONGITUDE: **-79.900097**	STATION:	SURFACE ELEVATION: **858.84**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
1		0.7					ML	(ML) SILTY SAND - brown, moist.
		0.2					ML	(ML) SILT - light brown, moist.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/04/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/04/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-2-A**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.015547**	LONGITUDE: **-79.900353**	STATION:	SURFACE ELEVATION: **859.07**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.5					ML	(ML) CLAYEY SILT - light brown.
1								
		1.0					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-2-B**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.015408**	LONGITUDE: **-79.900081**	STATION:	SURFACE ELEVATION: **860.48**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
	860.0	0.6					ML	(ML) CLAYEY SILT - dark brown.
1		1.3	B-2-B (VOCs)				ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-2-C**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.015383**	LONGITUDE: **-79.900294**	STATION:	SURFACE ELEVATION: **858.92**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.4					ML	(ML) SILT - light brown.
1		0.5					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-2-D**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.015392**	LONGITUDE: **-79.900539**	STATION:	SURFACE ELEVATION: **857.58**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
1		1.2					ML	(ML) CLAYEY SILT - light brown.
		1.0					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-2-E**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.015075**	LONGITUDE: **-79.900150**	STATION:	SURFACE ELEVATION: **859.8**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
1		1.0					ML	(ML) SILT - red brown.
		1.1					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-3-A**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.015281**	LONGITUDE: **-79.900650**	STATION:	SURFACE ELEVATION: **856.86**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.6					ML	(ML) SILT - dark brown.
1								
		0.8					ML	As above.
	855.0							
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**B-3-B**	**1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014981**	LONGITUDE: **-79.900833**	STATION:	SURFACE ELEVATION: **859.4**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.4					ML	(ML) CLAYEY SILT - red brown.
1								
		0.4					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**B-3-C**	**1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.015036**	LONGITUDE: **-79.900628**	STATION:	SURFACE ELEVATION: **858.07**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.4					ML	(ML) CLAYEY SILT - red brown.
1		0.3					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**B-3-D**	**1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014817**	LONGITUDE: **-79.901131**	STATION:	SURFACE ELEVATION: **860.5**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
	860.0	0.7					ML	(ML) CLAYEY SILT - dark brown.
1								
		0.3					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-3-E**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014725**	LONGITUDE: **-79.900886**	STATION:	SURFACE ELEVATION: **861.09**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.8					ML	(ML) CLAYEY SILT - red brown.
1	860.0	0.9	B-3-E (VOCs)				ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-4-A**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014964**	LONGITUDE: **-79.900394**	STATION:	SURFACE ELEVATION: **859.2**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.6					ML	(ML) SILT - dark brown.
1		0.4					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-4-B**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014836**	LONGITUDE: **-79.899939**	STATION:	SURFACE ELEVATION: **860.74**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
	860.0	0.5					ML	(ML) CLAYEY SILT - red brown.
1		0.5					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**B-4-C**	**1 OF 1**

PROJECT NAME:	SITE LOCATION:
Fortress Wood Products II - Brownfields Assessment	**1 Metals Drive, Greensboro, North Carolina, 27407**

LATITUDE:	LONGITUDE:	STATION:	SURFACE ELEVATION:
36.014689	**-79.900408**		**860.31**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
	860.0	0.6	B-4-C (TCLP RCRA)				ML	(ML) CLAYEY SILT - light brown.
1		0.6					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-4-D**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014517**	LONGITUDE: **-79.900533**	STATION:	SURFACE ELEVATION: **860.84**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
1	860.0	0.5	B-4-D (TCLP RCRA)				ML	(ML) SANDY SILT - gray.
		0.5					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-4-E**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014417**	LONGITUDE: **-79.900314**	STATION:	SURFACE ELEVATION: **865.09**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
	865.0	0.1					ML	(ML) SANDY SILT - gray.
1		0.9	B-4-E (VOCs)				ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-5-A**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014461**	LONGITUDE: **-79.899961**	STATION:	SURFACE ELEVATION: **864.65**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.3					ML	(ML) CLAYEY SILT - red brown.
1		0.3					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-5-B**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014264**	LONGITUDE: **-79.900300**	STATION:	SURFACE ELEVATION: **865.32**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
	865.0	0.3					ML	(ML) CLAYEY SILT - red brown.
1		0.3					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-5-C**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014108**	LONGITUDE: **-79.900131**	STATION:	SURFACE ELEVATION: **865.48**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
	865.0	0.4	B-5-C (TCLP RCRA)				ML	(ML) SANDY SILT - light brown.
1		0.4					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-5-D**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013942**	LONGITUDE: **-79.900228**	STATION:	SURFACE ELEVATION: **862.75**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
1		0.2					ML	(ML) CLAYEY SILT - red brown.
		0.9	B-5-D (VOCs)				ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-5-E**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013822**	LONGITUDE: **-79.900014**	STATION:	SURFACE ELEVATION: **863.09**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.3					ML	(ML) CLAYEY SILT - red brown.
1		0.3					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-6-A**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014633**	LONGITUDE: **-79.901278**	STATION:	SURFACE ELEVATION: **861.63**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.7					ML	(ML) CLAYEY SILT - dark brown.
1								
		1.9	B-6-A (VOCs)				ML	As above.
	860.0							
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-6-B**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		

LATITUDE: **36.014389**	LONGITUDE: **-79.901208**	STATION:	SURFACE ELEVATION: **862.73**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
1		0.5					ML	(ML) CLAYEY SILT - red brown.
		1.5					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-6-C**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014481**	LONGITUDE: **-79.901428**	STATION:	SURFACE ELEVATION: **862.36**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.5					ML	(ML) SANDY SILT - light brown.
1								
		1.5					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-6-D**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014139**	LONGITUDE: **-79.901417**	STATION:	SURFACE ELEVATION: **862.22**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		1.2					ML	Lithology not recorded.
1								
		1.7					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-6-E**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014225**	LONGITUDE: **-79.901708**	STATION:	SURFACE ELEVATION: **862.53**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		1.0					ML	(ML) SANDY SILT - dark brown.
1								
		1.2					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-7-A**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014475**	LONGITUDE: **-79.900811**	STATION:	SURFACE ELEVATION: **861.41**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.9					ML	(ML) CLAYEY SILT - red brown.
1								
	860.0	2.6					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-7-B**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014281**	LONGITUDE: **-79.900486**	STATION:	SURFACE ELEVATION: **863.87**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
1		2.1					ML	(ML) SANDY SILT - light brown.
		2.2					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-7-C**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014183**	LONGITUDE: **-79.900978**	STATION:	SURFACE ELEVATION: **860.98**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		10.6					ML	(ML) SANDY SILT - gray.
1	860.0							
		10.9	B-7-C (VOCs)				ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**B-7-D**	**1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014111**	LONGITUDE: **-79.901194**	STATION:	SURFACE ELEVATION: **861.71**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		1.2					ML	(ML) SANDY SILT - gray.
1								
		0.8					ML	As above.
	860.0							
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-7-E**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013869**	LONGITUDE: **-79.900831**	STATION:	SURFACE ELEVATION: **861.1**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		1.1					ML	(ML) SANDY SILT - gray.
1	860.0							
		0.4					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**B-8-A**	**1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013747**	LONGITUDE: **-79.900544**	STATION:	SURFACE ELEVATION: **859.86**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
1		0.4					ML	(ML) SANDY SILT - dark brown.
		1.8	B-8-A (VOCs)				ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-8-B**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013539**	LONGITUDE: **-79.900558**	STATION:	SURFACE ELEVATION: **858.62**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
1		1.0	B-8-B (TCLP RCRA)				ML	(ML) SANDY SILT - dark brown.
		0.5					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-8-C**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013647**	LONGITUDE: **-79.900792**	STATION:	SURFACE ELEVATION: **858.44**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.9					ML	(ML) CLAYEY SILT - red brown.
1		0.7					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-8-D**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013511**	LONGITUDE: **-79.900303**	STATION:	SURFACE ELEVATION: **860.44**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
	860.0	1.0					ML	(ML) SILT - light brown.
1		0.5					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-8-E**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013386**	LONGITUDE: **-79.899958**	STATION:	SURFACE ELEVATION: **861.39**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.8					ML	(ML) SILT - light brown.
1								
	860.0	0.7					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-9-A**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014033**	LONGITUDE: **-79.901836**	STATION:	SURFACE ELEVATION: **860.51**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
	860.0	0.9					ML	(ML) CLAYEY SILT - light brown.
1		0.8					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-9-B**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013936**	LONGITUDE: **-79.901756**	STATION:	SURFACE ELEVATION: **859.63**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.6					ML	Lithology not recorded.
1								
		1.5					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-9-C**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013753**	LONGITUDE: **-79.901869**	STATION:	SURFACE ELEVATION: **858.83**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
1		1.3					ML	Lithology not recorded.
		1.5					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-9-D**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013889**	LONGITUDE: **-79.901872**	STATION:	SURFACE ELEVATION: **858.92**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		1.3					ML	Lithology not recorded.
1								
		1.6	B-9-D (VOCs)				ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-9-E**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013533**	LONGITUDE: **-79.901892**	STATION:	SURFACE ELEVATION: **858.49**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.4					ML	Lithology not recorded.
1								
		1.3					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-10-A**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013886**	LONGITUDE: **-79.901431**	STATION:	SURFACE ELEVATION: **859.29**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
1		1.2					ML	(ML) CLAYEY SILT - light brown.
		1.3					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**B-10-B**	**1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013706**	LONGITUDE: **-79.900992**	STATION:	SURFACE ELEVATION: **858.38**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
1		0.6					ML	(ML) CLAYEY SILT - red brown.
		0.5					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**B-10-C**	**1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013717**	LONGITUDE: **-79.901356**	STATION:	SURFACE ELEVATION: **858.2**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.9					ML	(ML) CLAYEY SILT - light brown.
1								
		1.1					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**B-10-D**	**1 OF 1**
PROJECT NAME:	SITE LOCATION:		
Fortress Wood Products II - Brownfields Assessment	**1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE:	LONGITUDE:	STATION:	SURFACE ELEVATION:
36.013475	**-79.901725**		**858.95**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.8					ML	(ML) CLAYEY SILT - dark brown.
1								
		1.3					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-10-E**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013506**	LONGITUDE: **-79.901247**	STATION:	SURFACE ELEVATION: **856.1**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		1.0					ML	(ML) CLAYEY SILT - dark brown.
1	855.0							
		1.4	B-10-E (VOCs)				ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/03/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/03/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**B-11-A**	**1 OF 1**
PROJECT NAME:	SITE LOCATION:		
Fortress Wood Products II - Brownfields Assessment	**1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE:	LONGITUDE:	STATION:	SURFACE ELEVATION:
36.013433	**-79.901331**		**856.56**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.5					ML	(ML) SANDY SILT - gray, moist.
1								
	855.0	0.8					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/04/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/04/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-11-B**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013275**	LONGITUDE: **-79.900556**	STATION:	SURFACE ELEVATION: **857.57**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.5					ML	(ML) SANDY SILT - brown, moist.
1		0.5					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/04/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/04/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-11-C**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013200**	LONGITUDE: **-79.901358**	STATION:	SURFACE ELEVATION: **835.89**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
1	835.0	3.9	B-11-C (VOCs)				ML	(ML) SILTY CLAY - dark gray, moist.
		1.0					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/04/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/04/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-11-D**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013028**	LONGITUDE: **-79.901319**	STATION:	SURFACE ELEVATION: **836.27**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		1.1					ML	(ML) SILTY CLAY - dark gray, moist.
1								
	835.0	0.4					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/04/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/04/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-11-E**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		

LATITUDE: **36.013061**	LONGITUDE: **-79.900589**	STATION:	SURFACE ELEVATION: **856.64**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.1					ML	(ML) CLAYEY SILT - brown, moist.
1								
		0.3					ML	As above.
	855.0							
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/04/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/04/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**B-12-A**	**1 OF 1**

PROJECT NAME:	SITE LOCATION:
Fortress Wood Products II - Brownfields Assessment	**1 Metals Drive, Greensboro, North Carolina, 27407**

LATITUDE:	LONGITUDE:	STATION:	SURFACE ELEVATION:
36.012669	**-79.901006**		**844.7**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
1		1.4					ML	(ML) CLAY - light brown.
		1.6	B-12-A (VOCs)				ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-12-B**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.012761**	LONGITUDE: **-79.900928**	STATION:	SURFACE ELEVATION: **846.42**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.4					ML	(ML) CLAY - light brown.
1								
	845.0	0.4					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-12-C**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		

LATITUDE: **36.012517**	LONGITUDE: **-79.900958**	STATION:	SURFACE ELEVATION: **844.86**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
1		1.3					ML	(ML) CLAY - light brown.
		0.6					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**B-12-D**	**1 OF 1**
PROJECT NAME:	SITE LOCATION:		
Fortress Wood Products II - Brownfields Assessment	**1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE:	LONGITUDE:	STATION:	SURFACE ELEVATION:
36.012228	**-79.901300**		**850.62**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
	850.0	0.5					ML	(ML) CLAYEY SILT - light brown.
1		0.5					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**B-12-E**	**1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.012131**	LONGITUDE: **-79.900906**	STATION:	SURFACE ELEVATION: **848.9**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.4					ML	(ML) CLAYEY SILT - light brown.
1		0.7					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-13-A**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.012861**	LONGITUDE: **-79.900769**	STATION:	SURFACE ELEVATION: **850.33**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
	850.0	0.4					ML	(ML) CLAYEY SILT - light brown.
1		1.0					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-13-B**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.012533**	LONGITUDE: **-79.900786**	STATION:	SURFACE ELEVATION: **847.51**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		1.0					ML	(ML) CLAY - light brown.
1								
		1.0					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-13-C**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.012625**	LONGITUDE: **-79.900539**	STATION:	SURFACE ELEVATION: **851.67**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		1.4					ML	(ML) CLAYEY SILT - light brown.
1								
		1.5					ML	As above.
	850.0							
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-13-D**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.012311**	LONGITUDE: **-79.900631**	STATION:	SURFACE ELEVATION: **855.82**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
	855.0	0.4					ML	(ML) CLAY - light brown.
1		1.0	B-13-D (VOCs)				ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-13-E**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.012311**	LONGITUDE: **-79.900686**	STATION:	SURFACE ELEVATION: **847.82**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		1.5					ML	(ML) CLAYEY SILT - dark brown.
1								
		1.4					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-14-A**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.012606**	LONGITUDE: **-79.899908**	STATION:	SURFACE ELEVATION: **857.91**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
1		1.3					ML	(ML) CLAYEY SILT - light brown.
		1.5	B-14-A (VOCs)				ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-14-B**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.012431**	LONGITUDE: **-79.899817**	STATION:	SURFACE ELEVATION: **859.14**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.8					ML	(ML) CLAYEY SILT - light brown.
1		0.9					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**B-14-C**	**1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.012311**	LONGITUDE: **-79.899536**	STATION:	SURFACE ELEVATION: **861.39**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
		0.6					ML	(ML) CLAYEY SILT - red brown, moist to wet.
1								
	860.0	0.5					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**B-14-D**	**1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.012178**	LONGITUDE: **-79.899683**	STATION:	SURFACE ELEVATION: **860.21**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
	860.0	0.3					ML	(ML) CLAYEY SILT - red brown, moist to wet.
1		0.3					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **B-14-E**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.012417**	LONGITUDE: **-79.900139**	STATION:	SURFACE ELEVATION: **855.65**

General comments: Composite Aliquot

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
	855.0	1.5					ML	(ML) CLAYEY SILT - dark brown.
1		1.4					ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/02/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/02/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **BG-1**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.012967**	LONGITUDE: **-79.902836**	STATION:	SURFACE ELEVATION: **832.14**

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
							ML	(ML) SILTY CLAY - dark gray, moist.
1							ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/04/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/04/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **BG-2**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013028**	LONGITUDE: **-79.901694**	STATION:	SURFACE ELEVATION: **836.31**

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
							ML	(ML) SILTY CLAY - dark gray, moist.
1	835.0						ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/04/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/04/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	**Geoprobe 788DT**	**Seth Greene**	**Direct Push**

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **BG-3**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.012967**	LONGITUDE: **-79.902836**	STATION:	SURFACE ELEVATION: **832.14**

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
							ML	(ML) SILTY CLAY - dark gray, moist.
1							ML	As above.
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/04/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/04/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **GW-1**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.015508**	LONGITUDE: **-79.900075**	STATION:	SURFACE ELEVATION:

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
							TS	Topsoil.
							GW	(GW) WELL-GRADED GRAVEL.
							ML	(ML) CLAYEY SILT - red/brown.
5							ML	(ML) SILT - brown/tan, with water at 9' bgs.
10						▼	ML	(ML) SILT - tan/brown with black mottling.
15								
20								
								END OF BORING AT 25 Ft

Well Diagram: GW-1

- Grout
- 2`` Sch. 40 PVC Riser
- Bentonite
- Sand
- 2`` Sch. 40 PVC Screen

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

▽ **WL (First Encountered):**	**BORING STARTED:** 06/06/2025
▼ **WL (Completion):** 14.53 Ft	**BORING COMPLETED:** 06/06/2025

Remarks:	EQUIPMENT:	LOGGED BY:	DRILLING METHOD:
	Geoprobe 788DT	Randy Cavillier	Solid Stem Auger

ENVIRONMENTAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **GW-2**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014789**	LONGITUDE: **-79.899903**	STATION:	SURFACE ELEVATION:

DEPTH (FT)	SOIL CLASSIFICATION	Description
	SM	(SM) SILTY SAND WITH GRAVEL - gray, moist.
	ML	(ML) CLAYEY SILT - trace gravel, reddish brown, moist.
5	ML	(ML) CLAYEY SILT - light brown, moist.
10	ML	As above
15	ML	As above but saturated at 20' bgs.
20	ML	As above but saturated.
		END OF BORING AT 25 Ft

Well Diagram: GW-2

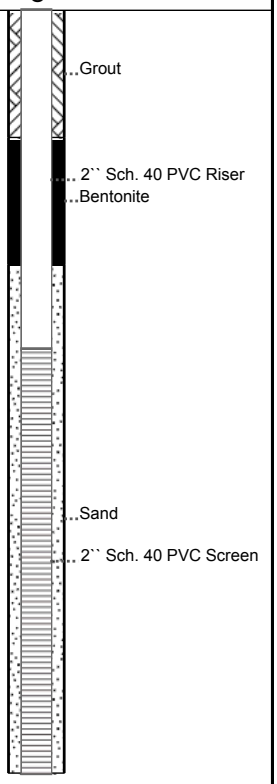

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

▽ **WL (First Encountered):**		**BORING STARTED:**	**06/05/2025**
▼ **WL (Completion):**	**3.35 Ft**	**BORING COMPLETED:**	**06/05/2025**
Remarks:	**EQUIPMENT:** **Geoprobe 788DT**	**LOGGED BY:** **Emery Lovekamp**	**DRILLING METHOD:** **Solid Stem Auger**

ENVIRONMENTAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **GW-3**	SHEET: **1 OF 2**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014692**	LONGITUDE: **-79.900408**	STATION:	SURFACE ELEVATION:

DEPTH (FT)	SOIL CLASSIFICATION	Description
	SM	(SM) SILTY SAND WITH GRAVEL - gray, moist.
	ML	(ML) SANDY SILT - lt brown, moist.
5	ML	As above.
10	ML	(ML) CLAYEY SILT - light brown, moist.
15	ML	As above.
	SM	(SM) SILTY SAND - gray-brown, saturated.
20	ML	(ML) SANDY SILT - gray-brown, moist, saturated at 32.
25		

Well Diagram: GW-3



THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):		BORING STARTED: 06/05/2025	
WL (Completion): 14.68 Ft		BORING COMPLETED: 06/05/2025	
Remarks:	EQUIPMENT: Geoprobe 788DT	LOGGED BY: Emery Lovekamp	DRILLING METHOD: Solid Stem Auger

ENVIRONMENTAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **GW-3**	SHEET: **2 OF 2**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014692**	LONGITUDE: **-79.900408**	STATION:	SURFACE ELEVATION:

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description	Well Diagram
							ML	(ML) SANDY SILT - gray-brown, moist, saturated at 32. (continued)	
								END OF BORING AT 32 Ft	

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):		**BORING STARTED:**	**06/05/2025**
WL (Completion):	**14.68 Ft**	**BORING COMPLETED:**	**06/05/2025**
Remarks:	**EQUIPMENT:** **Geoprobe 788DT**	**LOGGED BY:** **Emery Lovekamp**	**DRILLING METHOD:** **Solid Stem Auger**

ENVIRONMENTAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **GW-4**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.014156**	LONGITUDE: **-79.900975**	STATION:	SURFACE ELEVATION:

DEPTH (FT)	SOIL CLASSIFICATION	Description
	SM	(SM) SILTY SAND WITH GRAVEL - gray-brown, moist.
	SM	As above but without gravel
5	ML	(ML) SANDY SILT - light brown, moist.
10	ML	As above.
15	SM	(SM) SILTY SAND - gray, moist.
20		
		END OF BORING AT 25 Ft

Well Diagram: GW-4

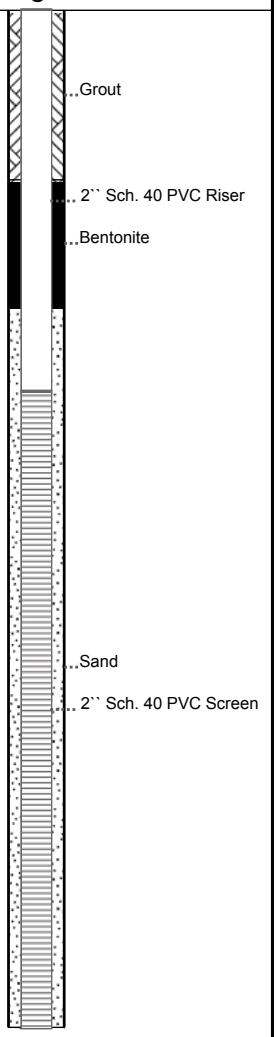

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

▽ **WL (First Encountered):**	**BORING STARTED:** 06/05/2025
▼ **WL (Completion):** 16.89 Ft	**BORING COMPLETED:** 06/05/2025

Remarks:	EQUIPMENT:	LOGGED BY:	DRILLING METHOD:
	Geoprobe 788DT	Emery Lovekamp	Solid Stem Auger

ENVIRONMENTAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**GW-5**	**1 OF 1**
PROJECT NAME:	SITE LOCATION:		
Fortress Wood Products II - Brownfields Assessment	**1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE:	LONGITUDE:	STATION:	SURFACE ELEVATION:
36.013756	**-79.901847**		

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
							SM	(SM) SILTY SAND - trace gravel, brown, moist.
							CL-ML	(CL-ML) SILTY CLAY - trace gravel, gray, moist.
5							CL-ML	As above but trace gravel.
							CL-ML	(CL-ML) SILTY CLAY - gray-brown, moist.
10							CL-ML	As above.
15							CL-ML	As above.
							ML	(ML) SILT - gray-brown, moist.
							SP	(SP) SAND - light brown, moist.
20						▼	CL-ML	(CL-ML) SILTY CLAY - gray-brown, saturated.
							CL	(CL) CLAY - gray-brown, saturated.
								END OF BORING AT 25 Ft

Well Diagram

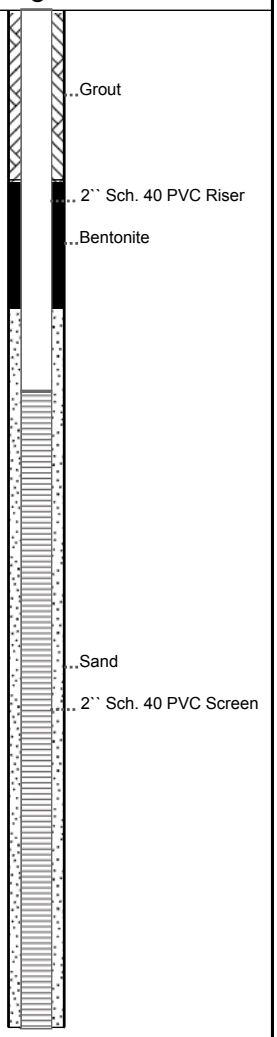

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

▽ **WL (First Encountered):**		**BORING STARTED:**	**06/06/2025**
▼ **WL (Completion):**	**22.21 Ft**	**BORING COMPLETED:**	**06/06/2025**
Remarks:	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
	Geoprobe 788DT	**Randy Cavallier**	**Solid Stem Auger**

ENVIRONMENTAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**GW-6**	**1 OF 1**
PROJECT NAME:	SITE LOCATION:		
Fortress Wood Products II - Brownfields Assessment	**1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE:	LONGITUDE:	STATION:	SURFACE ELEVATION:
36.013630	**-79.900150**		

DEPTH (FT)	SOIL CLASSIFICATION	Description
	SM	(SM) SILTY SAND - trace gravel, light brown, moist.
5	ML	(ML) CLAYEY SILT - light brown, moist.
	ML	As above but trace gravel.
	CL-ML	(CL-ML) SILTY CLAY - light brown, moist.
10	CL-ML	As above.
15	ML	(ML) CLAYEY SILT - light brown, moist.
	ML	As above but with white mottles.
20	ML	(ML) CLAYEY SILT - light brown, moist.
	ML	As above but wet.
		END OF BORING AT 25 Ft

Well Diagram: GW-6



THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/06/2025
WL (Completion): 10.23 Ft	**BORING COMPLETED:** 06/06/2025

Remarks:	EQUIPMENT:	LOGGED BY:	DRILLING METHOD:
	Geoprobe 788DT	Emery Lovekamp	Solid Stem Auger

ENVIRONMENTAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **GW-7**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013317**	LONGITUDE: **-79.899900**	STATION:	SURFACE ELEVATION:

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
							CL	(CL) CLAY - trace gravel, light brown, moist.
							CL	As above but reddish brown.
5						▼	CL	(CL) CLAY - red-brown, moist.
10							CL	As above.
15							CL	As above, saturated at 16' bgs
20							CL	(CL) CLAY - red-brown, saturated to wet.
								END OF BORING AT 25 Ft

Well Diagram: GW-7

- Grout
- 2`` Sch. 40 PVC Riser
- Bentonite
- Sand
- 2`` Sch. 40 PVC Screen

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

▽ **WL (First Encountered):**	**BORING STARTED:** 06/06/2025
▼ **WL (Completion):** 7.83 Ft	**BORING COMPLETED:** 06/06/2025

Remarks:	EQUIPMENT:	LOGGED BY:	DRILLING METHOD:
	Geoprobe 788DT	Emery Lovekamp	Solid Stem Auger

ENVIRONMENTAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**GW-8**	**1 OF 1**
PROJECT NAME:	SITE LOCATION:		
Fortress Wood Products II - Brownfields Assessment	**1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE:	LONGITUDE:	STATION:	SURFACE ELEVATION:
36.012372	**-79.900658**		

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description	Well Diagram
						▼	CL-ML	(CL-ML) SILTY CLAY - light brown, moist.	GW-8
							CL	(CL) CLAY - gray-brown, moist.	Grout
5							ML	(ML) CLAYEY SILT - gray-brown, moist, saturated at 10' bgs.	Bentonite
									2`` Sch. 40 PVC Riser
10							ML	As above but saturated.	Sand
									2`` Sch. 40 PVC Riser
15							ML	As above.	
								END OF BORING AT 20 Ft	

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/09/2025
WL (Completion): 1.06 Ft	**BORING COMPLETED:** 06/09/2025

Remarks:	EQUIPMENT:	LOGGED BY:	DRILLING METHOD:
	Geoprobe 788DT	Emery Lovekamp	Solid Stem Auger

ENVIRONMENTAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**GW-9**	**1 OF 1**
PROJECT NAME:	SITE LOCATION:		
Fortress Wood Products II - Brownfields Assessment	**1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE:	LONGITUDE:	STATION:	SURFACE ELEVATION:
36.012608	**-79.900172**		

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description	Well Diagram
						▼	CL-ML	(CL-ML) SILTY CLAY - light brown, moist.	GW-8
							CL	(CL) CLAY - gray-brown, moist.	
5							ML	(ML) CLAYEY SILT - gray-brown, moist, saturated at 10' bgs.	
10							ML	As above but saturated.	
							ML	As above.	
								END OF BORING AT 15 Ft	

Grout
Bentonite
2`` Sch. 40 PVC Screen
Sand
2`` Sch. 40 PVC Screen

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/09/2025
WL (Completion): 1.49 Ft	**BORING COMPLETED:** 06/08/2025

Remarks:	EQUIPMENT:	LOGGED BY:	DRILLING METHOD:
	Geoprobe 788DT	Emery Lovekamp	Solid Stem Auger

ENVIRONMENTAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**GW-10**	**1 OF 1**
PROJECT NAME:	SITE LOCATION:		
Fortress Wood Products II - Brownfields Assessment	**1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE:	LONGITUDE:	STATION:	SURFACE ELEVATION:
36.014347	**-79.900350**		

DEPTH (FT)	SOIL CLASSIFICATION	Description
	SM	(SM) SILTY SAND - trace gravel, gray, moist.
5	ML	(ML) SANDY SILT - reddish brown, moist.
	ML	As above.
10	ML	(ML) CLAYEY SILT - reddish brown, moist.
	ML	(ML) CLAYEY SILT - lt brown, moist.
15	CL-ML	(CL-ML) SILTY CLAY - light brown, moist.
20	CL-ML	As above.
	CL-ML	As above but saturated.
		END OF BORING AT 25 Ft

Well Diagram: GW-10



THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):		**BORING STARTED:**	**06/09/2025**
WL (Completion):	**17.8 Ft**	**BORING COMPLETED:**	**06/09/2025**
Remarks:	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
	Geoprobe 788DT	**Emery Lovekamp**	**Solid Stem Auger**

ENVIRONMENTAL BOREHOLE LOG

CLIENT:	PROJECT NO.:	BORING NO.:	SHEET:
Riverside Construction Materials	**49:24413-C**	**TX-1**	**1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.015011**	LONGITUDE: **-79.899906**	STATION:	SURFACE ELEVATION: **858.82**

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
1							ML	(ML) CLAYEY SILT - gray brown, moist.
							ML	(ML) SILTY CLAY - light brown, moist
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/10/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/10/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

CLIENT: **Riverside Construction Materials**	PROJECT NO.: **49:24413-C**	BORING NO.: **WC-1**	SHEET: **1 OF 1**
PROJECT NAME: **Fortress Wood Products II - Brownfields Assessment**	SITE LOCATION: **1 Metals Drive, Greensboro, North Carolina, 27407**		
LATITUDE: **36.013297**	LONGITUDE: **-79.901325**	STATION:	SURFACE ELEVATION: **838.6**

DEPTH (FT)	ELEVATION (FT)	PID READING (PPM)	SAMPLE NUMBER	SAMPLE RECOVERY	GRAPHIC LOG	WATER LEVELS	SOIL CLASSIFICATION	Description
							ML	(ML) SANDY GRAVEL - gray brown, moist.
1							ML	(ML) GRAVELLY SAND - gray brown, moist
								END OF BORING AT 2 Ft

THE STRATIFICATION LINES REPRESENT THE APPROXIMATE BOUNDARY LINES BETWEEN SOIL TYPES. IN-SITU THE TRANSITION MAY BE GRADUAL

WL (First Encountered):	**BORING STARTED:** 06/11/2025		**CAVE IN DEPTH:** Not Observed
WL (Completion):	**BORING COMPLETED:** 06/11/2025		**HAMMER TYPE:**
WL (Seasonal High Water):	**EQUIPMENT:**	**LOGGED BY:**	**DRILLING METHOD:**
WL (Stabilized):	Geoprobe 788DT	Seth Greene	Direct Push

GEOTECHNICAL BOREHOLE LOG

APPENDIX D

Sample Location & Monitoring Well Survey Data

Fortress Wood Products II Site

Sample Location and Monitoring Well Survey Data

ID	Northing	Easting	Elevation	Latitude	Longitude
B-2-B	825716.19	1733814.61	860.48	N36° 00' 55.47"	W79° 54' 00.29"
CL GW-1	825751.89	1733816.36	860.38	N30° 00' 55.83"	W79° 54' 00.27"
GW-1 TOP OF PIPE	825751.89	1733816.36	860.03	N30° 00' 55.83"	W79° 54' 00.27"
NGD CONC GW-1	825752.38	1733816.07	860.50	N36° 00' 55.83"	W79° 54' 00.28"
B-2-C	825707.45	1733750.96	858.92	N36° 00" 55.38"	W79° 54' 01.06"
B-2-D	825711.01	1733679.34	857.58	N36° 00' 55.41"	W79° 54' 01.94"
B-3-A	825671.25	1733645.45	856.86	N36° 00' 55.01"	W79° 54' 02.34"
B-2-A	825767.51	1733734.40	859.07	N36° 00' 55.97"	W79° 54' 01.27"
B-4-A	825555.15	1733720.07	859.20	N36° 00' 53.87"	W79° 54' 01.42"
B-2-E	825594.48	1733792.66	859.80	N36° 00' 54.27"	W79° 54' 00.54"
B-3-C	825581.48	1733651.79	858.07	N36° 00' 54.13"	W79° 54' 02.26"
B-3-B	825561.87	1733590.57	859.40	N36° 00' 53.93"	W79° 54' 03.00"
B-3-D	825502.84	1733502.14	860.50	N36° 00' 53.34"	W79° 54' 04.07"
B-3-E	825469.68	1733574.20	861.09	N36° 00' 53.01"	W79° 54' 03.19"
B-4-D + RCRA	825392.08	1733677.85	860.84	N36° 00' 52.26"	W79° 54' 01.92"
CL GW-3	825455.53	1733715.39	860.59	N36° 00' 52.89"	W79° 54' 01.47"
GW-3 TOP OF PIPE	825455.53	1733715.39	860.26	N36° 00' 52.89"	W79° 54' 01.47"
NGD CONC GW-3	825454.91	1733715.41	860.49	N36° 00' 52.88"	W79° 54' 01.47"
B-4-C	825454.62	1733715.58	860.31	N36° 00' 52.88"	W79° 54' 01.47"
B-4-B	825507.04	1733854.50	860.74	N36° 00" 53.41	W79° 53' 59.78"
CL GW-2	825490.03	1733865.33	861.47	N36° 00' 53.24"	W79° 53' 59.65"
GW-2 TOP OF PIPE	825490.03	1733865.33	860.97	N36° 00' 53.24"	W79° 53' 59.65"
TX-1	825570.68	1733865.14	858.82	N36° 00' 54.04"	W79° 53' 59.66"
B-4-E	825355.36	1733742.32	865.09	N36° 00' 51.90"	W79° 54' 01.13"
B-5-A	825371.14	1733846.50	864.65	N36° 00' 52.06"	W79° 53' 59.86"
CL GW-10	825329.75	1733731.13	865.79	N36° 00' 51.65"	W79° 54' 01.26"
GW-10 TOP OF PIPE	825329.75	1733731.13	865.44	N36° 00' 51.65"	W79° 54' 01.26"
B-5-B	825299.57	1733745.48	865.32	N36° 00' 51.35"	W79° 54' 01.08"
B-5-C + RCRA	825242.76	1733795.78	865.48	N36° 00' 50.79"	W79° 54' 00.47"
B-5-E	825138.67	1733828.67	863.09	N36° 00' 49.76"	W79° 54' 00.05"
B-5-D	825182.09	1733766.43	862.75	N36° 00' 50.19"	W79° 54' 00.82"
B-7-B	825306.22	1733691.29	863.87	N36° 00' 51.41"	W79° 54' 01.75"
B-7-A	825377.67	1733595.54	861.41	N36° 00' 52.11"	W79° 54' 02.92"
CL GW-4	825262.30	1733546.23	861.52	N36° 00' 50.96"	W79° 54' 03.51"
CL GW-4 TOP OF PIPE	825262.30	1733546.23	861.24	N36° 00' 50.96"	W79° 54' 03.51"
NGD GW-4	825262.77	1733546.26	861.38	N36° 00' 50.97"	W79° 54' 03.51"
B-7-C	825272.76	1733545.42	860.98	N36° 00' 51.06"	W79° 54' 03.52"
B-7-E	825157.69	1733587.78	861.10	N36° 00' 49.93"	W79° 54' 02.99"
B-7-D	825246.44	1733481.13	861.71	N36° 00' 50.80"	W79° 54' 04.30"
B-6-D	825257.61	1733415.20	862.22	N36° 00' 50.90"	W79° 54' 05.10"
B-6-E	825289.09	1733328.96	862.53	N36° 00' 51.21"	W79° 54' 06.15"
B-6-C	825381.76	1733413.27	862.36	N36° 00' 52.13"	W79° 54' 05.14"
B-6-A	825437.02	1733458.07	861.63	N36° 00' 52.68"	W79° 54' 04.60"

B-6-B	825347.39	1733477.52	862.73	N36° 00' 51.80"	W79° 54' 04.35"
B-10-A	825165.09	1733409.99	859.29	N36° 00' 49.99"	W79° 54' 05.15"
B-10-B	825098.46	1733539.69	858.38	N36° 00' 49.34"	W79° 54' 03.57"
B-10-C	825103.27	1733432.06	858.20	N36° 00' 49.38"	W79° 54' 04.88"
B-10-E	825026.50	1733463.63	856.10	N36° 00' 48.62"	W79° 54' 04.49"
B-10-D	825016.40	1733321.90	858.95	N36° 00' 48.51"	W79° 54' 06.21"
B-9-E	825037.94	1733272.92	858.49	N36° 00' 48.72"	W79° 54' 06.81"
B-9-C	825117.48	1733279.98	858.83	N36° 00' 49.51"	W79° 54' 06.73"
B-9-D	825167.84	1733279.38	858.92	N36° 00' 50.00"	W79° 54' 06.74"
B-9-B	825184.21	1733314.25	859.63	N36° 00' 50.17"	W79° 54' 06.32"
B-9-A	825220.05	1733290.61	860.51	N36° 00' 50.52"	W79° 54' 06.61"
CL GW-5	825118.62	1733286.99	859.12	N36° 00' 49.52"	W79° 54' 06.65"
GW-5 TOP OF PIPE	825118.62	1733286.99	858.77	N36° 00' 49.52"	W79° 54' 06.65"
NGD CONC. GW-5	825118.95	1733286.53	859.13	N36° 00' 49.52"	W79° 54' 06.65"
B-11-A	824999.76	1733438.54	856.56	N36° 00' 48.36"	W79° 54' 04.79"
B-11-B	824940.12	1733667.34	857.57	N36° 00' 47.79"	W79° 54' 02.00"
B-11-E	824863.13	1733656.25	856.64	N36° 00' 47.02"	W79° 54' 02.12"
NGD CONC GW-6	824927.09	1733687.29	857.93	N36° 00' 47.66"	W79° 54' 01.75"
CL GW-6	824926.59	1733687.13	858.03	N36° 00' 47.65"	W79° 54' 01.75"
GW-6 TOP OF PIPE	824926.59	1733687.13	857.79	N36° 00' 47.65"	W79° 54' 01.75"
B-8-D	825025.75	1733742.99	860.44	N36° 00' 48.64"	W79° 54' 01.09"
B-8-A	825111.86	1733672.14	859.86	N36° 00' 49.49"	W79° 54' 01.96"
B-8-B +RCRA	825037.02	1733667.23	858.62	N36° 00' 48.74"	W79° 54' 02.01"
B-8-C	825077.06	1733598.81	858.44	N36° 00' 49.13"	W79° 54' 02.85"
B-8-E	824979.24	1733844.05	861.39	N36° 00' 48.19"	W79° 53' 59.85"
NGD CONC GW-7	824953.61	1733860.83	861.61	N36° 00' 47.94"	W79° 53' 59.64"
CL GW-7	824954.05	1733861.24	861.52	N36° 00' 47.94"	W79° 53' 59.64"
GW-7 TOP OF PIPE	824954.05	1733861.24	861.27	N36° 00' 47.94"	W79° 53' 59.64"
NGD CONC GW-9	824697.58	1733778.46	856.70	N36° 00' 45.40"	W79° 54' 00.62"
CL GW-9	824697.09	1733778.31	856.71	N36° 00' 45.39"	W79° 54' 00.62"
GW-9 TOP OF PIPE	824697.09	1733778.31	856.26	N36° 00' 45.39"	W79° 54' 00.62"
B-14-A	824694.97	1733856.56	857.91	N36° 00' 45.38"	W79° 53' 59.67"
B-14-B	824631.12	1733882.50	859.14	N36° 00' 44.75"	W79° 53' 59.34"
B-14-C	824587.04	1733965.36	861.39	N36° 00' 44.32"	W79° 53' 58.33"
B-14-D	824538.38	1733921.47	860.21	N36° 00' 43.84"	W79° 53' 58.86"
B-14-E	824627.15	1733787.82	855.65	N36° 00' 44.70"	W79° 54' 00.50"
B-13-D	824727.90	1733730.63	855.82	N36° 00' 45.69"	W79° 54' 01.20"
B-13-A	824790.07	1733602.72	850.33	N36° 00' 46.30"	W79° 54' 02.77"
B-12-B	824754.50	1733553.70	846.28	N36° 00' 45.94"	W79° 54' 03.36"
B-13-C	824703.41	1733669.89	851.67	N36° 00' 45.45"	W79° 54' 01.94"
B-13-B	824671.05	1733596.28	847.51	N36° 00' 45.12"	W79° 54' 02.83"
NGD CONC GW-8	824611.41	1733632.88	849.03	N36° 00' 44.53"	W79° 54' 02.38"
CL GW-8	824611.74	1733633.37	849.03	N36° 00' 44.54"	W79° 54' 02.37"
GW-8 TOP OF PIPE	824611.74	1733633.37	848.57	N36° 00' 44.54"	W79° 54' 02.37"
B-13-E	824590.41	1733625.10	847.82	N36° 00' 44.32"	W79° 54' 02.47"
B-12-E	824524.56	1733559.94	848.90	N36° 00' 43.67"	W79° 54' 03.26"
B-12-D	824561.13	1733443.25	850.62	N36° 00' 44.02"	W79° 54' 04.68"

B-12-C	824665.16	1733545.68	844.86	N36° 00' 45.06"	W79° 54' 03.45"
B-12-B	824754.65	1733554.91	846.42	N36° 00' 45.94"	W79° 54' 03.34"
B-12-A	824721.41	1733532.24	844.70	N36° 00' 45.61"	W79° 54' 03.62"
BG-1	824834.21	1732991.50	832.14	N36° 00' 46.68"	W79° 54' 10.21"
BG-2	824853.33	1733329.79	836.31	N36° 00' 46.90"	W79° 54' 06.10"
BG-3	824861.85	1733407.68	836.80	N36° 00' 46.99"	W79° 54' 05.15"
B-11-D	824852.79	1733440.57	836.27	N36° 00' 46.90"	W79° 54' 04.75"
B-11-C	824915.37	1733429.70	835.89	N36° 00' 47.52"	W79° 54' 04.89"
W-C-1	824950.41	1733439.41	838.60	N36° 00' 47.87"	W79° 54' 04.77"
B-1-D	825826.54	1733787.36	856.89	N36° 00' 56.56"	W79° 54' 00.63"
B-1-C	825891.03	1733847.03	853.96	N36° 00' 57.21"	W79° 53' 59.91"
B-1-A	825904.69	1733888.47	850.89	N36° 00' 57.34"	W79° 53' 59.41"
B-1-B	825872.72	1733888.52	851.72	N36° 00' 57.03"	W79° 53' 59.41"
B-1-E	825782.73	1733810.31	858.84	N36° 00' 56.13"	W79° 54' 00.35"
SV-1	-	-	-	N36° 00' 53.02"	W79° 54' 03.59"
SV-2	-	-	-	N36° 00' 52.09"	W79° 54' 00.99"
SV-3	-	-	-	N36° 00' 50.73"	W79° 54' 00.97"
SW-1/SS-1	-	-	-	N36° 00' 47.56"	W79° 54' 09.83"
SW-2/SS-2	-	-	-	N36° 00' 47.41"	W79° 54' 05.02"
SW-3/SS-3	-	-	-	N36° 00' 45.53"	W79° 54' 03.24"

APPENDIX E

Field Sampling Notes & Groundwater Purge Logs

Fortress Wood Products 24413-C 6/2/25 Pg 1

- Seth Greene (ECS) onsite at 8:55.
- Emery Lovekamp (ECS), KCI, & Quantex already onsite. Geoprobe 7822DT/ Macro cores
- Sunny, 62°F
- Eastern Solutions Rental PID: MiRAE 3000
  Calibration @ 9:15: Zero Gas = 0.0 ppm, Isobutylene = 100.0 ppm
- Health & Safety Plan ✓
- Pre-Site Safety Survey ✓
- PFAS checklist ✓
- 9:40 Quantex begins advancing borings in cell B-14.
- 10:45 Quantex begins advancing borings in cell B-13.
- 11:57 Quantex begins advancing borings in cell B-12.
- 13:12 Quantex begins advancing borings in cell B-6.
- 13:53 Quantex begins advancing borings in cell B-7.
- 14:15 Collect FB-1_P (Field Blank)

Boring	Depth	Time	PID	Lithology
B-14-C	0-1	9:44	0.6	Red/Br clayey silt
	1-2	9:44	0.5	⊥
B-14-D	0-1	9:46	0.3	Red/Br clayey silt
	1-2	9:46	0.3	⊥
B-14-B	0-1	9:49	0.8	Lt Br clayey silt
	1-2	9:49	0.9	⊥
(B-14-A)	0-1	9:52	1.3	Lt Br clayey silt
	(1-2)	9:52	1.5	⊥
B-14-E	0-1	9:55	1.5	Pk Br clayey silt
	1-2	9:55	1.4	⊥

- Aliquot samples placed on ice for VOC analysis.
- Circled sample submitted for VOC grab sample.
- 10:00 composite B-14.

B-13-D	0-1	10:48	0.3	Lt Br clayey silt
	1-2	10:48	0.3	⊥
B-13-A	0-1	10:51	0.4	Lt Br clayey silt
	1-2	10:51	1.0	⊥
B-13-C	0-1	10:56	1.4	Lt Br clayey silt
	1-2	10:56	1.5	⊥
B-13-B	0-1	11:06	1.0	Lt Br clay
	1-2	11:06	1.0	⊥
(B-13-D)	0-1	11:28	0.9	Lt Br clay
	(1-2)	11:28	1.6	⊥

- Aliquot Samples placed on ice for VOC analysis.
- Circled Sample Submitted for VOC grab Sample.
- 11:40 Composite B-13

	Boring	Depth	Time	PID	Lithology
	B-12-E	0-1	12:00	0.4	Lt Br Clayey Silt
		1-2	12:00	0.7	1
	B-12-D	0-1	12:04	0.5	Lt Br Clayey Silt
		1-2	12:04	0.5	1
	B-12-C	0-1	12:10	1.3	Lt Br Clay
		1-2	12:10	0.6	1
	B-12-B	0-1	12:18	0.4	Lt Br Clay
		1-2	12:18	0.4	1
	(B-12-A)	0-1	12:21	1.4	
		(1-2)	12:21	1.6	

- Aliquot Samples placed on ice for VOC analysis.
- Circled Sample Submitted for VOC grab Sample.
- 12:30 Composite B-12.

	B-8-E	0-1	13:15	0.8	Lt Br Silt
		1-2	13:15	0.7	1
	B-8-D	0-1	13:20	0.8	Lt Br Silt
		1-2	13:20	1.0	1
*	B-8-B	0-1*	13:25	1.0	DK Br Sandy Silt
		1-2	13:25	0.5	1
	B-8-C	0-1	13:30	0.9	Red/Br Clayey Silt
		1-2	13:30	0.7	1
	(B-8-A)	0-1	13:34	0.4	DK Br Sandy Silt
		(1-2)	13:34	1.8	1

- Aliquot Samples placed on ice for VOC analysis.
- Circled Sample Submitted for VOC grab Sample.
- 13:50 Composite B-8.
- B-Dup duplicate Sample collected from B-8 grab & composite record Samples.

* Additional grab Sample for TCLP RCRA Metals. Collected from 0-1 ft.

Fortress Wood Products 24413-C 6/2/25

Boring	Depth	Time	PID	Lithology
(B-7-C)	0-1	13:55	10.6	Gray Sandy Silt
	(1-2)	13:55	10.9	1
B-7-E	0-1	14:00	1.1	Gray Sandy Silt
	1-2	14:00	0.4	1
B-7-D	0-1	14:12	1.2	Gray Sandy Silt
	1-2	14:12	0.8	1
B-7-B	0-1	14:20	2.1	Lt Br Sandy Silt
	1-2	14:20	2.2	1
B-7-A	0-1	14:25	0.9	Red/Br Clayey Silt
	1-2	14:25	2.6	1

* Aliquot Samples placed on ice for VOC analysis.
- Circled Sample submitted for VOC grab Sample.
- 14:30 composite B-7.

Fortress Wood Products 24413-C 6/3/25 Pg 1

- Seth Greene (ECS) onsite at 8:00.
- Quantex onsite at 8:15. Geoprobe 7822DT / macro cores
- Sunny, 63°F
- Eastern Solutions Rental PID: Mini RAE 3000
  Calibration @ 8:20: Zero Gas = 0.0 ppm, Isobutylene = 100.0 ppm
- Health & Safety Plan ✓
- Pre-site Safety Survey ✓
- PFAS checklist ✓
- 6:38 Quantex begins advancing borings in Cell B-5.
- 9:15 Quantex begins advancing borings in cell B-4.
- 10:35 Quantex begins advancing borings in cell B-2.
- 10:55 Quantex begins advancing borings in cell B-3.
- 12:00 Collect FB-2_P (Field Blank)
- 12:59 Quantex begins advancing borings in Cell B-6.
- 14:17 Quantex begins advancing borings in Cell B-10.
- 13:38 Quantex begins advancing borings in Cell B-9.

Fortress Wood Products 24413-C 6/3/25 P32

	Boring	Depth	Time	PID	Lithology
	B-5-E	0-1	8:41	0.3	Red/Br clayey Silt
		1-2	8:41	0.3	⊥
	(B-5-D)	0-1	8:45	0.2	Red/Br clayey Silt
		(1-2)	8:45	0.9	⊥
*	B-5-C	0-1 *	8:51	0.4	Lt Br Sandy Silt
		1-2	8:51	0.4	⊥
	B-5-B	0-1	9:04	0.3	Red/Br Clayey Silt
		1-2	9:04	0.3	⊥
	B-5-A	0-1	9:11	0.5	Red/Br clayey Silt
		1-2	9:11	0.5	⊥

- Aliquot samples placed on ice for VOC analysis.
- Circled Sample Submitted for VOC grab sample.
- 9:25 Composite B-5.

* Additional grab Sample for TCLP RCRA metals collected from 0-1 ft.

	(B-4-E)	0-1	9:18	0.1	Gray Sandy Silt
		(1-2)	9:18	0.9	⊥
	B-4-B	0-1	9:22	0.5	Red/Br clayey Silt
		1-2	9:22	0.5	⊥
	B-4-A	0-1	9:26	0.6	DK Br Silt
		1-2	9:26	0.4	⊥
*	B-4-C	0-1 *	9:29	0.6	Lt Br Clayey Silt
		1-2	9:29	0.6	⊥
*	B-4-D	0-1 *	9:35	0.5	Gray Sandy Silt
		1-2	9:35	0.5	⊥

- Aliquot Samples placed on ice for VOC analysis.
- Circled Sample Submitted for VOC grab Sample.
- 10:00 Composite B-4.

* Additional grab Samples for TCLP RCRA metals collected from 0-1 ft.

Boring	Depth	Time	PID	Lithology
B-2-E	0-1	10:37	1.0	Red/Br ML (Silt)
	1-2	10:37	1.1	⊥
B-2-C	0-1	10:43	0.4	Lt Br ML (Silt)
	1-2	10:43	0.5	⊥
(B-2-B)	0-1	10:46	0.6	DK Br Clayey Silt
	(1-2)	10:46	1.3	⊥
B-2-A	0-1	10:49	0.5	Lt Br Clayey Silt
	1-2	10:49	1.0	⊥
B-2-D	0-1	10:53	1.2	Lt Br clayey silt
	1-2	10:53	1.0	⊥

- Aliquot samples placed on ice for VOC analysis.
- Circled sample submitted for VOC grab sample
- 11:10 Composite B-2.

B-3-A	0-1	10:58	0.6	DK Br Silt
	1-2	10:58	0.8	⊥
B-3-C	0-1	11:00	0.4	Red/Br Clayey silt
	1-2	11:00	0.3	⊥
B-3-B	0-1	11:03	0.4	Red/Br Clayey Silt
	1-2	11:03	0.4	⊥
(B-3-E)	0-1	11:07	0.8	Red/Br Clayey silt
	(1-2)	(11:07)	0.9	⊥
B-3-D	0-1	11:12	0.7	DK Br Clayey silt
	1-2	11:12	0.3	⊥

- Aliquot samples placed on ice for VOC analysis.
- Circled sample submitted for VOC grab sample
- 11:35 composite B-3.

Fortress Wood Products 24413-C 6/3/25

Boring	Depth	Time	PID	Lithology
B-6-B	0-1	13:01	0.5	Red/Br Clayey Silt
	1-2	13:01	1.5	〃
B-6-C	0-1	13:05	0.9	Lt Br Sandy Silt
	1-2	13:05	1.1	〃
(B-6-A)	0-1	13:10	0.7	DK Br Clayey Silt
	(1-2)	13:10	1.9	〃
B-6-E	0-1	13:16	1.0	DK Br Sandy Silt
	1-2	13:16	1.2	〃
B-6-D	0-1	13:20	1.2	
	1-2	13:20	1.7	

- Aliquot Samples placed on ice for VOC analysis.
- Circled Sample submitted for VOC grab sample.
- 13:35 Composite B-6.

B-9-A	0-1	13:41	0.9	Lt Br Clayey Silt
	1-2	13:41	0.8	〃
B-9-B	0-1	13:46	0.6	
	1-2	13:46	1.5	
(B-9-D)	0-1	13:50	1.3	
	(1-2)	13:50	1.6	
B-9-C	0-1	13:53	1.3	
	1-2	13:53	1.5	
B-9-E	0-1	13:57	0.4	
	1-2	13:57	1.3	

- Aliquot Samples placed on ice for VOC analysis.
- Circled Sample submitted for VOC grab sample.
- 14:15 Composite B-9.

Boring	Depth	Time	PID	Lithology
B-10-D	0-1	14:19	0.8	Dark Br clayey silt
	1-2	14:19	1.3	〃
(B-10-E)	0-1	14:23	1.0	Dark Br clayey silt
	(1-2)	14:23	1.4	〃
B-10-C	0-1	14:27	0.9	Lt Br clayey silt
	1-2	14:27	1.1	〃
B-10-A	0-1	14:30	1.2	Lt Br clayey silt
	1-2	14:30	1.3	〃
B-10-B	0-1	14:33	0.6	Red/Br clayey silt
	1-2	14:33	0.5	〃

- Aliquot Samples placed on ice for VOC analysis.
- Circled Sample Submitted for VOC grab Sample.
- 14:45 Composite B-10.

FORTRESS WOOD PRODUCTS II — EL

6/4/25 — By 1

~~25~~ ~~2446-B~~ ~~C~~ 2443-C

0815 ECS (E COVELAMO) SITE ARRIVAL
- S GREENE OF ECS AND QUANTEX PRESENT
- SAFETY FORM

0830 TAILGATE SAFETY MEETING

0835 QUANTEX MOBE TO B-11 CELL FOR DPT
- PID CALIBRATION

0855 QUANTEX BEGINS DRILLING AT GW-6 WELL LOCATION USING DPT
- LITHOLOGY OBSERVED / LOGGED FOR LATER WELL INSTALLATION USING HSA

0900 ★ FB-3_P FIELD BLANK COLLECTED

0910 GW-6 DPT COMPLETED AT 25' BG
- S GREENE SITE DEPARTURE

0920 MOBE TO B-11-A SAMPLE LOCATION

0935 QUANTEX BEGINS DRILLING AT GW-5 WELL LOCATION

1000 GW-5 DPT COMPLETED AT 25' BG

1005 QUANTEX MOBE TO GW-7 WELL LOCATION
- B-11 CELL SOILS KEPT ON ICE

1030 GW-7 DPT COMPLETED AT 25' BG

1040 QUANTEX MOBE TO GW-9 WELL LOCATION

1050 GW-9 DPT COMPLETED AT 15' BG
- MOBE TO GW-8 WELL LOCATION

1110 GW-8 DPT COMPLETED AT 20' BG

1115 ECS / QUANTEX PREP FOR MOBE TO B-11 C AND D SAMPLE LOCATIONS
- B-11 CELL ACCESS VIA ADJOINING GRAVEYARD

1140 B-11 CELL SAMPLING COMPLETED
- MOBE TO AREA OF BACKGROUND SAMPLES

1230 BG-1 THROUGH BG-3 SAMPLES COLLECTED
- QUANTEX LUNCH

FORTRESS WOOD PRODUCTS II — EL

6/4/25 — Pg 2

24473-C

BORING	DEPTH	TIME	PID	LITHO
B-11-B	0-1	0846	0.5	BR - SANDY SILT; MOIST
	1-2	0847	0.5	SAA
B-11-E	0-1	0849	0.1	BR - CLAYEY SILT; MOIST
	1-2	0851	0.3	SAA
B-11-A	0-1	0924	0.5	GRAY - SANDY SILT; MOIST
	1-2	0926	0.8	SAA
B-11-D	0-1	1127	1.1	DARK GRAY - SILTY CLAY; MOIST
	1-2	1129	0.4	SAA
B-11-C	0-1	1138	3.9	DARK GRAY - SILTY CLAY; MOIST
	1-2	1140	1.0	SAA

- ALIQUOT SAMPLES PLACED ON ICE FOR VOC ANALYSIS
- CIRCLED SAMPLES SUBMITTED FOR VOC GRAB SAMPLE
- ★ 1240 COMPOSITE B-11

BORING	DEPTH	TIME	PID	LITHO
BG-1	0-1	1150	—	DARK GRAY - SILTY CLAY; MOIST
	1-2	1152	—	SAA
BG-2	0-1	1208	—	SAA
	1-2	1210	—	SAA
BG-3	0-1	1225	—	SAA
	1-2	1227	—	SAA

- ★ 1335 BG-1 COLLECTED
- ★ 1340 BG-2 COLLECTED
- ★ 1345 BG-3 COLLECTED

BORING (EL)

NEXT PAGE (EL)

FWP II — EL

6/4/25 — Pg 3

24413-C

GW-6

DEPTH	PID	LITHOLOGY (EL)	REC
0-4	—	LT-BR SILTY SAND w/ LITTLE GRAVEL; MOIST	3' 0-5 INT
4-5	—	LT-BR CLAYEY SILT; MOIST	
5-8	—	SAA w/ TRACE GRAVEL	2' 5-10 INT
8-10	—	LT-BR SILTY CLAY; MOIST	
10-15	—	SAA	1' 10-15 INT
15-19	—	LT-BR CLAYEY SILT; MOIST	5' 15-20 INT
19-20	—	SAA w/ WHITE MOTTLES	
20-21	—	LT-BR CLAYEY SILT; MOIST	5' 20-25 INT
21-25	—	SAA EXCEPT WET	
		• EOB	

GW-5

DEPTH	PID	LITHOLOGY	REC
0-1	—	BR SILTY SAND w/ LITTLE GRAVEL; MOIST	4' 0-5 INT
1-5	—	GRAY SILTY CLAY w/ LITTLE GRAVEL; MOIST	
5-6	—	SAA EXCEPT SOME GRAVEL	2.5' 5-10 INT
6-10	—	GR-BR SILTY CLAY; MOIST	
10-15	—	SAA	3.5' (EL) 10-15 INT
15-16	—	SAA	
16-17	—	GR-BR SILT; MOIST	5' 15-20 INT
17-20	—	LT-BR SAND; MOIST	
20-22	—	GR-BR SILTY CLAY; SAT	4' 20-25 INT
22-25	—	GR-BR CLAY; SAT	
		• EOB	

GW-7

DEPTH	PID	LITHOLOGY	REC
0-3	—	LT-BR CLAY w/ TRACE GRAVEL; MOIST	5' 0-5 INT
3-5	—	SAA EXCEPT REDDISH BR	

FORTRESS WOOD PRODUCTS II — EL

6/4/25 — PG 4

2443-C

[GW-7] CONT.

DEPTH	PID	LITHOLOGY	REC
5-10	—	RED-BR CLAY; MOIST	5' 5-10 INT
10-15	—	SAA	2' 10-15 INT
15-20	—	SAA	5' 15-20 INT
		• SAT AT 16' BG	
20-25	—	RED-BR CLAY; SAT/WET	5' 20-25 INT
		• EOB	

[GW-9]

DEPTH	PID	LITHOLOGY	REC
0-5	—	LT-BR SILTY CLAY; MOIST	2.5' 0-5 INT
5-10	—	LT-BR CLAYEY SILT; MOIST	5' 5-10 INT
10-15	—	LT-BR CLAYEY SILT; WET	5' 10-15 INT
		• EOB	

[GW-8]

DEPTH	PID	LITHOLOGY	REC
0-3	—	LT-BR SILTY CLAY; MOIST	5' 0-5 INT
3-5	—	GR-BR CLAY; MOIST	5' EL 5
5-10	—	GR-BR CLAYEY SILT; MOIST	5' 5-10 INT
		• SAT AT ~ 10' BG	
10-15	—	SAA EXCEPT SAT	5' 10-15 INT
15-20	—	SAA	5' 15-20 INT
		• EOB	

EL

FORTRESS WOOD PRODUCTS II — EL

6/4/25 — Pg 5

24413-C

CONT. NOTES

- B-11-C, B-11-D, AND BACKGROUND SAMPLES COLLECTED VIA HAND AUGER
- HAND AUGER DECON PERFORMED BETWEEN EACH SAMPLE LOCATION

1240 ★ B-11 SAMPLE COLLECTED

1335 ★ Bg-1 SAMPLE COLLECTED

1340 ★ Bg-2 SAMPLE COLLECTED

1345 ★ Bg-3 SAMPLE COLLECTED

~~13~~ 1400 • QUANTEX MOBE TO B-1 CELL FOR DPT/HAND AUGER

1440 QUANTEX COMPLETES B-1-E, -D, -C, AND -B; ECS WILL COLLECT B-1-A OUTSIDE OF FENCE LINE

1500 QUANTEX SITE DEPARTURE; ECS ATTEMPTS TO LOCATE DOWNED TRANSFORMER

1520 ECS MOBE TO B-1-A LOCATION

1545 B-1 CELL SAMPLING COMPLETED

1555 ★ B-1-A SAMPLE COLLECTED

1600 ★ B-1 SAMPLE COLLECTED

1620 ECS OFFSITE

EL

FWP II

EL

6/4/25

PG

24413 - C

CONT. NOTES

BORING	DEPTH	TIME	PID	LITHO
B-1-E	0-1	~~1458~~ 1358	0.7	BR - SILTY SAND ; MOIST
	1-2	1400	0.2	LT-BR - SILT ; MOIST
B-1-D	0-1	1410	10.8	GR-BR - SILTY SAND ; MOIST
	1-2	1412	11.9	SAA
B-1-C	0-1	1424	11.8	GR-BR - SANDY SILT ; MOIST
	1-2	1426	0.8	SAA
B-1-B	0-1	1435	2.2	GRAY ~~SILT~~ CLAYEY SILT ; MOIST
	1-2	1437	0.3	GR-BR CLAYEY SILT ; MOIST
B-1-A	0-1	1540	0.6	GR-BR CLAYEY SILT ; MOIST
	1-2	1545	0.9	SAA

- ALIQUOT SAMPLES PLACED ON ICE FOR VOC ANALYSES
- CIRCLED SAMPLES SUBMITTED FOR VOC GRAB SAMPLE
- * 1600 COMPOSITE B-1
- * 1555 B-1-A SAMPLED FOR TCLP RCRA (0-1)

EL

FWP II EL

6/5/25 Pg 1

24413-C

0840 ECS (ELOVEKAMP) SITE ARRIVAL

- QUANTEX DRILLING PRESENT

0850 HASP TAILGATE REVIEW

0855 SAFETY FORM COMPLETED; QUANTEX MOBE TO GW-10 FOR DPT ADVANCEMENT AND MONITORING WELL INSTALLATION

0900 DRILLING BEGINS AT GW-10

~~[GW-10]~~ EL

~~DEPTH~~ EL ~~LITHOLOGY~~ EL

0920 DPT TOOL STUCK IN COMPETE; QUANTEX MOBE TO GW-2 FOR DPT ADVANCEMENT WHILE ATTEMPTS TO REMOVE DPT TOOL AT MOB EL GW-10

0930 DRILLING BEGINS AT GW-2

[GW-2]

DEPTH	LITHOLOGY	REC
0-2	GREY SILTY SAND W/ SOME GRAVEL; MOIST	2.5' 0-5 INT
2-5	REDDISH BR CLAYEY SILT W/ TRACE GRAVEL; MOIST	
5-10	LT-BR CLAYEY SILT; MOIST	5' 5-10 INT
10-15	SAA	5' 10-15 INT
15-20	SAA; SAT AT 20' BG	1' 15-20 INT
20-25	SAA EXCEPT SAT	5' 20-25 INT

SOLID STEM ↑

0955 DPT COMPLETE; QUANTEX PREP FOR AUGER ADVANCEMENT

1015 WET SOILS OBSERVED AT ~ 13' BG DURING AUGER ADVANCEMENT

1025 GW-2 WELL SET AT 18' BG; 10' SCREEN AND 8' RISER

- GROUT: 0-3 FEET
- BENTONITE: 3-6 FEET
- SAND PACK: 6-18 FEET

1230 QUANTEX PERFORMS AUGER DECON

1245 MOBE TO GW-3 FOR DPT ADVANCEMENT

NEXT PAGE EL

Flup II — EL

6/5/25 — Pg 2

24413-C

GW-31

DEPTH	LITHOLOGY	PEC
0-1	GREY SILTY SAND W/ SOME GRAVEL; MOIST	4.5' 0-5 INT
1-5	LT-BR SANDY SILT; MOIST	
5-10	SAA	5' 5-10 INT
10-15	LT-BR CLAYEY SILT; MOIST	5' 10-15 INT
15-18	SAA	
18-20	GR-BR SILTY SAND; SAT	E 5' 4' 15-20 INT

1110 DPT COMPLETE; QUANTEX PREP FOR AUGER ADVANCEMENT

1135 WATER IN SOILS NOT YET OBSERVED AT 25' BG; QUANTEX AUGER ADVANCEMENT TO 30' BG

- WELL PAD COMPLETED AT GW-2

1145 SAT E SOILS SAT AT ~32' BG

- LITHOLOGY 20-32': GR-BR SANDY SILT; MOIST | SAT AT 32' BG

1200 GW-3 WELL E WELL SET AT 25' BG; BOREING CAVED DURING AUGER REMOVAL

- 15' SCREEN AND 10' RISER
- GROUT: 0-5 FEET
- BENTONITE: 5-8 FEET
- SAND PACK: ~~13-25~~ E 8-25 FEET

1210 QUANTEX PERFORMS AUGER DECON

1230 MOBE TO GW-4 FOR DPT ADVANCEMENT

GW-41

DEPTH	LITHOLOGY	PEC
0-1	GR-BR SILTY SAND W/ GRAVEL; MOIST	4.5' 0-5 INT
1-5	SAA EXCEPT W/O GRAVEL	
5-10	LT-BR SANDY SILT; MOIST	4.5' 5-10 INT
10-14	SAA	
14-15	GREY SILTY SAND; MOIST	

1250 DPT REFUSAL AT ~16' BG; QUANTEX PREP FOR AUGER ADVANCEMENT

FWP II

EL

6/5/25

Pg 3

24413-C

1300 WELL PAD ~~AT~~ COMPLETED AT ~~GW-4~~ GW-3

1305 AUGER REFUSAL AT 17' BG FOR GW-4; QUANTEX OFFSET 10 FEET TO THE SOUTH

- RAIN INCREASING

1355 GW-4 WELL SET AT ~~25~~ 24' BG AT OFFSET LOCATION

- AUGERS ADVANCED TO 25' BG; 1-FOOT CAVE-IN
- 15' SCREEN AND ~~10'~~ 9' RISER
- GRAUT: 0-4 ~~ft~~ FEET
- BENTONITE: 4-7 FEET
- SAND PACK: 7-24 FEET

1425 GW-4 DTW: 20.42' BTOC

1430 GW-3 DTW: 14.99' BTOC

1440 GW-2 DTW:

1445 SITE CLEANUP

1510 ECS AND QUANTEX OFFSITE

24413-C

10/6/25 Forest Wood Prods 131898 131899

700 Arrive @ office for safety

745 Arrive on site

Presite

750 Quarter Arrives

755 HASP Tailgate

805 Quarter leaving meet con out & Concrete

815 Decon rig to move to GW-1

835 Set up on GW-1

GW-1

0-1 topsoil brown silt

1-3 gravel

3-5 red/brown clayey silt

5-10 Brown/tan silt water in tube @ 9'

10-15 tan/brown w/ black mottled silt

Auger to 15'

Set well

5-15 screen

4.15 Sand 0-2 grout

2-4 bentonite

915 Switch to augers for GW-1

940 Quarter to decon

1013 Set up on GW-5 w augers to 25'

~~HOY Quarter decon~~

GW-5

9.5-24.5 Screen

~~25~~ Sand

bentonite

grout

1104 Quarter Decon

1120 Set up on GW-7

1140 check WL GW-2 3.09' TO

1145 Set GW-7

10-25' screen

25 Sand

bentonite

grout

1151 Quarter, decon

1219 Set up on GW-6

1245 GW build

10-25 Screen

25 Sand

bentonite

grout

1255 Quanterra decon

1350 Purge GW-2 SWL 3.09

1405 Purge GW-3 SWL 14.75

300 Purge GW-4 SWL 15.93

Quanterra Purge # 6 ?

Purge # 7 Monday Per JD

1430 check GW-5 < 1 Ft H2O

NO Purge

FWP II — EL

6/9/25 — Pg 1

24413-C

0805 EC's (E LOVEKAMP) SITE ARRIVAL ; QUANTEX PRESENT

0810 SAFETY FORM AND TAILGATE SAFETY MEETING

0820 QUANTEX AND ECS PERFORM DECON FOR EQUIPMENT

0825 QUANTEX SETUP AT GW-6 FOR WELL DEVELOPMENT

0835 QUANTEX MOBE REQ TO GW-10 FOR DPT ADVANCEMENT

- GW-10 OFFSET NW (ED) APPROX. 35' NW AND OFF CONCRETE SLAB ; CONCRETE OBSERVED TO BE ~ 4" THICK ON 6/6/25
- GW-10 LOCATED 12' N OF TRENCH DRAIN

0840 DRILLING BEGINS AT GW-10

[GW-10]

DEPTH	LITHOLOGY	REC
0-4	GREY SILTY SAND W/ SOME GRAVEL ; MOIST	1.5' 0-5 INT
4-5	REDDISH BR SANDY SILT ; MOIST	
5-10	SAA	5' 5-10 INT
10-14	REDDISH BR CLAYEY SILT ; MOIST	4' 10-15 INT
14-15	LT-BR CLAYEY SILT ; MOIST	
15-20	LT-BR SILTY CLAY ; MOIST	5' 15-20 INT
20-22	SAA	5' 20-25 INT
22-25	SAA EXCEPT SAT	

0955 DPT COMPLETE ; QUANTEX PREP FOR AUGER ADVANCEMENT

1020 SAT SOILS OBSERVED AT ~20' BG DURING AUGER ADVANCEMENT

1040 GW-10 WELL SET AT 25' BG ; 15' SCREEN AND 10' RISER

- GROUT: 0-5 FEET
- BENTONITE: 5-8 FEET
- SAND PACK: 8-25 FEET

1050 GW-6 DEVELOPMENT COMPLETE ; OBSERVED AS CLEAR

1055 GW-10 DTW: 21.48' BTOC

1120 bmf (ED) GW-10 WELL PAD COMPLETE ; GW-10 DEVELOPMENT BEGINS

1130 QUANTEX PERFORMING DECON FOR AUGERS

1150 QUANTEX MOBE REQ TO GW-9 FOR WELL INSTALLATION

FWP II

EL

6/9/25

Pg 2

24413-C

1230 DRILLING BEGINS AT GW-9

- SEE NOTES FROM 6/5/25 FOR LITHOLOGY

1240 WET SOILS OBSERVED AT ~9' BG DURING AUGER ADVANCEMENT

1255 GW-9 WELL SET AT 15' BG; 12' SCREEN AND 3' RISER

- GROUT: 0-1 FEET
- BENTONITE: 1-2 FEET
- SAND PACK: 2-15 FEET

1315 GW-9 WELL PAD COMPLETE

1320 QUANTEX MOBE TO GW-8 FOR WELL INSTALLATION

- SEE NOTES FROM 6/5/25 FOR LITHOLOGY

1340 WET SOILS OBSERVED AT ~10' BG FOR GW-8

1345 GW-9 DTW: 3.30' BTOC

1350 GW-9 DEVELOPMENT BEGINS

1355 GW-8 WELL SET AT 15' BG; 12' SCREEN AND 3' RISER

- SAME CONSTRUCTION AS GW-9

1420 GW-9 WELL PAD COMPLETE

1435 GW-8 DTW OBSERVED AT SURFACE; POTENTIAL ARTESIAN CONDITIONS

- SAME FOR GW-2 → ARTESIAN CONDITIONS

1445 GW-9 DEVELOPMENT COMPLETE; SETUP AT GW-8

1530 GW-8 DEVELOPMENT COMPLETE

1540 ECS AND QUANTEX OFFSITE

EL

FMP II EL

6/10/25 Pg 1

24413-C

0820 ECS (E LOVEKAMP) SITE ARRIVAL

0830 SAFETY FORM COMPLETED

0845 DTW MEASUREMENTS COLLECTED AT GW-8 AND GW-9

ID	DTW	DTB (FEET BTOC)
GW-8	~~1.44~~ 1.06	13.10
GW-9	~~1.66~~ 1.49	13.02
GW-7	7.83	24.45
GW-6	10.23	24.80
GW-2	3.35	19.40
GW-1	14.53	24.10
GW-10	17.80	24.40
GW-4	16.89	24.40
GW-3	14.68	25.20
GW-5	22.21	24.60

0930 WATER LEVEL MEASUREMENTS COMPLETE; MOBE TO GW-7 FOR LOW-FLOW SAMPLING

0955 LAWRENCE ASSOCIATES SITE ARRIVAL; DISCUSS SURVEY AND SAMPLE LOCATIONS; KMZ FILE GIVEN TO LAWRENCE

1020 ISSUES W/ HORIBA AT GW-7; FLOW CELL LEAKING

1025 GW-7 LOW-FLOW BEGINS

1100 ★ GW-7 AND GW-7_P COLLECTED (SEE FIELD FORM)

★ DUP-1 AND DUP-1_P COLLECTED FROM GW-7

1120 ★ EB-1 EQUIP BLANK COLLECTED

1125 ★ EB-1_P EQUIP BLANK COLLECTED } EB COLLECTED FROM WATER LEVEL METER

1135 ★ FB-4_P FIELD BLANK COLLECTED

1150 MOBE TO GW-1 FOR LOW-FLOW SAMPLING

1200 ASSIST SURVEYING CREW

1235 GW-1 LOW-FLOW BEGINS

1325 ★ GW-1 AND GW-1_P COLLECTED (SEE FIELD FORM)

1340 MOBE TO GW-2 FOR LOW-FLOW SAMPLING

FWP II EL

6/10/25 Pg 2

24413-C

1350 GW-2 LOW-FLOW BEGINS

1420 * GW-2 AND GW-2_P COLLECTED (SEE FIELD FORM)

1445 ECS PREPS TO COLLECT TX-1 AND TX-DUP SOIL SAMPLES

1500 * TX-1 SOIL SAMPLE COLLECTED ; * TX-DUP COLLECTED

- SAMPLE COLLECTED AT 2' BG
- OUTSIDE OF FENCE / DENSE VEGETATION ADJACENT W OF POWER TRANSFORMER

1515 * TB-1 TRIP BLANK INCLUDED IN SAMPLE COOLER

TX-11

DEPTH	PID	LITHO
0-1	-	GR-BR CLAYEY SILT ; MOIST
1-2	-	LT-BR SILTY CLAY ; MOIST
		• EOB

1520 LAWRENCE ASSOCIATES SITE DEPARTURE

1530 COC's COMPLETED

1540 ECS OFFSITE

EL

FMP II EL

6/11/25 pg 1

24413-C

0840 ECS (E LOVELAMP) SITE ARRIVAL

0850 SAFETY FORM (COMPLETED)

0900 ECS MOBE TO GW-5 FOR LOW-FLOW SAMPLING

0920 GW-5 LOW-FLOW BEGINS

0945 ★ GW-5 AND GW-5_P SAMPLES COLLECTED (SEE FIELD FORM)

1000 ★ FB-5_P FIELD BLANK COLLECTED

1020 MOBE TO GW-4 FOR LOW-FLOW SAMPLING

1030 LAWRENCE ASSOCIATES SITE ARRIVAL

1035 GW-4 LOW-FLOW BEGINS

1110 ★ GW-4 AND GW-4_P SAMPLES COLLECTED; ★ DUP-2_P FROM GW-4

1120 ★ EB-2 EQUIP BLANK COLLECTED ↳ SEE FIELD FORM

1130 D HARSHMAN SITE ARRIVAL

1140 MOBE TO GW-3 FOR LOW-FLOW SAMPLING

1205 GW-3 LOW-FLOW BEGINS

1245 ★ GW-3 AND GW-3_P SAMPLES COLLECTED (SEE FIELD FORM)

1315 MOBE TO GRAVEYARD SIDE TO ASSIST SURVEY CREW

1325 ~~1345~~ EL PREP FOR

1345 ★ WC-1 SOIL SAMPLE COLLECTED FROM ~2' BG

[WC-1]

DEPTH	PID	LITHO
0-1	—	GR-BR SANDY GRAVEL; MOIST
1-2	—	GR-BR SAND W/ SOME GRAVEL; MOIST

1400 ECS MOBE TO GW-10 FOR LOW-FLOW SAMPLING

o D HARSHMAN SITE DEPARTURE

1430 ★ EB-2_P EQUIP BLANK COLLECTED

1455 ★ GW-10 AND GW-10_P SAMPLES COLLECTED (SEE FIELD FORM)

1520 MOBE TO GW-6 FOR LOW-FLOW SAMPLING

1620 ★ GW-6 SAMPLE COLLECTED (SEE FIELD FORM)

1645 ECS OFFSITE

EL

FWP II — EL

6/12/25 — pg 1

24413-C

1630 ECS (E LOVEKAMP) SITE ARRIVAL
- SAFETY FORM

1635 SITE CLEANUP AND CLOSE WELL COVERS

1655 MOBE TO GW-4 FOR LOW-FLOW SAMPLING

1715 GW-4 LOW-FLOW BEGINS

1745 ★ GW-4 SAMPLE COLLECTED (SEE FIELD FORM)

1750 ★ EB-3 EQUIP BLANK COLLECTED

1755 MOBE TO GW-8 FOR LOW-FLOW SAMPLING

1800 GW OBSERVED AT TOP OF CASING; AIR BUBBLES OBSERVED UPON OPENING J-PLUG → ASSUMED ARTESIAN CONDITIONS DUE TO PRESSURE

1805 WATER LEVEL STATIC DURING LOW-FLOW PURGE

1810 GW-8 LOW-FLOW BEGINS

1835 ★ GW-8 SAMPLE COLLECTED

1840 SITE CLEANUP

1845 ECS OFFSITE

EL

Well Sampling Data Form

Client: FWP II **Project Number:** 24413-C

Site Location: 1 METALS DRIVE

Well No: GW-7 Weather: 74°F, PARTLY CLOUDY

Date: 6/10/25 Purge Water Disposal: ON-SITE

Sampled By: EL Well Diameter / Type: 2" FLUSH

Depth of Well (ft): 24.95 Water Column (ft): 17.12

Depth to Water(ft): 7.83 Volume of Water in Well (gal) 2.79

Depth to Product (ft): — Volume of Water to Remove (gal): —

well diameter:	1 in	2 in	4 in	6 in	8 in
gallons per foot:	0.041	0.163	0.653	1.469	2.611

Start Purging: 1025 Purge Rate: 100 ML/MIN

End Purging: 1055 Volume of Water Removed (gal): 1 L

Method of Purge: PERI Method of Sampling: LOW-FLOW

Physical Appearance/ Comments: CLEAR, NO ODOR

* NTUS ABOVE 10 PRIOR TO COLLECTION

Samples Collected: (analyses / no. bottles) ~~GW-7, GW-7-P, DUP-GW-1~~ (EL), DUP-1, DUP-1-P

Time: 1100 Laboratory: PACE

Field Measurements:

Time	DTW ft	Flow Rate ml/min	ORP mV (+/- 10 mV)	Conductivity mS/m - S/m (w/in 3%)	Turbidity NTU (w/in %10)	pH SU (+/- 0.1)	Temperature C° - F° (w/in 3%)	Dissolved O_2 mg/L (w/in 10%)
1030	8.10	100	47	0.106	52.7	5.87	26.65	4.41
1035	"	"	211	0.113	52.6	5.07	26.01	3.95
1040	"	"	239	0.114	47.4	5.04	25.36	3.85
1045	"	"	249	0.114	46.3	5.05	25.06	3.82
1050	"	"	258	0.115	42.8	5.06	24.91	3.78
1055	"	"	268	0.115	43.6	5.06	25.04	3.67

[redacted] START AT FB-4_P FOR FIELD BLANK

Well Sampling Data Form

Client: FWP II **Project Number:** 24413-C

Site Location: 1 METALS DRIVE

Well No: GW-1 Weather: 79° F, PARTLY CLOUDY

Date: 6/10/25 Purge Water Disposal: ON-SITE

Sampled By: EL Well Diameter / Type: 2" FLUSH

Depth of Well (ft): 24.10 Water Column (ft): 9.57

Depth to Water(ft): 14.53 Volume of Water in Well (gal) 1.56

Depth to Product (ft): — Volume of Water to Remove (gal): —

well diameter:	1 in	(2 in)	4 in	6 in	8 in
gallons per foot:	0.041	0.163	0.653	1.469	2.611

Start Purging: 1235 Purge Rate: 100 ML/MIN

End Purging: 1321 Volume of Water Removed (gal): 1.25 G

Method of Purge: PERF Method of Sampling: LOW-FLOW

Physical Appearance/ Comments: CLEAR, NO ODOR

* NTUs ABOVE 10 PRIOR TO COLLECTION

Samples Collected: (analyses / no. bottles) GW-1, GW-1-P

Time: 1325 Laboratory: PACE

Field Measurements:

Time	DTW ft	Flow Rate ml/min	ORP mV (+/- 10 mV)	Conductivity mS/m - S/m (w/in 3%)	Turbidity NTU (w/in %10)	pH SU (+/- 0.1)	Temperature C° - F° (w/in 3%)	Dissolved O_2 mg/L (w/in 10%)
1245	14.79	100	183	0.104	424	5.85	28.38	2.24
1250	14.80	"	195	0.105	384	5.77	27.22	2.11
1255	"	"	202	0.107	331	5.73	25.25	2.07
1300	"	"	206	0.107	241	5.72	25.37	1.97
1305	"	"	209	0.106	150	5.71	24.76	1.75
1310	"	"	210	0.107	137	5.71	24.81	1.78
1315	"	"	211	0.107	114	5.70	24.67	1.75
1318	"	"	213	0.107	110	5.70	24.39	1.79
1321	"	"	214	0.107	108	5.71	24.40	1.76

[redacted]

* FLOW CELL CLEANED MULTIPLE TIMES IN ORDER TO REMOVE NTUs

Well Sampling Data Form

Client: FWD II **Project Number:** 24413-C

Site Location: 1 METALS DRIVE

Well No: GW-2 Weather: 79°F, PARTLY CLOUDY

Date: 6/10/25 Purge Water Disposal: ON-SITE

Sampled By: EL Well Diameter / Type: 2" FLUSH

Depth of Well (ft): 18.40 Water Column (ft): 15.05

Depth to Water(ft): 3.35 Volume of Water in Well (gal) 2.45

Depth to Product (ft): — Volume of Water to Remove (gal): —

well diameter:	1 in	(2 in)	4 in	6 in	8 in
gallons per foot:	0.041	0.163	0.653	1.469	2.611

Start Purging: 1350 Purge Rate: 100 ML/MIN

End Purging: (EL) 1265 1416 Volume of Water Removed (gal):

Method of Purge: PERI Method of Sampling: LOW-FLOW

Physical Appearance/ Comments: CLEAR, NO ODOR

Samples Collected: (analyses / no. bottles) GW-2, GW-2-P

Time: 1420 Laboratory: PACE

Field Measurements:

Time	DTW ft	Flow Rate ml/min	ORP mV (+/- 10 mV)	Conductivity mS/m - S/m (w/in 3%)	Turbidity NTU (w/in %10)	pH SU (+/- 0.1)	Temperature C° - F° (w/in 3%)	Dissolved O_2 mg/L (w/in 10%)
1355	3.44	100	191	0.032	4.6	3.83	30.35	1.13
1400	3.49	"	177	0.158	2.8	5.36	23.16	0.32
1405	"	"	196	0.164	3.1	5.34	21.43	0.12
1410	"	"	202	0.164	3.3	5.31	21.27	0.09
1413	"	"	205	0.164	3.1	5.30	21.11	0.07
1416	"	"	206	0.164	3.0	5.30	21.11	0.06

[redacted]

Well Sampling Data Form

Client: FWD II **Project Number:** 24493-C

Site Location: 1 METALS DRIVE

Well No: GW-4 Weather: 78°F, SUNNY

Date: 6/11/25 Purge Water Disposal: ON-SITE

Sampled By: EL Well Diameter / Type: 2" FLUSH

Depth of Well (ft): 24.40 Water Column (ft): 7.51

Depth to Water(ft): 16.89 Volume of Water in Well (gal) 1.22

Depth to Product (ft): — Volume of Water to Remove (gal): —

well diameter:	1 in	(2 in)	4 in	6 in	8 in
gallons per foot:	0.041	0.163	0.653	1.469	2.611

Start Purging: 1030 Purge Rate: 100 ML/MIN

End Purging: 1105 Volume of Water Removed (gal): 1 G

Method of Purge: PERI Method of Sampling: LOW-FLOW

Physical Appearance/ Comments: CLEAR, NO ODOR

Samples Collected: (analyses / no. bottles) GW-4, GW-4-P, DUP-2-P

Time: 1110 Laboratory: PACE

Field Measurements:

Time	DTW ft	Flow Rate ml/min	ORP mV (+/- 10 mV)	Conductivity mS/m - S/m (w/in 3%)	Turbidity NTU (w/in %10)	pH SU (+/- 0.1)	Temperature C° - F° (w/in 3%)	Dissolved O_2 mg/L (w/in 10%)
1035	16.84	100	102	0.213	20.5	6.81	32.15	4.93
~~1040~~ 1040	17.33	"	164	0.222	24.8	6.29	30.02	4.41
1045	17.49	"	180	0.224	22.2	6.24	28.16	4.55
1050	17.62	"	184	0.234	19.6	6.22	27.18	4.83
1055	17.93	"	185	0.238	17.8	6.20	26.80	5.00
1058	17.78	"	186	0.238	13.3	6.20	26.72	4.93
1101	17.81	"	186	0.238	10.2	6.20	26.69	4.92
1104	17.85	"	187	0.239	9.8	6.20	26.63	4.90

[redacted]

Well Sampling Data Form

Client: FWD II **Project Number:** 24413-C

Site Location: 1 METALS DRIVE

Well No: GW-5 Weather: 74° F, PARTLY CLOUDY

Date: 6/11/25 Purge Water Disposal: ON-SITE

Sampled By: EL Well Diameter / Type: 2" FLUSH

Depth of Well (ft): 24.60 Water Column (ft): 2.31

Depth to Water(ft): 22.29 Volume of Water in Well (gal) 0.38

Depth to Product (ft): — Volume of Water to Remove (gal):

well diameter:	1 in	(2 in)	4 in	6 in	8 in
gallons per foot:	0.041	0.163	0.653	1.469	2.611

Start Purging: 0920 Purge Rate: 100 ML/MIN

End Purging: 0942 Volume of Water Removed (gal): 0.5 L

Method of Purge: PERI Method of Sampling: LOW-FLOW

Physical Appearance/ Comments: CLEAR, NO ODOR

* LIMITED VOLUME OF GW; REINAPPLE REQUIRED DURING SAMPLING

Samples Collected: (analyses / no. bottles) GW-5, GW-5-P

Time: 0945 Laboratory: PACE

Field Measurements:

Time	DTW ft	Flow Rate ml/min	ORP mV (+/- 10 mV)	Conductivity mS/m - S/m (w/in 3%)	Turbidity NTU (w/in %10)	pH SU (+/- 0.1)	Temperature C° - F° (w/in 3%)	Dissolved O_2 mg/L (w/in 10%)
0923	22.58	100	-64.7	0.144	9.4	8.49	23.51	6.67
0928	22.60	"	101	0.426	9.9	6.38	22.52	6.00
0933	"	"	100	0.426	9.3	6.41	22.97	5.78
0936	"	"	103	0.422	9.7	6.44	23.42	5.65
0939	"	"	104	0.426	9.8	6.46	23.59	5.59
0942	"	"	106	0.428	9.8	6.46	23.88	5.56

[redacted]

Well Sampling Data Form

Client: FWD II **Project Number:** 24413-C

Site Location: 1 METALS DRIVE

Well No: GW-3 Weather: 83°F, PARTLY CLOUDY

Date: 6/11/25 Purge Water Disposal: ON-SITE

Sampled By: EL Well Diameter / Type: 2" FLUSH

Depth of Well (ft): 25.20 Water Column (ft): 10.55

Depth to Water(ft): 14.65 Volume of Water in Well (gal) 1.72

Depth to Product (ft): — Volume of Water to Remove (gal): —

well diameter:	1 in	(2 in)	4 in	6 in	8 in
gallons per foot:	0.041	0.163	0.653	1.469	2.611

Start Purging: 1205 Purge Rate: 100 ML/MIN

End Purging: 1240 Volume of Water Removed (gal): 1 G

Method of Purge: PERI Method of Sampling: LOW-FLOW

Physical Appearance/ Comments: CLEAR, NO ODOR

* NTUs GREATER THAN 10 PRIOR TO COLLECTION

Samples Collected: (analyses / no. bottles) GW-3, GW-3-P

Time: 1245 Laboratory: PACE

Field Measurements:

Time	DTW ft	Flow Rate ml/min	ORP mV (+/- 10 mV)	Conductivity mS/m - S/m (w/in 3%)	Turbidity NTU (w/in %10)	pH SU (+/- 0.1)	Temperature C° - F° (w/in 3%)	Dissolved O_2 mg/L (w/in 10%)
1210	15.00	100	153	0.222	56.4	6.16	31.01	4.04
1215	15.12	"	172	0.234	56.0	6.09	28.57	4.18
1220	15.17	"	180	0.242	56.1	6.07	27.34	4.21
1225	15.22	"	183	0.247	52.3	6.07	27.02	4.34
1230	15.27	"	185	0.249	49.3	6.08	26.73	4.22
1233	15.31	"	186	0.249	48.1	6.09	26.60	4.20
1236	15.33	"	188	0.252	43.4	6.10	26.64	4.12
1239	15.35	"	188	0.252	43.1	6.10	26.70	3.99

[redacted]

Well Sampling Data Form

Client: FWD II **Project Number:** 24413 - C

Site Location: 1 METALS DRIVE

Well No: GW-10 Weather: 85°F, PARTLY CLOUDY

Date: 6/11/25 Purge Water Disposal: ON-SITE

Sampled By: EL Well Diameter / Type: 2" FLUSH

Depth of Well (ft): 24.90 Water Column (ft): 7.1

Depth to Water(ft): 17.80 Volume of Water in Well (gal) 1.16

Depth to Product (ft): — Volume of Water to Remove (gal): —

well diameter:	1 in	(2 in)	4 in	6 in	8 in
gallons per foot:	0.041	0.163	0.653	1.469	2.611

Start Purging: 1420 Purge Rate: 100 ML/MIN

End Purging: 1453 Volume of Water Removed (gal): 0.75 G

Method of Purge: PERI Method of Sampling: LOW-FLOW

Physical Appearance/ Comments: CLEAR, NO ODOR

* NOT NTUS GREATER THAN 10 PRIOR TO COLLECTION

Samples Collected: (analyses / no. bottles) GW-10, GW-10_P

Time: 1455 Laboratory: PACE

Field Measurements:

Time	DTW ft	Flow Rate ml/min	ORP mV (+/- 10 mV)	Conductivity mS/m - S/m (w/in 3%)	Turbidity NTU (w/in %10)	pH SU (+/- 0.1)	Temperature C° - F° (w/in 3%)	Dissolved O_2 mg/L (w/in 10%)
1425	18.21	100	96	0.293	21.5	6.35	31.87	4.62
1430	18.36	"	151	0.281	23.0	6.09	30.75	4.05
1435	18.55	"	173	0.290	22.4	6.04	28.63	4.14
1440	18.65	"	177	0.294	17.4	6.03	28.00	4.26
1445	18.71	"	178	0.297	17.3	6.02	27.86	4.24
1448	18.75	"	179	0.295	16.9	6.02	27.92	4.13
1451	18.78	"	179	0.295	17.0	6.02	28.00	4.07
1453	18.82	"	179	0.295	16.9	6.02	28.02	4.03

[redacted]

Well Sampling Data Form

Client: FWP II **Project Number:** 24413-C

Site Location: 1 METALS DRIVE

Well No: GW-6 Weather: 85°F, PARTLY CLOUDY

Date: 6/11/25 Purge Water Disposal: ON-SITE

Sampled By: EL Well Diameter / Type: 2" FLUSH

Depth of Well (ft): 24.80 Water Column (ft): 14.6

Depth to Water(ft): 10.20 Volume of Water in Well (gal) 2.34

Depth to Product (ft): — Volume of Water to Remove (gal): —

well diameter:	1 in	(2 in)	4 in	6 in	8 in
gallons per foot:	0.041	0.163	0.653	1.469	2.611

Start Purging: 1540 Purge Rate: 100 ML/MIN

End Purging: 1613 Volume of Water Removed (gal): 0.75 G

Method of Purge: PERI Method of Sampling: LOW-FLOW

Physical Appearance/ Comments: CLEAR, NO ODOR

Samples Collected: (analyses / no. bottles) GW-6

Time: 1620 Laboratory : PACE

Field Measurements:

Time	DTW ft	Flow Rate ml/min	ORP mV (+/- 10 mV)	Conductivity mS/m - S/m (w/in 3%)	Turbidity NTU (w/in %10)	pH SU (+/- 0.1)	Temperature C° - F° (w/in 3%)	Dissolved O_2 mg/L (w/in 10%)
1545	10.38	100	178	0.212	24.6	5.89	36.51	1.02
1550	"	"	163	0.215	24.0	5.73	32.97	0.62
1555	"	"	171	0.216	19.5	5.70	31.29	0.59
1600	"	"	180	0.221	11.3	5.67	29.75	0.59
1605	"	"	184	0.225	7.9	5.66	29.06	0.60
1610	"	"	186	0.226	7.4	5.66	28.83	0.60
1613	"	"	187	0.225	7.2	5.66	28.57	0.60

[redacted]

Well Sampling Data Form

Client: FWP II **Project Number:** 24413-C

Site Location: 1 METALS DRIVE

Well No: GW-9 Weather: 88°F, PARTLY CLOUDY

Date: 6/12/25 Purge Water Disposal: ON-SITE

Sampled By: EL Well Diameter / Type: 2" FLUSH

Depth of Well (ft): 13.02 Water Column (ft): 11.33

Depth to Water(ft): 1.69 Volume of Water in Well (gal) 1.85

Depth to Product (ft): — Volume of Water to Remove (gal): —

well diameter:	1 in	2 in	4 in	6 in	8 in
gallons per foot:	0.041	0.163	0.653	1.469	2.611

Start Purging: 1712 Purge Rate: 100 ML/MIN

End Purging: 1736 Volume of Water Removed (gal): 0.64

Method of Purge: PERI Method of Sampling: LOW-FLOW

Physical Appearance/ Comments: CLEAR, NO ODOR

* NTUs GREATER THAN 10 PRIOR TO SAMPLE COLLECTION

Samples Collected: (analyses / no. bottles) GW-9

Time: 1745 Laboratory: PERI

Field Measurements:

Time	DTW ft	Flow Rate ml/min	ORP mV (+/- 10 mV)	Conductivity mS/m - S/m (w/in 3%)	Turbidity NTU (w/in %10)	pH SU (+/- 0.1)	Temperature C° - F° (w/in 3%)	Dissolved O_2 mg/L (w/in 10%)
1715	1.69	100	195	0.120	17.7	4.01	30.49	2.10
1720	1.99	"	169	0.133	17.5	5.88	24.94	0.32
1725	2.10	"	174	0.130	17.8	5.87	24.24	0.15
1730	2.16	"	174	0.128	18.0	5.88	24.10	0.08
1733	2.20	"	176	0.127	17.9	5.89	24.00	0.06
1736	2.23	"	176	0.127	18.0	5.89	23.90	0.06

[redacted]

VOC TB-3 FROM 6/11

Well Sampling Data Form

Client: FWP II **Project Number:** 24413-C

Site Location: 1 METALS DRIVE

Well No: GW-8 Weather: 38 °F, PARTLY CLOUDY

Date: 6/12/25 Purge Water Disposal: ON-SITE

Sampled By: EL Well Diameter / Type: 2" FLUSH

Depth of Well (ft): 13.10 Water Column (ft): 13.10

Depth to Water(ft): SURFACE Volume of Water in Well (gal) 2.14

Depth to Product (ft): — Volume of Water to Remove (gal): —

well diameter:	1 in	(2 in)	4 in	6 in	8 in
gallons per foot:	0.041	0.163	0.653	1.469	2.611

Start Purging: 1808 Purge Rate: 100 ML/MIN

End Purging: 1830 Volume of Water Removed (gal):

Method of Purge: PERI Method of Sampling: LOW-FLOW

Physical Appearance/ Comments: CLEAR, NO ODOR; WATER LEVEL REMAINS STATIC THROUGH PURGE

* NTUs GREATER THAN 10 PRIOR TO COLLECTION

Samples Collected: (analyses / no. bottles) GW-8

Time: 1835 Laboratory: PACE

Field Measurements:

Time	DTW ft AT TOC (SURFACE)	Flow Rate ml/min	ORP mV (+/- 10 mV)	Conductivity mS/m - S/m (w/in 3%)	Turbidity NTU (w/in %10)	pH SU (+/- 0.1)	Temperature C° - F° (w/in 3%)	Dissolved O_2 mg/L (w/in 10%)
1808	—	100	200	0.143	62.0	6.45	29.02	3.63
1813	—	"	192	0.151	68.2	6.30	27.14	3.17
1818	—	"	198	0.152	65.6	6.29	26.23	2.97
1821	—	"	200	0.150	61.3	6.28	25.78	2.82
1824	—	"	200	0.151	59.4	6.28	25.64	2.73
1827	—	"	200	0.150	57.9	6.28	25.57	2.72

[redacted]

7/9/25 FWP II EL

0830 ECS (E LOVELAND) SITE ARRIVAL

WEATHER 69-84°F, PARTLY CLOUDY, H 88+/-, P 30.08", WIND AT 7 MPH FROM SW

- S GREENE OF ECS PRESENT

0835 SAFETY FORM (COMPLETED); TAILGATE REVIEW OF HASP

0840 MOVE TO CELL B B-1 FOR TCLP PCRA SAMPLING (COMPOSITE)

0855 ECS SETUP AT B-1-E

0935 ECS COMPLETES ~~CELL~~ B-1 CELL SAMPLING

0940 ★ B-1-TCLP SS COLLECTED

- COMPOSITE SAMPLE; SOILS COLLECTED FROM 0-2' BG AT EACH LOCATION

0950 ECS SETUP AT B-4-C

- HAND AUGER DECON PERFORMED BETWEEN CELLS AND PCRA GRABS

1000 ★ B-4-C SS COLLECTED

1005 ECS SETUP AT B-4-D

1010 ★ B-4-D SS COLLECTED

1025 ECS SETUP AT B-5-C

1040 ★ B-5-C SS COLLECTED

1045 ECS SETUP AT B-8-B

1050 ★ B-8-B SS COLLECTED

1100 ECS SETUP AT B-3-A

1145 ★ B-3-TCLP SS COLLECTED

7/9/25 FWP II EL

- COMPOSITE SAMPLE; SOILS COLLECTED FROM 0-2' BG AT EACH LOCATION

1150 WORK BREAK

1215 ECS SETUP AT B-6-B

1300 ★ B-6-TCLP SS COLLECTED

- COMP SAMPLE; SOILS COLLECTED FROM 0-2' BG AT EACH LOCATION
- DUP-TCLP COLLECTED FROM B-6

1315 ECS SETUP AT B-12-C

1345 ★ B-12-TCLP SS COLLECTED

1350 SITE CLEANUP

1405 ECS OFFSITE

EL

FWP II - BROWNFIELDS
24413-E ~~WEATHER~~
12/4/25

0900 ECS (E LOVELAMP) SITE ARRIVAL
- R CAVALIER OF ECS PRESENT

0905 SAFETY FORM / HASP REVIEW

0915 ECS SETUP AT SV-2 AND SV-3 FOR SOIL VAPOR POINT INSTALLATIONS TO 6' BG

[SV-2]

DEPTH	LITHO
0-1	DARK GREY, SANDY GRAVEL, METAL, GLASS (FILL); MOIST
1-2	SAA

1030 SV-2 ADVANCED TO 2' BG

1045 SV-3 VAPOR LOCATION SET AT 6' BG USING 6" SS SCREEN AND TEFLON LINED TUBING
- 1 FOOT OF SAND PACK AND HYDRATED BENTONITE TO SURFACE
- SAND PACK ALSO PLACED AT BOREHOLE BOTTOM ★

[SV-2] CONT.

DEPTH	LITHO
2-3	GREYISH GREEN, CLAYEY SILT W/ TRACE GRAVEL; MOIST
3-4	SAA
4-5	LIGHT BROWN, CLAYEY SILT; MOIST
5-6	SAA

- EOB; FULL RECOVERY 0-6' BG

1100 R CAVALIER MOBE TO SV-1 TO BEGIN HAND AUGER FOR SOIL VAPOR POINT

1135 SV-2 VAPOR POINT SET AT 6' BG USING 6" SS SCREEN AND TEFLON LINED TUBING
- 1 FOOT OF SAND PACK ABOVE SCREEN AND HYDRATED BENTONITE TO SURFACE
- ★ SAME AS ABOVE

1230 SV-1 VAPOR POINT INSTALLED (EL) ~~IN~~ SAME AS SV-2 AND SV-3
- DI WATER USED FOR HYDRATION AT EACH VAPOR POINT

1245 R CAVALIER SITE DEPARTURE; E LOVELAMP MOBE TO ONSITE STREAM

1315 SITE WALK AT STREAM COMPLETE; WATER PRESENT

1320 ECS OFFSITE

EL

WP II - BROWNFIELDS
24413-E
12/5/25 WEATHER: 33-37°F, CLOUDY | DRIZZLE, H 93%, P 30.15"

0850 ECS (E LOVEKAMP) SITE ARRIVAL
0905 SITE ~~FORM~~ SAFETY FORM | HASP REVIEW
0915 ECS PREP FOR SOIL VAPOR SAMPLING AT SV-3

[SV-3]
CAN #: 24690 FC #: 22333
SHUT-IN TEST → PASS
LEAK TEST → HELIUM SHROUD: 3.2%, 2.9%, 2.4%

1	0	PPM	✓
2	0	↓	✓
3	0		✓

* PURGE CONDUCTED PRIOR TO SAMPLING; NO WATER OBSERVED

T1 0953 P1 -28 "Hg
T2 0958 P2 -5 "Hg

1005 ECS MOBE TO SV-2

[SV-2]
CAN #: 13740 FC #: 22415
SHUT-IN TEST → PASS
LEAK TEST → HELIUM SHROUD: 3.7%, 3.1%, 2.8%

1	0	PPM	✓
2	0	↓	✓
3	0		✓

* PURGE CONDUCTED SAA

T1 1037 P1 -28 "Hg
T2 1042 P2 -5 "Hg

1045 BUCKEYE SITE ARRIVAL FOR WSW ABANDONMENT
1050 ECS MOBE TO ~~SV-3~~ SV-1

~~SV-3~~ [SV-1] + SV-DUP
CAN #: 29709 FC #: 15910
CAN #: 24422 FC #: 22475 → DUPLICATE
SHUT-IN TEST →
LEAK TEST → HELIUM SHROUD:

1	0	PPM	✓
2	0	↓	✓
3	0		✓

* PURGE CONDUCTED ~~SS~~ SAA

T1 1135 P1 -29
T2 1141 P2 -5

SV-DUP
T1 1135 P1 -27
T2 1140 P2 -5

FWP II - BROWNFIELDS

12/5/25 ~~WEATHER:~~

24413-E

1200 ECS MOBE TO SW-3/SS-3 STREAM SAMPLE (UP-GRADIENT)

1215 ★ SW-3 AND SW-3-P COLLECTED

- SW-DUP AND SW-DUP-P COLLECTED FROM SW-3 LOCATION

1300 ★ SS-3 AND SS-3-P COLLECTED

- SS-DUP + SS-DUP-P COLLECTED

1320 ★ FB-6-P COLLECTED FOR PFAS

1325 ★ EB-3-P COLLECTED FOR PFAS

1350 ★ SW-2 + SW-2-P COLLECTED

1355 ★ SS-2 + SS-2-P COLLECTED

1425 ★ SW-1 + SW-1-P COLLECTED

1435 ★ SS-1 + SS-1-P COLLECTED

1445 ECS OFFSITE

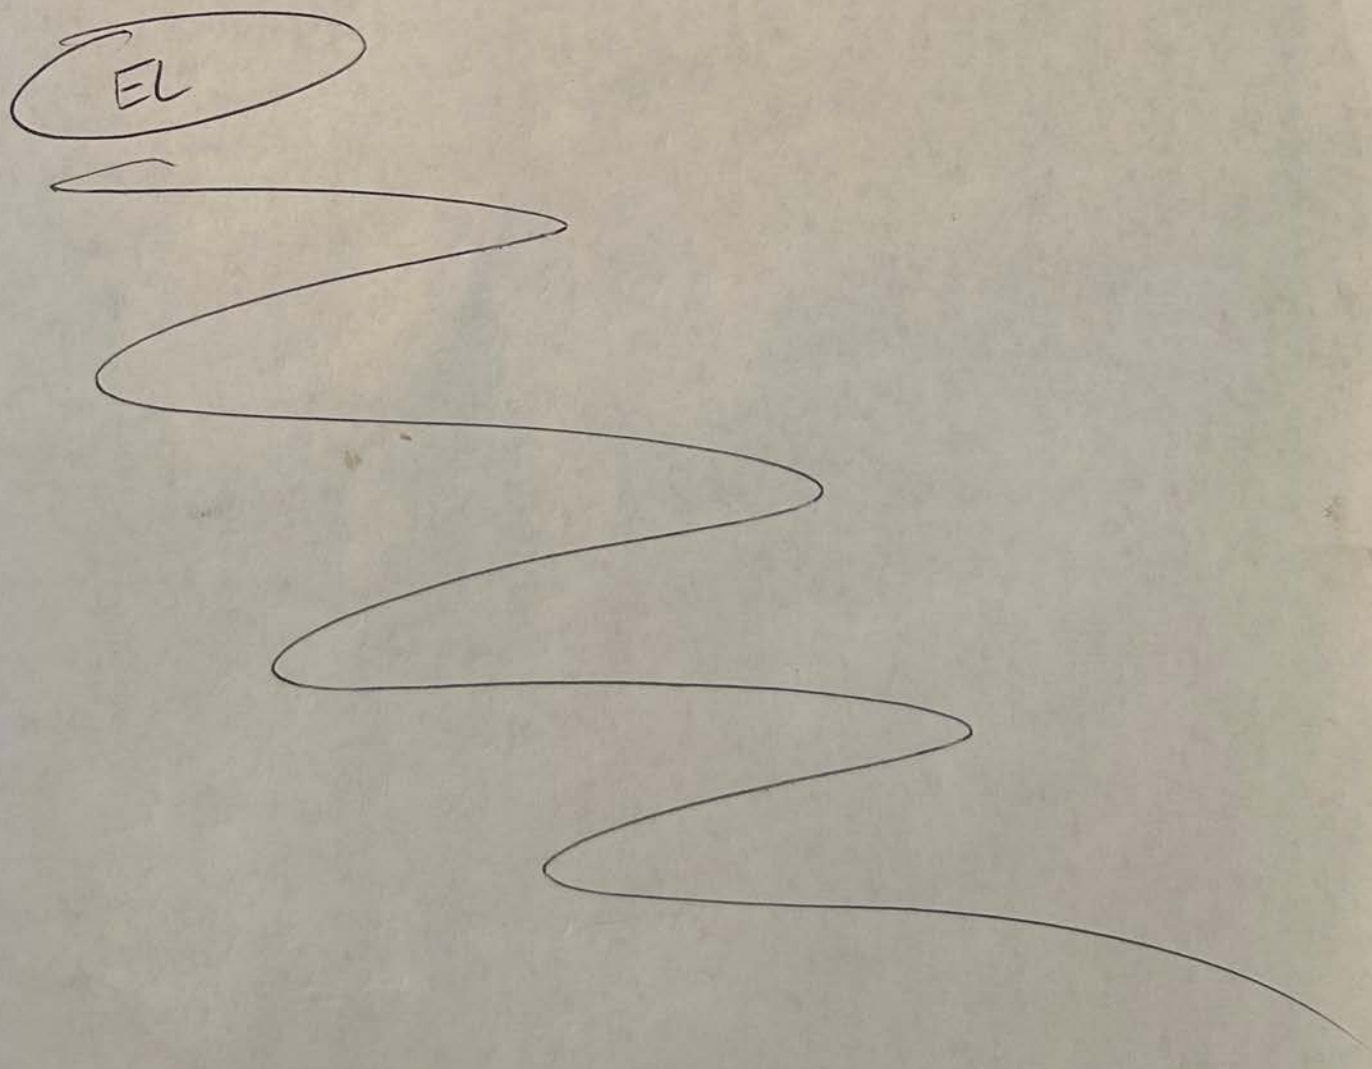

APPENDIX F

Laboratory Analytical Reports & Chains-of-Custody Forms

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

June 17, 2025

Emery Lovekamp
ECS Southeast, LLC-Charlotte
1812 Center Park Drive
Suite D
Charlotte, NC 28217

RE: Project: Fortress Wood Products
Pace Project No.: 92799827

Dear Emery Lovekamp:

Enclosed are the analytical results for sample(s) received by the laboratory on June 02, 2025. The results relate only to the samples included in this report. Results reported herein conform to the applicable TNI/NELAC Standards and the laboratory's Quality Manual, where applicable, unless otherwise noted in the body of the report.

The test results provided in this final report were generated by each of the following laboratories within the Pace Network:

- Pace Analytical Services - Charlotte
- Pace Analytical Services - Ormond Beach

If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Angela M. Baioni

Angela Baioni
angela.baioni@pacelabs.com
612-473-6801
Project Manager

Enclosures

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

CERTIFICATIONS

Project: Fortress Wood Products
Pace Project No.: 92799827

Pace Analytical Services Ormond Beach
8 East Tower Circle, Ormond Beach, FL 32174
Alaska DEC- CS/UST/LUST
Alabama Certification #: 41320
California Certification# 3096
Colorado Certification: FL NELAC Reciprocity
Connecticut Certification #: PH-0216
Delaware Certification: FL NELAC Reciprocity
DoD-ANAB #:ADE-3199
Florida Certification #: E83079
Georgia Certification #: 955
Guam Certification: FL NELAC Reciprocity
Hawaii Certification: FL NELAC Reciprocity
Illinois Certification #: 200068
Indiana Certification: FL NELAC Reciprocity
Kansas Certification #: E-10383
Kentucky Certification #: 90050
Louisiana Certification #: FL NELAC Reciprocity
Louisiana Environmental Certificate #: 05007
Maine Certification #: FL01264
Maryland Certification: #346
Massachusetts Certification #: M-FL1264
Michigan Certification #: 9911
Mississippi Certification: FL NELAC Reciprocity
Missouri Certification #: 236
Montana Certification #: Cert 0074
Nebraska Certification: NE-OS-28-14
Nevada Certification: FL NELAC Reciprocity
New Hampshire Certification #: 2958
New Jersey Certification #: FL022
New York Certification #: 11608
North Carolina Environmental Certificate #: 667
North Carolina Certification #: 12710
North Dakota Certification #: R-216
Ohio DEP 87780
Oklahoma Certification #: D9947
Pennsylvania Certification #: 68-00547
Puerto Rico Certification #: FL01264
South Carolina Certification: #96042001
Tennessee Certification #: TN02974
Texas Certification: FL NELAC Reciprocity
US Virgin Islands Certification: FL NELAC Reciprocity
Utah FL NELAC Reciprocity
Utah
Virginia Environmental Certification #: 460165
West Virginia Certification #: 9962C
Wisconsin Certification #: 399079670
Wyoming (EPA Region 8): FL NELAC Reciprocity

Pace Analytical Services Charlotte
South Carolina Laboratory ID: 99006
9800 Kincey Ave. Ste 100, Huntersville, NC 28078
North Carolina Drinking Water Certification #: 37706
North Carolina Field Services Certification #: 5342
North Carolina Wastewater Certification #: 12
South Carolina Laboratory ID: 99006
South Carolina Certification #: 99006001
South Carolina Drinking Water Cert. #: 99006003
Florida/NELAP Certification #: E87627
Kentucky UST Certification #: 84
Louisiana DoH Drinking Water #: LA029
Virginia/VELAP Certification #: 460221

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE SUMMARY

Project: Fortress Wood Products
Pace Project No.: 92799827

Lab ID	Sample ID	Matrix	Date Collected	Date Received
92799827001	**B-14**	Solid	06/02/25 10:00	06/02/25 15:52
92799827002	**B-13**	Solid	06/02/25 11:40	06/02/25 15:52
92799827003	**B-12**	Solid	06/02/25 12:30	06/02/25 15:52
92799827004	**B-8**	Solid	06/02/25 13:50	06/02/25 15:52
92799827005	**B-8-B**	Solid	06/02/25 13:25	06/02/25 15:52
92799827006	**B-7**	Solid	06/02/25 14:30	06/02/25 15:52
92799827007	**B-DUP**	Solid	06/02/25 00:01	06/02/25 15:52

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE ANALYTE COUNT

Project: Fortress Wood Products
Pace Project No.: 92799827

Lab ID	Sample ID	Method	Analysts	Analytes Reported	Laboratory
92799827001	**B-14**	EPA 7199	VJM	1	PASI-C
		EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		EPA 8270E	PKS	75	PASI-C
		EPA 8260D	SAS	70	PASI-C
		SW-846	KDF	1	PASI-C
92799827002	**B-13**	EPA 7199	VJM	1	PASI-C
		EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		EPA 8270E	PKS	75	PASI-C
		EPA 8260D	SAS	70	PASI-C
		SW-846	KDF	1	PASI-C
92799827003	**B-12**	EPA 7199	VJM	1	PASI-C
		EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		EPA 8270E	PKS	75	PASI-C
		EPA 8260D	SAS	70	PASI-C
		SW-846	KDF	1	PASI-C
92799827004	**B-8**	EPA 7199	VJM	1	PASI-C
		EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		EPA 8270E	PKS	75	PASI-C
		EPA 8260D	SAS	70	PASI-C
		SW-846	KDF	1	PASI-C
92799827005	**B-8-B**	EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		ASTM D2974-87	NP1	1	PASI-O
92799827006	**B-7**	EPA 7199	VJM	1	PASI-C
		EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		EPA 8270E	PKS	75	PASI-C
		EPA 8260D	SAS	70	PASI-C
		SW-846	KDF	1	PASI-C
92799827007	**B-DUP**	EPA 7199	VJM	1	PASI-C
		EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		EPA 8270E	PKS	75	PASI-C

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE ANALYTE COUNT

Project: Fortress Wood Products
Pace Project No.: 92799827

Lab ID	Sample ID	Method	Analysts	Analytes Reported	Laboratory
		EPA 8260D	SAS	70	PASI-C
		SW-846	KDF	1	PASI-C

PASI-C = Pace Analytical Services - Charlotte
PASI-O = Pace Analytical Services - Ormond Beach

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-14 **Lab ID: 92799827001** Collected: 06/02/25 10:00 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199 Pace Analytical Services - Charlotte								
Chromium, Hexavalent	**1.4**	mg/kg	1.3	0.21	1	06/05/25 10:05	06/06/25 10:20	18540-29-9	
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050 Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	2.9	0.75	20	06/10/25 05:23	06/10/25 23:57	7440-36-0	1g,N2
Arsenic	**6.8**	mg/kg	1.4	0.23	20	06/10/25 05:23	06/10/25 23:57	7440-38-2	1g
Beryllium	**0.22**	mg/kg	0.17	0.084	20	06/10/25 05:23	06/10/25 23:57	7440-41-7	1g
Cadmium	ND	mg/kg	0.17	0.038	20	06/10/25 05:23	06/10/25 23:57	7440-43-9	1g
Chromium	**27.7**	mg/kg	1.4	0.83	20	06/10/25 05:23	06/10/25 23:57	7440-47-3	1g
Copper	**18.5**	mg/kg	2.9	0.74	20	06/10/25 05:23	06/10/25 23:57	7440-50-8	1g
Lead	**42.3**	mg/kg	1.4	0.53	20	06/10/25 05:23	06/10/25 23:57	7439-92-1	1g
Nickel	**5.9**	mg/kg	1.4	0.70	20	06/10/25 05:23	06/10/25 23:57	7440-02-0	1g
Selenium	ND	mg/kg	1.4	0.74	20	06/10/25 05:23	06/10/25 23:57	7782-49-2	1g
Silver	ND	mg/kg	0.17	0.055	20	06/10/25 05:23	06/10/25 23:57	7440-22-4	1g
Thallium	ND	mg/kg	1.4	0.25	20	06/10/25 05:23	06/10/25 23:57	7440-28-0	1g
Zinc	ND	mg/kg	57.9	11.3	20	06/10/25 05:23	06/10/25 23:57	7440-66-6	1g
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471 Pace Analytical Services - Ormond Beach								
Mercury	**0.061**	mg/kg	0.0096	0.0048	1	06/10/25 12:48	06/10/25 15:43	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.42	0.15	1	06/04/25 11:57	06/06/25 10:50	83-32-9	
Acenaphthylene	ND	mg/kg	0.42	0.15	1	06/04/25 11:57	06/06/25 10:50	208-96-8	
Aniline	ND	mg/kg	0.42	0.16	1	06/04/25 11:57	06/06/25 10:50	62-53-3	
Anthracene	ND	mg/kg	0.42	0.14	1	06/04/25 11:57	06/06/25 10:50	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.42	0.14	1	06/04/25 11:57	06/06/25 10:50	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.42	0.14	1	06/04/25 11:57	06/06/25 10:50	50-32-8	
Benzo(b)fluoranthene	ND	mg/kg	0.42	0.14	1	06/04/25 11:57	06/06/25 10:50	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.42	0.16	1	06/04/25 11:57	06/06/25 10:50	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.42	0.15	1	06/04/25 11:57	06/06/25 10:50	207-08-9	
Benzoic Acid	ND	mg/kg	2.1	0.90	1	06/04/25 11:57	06/06/25 10:50	65-85-0	
Benzyl alcohol	ND	mg/kg	0.84	0.32	1	06/04/25 11:57	06/06/25 10:50	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.42	0.16	1	06/04/25 11:57	06/06/25 10:50	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.42	0.18	1	06/04/25 11:57	06/06/25 10:50	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	0.84	0.30	1	06/04/25 11:57	06/06/25 10:50	59-50-7	
4-Chloroaniline	ND	mg/kg	0.84	0.33	1	06/04/25 11:57	06/06/25 10:50	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.42	0.17	1	06/04/25 11:57	06/06/25 10:50	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.42	0.16	1	06/04/25 11:57	06/06/25 10:50	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.42	0.17	1	06/04/25 11:57	06/06/25 10:50	91-58-7	
2-Chlorophenol	ND	mg/kg	0.42	0.16	1	06/04/25 11:57	06/06/25 10:50	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.42	0.16	1	06/04/25 11:57	06/06/25 10:50	7005-72-3	
Chrysene	ND	mg/kg	0.42	0.15	1	06/04/25 11:57	06/06/25 10:50	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-14 **Lab ID: 92799827001** Collected: 06/02/25 10:00 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.42	0.16	1	06/04/25 11:57	06/06/25 10:50	53-70-3	
Dibenzofuran	ND	mg/kg	0.42	0.15	1	06/04/25 11:57	06/06/25 10:50	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.42	0.15	1	06/04/25 11:57	06/06/25 10:50	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.42	0.15	1	06/04/25 11:57	06/06/25 10:50	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.42	0.16	1	06/04/25 11:57	06/06/25 10:50	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	0.84	0.28	1	06/04/25 11:57	06/06/25 10:50	91-94-1	
2,4-Dichlorophenol	ND	mg/kg	0.42	0.16	1	06/04/25 11:57	06/06/25 10:50	120-83-2	
Diethylphthalate	ND	mg/kg	0.42	0.15	1	06/04/25 11:57	06/06/25 10:50	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.42	0.17	1	06/04/25 11:57	06/06/25 10:50	105-67-9	
Dimethylphthalate	ND	mg/kg	0.42	0.15	1	06/04/25 11:57	06/06/25 10:50	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.42	0.14	1	06/04/25 11:57	06/06/25 10:50	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	0.84	0.39	1	06/04/25 11:57	06/06/25 10:50	534-52-1	
2,4-Dinitrophenol	ND	mg/kg	2.1	1.3	1	06/04/25 11:57	06/06/25 10:50	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.42	0.16	1	06/04/25 11:57	06/06/25 10:50	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.42	0.15	1	06/04/25 11:57	06/06/25 10:50	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.42	0.17	1	06/04/25 11:57	06/06/25 10:50	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.42	0.16	1	06/04/25 11:57	06/06/25 10:50	117-81-7	
Fluoranthene	ND	mg/kg	0.42	0.14	1	06/04/25 11:57	06/06/25 10:50	206-44-0	
Fluorene	ND	mg/kg	0.42	0.15	1	06/04/25 11:57	06/06/25 10:50	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.42	0.18	1	06/04/25 11:57	06/06/25 10:50	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.42	0.16	1	06/04/25 11:57	06/06/25 10:50	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.42	0.24	1	06/04/25 11:57	06/06/25 10:50	77-47-4	
Hexachloroethane	ND	mg/kg	0.42	0.16	1	06/04/25 11:57	06/06/25 10:50	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.42	0.17	1	06/04/25 11:57	06/06/25 10:50	193-39-5	
Isophorone	ND	mg/kg	0.42	0.19	1	06/04/25 11:57	06/06/25 10:50	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.42	0.15	1	06/04/25 11:57	06/06/25 10:50	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.42	0.17	1	06/04/25 11:57	06/06/25 10:50	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.42	0.17	1	06/04/25 11:57	06/06/25 10:50	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.42	0.17	1	06/04/25 11:57	06/06/25 10:50	15831-10-4	
Naphthalene	ND	mg/kg	0.42	0.14	1	06/04/25 11:57	06/06/25 10:50	91-20-3	
2-Nitroaniline	ND	mg/kg	2.1	0.34	1	06/04/25 11:57	06/06/25 10:50	88-74-4	
3-Nitroaniline	ND	mg/kg	2.1	0.33	1	06/04/25 11:57	06/06/25 10:50	99-09-2	
4-Nitroaniline	ND	mg/kg	0.84	0.32	1	06/04/25 11:57	06/06/25 10:50	100-01-6	
Nitrobenzene	ND	mg/kg	0.42	0.19	1	06/04/25 11:57	06/06/25 10:50	98-95-3	
2-Nitrophenol	ND	mg/kg	0.42	0.18	1	06/04/25 11:57	06/06/25 10:50	88-75-5	
4-Nitrophenol	ND	mg/kg	2.1	0.81	1	06/04/25 11:57	06/06/25 10:50	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.42	0.14	1	06/04/25 11:57	06/06/25 10:50	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.42	0.16	1	06/04/25 11:57	06/06/25 10:50	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.42	0.15	1	06/04/25 11:57	06/06/25 10:50	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.42	0.20	1	06/04/25 11:57	06/06/25 10:50	108-60-1	
Pentachlorophenol	ND	mg/kg	0.84	0.41	1	06/04/25 11:57	06/06/25 10:50	87-86-5	
Phenanthrene	ND	mg/kg	0.42	0.14	1	06/04/25 11:57	06/06/25 10:50	85-01-8	
Phenol	ND	mg/kg	0.42	0.19	1	06/04/25 11:57	06/06/25 10:50	108-95-2	
Pyrene	ND	mg/kg	0.42	0.17	1	06/04/25 11:57	06/06/25 10:50	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-14 **Lab ID: 92799827001** Collected: 06/02/25 10:00 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.42	0.13	1	06/04/25 11:57	06/06/25 10:50	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.42	0.17	1	06/04/25 11:57	06/06/25 10:50	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.42	0.19	1	06/04/25 11:57	06/06/25 10:50	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.42	0.17	1	06/04/25 11:57	06/06/25 10:50	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	60	%	10-130		1	06/04/25 11:57	06/06/25 10:50	4165-60-0	
2-Fluorobiphenyl (S)	58	%	10-130		1	06/04/25 11:57	06/06/25 10:50	321-60-8	
Terphenyl-d14 (S)	75	%	10-130		1	06/04/25 11:57	06/06/25 10:50	1718-51-0	
Phenol-d6 (S)	55	%	10-130		1	06/04/25 11:57	06/06/25 10:50	13127-88-3	
2-Fluorophenol (S)	52	%	10-130		1	06/04/25 11:57	06/06/25 10:50	367-12-4	
2,4,6-Tribromophenol (S)	71	%	10-130		1	06/04/25 11:57	06/06/25 10:50	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.14	0.045	1	06/04/25 21:17	06/05/25 17:03	67-64-1	2g
Benzene	ND	mg/kg	0.0070	0.0028	1	06/04/25 21:17	06/05/25 17:03	71-43-2	2g
Bromobenzene	ND	mg/kg	0.0070	0.0023	1	06/04/25 21:17	06/05/25 17:03	108-86-1	2g
Bromochloromethane	ND	mg/kg	0.0070	0.0021	1	06/04/25 21:17	06/05/25 17:03	74-97-5	2g
Bromodichloromethane	ND	mg/kg	0.0070	0.0027	1	06/04/25 21:17	06/05/25 17:03	75-27-4	2g
Bromoform	ND	mg/kg	0.0070	0.0025	1	06/04/25 21:17	06/05/25 17:03	75-25-2	2g
Bromomethane	ND	mg/kg	0.028	0.022	1	06/04/25 21:17	06/05/25 17:03	74-83-9	2g
2-Butanone (MEK)	ND	mg/kg	0.14	0.034	1	06/04/25 21:17	06/05/25 17:03	78-93-3	2g
n-Butylbenzene	ND	mg/kg	0.0070	0.0044	1	06/04/25 21:17	06/05/25 17:03	104-51-8	2g
sec-Butylbenzene	ND	mg/kg	0.0070	0.0031	1	06/04/25 21:17	06/05/25 17:03	135-98-8	2g
tert-Butylbenzene	ND	mg/kg	0.0070	0.0025	1	06/04/25 21:17	06/05/25 17:03	98-06-6	2g
Carbon tetrachloride	ND	mg/kg	0.0070	0.0026	1	06/04/25 21:17	06/05/25 17:03	56-23-5	2g
Chlorobenzene	ND	mg/kg	0.0070	0.0040	1	06/04/25 21:17	06/05/25 17:03	108-90-7	2g
Chloroethane	ND	mg/kg	0.014	0.0054	1	06/04/25 21:17	06/05/25 17:03	75-00-3	2g
Chloroform	ND	mg/kg	0.0070	0.0059	1	06/04/25 21:17	06/05/25 17:03	67-66-3	2g
Chloromethane	ND	mg/kg	0.014	0.0059	1	06/04/25 21:17	06/05/25 17:03	74-87-3	2g
2-Chlorotoluene	ND	mg/kg	0.0070	0.0025	1	06/04/25 21:17	06/05/25 17:03	95-49-8	2g
4-Chlorotoluene	ND	mg/kg	0.0070	0.0039	1	06/04/25 21:17	06/05/25 17:03	106-43-4	2g
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0070	0.0027	1	06/04/25 21:17	06/05/25 17:03	96-12-8	2g
Dibromochloromethane	ND	mg/kg	0.0070	0.0039	1	06/04/25 21:17	06/05/25 17:03	124-48-1	2g
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0070	0.0031	1	06/04/25 21:17	06/05/25 17:03	106-93-4	2g
Dibromomethane	ND	mg/kg	0.0070	0.0015	1	06/04/25 21:17	06/05/25 17:03	74-95-3	2g
1,2-Dichlorobenzene	ND	mg/kg	0.0070	0.0025	1	06/04/25 21:17	06/05/25 17:03	95-50-1	2g
1,3-Dichlorobenzene	ND	mg/kg	0.0070	0.0022	1	06/04/25 21:17	06/05/25 17:03	541-73-1	2g
1,4-Dichlorobenzene	ND	mg/kg	0.0070	0.0018	1	06/04/25 21:17	06/05/25 17:03	106-46-7	2g
Dichlorodifluoromethane	ND	mg/kg	0.014	0.0071	1	06/04/25 21:17	06/05/25 17:03	75-71-8	2g
1,1-Dichloroethane	ND	mg/kg	0.0070	0.0029	1	06/04/25 21:17	06/05/25 17:03	75-34-3	2g
1,2-Dichloroethane	ND	mg/kg	0.0070	0.0046	1	06/04/25 21:17	06/05/25 17:03	107-06-2	2g
1,1-Dichloroethene	ND	mg/kg	0.0070	0.0029	1	06/04/25 21:17	06/05/25 17:03	75-35-4	2g
cis-1,2-Dichloroethene	ND	mg/kg	0.0070	0.0024	1	06/04/25 21:17	06/05/25 17:03	156-59-2	2g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-14 **Lab ID: 92799827001** Collected: 06/02/25 10:00 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0070	0.0060	1	06/04/25 21:17	06/05/25 17:03	156-60-5	2g
1,2-Dichloropropane	ND	mg/kg	0.0070	0.0021	1	06/04/25 21:17	06/05/25 17:03	78-87-5	2g
1,3-Dichloropropane	ND	mg/kg	0.0070	0.0022	1	06/04/25 21:17	06/05/25 17:03	142-28-9	2g
2,2-Dichloropropane	ND	mg/kg	0.0070	0.0053	1	06/04/25 21:17	06/05/25 17:03	594-20-7	2g
1,1-Dichloropropene	ND	mg/kg	0.0070	0.0034	1	06/04/25 21:17	06/05/25 17:03	563-58-6	2g
cis-1,3-Dichloropropene	ND	mg/kg	0.0070	0.0019	1	06/04/25 21:17	06/05/25 17:03	10061-01-5	2g
trans-1,3-Dichloropropene	ND	mg/kg	0.0070	0.0024	1	06/04/25 21:17	06/05/25 17:03	10061-02-6	2g
Diisopropyl ether	ND	mg/kg	0.0070	0.0019	1	06/04/25 21:17	06/05/25 17:03	108-20-3	2g
Ethylbenzene	ND	mg/kg	0.0070	0.0033	1	06/04/25 21:17	06/05/25 17:03	100-41-4	2g
Hexachloro-1,3-butadiene	ND	mg/kg	0.014	0.011	1	06/04/25 21:17	06/05/25 17:03	87-68-3	2g
2-Hexanone	ND	mg/kg	0.070	0.0068	1	06/04/25 21:17	06/05/25 17:03	591-78-6	2g
Isopropylbenzene (Cumene)	ND	mg/kg	0.0070	0.0024	1	06/04/25 21:17	06/05/25 17:03	98-82-8	2g
p-Isopropyltoluene	ND	mg/kg	0.0070	0.0035	1	06/04/25 21:17	06/05/25 17:03	99-87-6	2g
Methylene Chloride	ND	mg/kg	0.028	0.019	1	06/04/25 21:17	06/05/25 17:03	75-09-2	2g
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.070	0.0068	1	06/04/25 21:17	06/05/25 17:03	108-10-1	2g
Methyl-tert-butyl ether	ND	mg/kg	0.0070	0.0026	1	06/04/25 21:17	06/05/25 17:03	1634-04-4	2g
Naphthalene	ND	mg/kg	0.0070	0.0037	1	06/04/25 21:17	06/05/25 17:03	91-20-3	2g
n-Propylbenzene	ND	mg/kg	0.0070	0.0025	1	06/04/25 21:17	06/05/25 17:03	103-65-1	2g
Styrene	ND	mg/kg	0.0070	0.0019	1	06/04/25 21:17	06/05/25 17:03	100-42-5	2g
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0070	0.0027	1	06/04/25 21:17	06/05/25 17:03	630-20-6	2g
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0070	0.0019	1	06/04/25 21:17	06/05/25 17:03	79-34-5	2g
Tetrachloroethene	ND	mg/kg	0.0070	0.0022	1	06/04/25 21:17	06/05/25 17:03	127-18-4	2g
Toluene	ND	mg/kg	0.0070	0.0048	1	06/04/25 21:17	06/05/25 17:03	108-88-3	2g
1,2,3-Trichlorobenzene	ND	mg/kg	0.0070	0.0057	1	06/04/25 21:17	06/05/25 17:03	87-61-6	2g
1,2,4-Trichlorobenzene	ND	mg/kg	0.0070	0.0059	1	06/04/25 21:17	06/05/25 17:03	120-82-1	2g
1,1,1-Trichloroethane	ND	mg/kg	0.0070	0.0036	1	06/04/25 21:17	06/05/25 17:03	71-55-6	2g
1,1,2-Trichloroethane	ND	mg/kg	0.0070	0.0023	1	06/04/25 21:17	06/05/25 17:03	79-00-5	2g
Trichloroethene	ND	mg/kg	0.0070	0.0057	1	06/04/25 21:17	06/05/25 17:03	79-01-6	2g
Trichlorofluoromethane	ND	mg/kg	0.0070	0.0039	1	06/04/25 21:17	06/05/25 17:03	75-69-4	2g
1,2,3-Trichloropropane	ND	mg/kg	0.0070	0.0035	1	06/04/25 21:17	06/05/25 17:03	96-18-4	2g
1,2,4-Trimethylbenzene	ND	mg/kg	0.0070	0.0042	1	06/04/25 21:17	06/05/25 17:03	95-63-6	2g
1,3,5-Trimethylbenzene	ND	mg/kg	0.0070	0.0024	1	06/04/25 21:17	06/05/25 17:03	108-67-8	2g
Vinyl acetate	ND	mg/kg	0.070	0.014	1	06/04/25 21:17	06/05/25 17:03	108-05-4	2g
Vinyl chloride	ND	mg/kg	0.014	0.0036	1	06/04/25 21:17	06/05/25 17:03	75-01-4	2g
Xylene (Total)	ND	mg/kg	0.014	0.0040	1	06/04/25 21:17	06/05/25 17:03	1330-20-7	2g
m&p-Xylene	ND	mg/kg	0.014	0.0048	1	06/04/25 21:17	06/05/25 17:03	179601-23-1	2g
o-Xylene	ND	mg/kg	0.0070	0.0031	1	06/04/25 21:17	06/05/25 17:03	95-47-6	2g
Surrogates									
Toluene-d8 (S)	98	%	70-130		1	06/04/25 21:17	06/05/25 17:03	2037-26-5	2g
4-Bromofluorobenzene (S)	93	%	70-130		1	06/04/25 21:17	06/05/25 17:03	460-00-4	2g
1,2-Dichloroethane-d4 (S)	111	%	70-135		1	06/04/25 21:17	06/05/25 17:03	17060-07-0	2g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-14 **Lab ID: 92799827001** Collected: 06/02/25 10:00 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**21.4**	%	0.10	0.10	1		06/03/25 14:37		N2

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-13 **Lab ID: 92799827002** Collected: 06/02/25 11:40 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199 Pace Analytical Services - Charlotte								
Chromium, Hexavalent	**1.3J**	mg/kg	1.3	0.22	1	06/05/25 10:05	06/06/25 11:13	18540-29-9	
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050 Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	2.3	0.61	20	06/10/25 05:23	06/11/25 00:01	7440-36-0	1g,N2
Arsenic	**1.2**	mg/kg	1.2	0.18	20	06/10/25 05:23	06/11/25 00:01	7440-38-2	1g
Beryllium	**0.65**	mg/kg	0.14	0.067	20	06/10/25 05:23	06/11/25 00:01	7440-41-7	1g
Cadmium	ND	mg/kg	0.14	0.030	20	06/10/25 05:23	06/11/25 00:01	7440-43-9	1g
Chromium	**54.8**	mg/kg	1.2	0.67	20	06/10/25 05:23	06/11/25 00:01	7440-47-3	1g
Copper	**76.0**	mg/kg	2.3	0.59	20	06/10/25 05:23	06/11/25 00:01	7440-50-8	1g
Lead	**8.4**	mg/kg	1.2	0.42	20	06/10/25 05:23	06/11/25 00:01	7439-92-1	1g
Nickel	**43.9**	mg/kg	1.2	0.56	20	06/10/25 05:23	06/11/25 00:01	7440-02-0	1g
Selenium	ND	mg/kg	1.2	0.60	20	06/10/25 05:23	06/11/25 00:01	7782-49-2	1g
Silver	ND	mg/kg	0.14	0.044	20	06/10/25 05:23	06/11/25 00:01	7440-22-4	1g
Thallium	ND	mg/kg	1.2	0.20	20	06/10/25 05:23	06/11/25 00:01	7440-28-0	1g
Zinc	ND	mg/kg	46.5	9.1	20	06/10/25 05:23	06/11/25 00:01	7440-66-6	1g
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471 Pace Analytical Services - Ormond Beach								
Mercury	**0.018**	mg/kg	0.010	0.0050	1	06/11/25 09:21	06/11/25 11:21	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.44	0.16	1	06/04/25 11:57	06/06/25 11:17	83-32-9	
Acenaphthylene	ND	mg/kg	0.44	0.16	1	06/04/25 11:57	06/06/25 11:17	208-96-8	
Aniline	ND	mg/kg	0.44	0.17	1	06/04/25 11:57	06/06/25 11:17	62-53-3	
Anthracene	ND	mg/kg	0.44	0.14	1	06/04/25 11:57	06/06/25 11:17	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.44	0.15	1	06/04/25 11:57	06/06/25 11:17	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.44	0.15	1	06/04/25 11:57	06/06/25 11:17	50-32-8	
Benzo(b)fluoranthene	ND	mg/kg	0.44	0.15	1	06/04/25 11:57	06/06/25 11:17	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.44	0.17	1	06/04/25 11:57	06/06/25 11:17	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.44	0.16	1	06/04/25 11:57	06/06/25 11:17	207-08-9	
Benzoic Acid	ND	mg/kg	2.2	0.95	1	06/04/25 11:57	06/06/25 11:17	65-85-0	
Benzyl alcohol	ND	mg/kg	0.89	0.34	1	06/04/25 11:57	06/06/25 11:17	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.44	0.17	1	06/04/25 11:57	06/06/25 11:17	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.44	0.19	1	06/04/25 11:57	06/06/25 11:17	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	0.89	0.31	1	06/04/25 11:57	06/06/25 11:17	59-50-7	
4-Chloroaniline	ND	mg/kg	0.89	0.35	1	06/04/25 11:57	06/06/25 11:17	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.44	0.18	1	06/04/25 11:57	06/06/25 11:17	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.44	0.17	1	06/04/25 11:57	06/06/25 11:17	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.44	0.18	1	06/04/25 11:57	06/06/25 11:17	91-58-7	
2-Chlorophenol	ND	mg/kg	0.44	0.17	1	06/04/25 11:57	06/06/25 11:17	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.44	0.17	1	06/04/25 11:57	06/06/25 11:17	7005-72-3	
Chrysene	ND	mg/kg	0.44	0.16	1	06/04/25 11:57	06/06/25 11:17	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-13 **Lab ID: 92799827002** Collected: 06/02/25 11:40 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.44	0.17	1	06/04/25 11:57	06/06/25 11:17	53-70-3	
Dibenzofuran	ND	mg/kg	0.44	0.16	1	06/04/25 11:57	06/06/25 11:17	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.44	0.16	1	06/04/25 11:57	06/06/25 11:17	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.44	0.16	1	06/04/25 11:57	06/06/25 11:17	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.44	0.17	1	06/04/25 11:57	06/06/25 11:17	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	0.89	0.30	1	06/04/25 11:57	06/06/25 11:17	91-94-1	
2,4-Dichlorophenol	ND	mg/kg	0.44	0.17	1	06/04/25 11:57	06/06/25 11:17	120-83-2	
Diethylphthalate	ND	mg/kg	0.44	0.16	1	06/04/25 11:57	06/06/25 11:17	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.44	0.18	1	06/04/25 11:57	06/06/25 11:17	105-67-9	
Dimethylphthalate	ND	mg/kg	0.44	0.16	1	06/04/25 11:57	06/06/25 11:17	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.44	0.15	1	06/04/25 11:57	06/06/25 11:17	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	0.89	0.41	1	06/04/25 11:57	06/06/25 11:17	534-52-1	
2,4-Dinitrophenol	ND	mg/kg	2.2	1.4	1	06/04/25 11:57	06/06/25 11:17	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.44	0.17	1	06/04/25 11:57	06/06/25 11:17	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.44	0.16	1	06/04/25 11:57	06/06/25 11:17	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.44	0.17	1	06/04/25 11:57	06/06/25 11:17	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.44	0.17	1	06/04/25 11:57	06/06/25 11:17	117-81-7	
Fluoranthene	ND	mg/kg	0.44	0.15	1	06/04/25 11:57	06/06/25 11:17	206-44-0	
Fluorene	ND	mg/kg	0.44	0.16	1	06/04/25 11:57	06/06/25 11:17	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.44	0.19	1	06/04/25 11:57	06/06/25 11:17	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.44	0.17	1	06/04/25 11:57	06/06/25 11:17	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.44	0.25	1	06/04/25 11:57	06/06/25 11:17	77-47-4	
Hexachloroethane	ND	mg/kg	0.44	0.17	1	06/04/25 11:57	06/06/25 11:17	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.44	0.17	1	06/04/25 11:57	06/06/25 11:17	193-39-5	
Isophorone	ND	mg/kg	0.44	0.20	1	06/04/25 11:57	06/06/25 11:17	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.44	0.16	1	06/04/25 11:57	06/06/25 11:17	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.44	0.18	1	06/04/25 11:57	06/06/25 11:17	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.44	0.18	1	06/04/25 11:57	06/06/25 11:17	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.44	0.18	1	06/04/25 11:57	06/06/25 11:17	15831-10-4	
Naphthalene	ND	mg/kg	0.44	0.15	1	06/04/25 11:57	06/06/25 11:17	91-20-3	
2-Nitroaniline	ND	mg/kg	2.2	0.36	1	06/04/25 11:57	06/06/25 11:17	88-74-4	
3-Nitroaniline	ND	mg/kg	2.2	0.35	1	06/04/25 11:57	06/06/25 11:17	99-09-2	
4-Nitroaniline	ND	mg/kg	0.89	0.34	1	06/04/25 11:57	06/06/25 11:17	100-01-6	
Nitrobenzene	ND	mg/kg	0.44	0.21	1	06/04/25 11:57	06/06/25 11:17	98-95-3	
2-Nitrophenol	ND	mg/kg	0.44	0.19	1	06/04/25 11:57	06/06/25 11:17	88-75-5	
4-Nitrophenol	ND	mg/kg	2.2	0.86	1	06/04/25 11:57	06/06/25 11:17	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.44	0.15	1	06/04/25 11:57	06/06/25 11:17	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.44	0.17	1	06/04/25 11:57	06/06/25 11:17	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.44	0.16	1	06/04/25 11:57	06/06/25 11:17	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.44	0.21	1	06/04/25 11:57	06/06/25 11:17	108-60-1	
Pentachlorophenol	ND	mg/kg	0.89	0.43	1	06/04/25 11:57	06/06/25 11:17	87-86-5	
Phenanthrene	ND	mg/kg	0.44	0.14	1	06/04/25 11:57	06/06/25 11:17	85-01-8	
Phenol	ND	mg/kg	0.44	0.20	1	06/04/25 11:57	06/06/25 11:17	108-95-2	
Pyrene	ND	mg/kg	0.44	0.18	1	06/04/25 11:57	06/06/25 11:17	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-13 **Lab ID: 92799827002** Collected: 06/02/25 11:40 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.44	0.14	1	06/04/25 11:57	06/06/25 11:17	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.44	0.17	1	06/04/25 11:57	06/06/25 11:17	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.44	0.20	1	06/04/25 11:57	06/06/25 11:17	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.44	0.18	1	06/04/25 11:57	06/06/25 11:17	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	61	%	10-130		1	06/04/25 11:57	06/06/25 11:17	4165-60-0	
2-Fluorobiphenyl (S)	59	%	10-130		1	06/04/25 11:57	06/06/25 11:17	321-60-8	
Terphenyl-d14 (S)	76	%	10-130		1	06/04/25 11:57	06/06/25 11:17	1718-51-0	
Phenol-d6 (S)	54	%	10-130		1	06/04/25 11:57	06/06/25 11:17	13127-88-3	
2-Fluorophenol (S)	50	%	10-130		1	06/04/25 11:57	06/06/25 11:17	367-12-4	
2,4,6-Tribromophenol (S)	70	%	10-130		1	06/04/25 11:57	06/06/25 11:17	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.14	0.044	1	06/04/25 21:17	06/05/25 17:27	67-64-1	2g
Benzene	ND	mg/kg	0.0069	0.0028	1	06/04/25 21:17	06/05/25 17:27	71-43-2	2g
Bromobenzene	ND	mg/kg	0.0069	0.0023	1	06/04/25 21:17	06/05/25 17:27	108-86-1	2g
Bromochloromethane	ND	mg/kg	0.0069	0.0020	1	06/04/25 21:17	06/05/25 17:27	74-97-5	2g
Bromodichloromethane	ND	mg/kg	0.0069	0.0027	1	06/04/25 21:17	06/05/25 17:27	75-27-4	2g
Bromoform	ND	mg/kg	0.0069	0.0024	1	06/04/25 21:17	06/05/25 17:27	75-25-2	2g
Bromomethane	ND	mg/kg	0.028	0.021	1	06/04/25 21:17	06/05/25 17:27	74-83-9	2g
2-Butanone (MEK)	ND	mg/kg	0.14	0.033	1	06/04/25 21:17	06/05/25 17:27	78-93-3	2g
n-Butylbenzene	ND	mg/kg	0.0069	0.0044	1	06/04/25 21:17	06/05/25 17:27	104-51-8	2g
sec-Butylbenzene	ND	mg/kg	0.0069	0.0030	1	06/04/25 21:17	06/05/25 17:27	135-98-8	2g
tert-Butylbenzene	ND	mg/kg	0.0069	0.0025	1	06/04/25 21:17	06/05/25 17:27	98-06-6	2g
Carbon tetrachloride	ND	mg/kg	0.0069	0.0026	1	06/04/25 21:17	06/05/25 17:27	56-23-5	2g
Chlorobenzene	ND	mg/kg	0.0069	0.0040	1	06/04/25 21:17	06/05/25 17:27	108-90-7	2g
Chloroethane	ND	mg/kg	0.014	0.0053	1	06/04/25 21:17	06/05/25 17:27	75-00-3	2g
Chloroform	ND	mg/kg	0.0069	0.0058	1	06/04/25 21:17	06/05/25 17:27	67-66-3	2g
Chloromethane	ND	mg/kg	0.014	0.0058	1	06/04/25 21:17	06/05/25 17:27	74-87-3	2g
2-Chlorotoluene	ND	mg/kg	0.0069	0.0024	1	06/04/25 21:17	06/05/25 17:27	95-49-8	2g
4-Chlorotoluene	ND	mg/kg	0.0069	0.0038	1	06/04/25 21:17	06/05/25 17:27	106-43-4	2g
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0069	0.0027	1	06/04/25 21:17	06/05/25 17:27	96-12-8	2g
Dibromochloromethane	ND	mg/kg	0.0069	0.0039	1	06/04/25 21:17	06/05/25 17:27	124-48-1	2g
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0069	0.0030	1	06/04/25 21:17	06/05/25 17:27	106-93-4	2g
Dibromomethane	ND	mg/kg	0.0069	0.0015	1	06/04/25 21:17	06/05/25 17:27	74-95-3	2g
1,2-Dichlorobenzene	ND	mg/kg	0.0069	0.0025	1	06/04/25 21:17	06/05/25 17:27	95-50-1	2g
1,3-Dichlorobenzene	ND	mg/kg	0.0069	0.0021	1	06/04/25 21:17	06/05/25 17:27	541-73-1	2g
1,4-Dichlorobenzene	ND	mg/kg	0.0069	0.0018	1	06/04/25 21:17	06/05/25 17:27	106-46-7	2g
Dichlorodifluoromethane	ND	mg/kg	0.014	0.0070	1	06/04/25 21:17	06/05/25 17:27	75-71-8	2g
1,1-Dichloroethane	ND	mg/kg	0.0069	0.0028	1	06/04/25 21:17	06/05/25 17:27	75-34-3	2g
1,2-Dichloroethane	ND	mg/kg	0.0069	0.0046	1	06/04/25 21:17	06/05/25 17:27	107-06-2	2g
1,1-Dichloroethene	ND	mg/kg	0.0069	0.0028	1	06/04/25 21:17	06/05/25 17:27	75-35-4	2g
cis-1,2-Dichloroethene	ND	mg/kg	0.0069	0.0024	1	06/04/25 21:17	06/05/25 17:27	156-59-2	2g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-13 **Lab ID: 92799827002** Collected: 06/02/25 11:40 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0069	0.0059	1	06/04/25 21:17	06/05/25 17:27	156-60-5	2g
1,2-Dichloropropane	ND	mg/kg	0.0069	0.0021	1	06/04/25 21:17	06/05/25 17:27	78-87-5	2g
1,3-Dichloropropane	ND	mg/kg	0.0069	0.0022	1	06/04/25 21:17	06/05/25 17:27	142-28-9	2g
2,2-Dichloropropane	ND	mg/kg	0.0069	0.0052	1	06/04/25 21:17	06/05/25 17:27	594-20-7	2g
1,1-Dichloropropene	ND	mg/kg	0.0069	0.0033	1	06/04/25 21:17	06/05/25 17:27	563-58-6	2g
cis-1,3-Dichloropropene	ND	mg/kg	0.0069	0.0019	1	06/04/25 21:17	06/05/25 17:27	10061-01-5	2g
trans-1,3-Dichloropropene	ND	mg/kg	0.0069	0.0024	1	06/04/25 21:17	06/05/25 17:27	10061-02-6	2g
Diisopropyl ether	ND	mg/kg	0.0069	0.0019	1	06/04/25 21:17	06/05/25 17:27	108-20-3	2g
Ethylbenzene	ND	mg/kg	0.0069	0.0032	1	06/04/25 21:17	06/05/25 17:27	100-41-4	2g
Hexachloro-1,3-butadiene	ND	mg/kg	0.014	0.011	1	06/04/25 21:17	06/05/25 17:27	87-68-3	2g
2-Hexanone	ND	mg/kg	0.069	0.0067	1	06/04/25 21:17	06/05/25 17:27	591-78-6	2g
Isopropylbenzene (Cumene)	ND	mg/kg	0.0069	0.0023	1	06/04/25 21:17	06/05/25 17:27	98-82-8	2g
p-Isopropyltoluene	ND	mg/kg	0.0069	0.0034	1	06/04/25 21:17	06/05/25 17:27	99-87-6	2g
Methylene Chloride	ND	mg/kg	0.028	0.019	1	06/04/25 21:17	06/05/25 17:27	75-09-2	2g
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.069	0.0067	1	06/04/25 21:17	06/05/25 17:27	108-10-1	2g
Methyl-tert-butyl ether	ND	mg/kg	0.0069	0.0026	1	06/04/25 21:17	06/05/25 17:27	1634-04-4	2g
Naphthalene	ND	mg/kg	0.0069	0.0036	1	06/04/25 21:17	06/05/25 17:27	91-20-3	2g
n-Propylbenzene	ND	mg/kg	0.0069	0.0025	1	06/04/25 21:17	06/05/25 17:27	103-65-1	2g
Styrene	ND	mg/kg	0.0069	0.0018	1	06/04/25 21:17	06/05/25 17:27	100-42-5	2g
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0069	0.0027	1	06/04/25 21:17	06/05/25 17:27	630-20-6	2g
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0069	0.0018	1	06/04/25 21:17	06/05/25 17:27	79-34-5	2g
Tetrachloroethene	ND	mg/kg	0.0069	0.0022	1	06/04/25 21:17	06/05/25 17:27	127-18-4	2g
Toluene	ND	mg/kg	0.0069	0.0048	1	06/04/25 21:17	06/05/25 17:27	108-88-3	2g
1,2,3-Trichlorobenzene	ND	mg/kg	0.0069	0.0056	1	06/04/25 21:17	06/05/25 17:27	87-61-6	2g
1,2,4-Trichlorobenzene	ND	mg/kg	0.0069	0.0058	1	06/04/25 21:17	06/05/25 17:27	120-82-1	2g
1,1,1-Trichloroethane	ND	mg/kg	0.0069	0.0036	1	06/04/25 21:17	06/05/25 17:27	71-55-6	2g
1,1,2-Trichloroethane	ND	mg/kg	0.0069	0.0023	1	06/04/25 21:17	06/05/25 17:27	79-00-5	2g
Trichloroethene	ND	mg/kg	0.0069	0.0056	1	06/04/25 21:17	06/05/25 17:27	79-01-6	2g
Trichlorofluoromethane	ND	mg/kg	0.0069	0.0038	1	06/04/25 21:17	06/05/25 17:27	75-69-4	2g
1,2,3-Trichloropropane	ND	mg/kg	0.0069	0.0035	1	06/04/25 21:17	06/05/25 17:27	96-18-4	2g
1,2,4-Trimethylbenzene	ND	mg/kg	0.0069	0.0041	1	06/04/25 21:17	06/05/25 17:27	95-63-6	2g
1,3,5-Trimethylbenzene	ND	mg/kg	0.0069	0.0023	1	06/04/25 21:17	06/05/25 17:27	108-67-8	2g
Vinyl acetate	ND	mg/kg	0.069	0.014	1	06/04/25 21:17	06/05/25 17:27	108-05-4	2g
Vinyl chloride	ND	mg/kg	0.014	0.0035	1	06/04/25 21:17	06/05/25 17:27	75-01-4	2g
Xylene (Total)	ND	mg/kg	0.014	0.0039	1	06/04/25 21:17	06/05/25 17:27	1330-20-7	2g
m&p-Xylene	ND	mg/kg	0.014	0.0047	1	06/04/25 21:17	06/05/25 17:27	179601-23-1	2g
o-Xylene	ND	mg/kg	0.0069	0.0031	1	06/04/25 21:17	06/05/25 17:27	95-47-6	2g
Surrogates									
Toluene-d8 (S)	97	%	70-130		1	06/04/25 21:17	06/05/25 17:27	2037-26-5	2g
4-Bromofluorobenzene (S)	92	%	70-130		1	06/04/25 21:17	06/05/25 17:27	460-00-4	2g
1,2-Dichloroethane-d4 (S)	111	%	70-135		1	06/04/25 21:17	06/05/25 17:27	17060-07-0	2g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-13 **Lab ID: 92799827002** Collected: 06/02/25 11:40 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**24.2**	%	0.10	0.10	1		06/03/25 14:37		N2

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-12 **Lab ID: 92799827003** Collected: 06/02/25 12:30 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199 Pace Analytical Services - Charlotte								
Chromium, Hexavalent	**1.5J**	mg/kg	1.5	0.25	1	06/05/25 10:05	06/06/25 12:06	18540-29-9	
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050 Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	3.3	0.86	20	06/10/25 05:23	06/11/25 00:06	7440-36-0	1g,N2
Arsenic	ND	mg/kg	1.6	0.26	20	06/10/25 05:23	06/11/25 00:06	7440-38-2	1g
Beryllium	**0.41**	mg/kg	0.20	0.095	20	06/10/25 05:23	06/11/25 00:06	7440-41-7	1g
Cadmium	ND	mg/kg	0.20	0.043	20	06/10/25 05:23	06/11/25 00:06	7440-43-9	1g
Chromium	**264**	mg/kg	1.6	0.94	20	06/10/25 05:23	06/11/25 00:06	7440-47-3	1g
Copper	**82.7**	mg/kg	3.3	0.84	20	06/10/25 05:23	06/11/25 00:06	7440-50-8	1g
Lead	ND	mg/kg	1.6	0.60	20	06/10/25 05:23	06/11/25 00:06	7439-92-1	1g
Nickel	**33.5**	mg/kg	1.6	0.79	20	06/10/25 05:23	06/11/25 00:06	7440-02-0	1g
Selenium	ND	mg/kg	1.6	0.85	20	06/10/25 05:23	06/11/25 00:06	7782-49-2	1g
Silver	ND	mg/kg	0.20	0.063	20	06/10/25 05:23	06/11/25 00:06	7440-22-4	1g
Thallium	ND	mg/kg	1.6	0.29	20	06/10/25 05:23	06/11/25 00:06	7440-28-0	1g
Zinc	ND	mg/kg	65.8	12.8	20	06/10/25 05:23	06/11/25 00:06	7440-66-6	1g
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471 Pace Analytical Services - Ormond Beach								
Mercury	**0.037**	mg/kg	0.014	0.0068	1	06/11/25 09:21	06/11/25 11:23	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.50	0.18	1	06/04/25 11:57	06/06/25 11:44	83-32-9	
Acenaphthylene	ND	mg/kg	0.50	0.18	1	06/04/25 11:57	06/06/25 11:44	208-96-8	
Aniline	ND	mg/kg	0.50	0.19	1	06/04/25 11:57	06/06/25 11:44	62-53-3	
Anthracene	ND	mg/kg	0.50	0.16	1	06/04/25 11:57	06/06/25 11:44	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.50	0.17	1	06/04/25 11:57	06/06/25 11:44	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.50	0.17	1	06/04/25 11:57	06/06/25 11:44	50-32-8	
Benzo(b)fluoranthene	ND	mg/kg	0.50	0.17	1	06/04/25 11:57	06/06/25 11:44	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.50	0.19	1	06/04/25 11:57	06/06/25 11:44	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.50	0.18	1	06/04/25 11:57	06/06/25 11:44	207-08-9	
Benzoic Acid	ND	mg/kg	2.5	1.1	1	06/04/25 11:57	06/06/25 11:44	65-85-0	
Benzyl alcohol	ND	mg/kg	1.0	0.38	1	06/04/25 11:57	06/06/25 11:44	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.50	0.19	1	06/04/25 11:57	06/06/25 11:44	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.50	0.21	1	06/04/25 11:57	06/06/25 11:44	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	1.0	0.35	1	06/04/25 11:57	06/06/25 11:44	59-50-7	
4-Chloroaniline	ND	mg/kg	1.0	0.39	1	06/04/25 11:57	06/06/25 11:44	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.50	0.21	1	06/04/25 11:57	06/06/25 11:44	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.50	0.19	1	06/04/25 11:57	06/06/25 11:44	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.50	0.20	1	06/04/25 11:57	06/06/25 11:44	91-58-7	
2-Chlorophenol	ND	mg/kg	0.50	0.19	1	06/04/25 11:57	06/06/25 11:44	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.50	0.19	1	06/04/25 11:57	06/06/25 11:44	7005-72-3	
Chrysene	ND	mg/kg	0.50	0.18	1	06/04/25 11:57	06/06/25 11:44	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-12 **Lab ID: 92799827003** Collected: 06/02/25 12:30 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.50	0.19	1	06/04/25 11:57	06/06/25 11:44	53-70-3	
Dibenzofuran	ND	mg/kg	0.50	0.18	1	06/04/25 11:57	06/06/25 11:44	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.50	0.18	1	06/04/25 11:57	06/06/25 11:44	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.50	0.18	1	06/04/25 11:57	06/06/25 11:44	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.50	0.19	1	06/04/25 11:57	06/06/25 11:44	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	1.0	0.34	1	06/04/25 11:57	06/06/25 11:44	91-94-1	
2,4-Dichlorophenol	ND	mg/kg	0.50	0.19	1	06/04/25 11:57	06/06/25 11:44	120-83-2	
Diethylphthalate	ND	mg/kg	0.50	0.18	1	06/04/25 11:57	06/06/25 11:44	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.50	0.21	1	06/04/25 11:57	06/06/25 11:44	105-67-9	
Dimethylphthalate	ND	mg/kg	0.50	0.18	1	06/04/25 11:57	06/06/25 11:44	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.50	0.17	1	06/04/25 11:57	06/06/25 11:44	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	1.0	0.46	1	06/04/25 11:57	06/06/25 11:44	534-52-1	
2,4-Dinitrophenol	ND	mg/kg	2.5	1.5	1	06/04/25 11:57	06/06/25 11:44	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.50	0.19	1	06/04/25 11:57	06/06/25 11:44	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.50	0.18	1	06/04/25 11:57	06/06/25 11:44	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.50	0.20	1	06/04/25 11:57	06/06/25 11:44	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.50	0.19	1	06/04/25 11:57	06/06/25 11:44	117-81-7	
Fluoranthene	ND	mg/kg	0.50	0.17	1	06/04/25 11:57	06/06/25 11:44	206-44-0	
Fluorene	ND	mg/kg	0.50	0.18	1	06/04/25 11:57	06/06/25 11:44	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.50	0.22	1	06/04/25 11:57	06/06/25 11:44	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.50	0.19	1	06/04/25 11:57	06/06/25 11:44	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.50	0.29	1	06/04/25 11:57	06/06/25 11:44	77-47-4	
Hexachloroethane	ND	mg/kg	0.50	0.19	1	06/04/25 11:57	06/06/25 11:44	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.50	0.20	1	06/04/25 11:57	06/06/25 11:44	193-39-5	
Isophorone	ND	mg/kg	0.50	0.22	1	06/04/25 11:57	06/06/25 11:44	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.50	0.18	1	06/04/25 11:57	06/06/25 11:44	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.50	0.20	1	06/04/25 11:57	06/06/25 11:44	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.50	0.20	1	06/04/25 11:57	06/06/25 11:44	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.50	0.20	1	06/04/25 11:57	06/06/25 11:44	15831-10-4	
Naphthalene	ND	mg/kg	0.50	0.17	1	06/04/25 11:57	06/06/25 11:44	91-20-3	
2-Nitroaniline	ND	mg/kg	2.5	0.41	1	06/04/25 11:57	06/06/25 11:44	88-74-4	
3-Nitroaniline	ND	mg/kg	2.5	0.39	1	06/04/25 11:57	06/06/25 11:44	99-09-2	
4-Nitroaniline	ND	mg/kg	1.0	0.38	1	06/04/25 11:57	06/06/25 11:44	100-01-6	
Nitrobenzene	ND	mg/kg	0.50	0.23	1	06/04/25 11:57	06/06/25 11:44	98-95-3	
2-Nitrophenol	ND	mg/kg	0.50	0.22	1	06/04/25 11:57	06/06/25 11:44	88-75-5	
4-Nitrophenol	ND	mg/kg	2.5	0.96	1	06/04/25 11:57	06/06/25 11:44	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.50	0.17	1	06/04/25 11:57	06/06/25 11:44	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.50	0.19	1	06/04/25 11:57	06/06/25 11:44	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.50	0.18	1	06/04/25 11:57	06/06/25 11:44	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.50	0.24	1	06/04/25 11:57	06/06/25 11:44	108-60-1	
Pentachlorophenol	ND	mg/kg	1.0	0.49	1	06/04/25 11:57	06/06/25 11:44	87-86-5	
Phenanthrene	ND	mg/kg	0.50	0.16	1	06/04/25 11:57	06/06/25 11:44	85-01-8	
Phenol	ND	mg/kg	0.50	0.22	1	06/04/25 11:57	06/06/25 11:44	108-95-2	
Pyrene	ND	mg/kg	0.50	0.20	1	06/04/25 11:57	06/06/25 11:44	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-12 **Lab ID: 92799827003** Collected: 06/02/25 12:30 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.50	0.16	1	06/04/25 11:57	06/06/25 11:44	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.50	0.20	1	06/04/25 11:57	06/06/25 11:44	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.50	0.23	1	06/04/25 11:57	06/06/25 11:44	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.50	0.21	1	06/04/25 11:57	06/06/25 11:44	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	56	%	10-130		1	06/04/25 11:57	06/06/25 11:44	4165-60-0	
2-Fluorobiphenyl (S)	51	%	10-130		1	06/04/25 11:57	06/06/25 11:44	321-60-8	
Terphenyl-d14 (S)	62	%	10-130		1	06/04/25 11:57	06/06/25 11:44	1718-51-0	
Phenol-d6 (S)	49	%	10-130		1	06/04/25 11:57	06/06/25 11:44	13127-88-3	
2-Fluorophenol (S)	48	%	10-130		1	06/04/25 11:57	06/06/25 11:44	367-12-4	
2,4,6-Tribromophenol (S)	58	%	10-130		1	06/04/25 11:57	06/06/25 11:44	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.20	0.063	1	06/04/25 21:17	06/05/25 17:51	67-64-1	2g
Benzene	ND	mg/kg	0.0099	0.0039	1	06/04/25 21:17	06/05/25 17:51	71-43-2	2g
Bromobenzene	ND	mg/kg	0.0099	0.0032	1	06/04/25 21:17	06/05/25 17:51	108-86-1	2g
Bromochloromethane	ND	mg/kg	0.0099	0.0029	1	06/04/25 21:17	06/05/25 17:51	74-97-5	2g
Bromodichloromethane	ND	mg/kg	0.0099	0.0038	1	06/04/25 21:17	06/05/25 17:51	75-27-4	2g
Bromoform	ND	mg/kg	0.0099	0.0035	1	06/04/25 21:17	06/05/25 17:51	75-25-2	2g
Bromomethane	ND	mg/kg	0.040	0.031	1	06/04/25 21:17	06/05/25 17:51	74-83-9	2g
2-Butanone (MEK)	ND	mg/kg	0.20	0.047	1	06/04/25 21:17	06/05/25 17:51	78-93-3	2g
n-Butylbenzene	ND	mg/kg	0.0099	0.0062	1	06/04/25 21:17	06/05/25 17:51	104-51-8	2g
sec-Butylbenzene	ND	mg/kg	0.0099	0.0043	1	06/04/25 21:17	06/05/25 17:51	135-98-8	2g
tert-Butylbenzene	ND	mg/kg	0.0099	0.0035	1	06/04/25 21:17	06/05/25 17:51	98-06-6	2g
Carbon tetrachloride	ND	mg/kg	0.0099	0.0037	1	06/04/25 21:17	06/05/25 17:51	56-23-5	2g
Chlorobenzene	ND	mg/kg	0.0099	0.0057	1	06/04/25 21:17	06/05/25 17:51	108-90-7	2g
Chloroethane	**0.0077J**	mg/kg	0.020	0.0076	1	06/04/25 21:17	06/05/25 17:51	75-00-3	2g
Chloroform	ND	mg/kg	0.0099	0.0083	1	06/04/25 21:17	06/05/25 17:51	67-66-3	2g
Chloromethane	ND	mg/kg	0.020	0.0083	1	06/04/25 21:17	06/05/25 17:51	74-87-3	2g
2-Chlorotoluene	ND	mg/kg	0.0099	0.0035	1	06/04/25 21:17	06/05/25 17:51	95-49-8	2g
4-Chlorotoluene	ND	mg/kg	0.0099	0.0055	1	06/04/25 21:17	06/05/25 17:51	106-43-4	2g
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0099	0.0038	1	06/04/25 21:17	06/05/25 17:51	96-12-8	2g
Dibromochloromethane	ND	mg/kg	0.0099	0.0056	1	06/04/25 21:17	06/05/25 17:51	124-48-1	2g
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0099	0.0043	1	06/04/25 21:17	06/05/25 17:51	106-93-4	2g
Dibromomethane	ND	mg/kg	0.0099	0.0021	1	06/04/25 21:17	06/05/25 17:51	74-95-3	2g
1,2-Dichlorobenzene	ND	mg/kg	0.0099	0.0036	1	06/04/25 21:17	06/05/25 17:51	95-50-1	2g
1,3-Dichlorobenzene	ND	mg/kg	0.0099	0.0031	1	06/04/25 21:17	06/05/25 17:51	541-73-1	2g
1,4-Dichlorobenzene	ND	mg/kg	0.0099	0.0026	1	06/04/25 21:17	06/05/25 17:51	106-46-7	2g
Dichlorodifluoromethane	ND	mg/kg	0.020	0.010	1	06/04/25 21:17	06/05/25 17:51	75-71-8	2g
1,1-Dichloroethane	ND	mg/kg	0.0099	0.0041	1	06/04/25 21:17	06/05/25 17:51	75-34-3	2g
1,2-Dichloroethane	ND	mg/kg	0.0099	0.0065	1	06/04/25 21:17	06/05/25 17:51	107-06-2	2g
1,1-Dichloroethene	ND	mg/kg	0.0099	0.0041	1	06/04/25 21:17	06/05/25 17:51	75-35-4	2g
cis-1,2-Dichloroethene	ND	mg/kg	0.0099	0.0034	1	06/04/25 21:17	06/05/25 17:51	156-59-2	2g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-12 **Lab ID: 92799827003** Collected: 06/02/25 12:30 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0099	0.0084	1	06/04/25 21:17	06/05/25 17:51	156-60-5	2g
1,2-Dichloropropane	ND	mg/kg	0.0099	0.0030	1	06/04/25 21:17	06/05/25 17:51	78-87-5	2g
1,3-Dichloropropane	ND	mg/kg	0.0099	0.0031	1	06/04/25 21:17	06/05/25 17:51	142-28-9	2g
2,2-Dichloropropane	ND	mg/kg	0.0099	0.0075	1	06/04/25 21:17	06/05/25 17:51	594-20-7	2g
1,1-Dichloropropene	ND	mg/kg	0.0099	0.0047	1	06/04/25 21:17	06/05/25 17:51	563-58-6	2g
cis-1,3-Dichloropropene	ND	mg/kg	0.0099	0.0027	1	06/04/25 21:17	06/05/25 17:51	10061-01-5	2g
trans-1,3-Dichloropropene	ND	mg/kg	0.0099	0.0034	1	06/04/25 21:17	06/05/25 17:51	10061-02-6	2g
Diisopropyl ether	ND	mg/kg	0.0099	0.0027	1	06/04/25 21:17	06/05/25 17:51	108-20-3	2g
Ethylbenzene	ND	mg/kg	0.0099	0.0046	1	06/04/25 21:17	06/05/25 17:51	100-41-4	2g
Hexachloro-1,3-butadiene	ND	mg/kg	0.020	0.016	1	06/04/25 21:17	06/05/25 17:51	87-68-3	2g
2-Hexanone	ND	mg/kg	0.099	0.0095	1	06/04/25 21:17	06/05/25 17:51	591-78-6	2g
Isopropylbenzene (Cumene)	ND	mg/kg	0.0099	0.0034	1	06/04/25 21:17	06/05/25 17:51	98-82-8	2g
p-Isopropyltoluene	ND	mg/kg	0.0099	0.0049	1	06/04/25 21:17	06/05/25 17:51	99-87-6	2g
Methylene Chloride	ND	mg/kg	0.040	0.027	1	06/04/25 21:17	06/05/25 17:51	75-09-2	2g
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.099	0.0095	1	06/04/25 21:17	06/05/25 17:51	108-10-1	2g
Methyl-tert-butyl ether	ND	mg/kg	0.0099	0.0037	1	06/04/25 21:17	06/05/25 17:51	1634-04-4	2g
Naphthalene	ND	mg/kg	0.0099	0.0052	1	06/04/25 21:17	06/05/25 17:51	91-20-3	2g
n-Propylbenzene	ND	mg/kg	0.0099	0.0035	1	06/04/25 21:17	06/05/25 17:51	103-65-1	2g
Styrene	ND	mg/kg	0.0099	0.0026	1	06/04/25 21:17	06/05/25 17:51	100-42-5	2g
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0099	0.0038	1	06/04/25 21:17	06/05/25 17:51	630-20-6	2g
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0099	0.0026	1	06/04/25 21:17	06/05/25 17:51	79-34-5	2g
Tetrachloroethene	ND	mg/kg	0.0099	0.0031	1	06/04/25 21:17	06/05/25 17:51	127-18-4	2g
Toluene	ND	mg/kg	0.0099	0.0068	1	06/04/25 21:17	06/05/25 17:51	108-88-3	2g
1,2,3-Trichlorobenzene	ND	mg/kg	0.0099	0.0080	1	06/04/25 21:17	06/05/25 17:51	87-61-6	2g
1,2,4-Trichlorobenzene	ND	mg/kg	0.0099	0.0083	1	06/04/25 21:17	06/05/25 17:51	120-82-1	2g
1,1,1-Trichloroethane	ND	mg/kg	0.0099	0.0051	1	06/04/25 21:17	06/05/25 17:51	71-55-6	2g
1,1,2-Trichloroethane	ND	mg/kg	0.0099	0.0033	1	06/04/25 21:17	06/05/25 17:51	79-00-5	2g
Trichloroethene	ND	mg/kg	0.0099	0.0080	1	06/04/25 21:17	06/05/25 17:51	79-01-6	2g
Trichlorofluoromethane	ND	mg/kg	0.0099	0.0054	1	06/04/25 21:17	06/05/25 17:51	75-69-4	2g
1,2,3-Trichloropropane	ND	mg/kg	0.0099	0.0050	1	06/04/25 21:17	06/05/25 17:51	96-18-4	2g
1,2,4-Trimethylbenzene	ND	mg/kg	0.0099	0.0059	1	06/04/25 21:17	06/05/25 17:51	95-63-6	2g
1,3,5-Trimethylbenzene	ND	mg/kg	0.0099	0.0033	1	06/04/25 21:17	06/05/25 17:51	108-67-8	2g
Vinyl acetate	ND	mg/kg	0.099	0.020	1	06/04/25 21:17	06/05/25 17:51	108-05-4	2g
Vinyl chloride	ND	mg/kg	0.020	0.0050	1	06/04/25 21:17	06/05/25 17:51	75-01-4	2g
Xylene (Total)	ND	mg/kg	0.020	0.0056	1	06/04/25 21:17	06/05/25 17:51	1330-20-7	2g
m&p-Xylene	ND	mg/kg	0.020	0.0068	1	06/04/25 21:17	06/05/25 17:51	179601-23-1	2g
o-Xylene	ND	mg/kg	0.0099	0.0044	1	06/04/25 21:17	06/05/25 17:51	95-47-6	2g
Surrogates									
Toluene-d8 (S)	98	%	70-130		1	06/04/25 21:17	06/05/25 17:51	2037-26-5	2g
4-Bromofluorobenzene (S)	95	%	70-130		1	06/04/25 21:17	06/05/25 17:51	460-00-4	2g
1,2-Dichloroethane-d4 (S)	111	%	70-135		1	06/04/25 21:17	06/05/25 17:51	17060-07-0	2g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-12 **Lab ID: 92799827003** Collected: 06/02/25 12:30 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**34.0**	%	0.10	0.10	1		06/03/25 14:37		N2

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-8 **Lab ID: 92799827004** Collected: 06/02/25 13:50 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199 Pace Analytical Services - Charlotte								
Chromium, Hexavalent	ND	mg/kg	1.1	0.18	1	06/05/25 10:05	06/06/25 14:27	18540-29-9	
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050 Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	2.6	0.67	20	06/10/25 05:23	06/11/25 00:10	7440-36-0	1g,N2
Arsenic	**2.1**	mg/kg	1.3	0.20	20	06/10/25 05:23	06/11/25 00:10	7440-38-2	1g
Beryllium	**0.25**	mg/kg	0.15	0.075	20	06/10/25 05:23	06/11/25 00:10	7440-41-7	1g
Cadmium	**0.16**	mg/kg	0.15	0.033	20	06/10/25 05:23	06/11/25 00:10	7440-43-9	1g
Chromium	**69.3**	mg/kg	1.3	0.74	20	06/10/25 05:23	06/11/25 00:10	7440-47-3	1g
Copper	**23.1**	mg/kg	2.6	0.66	20	06/10/25 05:23	06/11/25 00:10	7440-50-8	1g
Lead	**14.6**	mg/kg	1.3	0.47	20	06/10/25 05:23	06/11/25 00:10	7439-92-1	1g
Nickel	**6.0**	mg/kg	1.3	0.62	20	06/10/25 05:23	06/11/25 00:10	7440-02-0	1g
Selenium	ND	mg/kg	1.3	0.66	20	06/10/25 05:23	06/11/25 00:10	7782-49-2	1g
Silver	ND	mg/kg	0.15	0.049	20	06/10/25 05:23	06/11/25 00:10	7440-22-4	1g
Thallium	ND	mg/kg	1.3	0.23	20	06/10/25 05:23	06/11/25 00:10	7440-28-0	1g
Zinc	ND	mg/kg	51.5	10.1	20	06/10/25 05:23	06/11/25 00:10	7440-66-6	1g
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471 Pace Analytical Services - Ormond Beach								
Mercury	**0.038**	mg/kg	0.0096	0.0048	1	06/11/25 09:21	06/11/25 11:26	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 12:10	83-32-9	
Acenaphthylene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 12:10	208-96-8	
Aniline	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 12:10	62-53-3	
Anthracene	ND	mg/kg	0.36	0.12	1	06/04/25 11:57	06/06/25 12:10	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.36	0.12	1	06/04/25 11:57	06/06/25 12:10	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 12:10	50-32-8	
Benzo(b)fluoranthene	ND	mg/kg	0.36	0.12	1	06/04/25 11:57	06/06/25 12:10	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 12:10	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 12:10	207-08-9	
Benzoic Acid	ND	mg/kg	1.8	0.78	1	06/04/25 11:57	06/06/25 12:10	65-85-0	
Benzyl alcohol	ND	mg/kg	0.73	0.27	1	06/04/25 11:57	06/06/25 12:10	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 12:10	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.36	0.15	1	06/04/25 11:57	06/06/25 12:10	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	0.73	0.26	1	06/04/25 11:57	06/06/25 12:10	59-50-7	
4-Chloroaniline	ND	mg/kg	0.73	0.28	1	06/04/25 11:57	06/06/25 12:10	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.36	0.15	1	06/04/25 11:57	06/06/25 12:10	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 12:10	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 12:10	91-58-7	
2-Chlorophenol	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 12:10	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 12:10	7005-72-3	
Chrysene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 12:10	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-8 **Lab ID: 92799827004** Collected: 06/02/25 13:50 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 12:10	53-70-3	
Dibenzofuran	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 12:10	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 12:10	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 12:10	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 12:10	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	0.73	0.25	1	06/04/25 11:57	06/06/25 12:10	91-94-1	
2,4-Dichlorophenol	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 12:10	120-83-2	
Diethylphthalate	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 12:10	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.36	0.15	1	06/04/25 11:57	06/06/25 12:10	105-67-9	
Dimethylphthalate	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 12:10	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.36	0.12	1	06/04/25 11:57	06/06/25 12:10	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	0.73	0.34	1	06/04/25 11:57	06/06/25 12:10	534-52-1	
2,4-Dinitrophenol	ND	mg/kg	1.8	1.1	1	06/04/25 11:57	06/06/25 12:10	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 12:10	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 12:10	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 12:10	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 12:10	117-81-7	
Fluoranthene	ND	mg/kg	0.36	0.12	1	06/04/25 11:57	06/06/25 12:10	206-44-0	
Fluorene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 12:10	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.36	0.16	1	06/04/25 11:57	06/06/25 12:10	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 12:10	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.36	0.21	1	06/04/25 11:57	06/06/25 12:10	77-47-4	
Hexachloroethane	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 12:10	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 12:10	193-39-5	
Isophorone	ND	mg/kg	0.36	0.16	1	06/04/25 11:57	06/06/25 12:10	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 12:10	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.36	0.15	1	06/04/25 11:57	06/06/25 12:10	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.36	0.15	1	06/04/25 11:57	06/06/25 12:10	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.36	0.15	1	06/04/25 11:57	06/06/25 12:10	15831-10-4	
Naphthalene	ND	mg/kg	0.36	0.12	1	06/04/25 11:57	06/06/25 12:10	91-20-3	
2-Nitroaniline	ND	mg/kg	1.8	0.30	1	06/04/25 11:57	06/06/25 12:10	88-74-4	
3-Nitroaniline	ND	mg/kg	1.8	0.28	1	06/04/25 11:57	06/06/25 12:10	99-09-2	
4-Nitroaniline	ND	mg/kg	0.73	0.28	1	06/04/25 11:57	06/06/25 12:10	100-01-6	
Nitrobenzene	ND	mg/kg	0.36	0.17	1	06/04/25 11:57	06/06/25 12:10	98-95-3	
2-Nitrophenol	ND	mg/kg	0.36	0.16	1	06/04/25 11:57	06/06/25 12:10	88-75-5	
4-Nitrophenol	ND	mg/kg	1.8	0.70	1	06/04/25 11:57	06/06/25 12:10	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.36	0.12	1	06/04/25 11:57	06/06/25 12:10	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 12:10	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 12:10	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.36	0.17	1	06/04/25 11:57	06/06/25 12:10	108-60-1	
Pentachlorophenol	ND	mg/kg	0.73	0.36	1	06/04/25 11:57	06/06/25 12:10	87-86-5	
Phenanthrene	ND	mg/kg	0.36	0.12	1	06/04/25 11:57	06/06/25 12:10	85-01-8	
Phenol	ND	mg/kg	0.36	0.16	1	06/04/25 11:57	06/06/25 12:10	108-95-2	
Pyrene	ND	mg/kg	0.36	0.15	1	06/04/25 11:57	06/06/25 12:10	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-8 **Lab ID: 92799827004** Collected: 06/02/25 13:50 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.36	0.11	1	06/04/25 11:57	06/06/25 12:10	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 12:10	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.36	0.17	1	06/04/25 11:57	06/06/25 12:10	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.36	0.15	1	06/04/25 11:57	06/06/25 12:10	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	59	%	10-130		1	06/04/25 11:57	06/06/25 12:10	4165-60-0	
2-Fluorobiphenyl (S)	58	%	10-130		1	06/04/25 11:57	06/06/25 12:10	321-60-8	
Terphenyl-d14 (S)	69	%	10-130		1	06/04/25 11:57	06/06/25 12:10	1718-51-0	
Phenol-d6 (S)	55	%	10-130		1	06/04/25 11:57	06/06/25 12:10	13127-88-3	
2-Fluorophenol (S)	53	%	10-130		1	06/04/25 11:57	06/06/25 12:10	367-12-4	
2,4,6-Tribromophenol (S)	71	%	10-130		1	06/04/25 11:57	06/06/25 12:10	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.10	0.033	1	06/04/25 21:17	06/05/25 18:16	67-64-1	2g
Benzene	ND	mg/kg	0.0052	0.0021	1	06/04/25 21:17	06/05/25 18:16	71-43-2	2g
Bromobenzene	ND	mg/kg	0.0052	0.0017	1	06/04/25 21:17	06/05/25 18:16	108-86-1	2g
Bromochloromethane	ND	mg/kg	0.0052	0.0015	1	06/04/25 21:17	06/05/25 18:16	74-97-5	2g
Bromodichloromethane	ND	mg/kg	0.0052	0.0020	1	06/04/25 21:17	06/05/25 18:16	75-27-4	2g
Bromoform	ND	mg/kg	0.0052	0.0018	1	06/04/25 21:17	06/05/25 18:16	75-25-2	2g
Bromomethane	ND	mg/kg	0.021	0.016	1	06/04/25 21:17	06/05/25 18:16	74-83-9	2g
2-Butanone (MEK)	ND	mg/kg	0.10	0.025	1	06/04/25 21:17	06/05/25 18:16	78-93-3	2g
n-Butylbenzene	ND	mg/kg	0.0052	0.0033	1	06/04/25 21:17	06/05/25 18:16	104-51-8	2g
sec-Butylbenzene	ND	mg/kg	0.0052	0.0023	1	06/04/25 21:17	06/05/25 18:16	135-98-8	2g
tert-Butylbenzene	ND	mg/kg	0.0052	0.0018	1	06/04/25 21:17	06/05/25 18:16	98-06-6	2g
Carbon tetrachloride	ND	mg/kg	0.0052	0.0019	1	06/04/25 21:17	06/05/25 18:16	56-23-5	2g
Chlorobenzene	ND	mg/kg	0.0052	0.0030	1	06/04/25 21:17	06/05/25 18:16	108-90-7	2g
Chloroethane	ND	mg/kg	0.010	0.0040	1	06/04/25 21:17	06/05/25 18:16	75-00-3	2g
Chloroform	ND	mg/kg	0.0052	0.0043	1	06/04/25 21:17	06/05/25 18:16	67-66-3	2g
Chloromethane	ND	mg/kg	0.010	0.0043	1	06/04/25 21:17	06/05/25 18:16	74-87-3	2g
2-Chlorotoluene	ND	mg/kg	0.0052	0.0018	1	06/04/25 21:17	06/05/25 18:16	95-49-8	2g
4-Chlorotoluene	ND	mg/kg	0.0052	0.0029	1	06/04/25 21:17	06/05/25 18:16	106-43-4	2g
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0052	0.0020	1	06/04/25 21:17	06/05/25 18:16	96-12-8	2g
Dibromochloromethane	ND	mg/kg	0.0052	0.0029	1	06/04/25 21:17	06/05/25 18:16	124-48-1	2g
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0052	0.0023	1	06/04/25 21:17	06/05/25 18:16	106-93-4	2g
Dibromomethane	ND	mg/kg	0.0052	0.0011	1	06/04/25 21:17	06/05/25 18:16	74-95-3	2g
1,2-Dichlorobenzene	ND	mg/kg	0.0052	0.0019	1	06/04/25 21:17	06/05/25 18:16	95-50-1	2g
1,3-Dichlorobenzene	ND	mg/kg	0.0052	0.0016	1	06/04/25 21:17	06/05/25 18:16	541-73-1	2g
1,4-Dichlorobenzene	ND	mg/kg	0.0052	0.0013	1	06/04/25 21:17	06/05/25 18:16	106-46-7	2g
Dichlorodifluoromethane	ND	mg/kg	0.010	0.0053	1	06/04/25 21:17	06/05/25 18:16	75-71-8	2g
1,1-Dichloroethane	ND	mg/kg	0.0052	0.0021	1	06/04/25 21:17	06/05/25 18:16	75-34-3	2g
1,2-Dichloroethane	ND	mg/kg	0.0052	0.0034	1	06/04/25 21:17	06/05/25 18:16	107-06-2	2g
1,1-Dichloroethene	ND	mg/kg	0.0052	0.0021	1	06/04/25 21:17	06/05/25 18:16	75-35-4	2g
cis-1,2-Dichloroethene	ND	mg/kg	0.0052	0.0018	1	06/04/25 21:17	06/05/25 18:16	156-59-2	2g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-8 **Lab ID: 92799827004** Collected: 06/02/25 13:50 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0052	0.0044	1	06/04/25 21:17	06/05/25 18:16	156-60-5	2g
1,2-Dichloropropane	ND	mg/kg	0.0052	0.0016	1	06/04/25 21:17	06/05/25 18:16	78-87-5	2g
1,3-Dichloropropane	ND	mg/kg	0.0052	0.0016	1	06/04/25 21:17	06/05/25 18:16	142-28-9	2g
2,2-Dichloropropane	ND	mg/kg	0.0052	0.0039	1	06/04/25 21:17	06/05/25 18:16	594-20-7	2g
1,1-Dichloropropene	ND	mg/kg	0.0052	0.0025	1	06/04/25 21:17	06/05/25 18:16	563-58-6	2g
cis-1,3-Dichloropropene	ND	mg/kg	0.0052	0.0014	1	06/04/25 21:17	06/05/25 18:16	10061-01-5	2g
trans-1,3-Dichloropropene	ND	mg/kg	0.0052	0.0018	1	06/04/25 21:17	06/05/25 18:16	10061-02-6	2g
Diisopropyl ether	ND	mg/kg	0.0052	0.0014	1	06/04/25 21:17	06/05/25 18:16	108-20-3	2g
Ethylbenzene	ND	mg/kg	0.0052	0.0024	1	06/04/25 21:17	06/05/25 18:16	100-41-4	2g
Hexachloro-1,3-butadiene	ND	mg/kg	0.010	0.0085	1	06/04/25 21:17	06/05/25 18:16	87-68-3	2g
2-Hexanone	ND	mg/kg	0.052	0.0050	1	06/04/25 21:17	06/05/25 18:16	591-78-6	2g
Isopropylbenzene (Cumene)	ND	mg/kg	0.0052	0.0018	1	06/04/25 21:17	06/05/25 18:16	98-82-8	2g
p-Isopropyltoluene	ND	mg/kg	0.0052	0.0025	1	06/04/25 21:17	06/05/25 18:16	99-87-6	2g
Methylene Chloride	ND	mg/kg	0.021	0.014	1	06/04/25 21:17	06/05/25 18:16	75-09-2	2g
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.052	0.0050	1	06/04/25 21:17	06/05/25 18:16	108-10-1	2g
Methyl-tert-butyl ether	ND	mg/kg	0.0052	0.0019	1	06/04/25 21:17	06/05/25 18:16	1634-04-4	2g
Naphthalene	ND	mg/kg	0.0052	0.0027	1	06/04/25 21:17	06/05/25 18:16	91-20-3	2g
n-Propylbenzene	ND	mg/kg	0.0052	0.0018	1	06/04/25 21:17	06/05/25 18:16	103-65-1	2g
Styrene	ND	mg/kg	0.0052	0.0014	1	06/04/25 21:17	06/05/25 18:16	100-42-5	2g
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0052	0.0020	1	06/04/25 21:17	06/05/25 18:16	630-20-6	2g
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0052	0.0014	1	06/04/25 21:17	06/05/25 18:16	79-34-5	2g
Tetrachloroethene	**0.025**	mg/kg	0.0052	0.0016	1	06/04/25 21:17	06/05/25 18:16	127-18-4	2g
Toluene	ND	mg/kg	0.0052	0.0036	1	06/04/25 21:17	06/05/25 18:16	108-88-3	2g
1,2,3-Trichlorobenzene	ND	mg/kg	0.0052	0.0042	1	06/04/25 21:17	06/05/25 18:16	87-61-6	2g
1,2,4-Trichlorobenzene	ND	mg/kg	0.0052	0.0043	1	06/04/25 21:17	06/05/25 18:16	120-82-1	2g
1,1,1-Trichloroethane	ND	mg/kg	0.0052	0.0027	1	06/04/25 21:17	06/05/25 18:16	71-55-6	2g
1,1,2-Trichloroethane	ND	mg/kg	0.0052	0.0017	1	06/04/25 21:17	06/05/25 18:16	79-00-5	2g
Trichloroethene	ND	mg/kg	0.0052	0.0042	1	06/04/25 21:17	06/05/25 18:16	79-01-6	2g
Trichlorofluoromethane	ND	mg/kg	0.0052	0.0028	1	06/04/25 21:17	06/05/25 18:16	75-69-4	2g
1,2,3-Trichloropropane	ND	mg/kg	0.0052	0.0026	1	06/04/25 21:17	06/05/25 18:16	96-18-4	2g
1,2,4-Trimethylbenzene	ND	mg/kg	0.0052	0.0031	1	06/04/25 21:17	06/05/25 18:16	95-63-6	2g
1,3,5-Trimethylbenzene	ND	mg/kg	0.0052	0.0017	1	06/04/25 21:17	06/05/25 18:16	108-67-8	2g
Vinyl acetate	ND	mg/kg	0.052	0.011	1	06/04/25 21:17	06/05/25 18:16	108-05-4	2g
Vinyl chloride	ND	mg/kg	0.010	0.0026	1	06/04/25 21:17	06/05/25 18:16	75-01-4	2g
Xylene (Total)	ND	mg/kg	0.010	0.0029	1	06/04/25 21:17	06/05/25 18:16	1330-20-7	2g
m&p-Xylene	ND	mg/kg	0.010	0.0035	1	06/04/25 21:17	06/05/25 18:16	179601-23-1	2g
o-Xylene	ND	mg/kg	0.0052	0.0023	1	06/04/25 21:17	06/05/25 18:16	95-47-6	2g
Surrogates									
Toluene-d8 (S)	96	%	70-130		1	06/04/25 21:17	06/05/25 18:16	2037-26-5	2g
4-Bromofluorobenzene (S)	99	%	70-130		1	06/04/25 21:17	06/05/25 18:16	460-00-4	2g
1,2-Dichloroethane-d4 (S)	108	%	70-135		1	06/04/25 21:17	06/05/25 18:16	17060-07-0	2g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-8 **Lab ID: 92799827004** Collected: 06/02/25 13:50 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**9.9**	%	0.10	0.10	1		06/03/25 14:37		N2

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-8-B **Lab ID: 92799827005** Collected: 06/02/25 13:25 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050								
	Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	2.1	0.54	20	06/10/25 05:23	06/11/25 00:14	7440-36-0	1g,N2
Arsenic	**1.0J**	mg/kg	1.0	0.16	20	06/10/25 05:23	06/11/25 00:14	7440-38-2	1g
Beryllium	**0.13**	mg/kg	0.12	0.060	20	06/10/25 05:23	06/11/25 00:14	7440-41-7	1g
Cadmium	ND	mg/kg	0.12	0.027	20	06/10/25 05:23	06/11/25 00:14	7440-43-9	1g
Chromium	**16.2**	mg/kg	1.0	0.59	20	06/10/25 05:23	06/11/25 00:14	7440-47-3	1g
Copper	**25.3**	mg/kg	2.1	0.53	20	06/10/25 05:23	06/11/25 00:14	7440-50-8	1g
Lead	**1.1**	mg/kg	1.0	0.38	20	06/10/25 05:23	06/11/25 00:14	7439-92-1	1g
Nickel	**10.1**	mg/kg	1.0	0.50	20	06/10/25 05:23	06/11/25 00:14	7440-02-0	1g
Selenium	ND	mg/kg	1.0	0.53	20	06/10/25 05:23	06/11/25 00:14	7782-49-2	1g
Silver	ND	mg/kg	0.12	0.039	20	06/10/25 05:23	06/11/25 00:14	7440-22-4	1g
Thallium	ND	mg/kg	1.0	0.18	20	06/10/25 05:23	06/11/25 00:14	7440-28-0	1g
Zinc	**38.4J**	mg/kg	41.6	8.1	20	06/10/25 05:23	06/11/25 00:14	7440-66-6	1g
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471								
	Pace Analytical Services - Ormond Beach								
Mercury	ND	mg/kg	0.0081	0.0040	1	06/11/25 09:21	06/11/25 11:28	7439-97-6	
Percent Moisture	Analytical Method: ASTM D2974-87								
	Pace Analytical Services - Ormond Beach								
Percent Moisture	**8.6**	%	0.10	0.10	1		06/17/25 07:19		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-7 **Lab ID: 92799827006** Collected: 06/02/25 14:30 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199 Pace Analytical Services - Charlotte								
Chromium, Hexavalent	**0.47J**	mg/kg	1.1	0.19	1	06/05/25 10:05	06/06/25 14:45	18540-29-9	
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050 Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	2.8	0.72	20	06/10/25 05:23	06/11/25 00:19	7440-36-0	1g,N2
Arsenic	ND	mg/kg	1.4	0.22	20	06/10/25 05:23	06/11/25 00:19	7440-38-2	1g
Beryllium	**0.27**	mg/kg	0.17	0.080	20	06/10/25 05:23	06/11/25 00:19	7440-41-7	1g
Cadmium	ND	mg/kg	0.17	0.036	20	06/10/25 05:23	06/11/25 00:19	7440-43-9	1g
Chromium	**35.8**	mg/kg	1.4	0.79	20	06/10/25 05:23	06/11/25 00:19	7440-47-3	1g
Copper	**54.1**	mg/kg	2.8	0.71	20	06/10/25 05:23	06/11/25 00:19	7440-50-8	1g
Lead	**2.2**	mg/kg	1.4	0.51	20	06/10/25 05:23	06/11/25 00:19	7439-92-1	1g
Nickel	**27.8**	mg/kg	1.4	0.67	20	06/10/25 05:23	06/11/25 00:19	7440-02-0	1g
Selenium	**1.5**	mg/kg	1.4	0.71	20	06/10/25 05:23	06/11/25 00:19	7782-49-2	1g
Silver	ND	mg/kg	0.17	0.053	20	06/10/25 05:23	06/11/25 00:19	7440-22-4	1g
Thallium	ND	mg/kg	1.4	0.24	20	06/10/25 05:23	06/11/25 00:19	7440-28-0	1g
Zinc	ND	mg/kg	55.5	10.8	20	06/10/25 05:23	06/11/25 00:19	7440-66-6	1g
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471 Pace Analytical Services - Ormond Beach								
Mercury	ND	mg/kg	0.0088	0.0044	1	06/11/25 09:21	06/11/25 11:30	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.40	0.14	1	06/04/25 11:57	06/06/25 12:37	83-32-9	
Acenaphthylene	ND	mg/kg	0.40	0.14	1	06/04/25 11:57	06/06/25 12:37	208-96-8	
Aniline	ND	mg/kg	0.40	0.15	1	06/04/25 11:57	06/06/25 12:37	62-53-3	
Anthracene	ND	mg/kg	0.40	0.13	1	06/04/25 11:57	06/06/25 12:37	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.40	0.13	1	06/04/25 11:57	06/06/25 12:37	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.40	0.14	1	06/04/25 11:57	06/06/25 12:37	50-32-8	
Benzo(b)fluoranthene	ND	mg/kg	0.40	0.13	1	06/04/25 11:57	06/06/25 12:37	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.40	0.15	1	06/04/25 11:57	06/06/25 12:37	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.40	0.14	1	06/04/25 11:57	06/06/25 12:37	207-08-9	
Benzoic Acid	ND	mg/kg	2.0	0.85	1	06/04/25 11:57	06/06/25 12:37	65-85-0	
Benzyl alcohol	ND	mg/kg	0.79	0.30	1	06/04/25 11:57	06/06/25 12:37	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.40	0.15	1	06/04/25 11:57	06/06/25 12:37	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.40	0.17	1	06/04/25 11:57	06/06/25 12:37	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	0.79	0.28	1	06/04/25 11:57	06/06/25 12:37	59-50-7	
4-Chloroaniline	ND	mg/kg	0.79	0.31	1	06/04/25 11:57	06/06/25 12:37	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.40	0.16	1	06/04/25 11:57	06/06/25 12:37	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.40	0.15	1	06/04/25 11:57	06/06/25 12:37	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.40	0.16	1	06/04/25 11:57	06/06/25 12:37	91-58-7	
2-Chlorophenol	ND	mg/kg	0.40	0.15	1	06/04/25 11:57	06/06/25 12:37	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.40	0.15	1	06/04/25 11:57	06/06/25 12:37	7005-72-3	
Chrysene	ND	mg/kg	0.40	0.14	1	06/04/25 11:57	06/06/25 12:37	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-7 **Lab ID: 92799827006** Collected: 06/02/25 14:30 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.40	0.15	1	06/04/25 11:57	06/06/25 12:37	53-70-3	
Dibenzofuran	ND	mg/kg	0.40	0.14	1	06/04/25 11:57	06/06/25 12:37	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.40	0.14	1	06/04/25 11:57	06/06/25 12:37	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.40	0.14	1	06/04/25 11:57	06/06/25 12:37	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.40	0.15	1	06/04/25 11:57	06/06/25 12:37	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	0.79	0.27	1	06/04/25 11:57	06/06/25 12:37	91-94-1	
2,4-Dichlorophenol	ND	mg/kg	0.40	0.15	1	06/04/25 11:57	06/06/25 12:37	120-83-2	
Diethylphthalate	ND	mg/kg	0.40	0.15	1	06/04/25 11:57	06/06/25 12:37	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.40	0.16	1	06/04/25 11:57	06/06/25 12:37	105-67-9	
Dimethylphthalate	ND	mg/kg	0.40	0.14	1	06/04/25 11:57	06/06/25 12:37	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.40	0.13	1	06/04/25 11:57	06/06/25 12:37	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	0.79	0.37	1	06/04/25 11:57	06/06/25 12:37	534-52-1	
2,4-Dinitrophenol	ND	mg/kg	2.0	1.2	1	06/04/25 11:57	06/06/25 12:37	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.40	0.15	1	06/04/25 11:57	06/06/25 12:37	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.40	0.15	1	06/04/25 11:57	06/06/25 12:37	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.40	0.16	1	06/04/25 11:57	06/06/25 12:37	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.40	0.15	1	06/04/25 11:57	06/06/25 12:37	117-81-7	
Fluoranthene	ND	mg/kg	0.40	0.14	1	06/04/25 11:57	06/06/25 12:37	206-44-0	
Fluorene	ND	mg/kg	0.40	0.14	1	06/04/25 11:57	06/06/25 12:37	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.40	0.17	1	06/04/25 11:57	06/06/25 12:37	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.40	0.15	1	06/04/25 11:57	06/06/25 12:37	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.40	0.23	1	06/04/25 11:57	06/06/25 12:37	77-47-4	
Hexachloroethane	ND	mg/kg	0.40	0.15	1	06/04/25 11:57	06/06/25 12:37	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.40	0.16	1	06/04/25 11:57	06/06/25 12:37	193-39-5	
Isophorone	ND	mg/kg	0.40	0.18	1	06/04/25 11:57	06/06/25 12:37	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.40	0.14	1	06/04/25 11:57	06/06/25 12:37	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.40	0.16	1	06/04/25 11:57	06/06/25 12:37	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.40	0.16	1	06/04/25 11:57	06/06/25 12:37	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.40	0.16	1	06/04/25 11:57	06/06/25 12:37	15831-10-4	
Naphthalene	ND	mg/kg	0.40	0.13	1	06/04/25 11:57	06/06/25 12:37	91-20-3	
2-Nitroaniline	ND	mg/kg	2.0	0.32	1	06/04/25 11:57	06/06/25 12:37	88-74-4	
3-Nitroaniline	ND	mg/kg	2.0	0.31	1	06/04/25 11:57	06/06/25 12:37	99-09-2	
4-Nitroaniline	ND	mg/kg	0.79	0.30	1	06/04/25 11:57	06/06/25 12:37	100-01-6	
Nitrobenzene	ND	mg/kg	0.40	0.18	1	06/04/25 11:57	06/06/25 12:37	98-95-3	
2-Nitrophenol	ND	mg/kg	0.40	0.17	1	06/04/25 11:57	06/06/25 12:37	88-75-5	
4-Nitrophenol	ND	mg/kg	2.0	0.77	1	06/04/25 11:57	06/06/25 12:37	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.40	0.13	1	06/04/25 11:57	06/06/25 12:37	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.40	0.15	1	06/04/25 11:57	06/06/25 12:37	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.40	0.14	1	06/04/25 11:57	06/06/25 12:37	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.40	0.19	1	06/04/25 11:57	06/06/25 12:37	108-60-1	
Pentachlorophenol	ND	mg/kg	0.79	0.39	1	06/04/25 11:57	06/06/25 12:37	87-86-5	
Phenanthrene	ND	mg/kg	0.40	0.13	1	06/04/25 11:57	06/06/25 12:37	85-01-8	
Phenol	ND	mg/kg	0.40	0.18	1	06/04/25 11:57	06/06/25 12:37	108-95-2	
Pyrene	ND	mg/kg	0.40	0.16	1	06/04/25 11:57	06/06/25 12:37	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-7 **Lab ID: 92799827006** Collected: 06/02/25 14:30 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.40	0.12	1	06/04/25 11:57	06/06/25 12:37	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.40	0.16	1	06/04/25 11:57	06/06/25 12:37	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.40	0.18	1	06/04/25 11:57	06/06/25 12:37	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.40	0.16	1	06/04/25 11:57	06/06/25 12:37	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	53	%	10-130		1	06/04/25 11:57	06/06/25 12:37	4165-60-0	
2-Fluorobiphenyl (S)	54	%	10-130		1	06/04/25 11:57	06/06/25 12:37	321-60-8	
Terphenyl-d14 (S)	76	%	10-130		1	06/04/25 11:57	06/06/25 12:37	1718-51-0	
Phenol-d6 (S)	50	%	10-130		1	06/04/25 11:57	06/06/25 12:37	13127-88-3	
2-Fluorophenol (S)	48	%	10-130		1	06/04/25 11:57	06/06/25 12:37	367-12-4	
2,4,6-Tribromophenol (S)	72	%	10-130		1	06/04/25 11:57	06/06/25 12:37	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.12	0.039	1	06/04/25 21:17	06/05/25 18:40	67-64-1	2g
Benzene	ND	mg/kg	0.0061	0.0024	1	06/04/25 21:17	06/05/25 18:40	71-43-2	2g
Bromobenzene	ND	mg/kg	0.0061	0.0020	1	06/04/25 21:17	06/05/25 18:40	108-86-1	2g
Bromochloromethane	ND	mg/kg	0.0061	0.0018	1	06/04/25 21:17	06/05/25 18:40	74-97-5	2g
Bromodichloromethane	ND	mg/kg	0.0061	0.0024	1	06/04/25 21:17	06/05/25 18:40	75-27-4	2g
Bromoform	ND	mg/kg	0.0061	0.0022	1	06/04/25 21:17	06/05/25 18:40	75-25-2	2g
Bromomethane	ND	mg/kg	0.024	0.019	1	06/04/25 21:17	06/05/25 18:40	74-83-9	2g
2-Butanone (MEK)	ND	mg/kg	0.12	0.029	1	06/04/25 21:17	06/05/25 18:40	78-93-3	2g
n-Butylbenzene	ND	mg/kg	0.0061	0.0039	1	06/04/25 21:17	06/05/25 18:40	104-51-8	2g
sec-Butylbenzene	ND	mg/kg	0.0061	0.0027	1	06/04/25 21:17	06/05/25 18:40	135-98-8	2g
tert-Butylbenzene	ND	mg/kg	0.0061	0.0022	1	06/04/25 21:17	06/05/25 18:40	98-06-6	2g
Carbon tetrachloride	ND	mg/kg	0.0061	0.0023	1	06/04/25 21:17	06/05/25 18:40	56-23-5	2g
Chlorobenzene	ND	mg/kg	0.0061	0.0035	1	06/04/25 21:17	06/05/25 18:40	108-90-7	2g
Chloroethane	ND	mg/kg	0.012	0.0047	1	06/04/25 21:17	06/05/25 18:40	75-00-3	2g
Chloroform	ND	mg/kg	0.0061	0.0051	1	06/04/25 21:17	06/05/25 18:40	67-66-3	2g
Chloromethane	ND	mg/kg	0.012	0.0051	1	06/04/25 21:17	06/05/25 18:40	74-87-3	2g
2-Chlorotoluene	ND	mg/kg	0.0061	0.0022	1	06/04/25 21:17	06/05/25 18:40	95-49-8	2g
4-Chlorotoluene	ND	mg/kg	0.0061	0.0034	1	06/04/25 21:17	06/05/25 18:40	106-43-4	2g
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0061	0.0024	1	06/04/25 21:17	06/05/25 18:40	96-12-8	2g
Dibromochloromethane	ND	mg/kg	0.0061	0.0034	1	06/04/25 21:17	06/05/25 18:40	124-48-1	2g
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0061	0.0027	1	06/04/25 21:17	06/05/25 18:40	106-93-4	2g
Dibromomethane	ND	mg/kg	0.0061	0.0013	1	06/04/25 21:17	06/05/25 18:40	74-95-3	2g
1,2-Dichlorobenzene	ND	mg/kg	0.0061	0.0022	1	06/04/25 21:17	06/05/25 18:40	95-50-1	2g
1,3-Dichlorobenzene	ND	mg/kg	0.0061	0.0019	1	06/04/25 21:17	06/05/25 18:40	541-73-1	2g
1,4-Dichlorobenzene	ND	mg/kg	0.0061	0.0016	1	06/04/25 21:17	06/05/25 18:40	106-46-7	2g
Dichlorodifluoromethane	ND	mg/kg	0.012	0.0062	1	06/04/25 21:17	06/05/25 18:40	75-71-8	2g
1,1-Dichloroethane	ND	mg/kg	0.0061	0.0025	1	06/04/25 21:17	06/05/25 18:40	75-34-3	2g
1,2-Dichloroethane	ND	mg/kg	0.0061	0.0040	1	06/04/25 21:17	06/05/25 18:40	107-06-2	2g
1,1-Dichloroethene	ND	mg/kg	0.0061	0.0025	1	06/04/25 21:17	06/05/25 18:40	75-35-4	2g
cis-1,2-Dichloroethene	ND	mg/kg	0.0061	0.0021	1	06/04/25 21:17	06/05/25 18:40	156-59-2	2g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-7 **Lab ID: 92799827006** Collected: 06/02/25 14:30 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0061	0.0052	1	06/04/25 21:17	06/05/25 18:40	156-60-5	2g
1,2-Dichloropropane	ND	mg/kg	0.0061	0.0018	1	06/04/25 21:17	06/05/25 18:40	78-87-5	2g
1,3-Dichloropropane	ND	mg/kg	0.0061	0.0019	1	06/04/25 21:17	06/05/25 18:40	142-28-9	2g
2,2-Dichloropropane	ND	mg/kg	0.0061	0.0046	1	06/04/25 21:17	06/05/25 18:40	594-20-7	2g
1,1-Dichloropropene	ND	mg/kg	0.0061	0.0029	1	06/04/25 21:17	06/05/25 18:40	563-58-6	2g
cis-1,3-Dichloropropene	ND	mg/kg	0.0061	0.0017	1	06/04/25 21:17	06/05/25 18:40	10061-01-5	2g
trans-1,3-Dichloropropene	ND	mg/kg	0.0061	0.0021	1	06/04/25 21:17	06/05/25 18:40	10061-02-6	2g
Diisopropyl ether	ND	mg/kg	0.0061	0.0017	1	06/04/25 21:17	06/05/25 18:40	108-20-3	2g
Ethylbenzene	ND	mg/kg	0.0061	0.0028	1	06/04/25 21:17	06/05/25 18:40	100-41-4	2g
Hexachloro-1,3-butadiene	ND	mg/kg	0.012	0.010	1	06/04/25 21:17	06/05/25 18:40	87-68-3	2g
2-Hexanone	ND	mg/kg	0.061	0.0059	1	06/04/25 21:17	06/05/25 18:40	591-78-6	2g
Isopropylbenzene (Cumene)	ND	mg/kg	0.0061	0.0021	1	06/04/25 21:17	06/05/25 18:40	98-82-8	2g
p-Isopropyltoluene	ND	mg/kg	0.0061	0.0030	1	06/04/25 21:17	06/05/25 18:40	99-87-6	2g
Methylene Chloride	ND	mg/kg	0.024	0.017	1	06/04/25 21:17	06/05/25 18:40	75-09-2	2g
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.061	0.0059	1	06/04/25 21:17	06/05/25 18:40	108-10-1	2g
Methyl-tert-butyl ether	ND	mg/kg	0.0061	0.0023	1	06/04/25 21:17	06/05/25 18:40	1634-04-4	2g
Naphthalene	ND	mg/kg	0.0061	0.0032	1	06/04/25 21:17	06/05/25 18:40	91-20-3	2g
n-Propylbenzene	ND	mg/kg	0.0061	0.0022	1	06/04/25 21:17	06/05/25 18:40	103-65-1	2g
Styrene	ND	mg/kg	0.0061	0.0016	1	06/04/25 21:17	06/05/25 18:40	100-42-5	2g
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0061	0.0023	1	06/04/25 21:17	06/05/25 18:40	630-20-6	2g
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0061	0.0016	1	06/04/25 21:17	06/05/25 18:40	79-34-5	2g
Tetrachloroethene	ND	mg/kg	0.0061	0.0019	1	06/04/25 21:17	06/05/25 18:40	127-18-4	2g
Toluene	ND	mg/kg	0.0061	0.0042	1	06/04/25 21:17	06/05/25 18:40	108-88-3	2g
1,2,3-Trichlorobenzene	ND	mg/kg	0.0061	0.0049	1	06/04/25 21:17	06/05/25 18:40	87-61-6	2g
1,2,4-Trichlorobenzene	ND	mg/kg	0.0061	0.0051	1	06/04/25 21:17	06/05/25 18:40	120-82-1	2g
1,1,1-Trichloroethane	ND	mg/kg	0.0061	0.0032	1	06/04/25 21:17	06/05/25 18:40	71-55-6	2g
1,1,2-Trichloroethane	ND	mg/kg	0.0061	0.0020	1	06/04/25 21:17	06/05/25 18:40	79-00-5	2g
Trichloroethene	ND	mg/kg	0.0061	0.0049	1	06/04/25 21:17	06/05/25 18:40	79-01-6	2g
Trichlorofluoromethane	ND	mg/kg	0.0061	0.0034	1	06/04/25 21:17	06/05/25 18:40	75-69-4	2g
1,2,3-Trichloropropane	ND	mg/kg	0.0061	0.0031	1	06/04/25 21:17	06/05/25 18:40	96-18-4	2g
1,2,4-Trimethylbenzene	ND	mg/kg	0.0061	0.0036	1	06/04/25 21:17	06/05/25 18:40	95-63-6	2g
1,3,5-Trimethylbenzene	ND	mg/kg	0.0061	0.0021	1	06/04/25 21:17	06/05/25 18:40	108-67-8	2g
Vinyl acetate	ND	mg/kg	0.061	0.013	1	06/04/25 21:17	06/05/25 18:40	108-05-4	2g
Vinyl chloride	ND	mg/kg	0.012	0.0031	1	06/04/25 21:17	06/05/25 18:40	75-01-4	2g
Xylene (Total)	ND	mg/kg	0.012	0.0035	1	06/04/25 21:17	06/05/25 18:40	1330-20-7	2g
m&p-Xylene	ND	mg/kg	0.012	0.0042	1	06/04/25 21:17	06/05/25 18:40	179601-23-1	2g
o-Xylene	ND	mg/kg	0.0061	0.0027	1	06/04/25 21:17	06/05/25 18:40	95-47-6	2g
Surrogates									
Toluene-d8 (S)	96	%	70-130		1	06/04/25 21:17	06/05/25 18:40	2037-26-5	2g
4-Bromofluorobenzene (S)	99	%	70-130		1	06/04/25 21:17	06/05/25 18:40	460-00-4	2g
1,2-Dichloroethane-d4 (S)	114	%	70-135		1	06/04/25 21:17	06/05/25 18:40	17060-07-0	2g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-7 **Lab ID: 92799827006** Collected: 06/02/25 14:30 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**15.2**	%	0.10	0.10	1		06/03/25 14:38		N2

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-DUP **Lab ID: 92799827007** Collected: 06/02/25 00:01 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199 Pace Analytical Services - Charlotte								
Chromium, Hexavalent	ND	mg/kg	1.1	0.19	1	06/05/25 10:05	06/06/25 16:10	18540-29-9	
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050 Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	2.6	0.67	20	06/10/25 05:23	06/11/25 00:23	7440-36-0	1g,N2
Arsenic	**4.6**	mg/kg	1.3	0.20	20	06/10/25 05:23	06/11/25 00:23	7440-38-2	1g
Beryllium	**0.20**	mg/kg	0.15	0.075	20	06/10/25 05:23	06/11/25 00:23	7440-41-7	1g
Cadmium	**1.2**	mg/kg	0.15	0.034	20	06/10/25 05:23	06/11/25 00:23	7440-43-9	1g
Chromium	**45.3**	mg/kg	1.3	0.74	20	06/10/25 05:23	06/11/25 00:23	7440-47-3	1g
Copper	**62.1**	mg/kg	2.6	0.66	20	06/10/25 05:23	06/11/25 00:23	7440-50-8	1g
Lead	**58.1**	mg/kg	1.3	0.47	20	06/10/25 05:23	06/11/25 00:23	7439-92-1	1g
Nickel	**16.0**	mg/kg	1.3	0.62	20	06/10/25 05:23	06/11/25 00:23	7440-02-0	1g
Selenium	ND	mg/kg	1.3	0.66	20	06/10/25 05:23	06/11/25 00:23	7782-49-2	1g
Silver	ND	mg/kg	0.15	0.049	20	06/10/25 05:23	06/11/25 00:23	7440-22-4	1g
Thallium	ND	mg/kg	1.3	0.23	20	06/10/25 05:23	06/11/25 00:23	7440-28-0	1g
Zinc	**255**	mg/kg	51.5	10.1	20	06/10/25 05:23	06/11/25 00:23	7440-66-6	1g
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471 Pace Analytical Services - Ormond Beach								
Mercury	**0.12**	mg/kg	0.010	0.0050	1	06/11/25 09:21	06/11/25 11:32	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 13:04	83-32-9	
Acenaphthylene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 13:04	208-96-8	
Aniline	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 13:04	62-53-3	
Anthracene	ND	mg/kg	0.36	0.12	1	06/04/25 11:57	06/06/25 13:04	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.36	0.12	1	06/04/25 11:57	06/06/25 13:04	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.36	0.12	1	06/04/25 11:57	06/06/25 13:04	50-32-8	
Benzo(b)fluoranthene	ND	mg/kg	0.36	0.12	1	06/04/25 11:57	06/06/25 13:04	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 13:04	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 13:04	207-08-9	
Benzoic Acid	ND	mg/kg	1.8	0.78	1	06/04/25 11:57	06/06/25 13:04	65-85-0	
Benzyl alcohol	ND	mg/kg	0.72	0.27	1	06/04/25 11:57	06/06/25 13:04	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 13:04	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.36	0.15	1	06/04/25 11:57	06/06/25 13:04	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	0.72	0.25	1	06/04/25 11:57	06/06/25 13:04	59-50-7	
4-Chloroaniline	ND	mg/kg	0.72	0.28	1	06/04/25 11:57	06/06/25 13:04	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.36	0.15	1	06/04/25 11:57	06/06/25 13:04	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 13:04	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 13:04	91-58-7	
2-Chlorophenol	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 13:04	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 13:04	7005-72-3	
Chrysene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 13:04	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-DUP **Lab ID: 92799827007** Collected: 06/02/25 00:01 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 13:04	53-70-3	
Dibenzofuran	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 13:04	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 13:04	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 13:04	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 13:04	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	0.72	0.24	1	06/04/25 11:57	06/06/25 13:04	91-94-1	
2,4-Dichlorophenol	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 13:04	120-83-2	
Diethylphthalate	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 13:04	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.36	0.15	1	06/04/25 11:57	06/06/25 13:04	105-67-9	
Dimethylphthalate	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 13:04	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.36	0.12	1	06/04/25 11:57	06/06/25 13:04	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	0.72	0.34	1	06/04/25 11:57	06/06/25 13:04	534-52-1	
2,4-Dinitrophenol	ND	mg/kg	1.8	1.1	1	06/04/25 11:57	06/06/25 13:04	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 13:04	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 13:04	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 13:04	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 13:04	117-81-7	
Fluoranthene	ND	mg/kg	0.36	0.12	1	06/04/25 11:57	06/06/25 13:04	206-44-0	
Fluorene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 13:04	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.36	0.16	1	06/04/25 11:57	06/06/25 13:04	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 13:04	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.36	0.21	1	06/04/25 11:57	06/06/25 13:04	77-47-4	
Hexachloroethane	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 13:04	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 13:04	193-39-5	
Isophorone	ND	mg/kg	0.36	0.16	1	06/04/25 11:57	06/06/25 13:04	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 13:04	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 13:04	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.36	0.15	1	06/04/25 11:57	06/06/25 13:04	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.36	0.15	1	06/04/25 11:57	06/06/25 13:04	15831-10-4	
Naphthalene	ND	mg/kg	0.36	0.12	1	06/04/25 11:57	06/06/25 13:04	91-20-3	
2-Nitroaniline	ND	mg/kg	1.8	0.30	1	06/04/25 11:57	06/06/25 13:04	88-74-4	
3-Nitroaniline	ND	mg/kg	1.8	0.28	1	06/04/25 11:57	06/06/25 13:04	99-09-2	
4-Nitroaniline	ND	mg/kg	0.72	0.27	1	06/04/25 11:57	06/06/25 13:04	100-01-6	
Nitrobenzene	ND	mg/kg	0.36	0.17	1	06/04/25 11:57	06/06/25 13:04	98-95-3	
2-Nitrophenol	ND	mg/kg	0.36	0.16	1	06/04/25 11:57	06/06/25 13:04	88-75-5	
4-Nitrophenol	ND	mg/kg	1.8	0.70	1	06/04/25 11:57	06/06/25 13:04	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.36	0.12	1	06/04/25 11:57	06/06/25 13:04	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 13:04	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.36	0.13	1	06/04/25 11:57	06/06/25 13:04	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.36	0.17	1	06/04/25 11:57	06/06/25 13:04	108-60-1	
Pentachlorophenol	ND	mg/kg	0.72	0.35	1	06/04/25 11:57	06/06/25 13:04	87-86-5	
Phenanthrene	ND	mg/kg	0.36	0.12	1	06/04/25 11:57	06/06/25 13:04	85-01-8	
Phenol	ND	mg/kg	0.36	0.16	1	06/04/25 11:57	06/06/25 13:04	108-95-2	
Pyrene	ND	mg/kg	0.36	0.15	1	06/04/25 11:57	06/06/25 13:04	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-DUP **Lab ID: 92799827007** Collected: 06/02/25 00:01 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.36	0.11	1	06/04/25 11:57	06/06/25 13:04	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.36	0.14	1	06/04/25 11:57	06/06/25 13:04	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.36	0.17	1	06/04/25 11:57	06/06/25 13:04	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.36	0.15	1	06/04/25 11:57	06/06/25 13:04	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	57	%	10-130		1	06/04/25 11:57	06/06/25 13:04	4165-60-0	
2-Fluorobiphenyl (S)	58	%	10-130		1	06/04/25 11:57	06/06/25 13:04	321-60-8	
Terphenyl-d14 (S)	64	%	10-130		1	06/04/25 11:57	06/06/25 13:04	1718-51-0	
Phenol-d6 (S)	49	%	10-130		1	06/04/25 11:57	06/06/25 13:04	13127-88-3	
2-Fluorophenol (S)	46	%	10-130		1	06/04/25 11:57	06/06/25 13:04	367-12-4	
2,4,6-Tribromophenol (S)	62	%	10-130		1	06/04/25 11:57	06/06/25 13:04	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.12	0.038	1	06/04/25 21:17	06/05/25 19:04	67-64-1	2g
Benzene	ND	mg/kg	0.0060	0.0024	1	06/04/25 21:17	06/05/25 19:04	71-43-2	2g
Bromobenzene	ND	mg/kg	0.0060	0.0020	1	06/04/25 21:17	06/05/25 19:04	108-86-1	2g
Bromochloromethane	ND	mg/kg	0.0060	0.0018	1	06/04/25 21:17	06/05/25 19:04	74-97-5	2g
Bromodichloromethane	ND	mg/kg	0.0060	0.0023	1	06/04/25 21:17	06/05/25 19:04	75-27-4	2g
Bromoform	ND	mg/kg	0.0060	0.0021	1	06/04/25 21:17	06/05/25 19:04	75-25-2	2g
Bromomethane	ND	mg/kg	0.024	0.019	1	06/04/25 21:17	06/05/25 19:04	74-83-9	2g
2-Butanone (MEK)	ND	mg/kg	0.12	0.029	1	06/04/25 21:17	06/05/25 19:04	78-93-3	2g
n-Butylbenzene	ND	mg/kg	0.0060	0.0038	1	06/04/25 21:17	06/05/25 19:04	104-51-8	2g
sec-Butylbenzene	ND	mg/kg	0.0060	0.0026	1	06/04/25 21:17	06/05/25 19:04	135-98-8	2g
tert-Butylbenzene	ND	mg/kg	0.0060	0.0021	1	06/04/25 21:17	06/05/25 19:04	98-06-6	2g
Carbon tetrachloride	ND	mg/kg	0.0060	0.0022	1	06/04/25 21:17	06/05/25 19:04	56-23-5	2g
Chlorobenzene	ND	mg/kg	0.0060	0.0034	1	06/04/25 21:17	06/05/25 19:04	108-90-7	2g
Chloroethane	ND	mg/kg	0.012	0.0046	1	06/04/25 21:17	06/05/25 19:04	75-00-3	2g
Chloroform	ND	mg/kg	0.0060	0.0050	1	06/04/25 21:17	06/05/25 19:04	67-66-3	2g
Chloromethane	**0.0056J**	mg/kg	0.012	0.0050	1	06/04/25 21:17	06/05/25 19:04	74-87-3	2g
2-Chlorotoluene	ND	mg/kg	0.0060	0.0021	1	06/04/25 21:17	06/05/25 19:04	95-49-8	2g
4-Chlorotoluene	ND	mg/kg	0.0060	0.0033	1	06/04/25 21:17	06/05/25 19:04	106-43-4	2g
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0060	0.0023	1	06/04/25 21:17	06/05/25 19:04	96-12-8	2g
Dibromochloromethane	ND	mg/kg	0.0060	0.0034	1	06/04/25 21:17	06/05/25 19:04	124-48-1	2g
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0060	0.0026	1	06/04/25 21:17	06/05/25 19:04	106-93-4	2g
Dibromomethane	ND	mg/kg	0.0060	0.0013	1	06/04/25 21:17	06/05/25 19:04	74-95-3	2g
1,2-Dichlorobenzene	ND	mg/kg	0.0060	0.0022	1	06/04/25 21:17	06/05/25 19:04	95-50-1	2g
1,3-Dichlorobenzene	ND	mg/kg	0.0060	0.0019	1	06/04/25 21:17	06/05/25 19:04	541-73-1	2g
1,4-Dichlorobenzene	ND	mg/kg	0.0060	0.0016	1	06/04/25 21:17	06/05/25 19:04	106-46-7	2g
Dichlorodifluoromethane	ND	mg/kg	0.012	0.0061	1	06/04/25 21:17	06/05/25 19:04	75-71-8	2g
1,1-Dichloroethane	ND	mg/kg	0.0060	0.0025	1	06/04/25 21:17	06/05/25 19:04	75-34-3	2g
1,2-Dichloroethane	ND	mg/kg	0.0060	0.0040	1	06/04/25 21:17	06/05/25 19:04	107-06-2	2g
1,1-Dichloroethene	ND	mg/kg	0.0060	0.0025	1	06/04/25 21:17	06/05/25 19:04	75-35-4	2g
cis-1,2-Dichloroethene	ND	mg/kg	0.0060	0.0020	1	06/04/25 21:17	06/05/25 19:04	156-59-2	2g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-DUP **Lab ID: 92799827007** Collected: 06/02/25 00:01 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0060	0.0051	1	06/04/25 21:17	06/05/25 19:04	156-60-5	2g
1,2-Dichloropropane	ND	mg/kg	0.0060	0.0018	1	06/04/25 21:17	06/05/25 19:04	78-87-5	2g
1,3-Dichloropropane	ND	mg/kg	0.0060	0.0019	1	06/04/25 21:17	06/05/25 19:04	142-28-9	2g
2,2-Dichloropropane	ND	mg/kg	0.0060	0.0045	1	06/04/25 21:17	06/05/25 19:04	594-20-7	2g
1,1-Dichloropropene	ND	mg/kg	0.0060	0.0029	1	06/04/25 21:17	06/05/25 19:04	563-58-6	2g
cis-1,3-Dichloropropene	ND	mg/kg	0.0060	0.0016	1	06/04/25 21:17	06/05/25 19:04	10061-01-5	2g
trans-1,3-Dichloropropene	ND	mg/kg	0.0060	0.0021	1	06/04/25 21:17	06/05/25 19:04	10061-02-6	2g
Diisopropyl ether	ND	mg/kg	0.0060	0.0016	1	06/04/25 21:17	06/05/25 19:04	108-20-3	2g
Ethylbenzene	ND	mg/kg	0.0060	0.0028	1	06/04/25 21:17	06/05/25 19:04	100-41-4	2g
Hexachloro-1,3-butadiene	ND	mg/kg	0.012	0.0098	1	06/04/25 21:17	06/05/25 19:04	87-68-3	2g
2-Hexanone	ND	mg/kg	0.060	0.0058	1	06/04/25 21:17	06/05/25 19:04	591-78-6	2g
Isopropylbenzene (Cumene)	ND	mg/kg	0.0060	0.0020	1	06/04/25 21:17	06/05/25 19:04	98-82-8	2g
p-Isopropyltoluene	ND	mg/kg	0.0060	0.0029	1	06/04/25 21:17	06/05/25 19:04	99-87-6	2g
Methylene Chloride	ND	mg/kg	0.024	0.016	1	06/04/25 21:17	06/05/25 19:04	75-09-2	2g
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.060	0.0058	1	06/04/25 21:17	06/05/25 19:04	108-10-1	2g
Methyl-tert-butyl ether	ND	mg/kg	0.0060	0.0022	1	06/04/25 21:17	06/05/25 19:04	1634-04-4	2g
Naphthalene	ND	mg/kg	0.0060	0.0032	1	06/04/25 21:17	06/05/25 19:04	91-20-3	2g
n-Propylbenzene	ND	mg/kg	0.0060	0.0021	1	06/04/25 21:17	06/05/25 19:04	103-65-1	2g
Styrene	ND	mg/kg	0.0060	0.0016	1	06/04/25 21:17	06/05/25 19:04	100-42-5	2g
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0060	0.0023	1	06/04/25 21:17	06/05/25 19:04	630-20-6	2g
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0060	0.0016	1	06/04/25 21:17	06/05/25 19:04	79-34-5	2g
Tetrachloroethene	**0.020**	mg/kg	0.0060	0.0019	1	06/04/25 21:17	06/05/25 19:04	127-18-4	2g
Toluene	ND	mg/kg	0.0060	0.0041	1	06/04/25 21:17	06/05/25 19:04	108-88-3	2g
1,2,3-Trichlorobenzene	ND	mg/kg	0.0060	0.0048	1	06/04/25 21:17	06/05/25 19:04	87-61-6	2g
1,2,4-Trichlorobenzene	ND	mg/kg	0.0060	0.0050	1	06/04/25 21:17	06/05/25 19:04	120-82-1	2g
1,1,1-Trichloroethane	ND	mg/kg	0.0060	0.0031	1	06/04/25 21:17	06/05/25 19:04	71-55-6	2g
1,1,2-Trichloroethane	ND	mg/kg	0.0060	0.0020	1	06/04/25 21:17	06/05/25 19:04	79-00-5	2g
Trichloroethene	ND	mg/kg	0.0060	0.0048	1	06/04/25 21:17	06/05/25 19:04	79-01-6	2g
Trichlorofluoromethane	ND	mg/kg	0.0060	0.0033	1	06/04/25 21:17	06/05/25 19:04	75-69-4	2g
1,2,3-Trichloropropane	ND	mg/kg	0.0060	0.0030	1	06/04/25 21:17	06/05/25 19:04	96-18-4	2g
1,2,4-Trimethylbenzene	ND	mg/kg	0.0060	0.0036	1	06/04/25 21:17	06/05/25 19:04	95-63-6	2g
1,3,5-Trimethylbenzene	ND	mg/kg	0.0060	0.0020	1	06/04/25 21:17	06/05/25 19:04	108-67-8	2g
Vinyl acetate	ND	mg/kg	0.060	0.012	1	06/04/25 21:17	06/05/25 19:04	108-05-4	2g
Vinyl chloride	ND	mg/kg	0.012	0.0030	1	06/04/25 21:17	06/05/25 19:04	75-01-4	2g
Xylene (Total)	ND	mg/kg	0.012	0.0034	1	06/04/25 21:17	06/05/25 19:04	1330-20-7	2g
m&p-Xylene	ND	mg/kg	0.012	0.0041	1	06/04/25 21:17	06/05/25 19:04	179601-23-1	2g
o-Xylene	ND	mg/kg	0.0060	0.0026	1	06/04/25 21:17	06/05/25 19:04	95-47-6	2g
Surrogates									
Toluene-d8 (S)	98	%	70-130		1	06/04/25 21:17	06/05/25 19:04	2037-26-5	2g
4-Bromofluorobenzene (S)	94	%	70-130		1	06/04/25 21:17	06/05/25 19:04	460-00-4	2g
1,2-Dichloroethane-d4 (S)	110	%	70-135		1	06/04/25 21:17	06/05/25 19:04	17060-07-0	2g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799827

Sample: B-DUP **Lab ID: 92799827007** Collected: 06/02/25 00:01 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**8.9**	%	0.10	0.10	1		06/03/25 14:38		N2

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

QC Batch: 1104809
QC Batch Method: EPA 7471
Analysis Method: EPA 7471
Analysis Description: 7471 Mercury
Laboratory: Pace Analytical Services - Ormond Beach
Associated Lab Samples: 92799827001

METHOD BLANK: 6060158 Matrix: Solid
Associated Lab Samples: 92799827001

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Mercury	mg/kg	ND	0.0096	0.0048	06/10/25 14:28	

LABORATORY CONTROL SAMPLE: 6060159

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Mercury	mg/kg	0.094	0.093	98	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6060160 6060161

Parameter	Units	35959870003 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Mercury	mg/kg	0.040	0.0843	0.0833	0.12	0.12	90	94	80-120	3	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

QC Batch: 1104810 | Analysis Method: EPA 7471
QC Batch Method: EPA 7471 | Analysis Description: 7471 Mercury
Laboratory: Pace Analytical Services - Ormond Beach
Associated Lab Samples: 92799827002, 92799827003, 92799827004, 92799827005, 92799827006, 92799827007

METHOD BLANK: 6060167 Matrix: Solid
Associated Lab Samples: 92799827002, 92799827003, 92799827004, 92799827005, 92799827006, 92799827007

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Mercury	mg/kg	ND	0.0093	0.0046	06/11/25 10:48	

LABORATORY CONTROL SAMPLE: 6060168

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Mercury	mg/kg	0.098	0.099	102	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6060169 6060170

Parameter	Units	35959546001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Mercury	mg/kg	0.55	0.372	0.351	0.69	0.76	37	60	80-120	10	20	M1

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

QC Batch: 1104665
QC Batch Method: EPA 3050
Analysis Method: EPA 6020
Analysis Description: 6020 MET SOLID
Laboratory: Pace Analytical Services - Ormond Beach
Associated Lab Samples: 92799827001, 92799827002, 92799827003, 92799827004, 92799827005, 92799827006, 92799827007

METHOD BLANK: 6059589 Matrix: Solid
Associated Lab Samples: 92799827001, 92799827002, 92799827003, 92799827004, 92799827005, 92799827006, 92799827007

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Antimony	mg/kg	ND	2.3	0.59	06/10/25 16:26	1g,N2
Arsenic	mg/kg	ND	1.1	0.18	06/10/25 16:26	1g
Beryllium	mg/kg	ND	0.14	0.065	06/10/25 16:26	1g
Cadmium	mg/kg	ND	0.14	0.029	06/10/25 16:26	1g
Chromium	mg/kg	ND	1.1	0.65	06/10/25 16:26	1g
Copper	mg/kg	ND	2.3	0.58	06/10/25 16:26	1g
Lead	mg/kg	ND	1.1	0.41	06/10/25 16:26	1g
Nickel	mg/kg	ND	1.1	0.54	06/10/25 16:26	1g
Selenium	mg/kg	ND	1.1	0.58	06/10/25 16:26	1g
Silver	mg/kg	ND	0.14	0.043	06/10/25 16:26	1g
Thallium	mg/kg	ND	1.1	0.20	06/10/25 16:26	1g
Zinc	mg/kg	ND	45.1	8.8	06/10/25 16:26	1g

LABORATORY CONTROL SAMPLE: 6059590

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Antimony	mg/kg	29.9	29.4	98	80-120	1g,N2
Arsenic	mg/kg	29.9	29.2	98	80-120	1g
Beryllium	mg/kg	3	2.9	97	80-120	1g
Cadmium	mg/kg	3	2.9	98	80-120	1g
Chromium	mg/kg	29.9	30.8	103	80-120	1g
Copper	mg/kg	29.9	30.3	101	80-120	1g
Lead	mg/kg	29.9	30.4	102	80-120	1g
Nickel	mg/kg	29.9	31.7	106	80-120	1g
Selenium	mg/kg	29.9	30.3	101	80-120	1g
Silver	mg/kg	3	3.2	107	80-120	1g
Thallium	mg/kg	29.9	29.5	99	80-120	1g
Zinc	mg/kg	150	143	96	80-120	1g

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6059591 6059592

Parameter	Units	35943072007 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Antimony	mg/kg	1.2U	66.2	65.9	58.6	59.5	88	89	75-125	1	20	1g,N2
Arsenic	mg/kg	1.7J	66.2	65.9	64.2	63.7	95	95	75-125	1	20	1g
Beryllium	mg/kg	0.13U	6.57	6.57	6.4	6.4	94	96	75-125	1	20	1g
Cadmium	mg/kg	2.8	6.57	6.57	9.0	8.8	98	94	75-125	3	20	1g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6059591 6059592

Parameter	Units	35943072007 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Chromium	mg/kg	54.4	66.2	65.9	116	115	94	92	75-125	1	20	1g
Copper	mg/kg	58.6	66.2	65.9	123	118	98	90	75-125	4	20	1g
Lead	mg/kg	6.4	66.2	65.9	71.9	72.0	98	99	75-125	0	20	1g
Nickel	mg/kg	49.1	66.2	65.9	115	116	100	101	75-125	0	20	1g
Selenium	mg/kg	1.3U	66.2	65.9	65.6	63.1	98	95	75-125	4	20	1g
Silver	mg/kg	1.3	6.57	6.57	7.5	7.9	98	104	75-125	5	20	1g
Thallium	mg/kg	0.44J	66.2	65.9	62.6	62.6	94	94	75-125	0	20	1g
Zinc	mg/kg	276	331	331	600	579	98	92	75-125	3	20	1g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

QC Batch: 939546 | Analysis Method: EPA 8260D
QC Batch Method: EPA 5035A/5030B | Analysis Description: 8260D 5035A 5030B
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92799827001, 92799827002, 92799827003, 92799827004, 92799827006, 92799827007

METHOD BLANK: 4828625 Matrix: Solid
Associated Lab Samples: 92799827001, 92799827002, 92799827003, 92799827004, 92799827006, 92799827007

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	ND	0.0050	0.0019	06/05/25 11:25	2g
1,1,1-Trichloroethane	mg/kg	ND	0.0050	0.0026	06/05/25 11:25	2g
1,1,2,2-Tetrachloroethane	mg/kg	ND	0.0050	0.0013	06/05/25 11:25	2g
1,1,2-Trichloroethane	mg/kg	ND	0.0050	0.0017	06/05/25 11:25	2g
1,1-Dichloroethane	mg/kg	ND	0.0050	0.0021	06/05/25 11:25	2g
1,1-Dichloroethene	mg/kg	ND	0.0050	0.0021	06/05/25 11:25	2g
1,1-Dichloropropene	mg/kg	ND	0.0050	0.0024	06/05/25 11:25	2g
1,2,3-Trichlorobenzene	mg/kg	ND	0.0050	0.0040	06/05/25 11:25	2g
1,2,3-Trichloropropane	mg/kg	ND	0.0050	0.0025	06/05/25 11:25	2g
1,2,4-Trichlorobenzene	mg/kg	ND	0.0050	0.0042	06/05/25 11:25	2g
1,2,4-Trimethylbenzene	mg/kg	ND	0.0050	0.0030	06/05/25 11:25	2g
1,2-Dibromo-3-chloropropane	mg/kg	ND	0.0050	0.0019	06/05/25 11:25	2g
1,2-Dibromoethane (EDB)	mg/kg	ND	0.0050	0.0022	06/05/25 11:25	2g
1,2-Dichlorobenzene	mg/kg	ND	0.0050	0.0018	06/05/25 11:25	2g
1,2-Dichloroethane	mg/kg	ND	0.0050	0.0033	06/05/25 11:25	2g
1,2-Dichloropropane	mg/kg	ND	0.0050	0.0015	06/05/25 11:25	2g
1,3,5-Trimethylbenzene	mg/kg	ND	0.0050	0.0017	06/05/25 11:25	2g
1,3-Dichlorobenzene	mg/kg	ND	0.0050	0.0016	06/05/25 11:25	2g
1,3-Dichloropropane	mg/kg	ND	0.0050	0.0016	06/05/25 11:25	2g
1,4-Dichlorobenzene	mg/kg	ND	0.0050	0.0013	06/05/25 11:25	2g
2,2-Dichloropropane	mg/kg	ND	0.0050	0.0038	06/05/25 11:25	2g
2-Butanone (MEK)	mg/kg	ND	0.10	0.024	06/05/25 11:25	2g
2-Chlorotoluene	mg/kg	ND	0.0050	0.0018	06/05/25 11:25	2g
2-Hexanone	mg/kg	ND	0.050	0.0048	06/05/25 11:25	2g
4-Chlorotoluene	mg/kg	ND	0.0050	0.0028	06/05/25 11:25	2g
4-Methyl-2-pentanone (MIBK)	mg/kg	ND	0.050	0.0048	06/05/25 11:25	2g
Acetone	mg/kg	ND	0.10	0.032	06/05/25 11:25	2g
Benzene	mg/kg	ND	0.0050	0.0020	06/05/25 11:25	2g
Bromobenzene	mg/kg	ND	0.0050	0.0016	06/05/25 11:25	2g
Bromochloromethane	mg/kg	ND	0.0050	0.0015	06/05/25 11:25	2g
Bromodichloromethane	mg/kg	ND	0.0050	0.0019	06/05/25 11:25	2g
Bromoform	mg/kg	ND	0.0050	0.0018	06/05/25 11:25	2g
Bromomethane	mg/kg	ND	0.020	0.016	06/05/25 11:25	2g
Carbon tetrachloride	mg/kg	ND	0.0050	0.0019	06/05/25 11:25	2g
Chlorobenzene	mg/kg	ND	0.0050	0.0029	06/05/25 11:25	2g
Chloroethane	mg/kg	ND	0.010	0.0039	06/05/25 11:25	2g
Chloroform	mg/kg	ND	0.0050	0.0042	06/05/25 11:25	2g
Chloromethane	mg/kg	ND	0.010	0.0042	06/05/25 11:25	2g
cis-1,2-Dichloroethene	mg/kg	ND	0.0050	0.0017	06/05/25 11:25	2g
cis-1,3-Dichloropropene	mg/kg	ND	0.0050	0.0014	06/05/25 11:25	2g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

METHOD BLANK: 4828625 Matrix: Solid
Associated Lab Samples: 92799827001, 92799827002, 92799827003, 92799827004, 92799827006, 92799827007

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Dibromochloromethane	mg/kg	ND	0.0050	0.0028	06/05/25 11:25	2g
Dibromomethane	mg/kg	ND	0.0050	0.0011	06/05/25 11:25	2g
Dichlorodifluoromethane	mg/kg	ND	0.010	0.0051	06/05/25 11:25	2g
Diisopropyl ether	mg/kg	ND	0.0050	0.0014	06/05/25 11:25	2g
Ethylbenzene	mg/kg	ND	0.0050	0.0023	06/05/25 11:25	2g
Hexachloro-1,3-butadiene	mg/kg	ND	0.010	0.0082	06/05/25 11:25	2g
Isopropylbenzene (Cumene)	mg/kg	ND	0.0050	0.0017	06/05/25 11:25	2g
m&p-Xylene	mg/kg	ND	0.010	0.0034	06/05/25 11:25	2g
Methyl-tert-butyl ether	mg/kg	ND	0.0050	0.0019	06/05/25 11:25	2g
Methylene Chloride	mg/kg	ND	0.020	0.014	06/05/25 11:25	2g
n-Butylbenzene	mg/kg	ND	0.0050	0.0032	06/05/25 11:25	2g
n-Propylbenzene	mg/kg	ND	0.0050	0.0018	06/05/25 11:25	2g
Naphthalene	mg/kg	ND	0.0050	0.0026	06/05/25 11:25	2g
o-Xylene	mg/kg	ND	0.0050	0.0022	06/05/25 11:25	2g
p-Isopropyltoluene	mg/kg	ND	0.0050	0.0025	06/05/25 11:25	2g
sec-Butylbenzene	mg/kg	ND	0.0050	0.0022	06/05/25 11:25	2g
Styrene	mg/kg	ND	0.0050	0.0013	06/05/25 11:25	2g
tert-Butylbenzene	mg/kg	ND	0.0050	0.0018	06/05/25 11:25	2g
Tetrachloroethene	mg/kg	ND	0.0050	0.0016	06/05/25 11:25	2g
Toluene	mg/kg	ND	0.0050	0.0034	06/05/25 11:25	2g
trans-1,2-Dichloroethene	mg/kg	ND	0.0050	0.0042	06/05/25 11:25	2g
trans-1,3-Dichloropropene	mg/kg	ND	0.0050	0.0017	06/05/25 11:25	2g
Trichloroethene	mg/kg	ND	0.0050	0.0040	06/05/25 11:25	2g
Trichlorofluoromethane	mg/kg	ND	0.0050	0.0028	06/05/25 11:25	2g
Vinyl acetate	mg/kg	ND	0.050	0.010	06/05/25 11:25	2g
Vinyl chloride	mg/kg	ND	0.010	0.0025	06/05/25 11:25	2g
Xylene (Total)	mg/kg	ND	0.010	0.0028	06/05/25 11:25	2g
1,2-Dichloroethane-d4 (S)	%	111	70-135		06/05/25 11:25	2g
4-Bromofluorobenzene (S)	%	92	70-130		06/05/25 11:25	2g
Toluene-d8 (S)	%	98	70-130		06/05/25 11:25	2g

LABORATORY CONTROL SAMPLE: 4828626

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	0.5	0.50	101	70-130	2g
1,1,1-Trichloroethane	mg/kg	0.5	0.47	94	68-130	2g
1,1,2,2-Tetrachloroethane	mg/kg	0.5	0.49	98	70-130	2g
1,1,2-Trichloroethane	mg/kg	0.5	0.48	97	70-130	2g
1,1-Dichloroethane	mg/kg	0.5	0.48	95	70-130	2g
1,1-Dichloroethene	mg/kg	0.5	0.50	100	67-139	2g
1,1-Dichloropropene	mg/kg	0.5	0.47	95	68-132	2g
1,2,3-Trichlorobenzene	mg/kg	0.5	0.48	95	68-130	2g
1,2,3-Trichloropropane	mg/kg	0.5	0.44	89	70-130	2g
1,2,4-Trichlorobenzene	mg/kg	0.5	0.48	95	67-130	2g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

LABORATORY CONTROL SAMPLE: 4828626

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,2,4-Trimethylbenzene	mg/kg	0.5	0.49	97	70-130	2g
1,2-Dibromo-3-chloropropane	mg/kg	0.5	0.50	100	68-130	2g
1,2-Dibromoethane (EDB)	mg/kg	0.5	0.51	102	70-130	2g
1,2-Dichlorobenzene	mg/kg	0.5	0.53	106	70-130	2g
1,2-Dichloroethane	mg/kg	0.5	0.44	89	68-130	2g
1,2-Dichloropropane	mg/kg	0.5	0.46	92	70-130	2g
1,3,5-Trimethylbenzene	mg/kg	0.5	0.53	106	70-130	2g
1,3-Dichlorobenzene	mg/kg	0.5	0.51	102	70-130	2g
1,3-Dichloropropane	mg/kg	0.5	0.50	100	70-130	2g
1,4-Dichlorobenzene	mg/kg	0.5	0.47	95	70-130	2g
2,2-Dichloropropane	mg/kg	0.5	0.40	81	49-137	2g
2-Butanone (MEK)	mg/kg	1	0.97	97	59-136	2g
2-Chlorotoluene	mg/kg	0.5	0.53	105	70-130	2g
2-Hexanone	mg/kg	1	1.1	106	63-143	2g
4-Chlorotoluene	mg/kg	0.5	0.53	107	70-130	2g
4-Methyl-2-pentanone (MIBK)	mg/kg	1	1.0	102	67-134	2g
Acetone	mg/kg	1	0.98	98	59-132	2g
Benzene	mg/kg	0.5	0.49	98	70-130	2g
Bromobenzene	mg/kg	0.5	0.48	97	70-130	2g
Bromochloromethane	mg/kg	0.5	0.49	97	70-130	2g
Bromodichloromethane	mg/kg	0.5	0.45	90	70-130	2g
Bromoform	mg/kg	0.5	0.54	107	70-130	2g
Bromomethane	mg/kg	0.5	0.46	91	36-180	2g
Carbon tetrachloride	mg/kg	0.5	0.52	104	69-133	2g
Chlorobenzene	mg/kg	0.5	0.50	100	70-130	2g
Chloroethane	mg/kg	0.5	0.49	99	61-147	2g
Chloroform	mg/kg	0.5	0.45	90	69-130	2g
Chloromethane	mg/kg	0.5	0.56	111	66-154	2g
cis-1,2-Dichloroethene	mg/kg	0.5	0.48	96	69-130	2g
cis-1,3-Dichloropropene	mg/kg	0.5	0.50	99	70-130	2g
Dibromochloromethane	mg/kg	0.5	0.52	104	70-130	2g
Dibromomethane	mg/kg	0.5	0.54	107	70-130	2g
Dichlorodifluoromethane	mg/kg	0.5	0.59	118	40-194	2g
Diisopropyl ether	mg/kg	0.5	0.46	93	64-130	2g
Ethylbenzene	mg/kg	0.5	0.51	103	69-130	2g
Hexachloro-1,3-butadiene	mg/kg	0.5	0.47	94	59-134	2g
Isopropylbenzene (Cumene)	mg/kg	0.5	0.59	118	70-130	2g
m&p-Xylene	mg/kg	1	1.1	105	70-130	2g
Methyl-tert-butyl ether	mg/kg	0.5	0.43	86	66-130	2g
Methylene Chloride	mg/kg	0.5	0.47	95	67-130	2g
n-Butylbenzene	mg/kg	0.5	0.48	96	66-130	2g
n-Propylbenzene	mg/kg	0.5	0.52	104	70-130	2g
Naphthalene	mg/kg	0.5	0.50	100	70-130	2g
o-Xylene	mg/kg	0.5	0.49	97	70-130	2g
p-Isopropyltoluene	mg/kg	0.5	0.51	102	69-130	2g
sec-Butylbenzene	mg/kg	0.5	0.52	103	70-130	2g
Styrene	mg/kg	0.5	0.46	92	70-130	2g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

LABORATORY CONTROL SAMPLE: 4828626

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
tert-Butylbenzene	mg/kg	0.5	0.46	92	61-130	2g
Tetrachloroethene	mg/kg	0.5	0.41	81	70-130	2g
Toluene	mg/kg	0.5	0.49	97	70-130	2g
trans-1,2-Dichloroethene	mg/kg	0.5	0.49	98	68-133	2g
trans-1,3-Dichloropropene	mg/kg	0.5	0.48	97	70-130	2g
Trichloroethene	mg/kg	0.5	0.52	105	70-130	2g
Trichlorofluoromethane	mg/kg	0.5	0.53	105	59-147	2g
Vinyl acetate	mg/kg	1	0.98	98	67-136	2g
Vinyl chloride	mg/kg	0.5	0.51	102	59-148	2g
Xylene (Total)	mg/kg	1.5	1.5	103	70-130	2g
1,2-Dichloroethane-d4 (S)	%			92	70-135	2g
4-Bromofluorobenzene (S)	%			102	70-130	2g
Toluene-d8 (S)	%			97	70-130	2g

MATRIX SPIKE SAMPLE: 4828627

Parameter	Units	92799553005 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	ND	1.1	1.1	106	10-174	2g
1,1,1-Trichloroethane	mg/kg	ND	1.1	1.1	106	10-178	2g
1,1,2,2-Tetrachloroethane	mg/kg	ND	1.1	1.1	103	10-164	2g
1,1,2-Trichloroethane	mg/kg	ND	1.1	1.1	104	10-167	2g
1,1-Dichloroethane	mg/kg	ND	1.1	1.1	99	10-175	2g
1,1-Dichloroethene	mg/kg	ND	1.1	0.93	87	10-189	2g
1,1-Dichloropropene	mg/kg	ND	1.1	1.1	102	10-179	2g
1,2,3-Trichlorobenzene	mg/kg	ND	1.1	0.96	90	10-154	2g
1,2,3-Trichloropropane	mg/kg	ND	1.1	1.2	112	10-157	2g
1,2,4-Trichlorobenzene	mg/kg	ND	1.1	1.0	98	10-156	2g
1,2,4-Trimethylbenzene	mg/kg	10.7 ug/kg	1.1	1.0	96	10-169	2g
1,2-Dibromo-3-chloropropane	mg/kg	ND	1.1	0.93	87	10-148	2g
1,2-Dibromoethane (EDB)	mg/kg	ND	1.1	1.2	109	10-166	2g
1,2-Dichlorobenzene	mg/kg	ND	1.1	1.2	109	10-166	2g
1,2-Dichloroethane	mg/kg	ND	1.1	1.1	106	10-171	2g
1,2-Dichloropropane	mg/kg	ND	1.1	1.1	101	10-175	2g
1,3,5-Trimethylbenzene	mg/kg	ND	1.1	1.1	105	10-171	2g
1,3-Dichlorobenzene	mg/kg	ND	1.1	1.1	104	10-166	2g
1,3-Dichloropropane	mg/kg	ND	1.1	1.1	103	10-167	2g
1,4-Dichlorobenzene	mg/kg	ND	1.1	1.0	97	10-163	2g
2,2-Dichloropropane	mg/kg	ND	1.1	0.86	81	10-158	2g
2-Butanone (MEK)	mg/kg	ND	2.1	1.3	61	10-156	2g
2-Chlorotoluene	mg/kg	ND	1.1	1.2	108	10-167	2g
2-Hexanone	mg/kg	ND	2.1	1.9	90	10-159	2g
4-Chlorotoluene	mg/kg	ND	1.1	1.3	119	10-167	2g
4-Methyl-2-pentanone (MIBK)	mg/kg	ND	2.1	2.1	99	10-162	2g
Acetone	mg/kg	ND	2.1	0.70	33	10-131	2g
Benzene	mg/kg	ND	1.1	1.1	107	10-175	2g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

MATRIX SPIKE SAMPLE: 4828627

Parameter	Units	92799553005 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Bromobenzene	mg/kg	ND	1.1	1.1	103	10-166	2g
Bromochloromethane	mg/kg	ND	1.1	0.99	93	10-173	2g
Bromodichloromethane	mg/kg	ND	1.1	1.0	96	10-169	2g
Bromoform	mg/kg	ND	1.1	1.1	103	10-165	2g
Bromomethane	mg/kg	40.7J ug/kg	1.1	1.3	119	10-130	2g
Carbon tetrachloride	mg/kg	ND	1.1	1.1	101	10-182	2g
Chlorobenzene	mg/kg	ND	1.1	1.1	106	10-171	2g
Chloroethane	mg/kg	ND	1.1	0.79	74	10-130	2g
Chloroform	mg/kg	ND	1.1	1.1	100	10-171	2g
Chloromethane	mg/kg	10.4J ug/kg	1.1	1.5	138	10-200	2g
cis-1,2-Dichloroethene	mg/kg	ND	1.1	1.1	105	10-172	2g
cis-1,3-Dichloropropene	mg/kg	ND	1.1	1.1	99	10-160	2g
Dibromochloromethane	mg/kg	ND	1.1	1.1	104	10-168	2g
Dibromomethane	mg/kg	ND	1.1	1.2	117	10-173	2g
Dichlorodifluoromethane	mg/kg	ND	1.1	1.4	129	10-200	2g
Diisopropyl ether	mg/kg	ND	1.1	1.1	101	10-169	2g
Ethylbenzene	mg/kg	ND	1.1	1.1	107	10-169	2g
Hexachloro-1,3-butadiene	mg/kg	ND	1.1	1.3	125	10-190	2g
Isopropylbenzene (Cumene)	mg/kg	ND	1.1	1.3	119	10-179	2g
m&p-Xylene	mg/kg	ND	2.1	2.3	106	10-174	2g
Methyl-tert-butyl ether	mg/kg	ND	1.1	0.98	91	10-157	2g
Methylene Chloride	mg/kg	55.8 ug/kg	1.1	0.78	68	10-177	2g
n-Butylbenzene	mg/kg	ND	1.1	1.0	96	10-174	2g
n-Propylbenzene	mg/kg	ND	1.1	1.2	108	10-170	2g
Naphthalene	mg/kg	94.8 ug/kg	1.1	1.1	94	10-155	2g
o-Xylene	mg/kg	ND	1.1	1.1	101	10-175	2g
p-Isopropyltoluene	mg/kg	ND	1.1	1.1	106	10-174	2g
sec-Butylbenzene	mg/kg	ND	1.1	1.2	113	10-177	2g
Styrene	mg/kg	ND	1.1	1.0	95	10-174	2g
tert-Butylbenzene	mg/kg	ND	1.1	1.1	101	10-142	2g
Tetrachloroethene	mg/kg	ND	1.1	0.83	78	10-166	2g
Toluene	mg/kg	23.0 ug/kg	1.1	1.1	102	10-173	2g
trans-1,2-Dichloroethene	mg/kg	ND	1.1	0.96	90	10-173	2g
trans-1,3-Dichloropropene	mg/kg	ND	1.1	1.0	97	10-159	2g
Trichloroethene	mg/kg	ND	1.1	1.1	107	10-181	2g
Trichlorofluoromethane	mg/kg	ND	1.1	1.2	108	10-130	2g
Vinyl acetate	mg/kg	ND	2.1	1.6	76	10-158	2g
Vinyl chloride	mg/kg	ND	1.1	1.2	115	10-189	2g
Xylene (Total)	mg/kg	ND	3.2	3.4	105	10-174	2g
1,2-Dichloroethane-d4 (S)	%				98	70-135	2g
4-Bromofluorobenzene (S)	%				103	70-130	2g
Toluene-d8 (S)	%				96	70-130	2g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

SAMPLE DUPLICATE: 4828628

Parameter	Units	92799553006 Result	Dup Result	RPD	Max RPD	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	ND	ND		30	2g
1,1,1-Trichloroethane	mg/kg	ND	ND		30	2g
1,1,2,2-Tetrachloroethane	mg/kg	ND	ND		30	2g
1,1,2-Trichloroethane	mg/kg	ND	ND		30	2g
1,1-Dichloroethane	mg/kg	ND	ND		30	2g
1,1-Dichloroethene	mg/kg	ND	ND		30	2g
1,1-Dichloropropene	mg/kg	ND	ND		30	2g
1,2,3-Trichlorobenzene	mg/kg	ND	ND		30	2g
1,2,3-Trichloropropane	mg/kg	ND	ND		30	2g
1,2,4-Trichlorobenzene	mg/kg	ND	ND		30	2g
1,2,4-Trimethylbenzene	mg/kg	ND	ND		30	2g
1,2-Dibromo-3-chloropropane	mg/kg	ND	ND		30	2g
1,2-Dibromoethane (EDB)	mg/kg	ND	ND		30	2g
1,2-Dichlorobenzene	mg/kg	ND	ND		30	2g
1,2-Dichloroethane	mg/kg	ND	ND		30	2g
1,2-Dichloropropane	mg/kg	ND	ND		30	2g
1,3,5-Trimethylbenzene	mg/kg	ND	ND		30	2g
1,3-Dichlorobenzene	mg/kg	ND	ND		30	2g
1,3-Dichloropropane	mg/kg	ND	ND		30	2g
1,4-Dichlorobenzene	mg/kg	ND	ND		30	2g
2,2-Dichloropropane	mg/kg	ND	ND		30	2g
2-Butanone (MEK)	mg/kg	ND	ND		30	2g
2-Chlorotoluene	mg/kg	ND	ND		30	2g
2-Hexanone	mg/kg	ND	ND		30	2g
4-Chlorotoluene	mg/kg	ND	ND		30	2g
4-Methyl-2-pentanone (MIBK)	mg/kg	ND	ND		30	2g
Acetone	mg/kg	ND	ND		30	2g
Benzene	mg/kg	ND	ND		30	2g
Bromobenzene	mg/kg	ND	ND		30	2g
Bromochloromethane	mg/kg	ND	ND		30	2g
Bromodichloromethane	mg/kg	ND	ND		30	2g
Bromoform	mg/kg	ND	ND		30	2g
Bromomethane	mg/kg	35.8 ug/kg	0.035	3	30	2g
Carbon tetrachloride	mg/kg	ND	ND		30	2g
Chlorobenzene	mg/kg	ND	ND		30	2g
Chloroethane	mg/kg	ND	ND		30	2g
Chloroform	mg/kg	ND	ND		30	2g
Chloromethane	mg/kg	ND	ND		30	2g
cis-1,2-Dichloroethene	mg/kg	ND	ND		30	2g
cis-1,3-Dichloropropene	mg/kg	ND	ND		30	2g
Dibromochloromethane	mg/kg	ND	ND		30	2g
Dibromomethane	mg/kg	ND	ND		30	2g
Dichlorodifluoromethane	mg/kg	ND	ND		30	2g
Diisopropyl ether	mg/kg	ND	ND		30	2g
Ethylbenzene	mg/kg	ND	ND		30	2g
Hexachloro-1,3-butadiene	mg/kg	ND	ND		30	2g
Isopropylbenzene (Cumene)	mg/kg	ND	ND		30	2g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

SAMPLE DUPLICATE: 4828628

Parameter	Units	92799553006 Result	Dup Result	RPD	Max RPD	Qualifiers
m&p-Xylene	mg/kg	ND	ND		30	2g
Methyl-tert-butyl ether	mg/kg	ND	ND		30	2g
Methylene Chloride	mg/kg	ND	ND		30	2g
n-Butylbenzene	mg/kg	ND	ND		30	2g
n-Propylbenzene	mg/kg	ND	ND		30	2g
Naphthalene	mg/kg	8.1J ug/kg	ND		30	2g
o-Xylene	mg/kg	ND	ND		30	2g
p-Isopropyltoluene	mg/kg	ND	ND		30	2g
sec-Butylbenzene	mg/kg	ND	ND		30	2g
Styrene	mg/kg	ND	ND		30	2g
tert-Butylbenzene	mg/kg	ND	ND		30	2g
Tetrachloroethene	mg/kg	ND	ND		30	2g
Toluene	mg/kg	ND	ND		30	2g
trans-1,2-Dichloroethene	mg/kg	ND	ND		30	2g
trans-1,3-Dichloropropene	mg/kg	ND	ND		30	2g
Trichloroethene	mg/kg	ND	ND		30	2g
Trichlorofluoromethane	mg/kg	ND	ND		30	2g
Vinyl acetate	mg/kg	ND	ND		30	2g
Vinyl chloride	mg/kg	ND	ND		30	2g
Xylene (Total)	mg/kg	ND	ND		30	2g
1,2-Dichloroethane-d4 (S)	%	104	110			2g
4-Bromofluorobenzene (S)	%	94	93			2g
Toluene-d8 (S)	%	98	97			2g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

QC Batch: 939919 | Analysis Method: EPA 7199
QC Batch Method: EPA 7199 | Analysis Description: 7199 Chromium, Hexavalent
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92799827001, 92799827002, 92799827003, 92799827004, 92799827006, 92799827007

METHOD BLANK: 4830575 Matrix: Solid
Associated Lab Samples: 92799827001, 92799827002, 92799827003, 92799827004, 92799827006, 92799827007

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Chromium, Hexavalent	mg/kg	ND	1.0	0.17	06/06/25 09:44	

LABORATORY CONTROL SAMPLE: 4830576

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Chromium, Hexavalent	mg/kg	10.4	10.6	102	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 4830577 4830578

Parameter	Units	92799827001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Chromium, Hexavalent	mg/kg	1.4	13.2	13.2	14.3	14.6	97	99	75-125	2	20	

MATRIX SPIKE SAMPLE: 4830579

Parameter	Units	92799827002 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Chromium, Hexavalent	mg/kg	1.3J	1460	1740	119	75-125	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

QC Batch: 939661 | Analysis Method: EPA 8270E
QC Batch Method: EPA 3546 | Analysis Description: 8270E Solid MSSV Microwave
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92799827001, 92799827002, 92799827003, 92799827004, 92799827006, 92799827007

METHOD BLANK: 4828973 Matrix: Solid
Associated Lab Samples: 92799827001, 92799827002, 92799827003, 92799827004, 92799827006, 92799827007

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,2,4-Trichlorobenzene	mg/kg	ND	0.34	0.13	06/06/25 10:24	
1,2-Dichlorobenzene	mg/kg	ND	0.34	0.12	06/06/25 10:24	
1,3-Dichlorobenzene	mg/kg	ND	0.34	0.12	06/06/25 10:24	
1,4-Dichlorobenzene	mg/kg	ND	0.34	0.13	06/06/25 10:24	
1-Methylnaphthalene	mg/kg	ND	0.34	0.12	06/06/25 10:24	
2,2'-Oxybis(1-chloropropane)	mg/kg	ND	0.34	0.16	06/06/25 10:24	
2,4,5-Trichlorophenol	mg/kg	ND	0.34	0.15	06/06/25 10:24	
2,4,6-Trichlorophenol	mg/kg	ND	0.34	0.14	06/06/25 10:24	
2,4-Dichlorophenol	mg/kg	ND	0.34	0.13	06/06/25 10:24	
2,4-Dimethylphenol	mg/kg	ND	0.34	0.14	06/06/25 10:24	
2,4-Dinitrophenol	mg/kg	ND	1.7	1.0	06/06/25 10:24	
2,4-Dinitrotoluene	mg/kg	ND	0.34	0.13	06/06/25 10:24	
2,6-Dinitrotoluene	mg/kg	ND	0.34	0.12	06/06/25 10:24	
2-Chloronaphthalene	mg/kg	ND	0.34	0.13	06/06/25 10:24	
2-Chlorophenol	mg/kg	ND	0.34	0.13	06/06/25 10:24	
2-Methylnaphthalene	mg/kg	ND	0.34	0.13	06/06/25 10:24	
2-Methylphenol(o-Cresol)	mg/kg	ND	0.34	0.14	06/06/25 10:24	
2-Nitroaniline	mg/kg	ND	1.7	0.27	06/06/25 10:24	
2-Nitrophenol	mg/kg	ND	0.34	0.15	06/06/25 10:24	
3&4-Methylphenol(m&p Cresol)	mg/kg	ND	0.34	0.14	06/06/25 10:24	
3,3'-Dichlorobenzidine	mg/kg	ND	0.67	0.23	06/06/25 10:24	
3-Nitroaniline	mg/kg	ND	1.7	0.26	06/06/25 10:24	
4,6-Dinitro-2-methylphenol	mg/kg	ND	0.67	0.31	06/06/25 10:24	
4-Bromophenylphenyl ether	mg/kg	ND	0.34	0.13	06/06/25 10:24	
4-Chloro-3-methylphenol	mg/kg	ND	0.67	0.24	06/06/25 10:24	
4-Chloroaniline	mg/kg	ND	0.67	0.26	06/06/25 10:24	
4-Chlorophenylphenyl ether	mg/kg	ND	0.34	0.13	06/06/25 10:24	
4-Nitroaniline	mg/kg	ND	0.67	0.26	06/06/25 10:24	
4-Nitrophenol	mg/kg	ND	1.7	0.65	06/06/25 10:24	
Acenaphthene	mg/kg	ND	0.34	0.12	06/06/25 10:24	
Acenaphthylene	mg/kg	ND	0.34	0.12	06/06/25 10:24	
Aniline	mg/kg	ND	0.34	0.13	06/06/25 10:24	
Anthracene	mg/kg	ND	0.34	0.11	06/06/25 10:24	
Benzo(a)anthracene	mg/kg	ND	0.34	0.11	06/06/25 10:24	
Benzo(a)pyrene	mg/kg	ND	0.34	0.12	06/06/25 10:24	
Benzo(b)fluoranthene	mg/kg	ND	0.34	0.11	06/06/25 10:24	
Benzo(g,h,i)perylene	mg/kg	ND	0.34	0.13	06/06/25 10:24	
Benzo(k)fluoranthene	mg/kg	ND	0.34	0.12	06/06/25 10:24	
Benzoic Acid	mg/kg	ND	1.7	0.72	06/06/25 10:24	
Benzyl alcohol	mg/kg	ND	0.67	0.25	06/06/25 10:24	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

METHOD BLANK: 4828973 Matrix: Solid
Associated Lab Samples: 92799827001, 92799827002, 92799827003, 92799827004, 92799827006, 92799827007

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
bis(2-Chloroethoxy)methane	mg/kg	ND	0.34	0.14	06/06/25 10:24	
bis(2-Chloroethyl) ether	mg/kg	ND	0.34	0.13	06/06/25 10:24	
bis(2-Ethylhexyl)phthalate	mg/kg	ND	0.34	0.13	06/06/25 10:24	
Butylbenzylphthalate	mg/kg	ND	0.34	0.14	06/06/25 10:24	
Chrysene	mg/kg	ND	0.34	0.12	06/06/25 10:24	
Di-n-butylphthalate	mg/kg	ND	0.34	0.11	06/06/25 10:24	
Di-n-octylphthalate	mg/kg	ND	0.34	0.13	06/06/25 10:24	
Dibenz(a,h)anthracene	mg/kg	ND	0.34	0.13	06/06/25 10:24	
Dibenzofuran	mg/kg	ND	0.34	0.12	06/06/25 10:24	
Diethylphthalate	mg/kg	ND	0.34	0.12	06/06/25 10:24	
Dimethylphthalate	mg/kg	ND	0.34	0.12	06/06/25 10:24	
Fluoranthene	mg/kg	ND	0.34	0.11	06/06/25 10:24	
Fluorene	mg/kg	ND	0.34	0.12	06/06/25 10:24	
Hexachloro-1,3-butadiene	mg/kg	ND	0.34	0.15	06/06/25 10:24	
Hexachlorobenzene	mg/kg	ND	0.34	0.13	06/06/25 10:24	
Hexachlorocyclopentadiene	mg/kg	ND	0.34	0.19	06/06/25 10:24	
Hexachloroethane	mg/kg	ND	0.34	0.13	06/06/25 10:24	
Indeno(1,2,3-cd)pyrene	mg/kg	ND	0.34	0.13	06/06/25 10:24	
Isophorone	mg/kg	ND	0.34	0.15	06/06/25 10:24	
N-Nitroso-di-n-propylamine	mg/kg	ND	0.34	0.13	06/06/25 10:24	
N-Nitrosodimethylamine	mg/kg	ND	0.34	0.11	06/06/25 10:24	
N-Nitrosodiphenylamine	mg/kg	ND	0.34	0.12	06/06/25 10:24	
Naphthalene	mg/kg	ND	0.34	0.11	06/06/25 10:24	
Nitrobenzene	mg/kg	ND	0.34	0.16	06/06/25 10:24	
Pentachlorophenol	mg/kg	ND	0.67	0.33	06/06/25 10:24	
Phenanthrene	mg/kg	ND	0.34	0.11	06/06/25 10:24	
Phenol	mg/kg	ND	0.34	0.15	06/06/25 10:24	
Pyrene	mg/kg	ND	0.34	0.14	06/06/25 10:24	
Pyridine	mg/kg	ND	0.34	0.11	06/06/25 10:24	
2,4,6-Tribromophenol (S)	%	66	10-130		06/06/25 10:24	
2-Fluorobiphenyl (S)	%	59	10-130		06/06/25 10:24	
2-Fluorophenol (S)	%	56	10-130		06/06/25 10:24	
Nitrobenzene-d5 (S)	%	58	10-130		06/06/25 10:24	
Phenol-d6 (S)	%	58	10-130		06/06/25 10:24	
Terphenyl-d14 (S)	%	71	10-130		06/06/25 10:24	

LABORATORY CONTROL SAMPLE: 4828974

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,2,4-Trichlorobenzene	mg/kg	1.7	1.1	63	40-130	
1,2-Dichlorobenzene	mg/kg	1.7	1.0	62	37-130	
1,3-Dichlorobenzene	mg/kg	1.7	1.1	62	36-130	
1,4-Dichlorobenzene	mg/kg	1.7	1.0	62	36-130	
1-Methylnaphthalene	mg/kg	1.7	1.1	67	46-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

LABORATORY CONTROL SAMPLE: 4828974

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
2,2'-Oxybis(1-chloropropane)	mg/kg	1.7	1.0	62	12-130	
2,4,5-Trichlorophenol	mg/kg	1.7	1.2	72	49-130	
2,4,6-Trichlorophenol	mg/kg	1.7	1.2	73	48-130	
2,4-Dichlorophenol	mg/kg	1.7	1.1	67	45-130	
2,4-Dimethylphenol	mg/kg	1.7	1.1	65	45-130	
2,4-Dinitrophenol	mg/kg	8.4	7.0	83	23-130	
2,4-Dinitrotoluene	mg/kg	1.7	1.3	80	50-130	
2,6-Dinitrotoluene	mg/kg	1.7	1.3	78	53-130	
2-Chloronaphthalene	mg/kg	1.7	1.1	68	46-130	
2-Chlorophenol	mg/kg	1.7	1.1	64	39-130	
2-Methylnaphthalene	mg/kg	1.7	1.1	67	45-130	
2-Methylphenol(o-Cresol)	mg/kg	1.7	1.1	66	38-130	
2-Nitroaniline	mg/kg	3.4	2.2	66	43-130	
2-Nitrophenol	mg/kg	1.7	1.2	71	43-130	
3&4-Methylphenol(m&p Cresol)	mg/kg	1.7	1.1	66	34-130	
3,3'-Dichlorobenzidine	mg/kg	3.4	2.6	76	68-130	
3-Nitroaniline	mg/kg	3.4	2.4	72	36-130	
4,6-Dinitro-2-methylphenol	mg/kg	3.4	2.9	86	38-130	
4-Bromophenylphenyl ether	mg/kg	1.7	1.3	75	52-130	
4-Chloro-3-methylphenol	mg/kg	3.4	2.4	70	45-130	
4-Chloroaniline	mg/kg	3.4	2.2	64	41-130	
4-Chlorophenylphenyl ether	mg/kg	1.7	1.2	72	46-130	
4-Nitroaniline	mg/kg	3.4	2.5	75	40-130	
4-Nitrophenol	mg/kg	8.4	6.1	73	34-130	
Acenaphthene	mg/kg	1.7	1.1	68	47-130	
Acenaphthylene	mg/kg	1.7	1.2	72	50-130	
Aniline	mg/kg	1.7	1.0	59	33-130	
Anthracene	mg/kg	1.7	1.2	74	46-130	
Benzo(a)anthracene	mg/kg	1.7	1.3	78	49-130	
Benzo(a)pyrene	mg/kg	1.7	1.4	81	45-130	
Benzo(b)fluoranthene	mg/kg	1.7	1.3	79	45-130	
Benzo(g,h,i)perylene	mg/kg	1.7	1.4	80	44-130	
Benzo(k)fluoranthene	mg/kg	1.7	1.4	81	46-130	
Benzoic Acid	mg/kg	8.4	3.9	46	14-130	
Benzyl alcohol	mg/kg	3.4	2.2	64	39-130	
bis(2-Chloroethoxy)methane	mg/kg	1.7	1.1	65	41-130	
bis(2-Chloroethyl) ether	mg/kg	1.7	1.0	62	34-130	
bis(2-Ethylhexyl)phthalate	mg/kg	1.7	1.3	79	39-130	
Butylbenzylphthalate	mg/kg	1.7	1.3	80	48-130	
Chrysene	mg/kg	1.7	1.3	79	50-130	
Di-n-butylphthalate	mg/kg	1.7	1.3	76	46-130	
Di-n-octylphthalate	mg/kg	1.7	1.4	84	49-130	
Dibenz(a,h)anthracene	mg/kg	1.7	1.4	83	46-130	
Dibenzofuran	mg/kg	1.7	1.2	71	49-130	
Diethylphthalate	mg/kg	1.7	1.3	75	49-130	
Dimethylphthalate	mg/kg	1.7	1.3	75	50-130	
Fluoranthene	mg/kg	1.7	1.3	75	49-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

LABORATORY CONTROL SAMPLE: 4828974

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Fluorene	mg/kg	1.7	1.2	70	47-130	
Hexachloro-1,3-butadiene	mg/kg	1.7	1.1	65	36-130	
Hexachlorobenzene	mg/kg	1.7	1.3	74	52-130	
Hexachlorocyclopentadiene	mg/kg	1.7	1.1	67	10-130	
Hexachloroethane	mg/kg	1.7	1.1	63	36-130	
Indeno(1,2,3-cd)pyrene	mg/kg	1.7	1.3	75	44-130	
Isophorone	mg/kg	1.7	1.2	68	40-130	
N-Nitroso-di-n-propylamine	mg/kg	1.7	1.1	68	34-130	
N-Nitrosodimethylamine	mg/kg	1.7	1.0	62	29-130	
N-Nitrosodiphenylamine	mg/kg	1.7	1.2	74	47-130	
Naphthalene	mg/kg	1.7	1.1	63	43-130	
Nitrobenzene	mg/kg	1.7	1.1	62	41-130	
Pentachlorophenol	mg/kg	3.4	2.6	77	35-130	
Phenanthrene	mg/kg	1.7	1.3	75	50-130	
Phenol	mg/kg	1.7	1.2	69	39-130	
Pyrene	mg/kg	1.7	1.3	79	51-130	
Pyridine	mg/kg	1.7	0.85	51	21-130	
2,4,6-Tribromophenol (S)	%			75	10-130	
2-Fluorobiphenyl (S)	%			60	10-130	
2-Fluorophenol (S)	%			57	10-130	
Nitrobenzene-d5 (S)	%			56	10-130	
Phenol-d6 (S)	%			60	10-130	
Terphenyl-d14 (S)	%			71	10-130	

MATRIX SPIKE SAMPLE: 4828975

Parameter	Units	92799827001 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
1,2,4-Trichlorobenzene	mg/kg	ND	2.2	1.4	63	22-130	
1,2-Dichlorobenzene	mg/kg	ND	2.2	1.3	59	22-130	
1,3-Dichlorobenzene	mg/kg	ND	2.2	1.3	59	22-130	
1,4-Dichlorobenzene	mg/kg	ND	2.2	1.3	59	21-130	
1-Methylnaphthalene	mg/kg	ND	2.2	1.4	67	27-130	
2,2'-Oxybis(1-chloropropane)	mg/kg	ND	2.2	1.3	61	10-130	
2,4,5-Trichlorophenol	mg/kg	ND	2.2	1.6	72	18-130	
2,4,6-Trichlorophenol	mg/kg	ND	2.2	1.5	72	17-130	
2,4-Dichlorophenol	mg/kg	ND	2.2	1.4	66	19-130	
2,4-Dimethylphenol	mg/kg	ND	2.2	1.0	47	17-130	
2,4-Dinitrophenol	mg/kg	ND	10.7	7.5	69	10-130	
2,4-Dinitrotoluene	mg/kg	ND	2.2	1.7	78	31-130	
2,6-Dinitrotoluene	mg/kg	ND	2.2	1.7	78	33-130	
2-Chloronaphthalene	mg/kg	ND	2.2	1.4	66	26-130	
2-Chlorophenol	mg/kg	ND	2.2	1.3	62	19-130	
2-Methylnaphthalene	mg/kg	ND	2.2	1.4	67	26-130	
2-Methylphenol(o-Cresol)	mg/kg	ND	2.2	1.2	57	19-130	
2-Nitroaniline	mg/kg	ND	4.3	2.8	65	29-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

MATRIX SPIKE SAMPLE: 4828975

Parameter	Units	92799827001 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
2-Nitrophenol	mg/kg	ND	2.2	1.5	71	16-130	
3&4-Methylphenol(m&p Cresol)	mg/kg	ND	2.2	1.2	57	14-130	
3,3'-Dichlorobenzidine	mg/kg	ND	4.3	3.0	70	16-130	
3-Nitroaniline	mg/kg	ND	4.3	3.0	70	28-130	
4,6-Dinitro-2-methylphenol	mg/kg	ND	4.3	3.3	77	10-131	
4-Bromophenylphenyl ether	mg/kg	ND	2.2	1.6	74	32-130	
4-Chloro-3-methylphenol	mg/kg	ND	4.3	3.0	69	26-130	
4-Chloroaniline	mg/kg	ND	4.3	2.6	61	19-130	
4-Chlorophenylphenyl ether	mg/kg	ND	2.2	1.5	70	29-130	
4-Nitroaniline	mg/kg	ND	4.3	3.1	71	22-130	
4-Nitrophenol	mg/kg	ND	10.7	7.5	70	10-130	
Acenaphthene	mg/kg	ND	2.2	1.5	68	29-130	
Acenaphthylene	mg/kg	ND	2.2	1.5	71	27-130	
Aniline	mg/kg	ND	2.2	0.59	28	10-130	
Anthracene	mg/kg	ND	2.2	1.6	74	26-130	
Benzo(a)anthracene	mg/kg	ND	2.2	1.6	75	31-130	
Benzo(a)pyrene	mg/kg	ND	2.2	1.6	75	24-130	
Benzo(b)fluoranthene	mg/kg	ND	2.2	1.6	73	12-137	
Benzo(g,h,i)perylene	mg/kg	ND	2.2	1.6	74	16-130	
Benzo(k)fluoranthene	mg/kg	ND	2.2	1.5	72	27-130	
Benzoic Acid	mg/kg	ND	10.7	1.8J	17	10-130	
Benzyl alcohol	mg/kg	ND	4.3	2.7	62	25-130	
bis(2-Chloroethoxy)methane	mg/kg	ND	2.2	1.4	65	26-130	
bis(2-Chloroethyl) ether	mg/kg	ND	2.2	1.4	63	23-130	
bis(2-Ethylhexyl)phthalate	mg/kg	ND	2.2	1.5	70	20-130	
Butylbenzylphthalate	mg/kg	ND	2.2	1.6	75	28-130	
Chrysene	mg/kg	ND	2.2	1.6	74	29-130	
Di-n-butylphthalate	mg/kg	ND	2.2	1.6	73	29-130	
Di-n-octylphthalate	mg/kg	ND	2.2	1.7	77	30-130	
Dibenz(a,h)anthracene	mg/kg	ND	2.2	1.6	76	27-130	
Dibenzofuran	mg/kg	ND	2.2	1.5	71	33-130	
Diethylphthalate	mg/kg	ND	2.2	1.6	73	34-130	
Dimethylphthalate	mg/kg	ND	2.2	1.6	73	35-130	
Fluoranthene	mg/kg	ND	2.2	1.6	75	26-130	
Fluorene	mg/kg	ND	2.2	1.5	70	27-130	
Hexachloro-1,3-butadiene	mg/kg	ND	2.2	1.3	63	19-130	
Hexachlorobenzene	mg/kg	ND	2.2	1.6	74	31-130	
Hexachlorocyclopentadiene	mg/kg	ND	2.2	1.3	60	10-130	
Hexachloroethane	mg/kg	ND	2.2	1.3	58	21-130	
Indeno(1,2,3-cd)pyrene	mg/kg	ND	2.2	1.5	70	16-130	
Isophorone	mg/kg	ND	2.2	1.5	69	29-130	
N-Nitroso-di-n-propylamine	mg/kg	ND	2.2	1.4	66	22-130	
N-Nitrosodimethylamine	mg/kg	ND	2.2	1.3	60	15-130	
N-Nitrosodiphenylamine	mg/kg	ND	2.2	1.6	73	30-130	
Naphthalene	mg/kg	ND	2.2	1.4	64	24-130	
Nitrobenzene	mg/kg	ND	2.2	1.3	62	25-130	
Pentachlorophenol	mg/kg	ND	4.3	3.5	81	10-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

MATRIX SPIKE SAMPLE: 4828975

Parameter	Units	92799827001 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Phenanthrene	mg/kg	ND	2.2	1.6	75	28-130	
Phenol	mg/kg	ND	2.2	1.3	60	18-130	
Pyrene	mg/kg	ND	2.2	1.6	76	27-130	
Pyridine	mg/kg	ND	2.2	0.49	23	10-130	
2,4,6-Tribromophenol (S)	%				74	10-130	
2-Fluorobiphenyl (S)	%				58	10-130	
2-Fluorophenol (S)	%				53	10-130	
Nitrobenzene-d5 (S)	%				57	10-130	
Phenol-d6 (S)	%				56	10-130	
Terphenyl-d14 (S)	%				67	10-130	

SAMPLE DUPLICATE: 4828976

Parameter	Units	92799827002 Result	Dup Result	RPD	Max RPD	Qualifiers
1,2,4-Trichlorobenzene	mg/kg	ND	ND		30	
1,2-Dichlorobenzene	mg/kg	ND	ND		30	
1,3-Dichlorobenzene	mg/kg	ND	ND		30	
1,4-Dichlorobenzene	mg/kg	ND	ND		30	
1-Methylnaphthalene	mg/kg	ND	ND		30	
2,2'-Oxybis(1-chloropropane)	mg/kg	ND	ND		30	
2,4,5-Trichlorophenol	mg/kg	ND	ND		30	
2,4,6-Trichlorophenol	mg/kg	ND	ND		30	
2,4-Dichlorophenol	mg/kg	ND	ND		30	
2,4-Dimethylphenol	mg/kg	ND	ND		30	
2,4-Dinitrophenol	mg/kg	ND	ND		30	
2,4-Dinitrotoluene	mg/kg	ND	ND		30	
2,6-Dinitrotoluene	mg/kg	ND	ND		30	
2-Chloronaphthalene	mg/kg	ND	ND		30	
2-Chlorophenol	mg/kg	ND	ND		30	
2-Methylnaphthalene	mg/kg	ND	ND		30	
2-Methylphenol(o-Cresol)	mg/kg	ND	ND		30	
2-Nitroaniline	mg/kg	ND	ND		30	
2-Nitrophenol	mg/kg	ND	ND		30	
3&4-Methylphenol(m&p Cresol)	mg/kg	ND	ND		30	
3,3'-Dichlorobenzidine	mg/kg	ND	ND		30	
3-Nitroaniline	mg/kg	ND	ND		30	
4,6-Dinitro-2-methylphenol	mg/kg	ND	ND		30	
4-Bromophenylphenyl ether	mg/kg	ND	ND		30	
4-Chloro-3-methylphenol	mg/kg	ND	ND		30	
4-Chloroaniline	mg/kg	ND	ND		30	
4-Chlorophenylphenyl ether	mg/kg	ND	ND		30	
4-Nitroaniline	mg/kg	ND	ND		30	
4-Nitrophenol	mg/kg	ND	ND		30	
Acenaphthene	mg/kg	ND	ND		30	
Acenaphthylene	mg/kg	ND	ND		30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

SAMPLE DUPLICATE: 4828976

Parameter	Units	92799827002 Result	Dup Result	RPD	Max RPD	Qualifiers
Aniline	mg/kg	ND	ND		30	
Anthracene	mg/kg	ND	ND		30	
Benzo(a)anthracene	mg/kg	ND	ND		30	
Benzo(a)pyrene	mg/kg	ND	ND		30	
Benzo(b)fluoranthene	mg/kg	ND	ND		30	
Benzo(g,h,i)perylene	mg/kg	ND	ND		30	
Benzo(k)fluoranthene	mg/kg	ND	ND		30	
Benzoic Acid	mg/kg	ND	ND		30	
Benzyl alcohol	mg/kg	ND	ND		30	
bis(2-Chloroethoxy)methane	mg/kg	ND	ND		30	
bis(2-Chloroethyl) ether	mg/kg	ND	ND		30	
bis(2-Ethylhexyl)phthalate	mg/kg	ND	ND		30	
Butylbenzylphthalate	mg/kg	ND	ND		30	
Chrysene	mg/kg	ND	ND		30	
Di-n-butylphthalate	mg/kg	ND	ND		30	
Di-n-octylphthalate	mg/kg	ND	ND		30	
Dibenz(a,h)anthracene	mg/kg	ND	ND		30	
Dibenzofuran	mg/kg	ND	ND		30	
Diethylphthalate	mg/kg	ND	ND		30	
Dimethylphthalate	mg/kg	ND	ND		30	
Fluoranthene	mg/kg	ND	ND		30	
Fluorene	mg/kg	ND	ND		30	
Hexachloro-1,3-butadiene	mg/kg	ND	ND		30	
Hexachlorobenzene	mg/kg	ND	ND		30	
Hexachlorocyclopentadiene	mg/kg	ND	ND		30	
Hexachloroethane	mg/kg	ND	ND		30	
Indeno(1,2,3-cd)pyrene	mg/kg	ND	ND		30	
Isophorone	mg/kg	ND	ND		30	
N-Nitroso-di-n-propylamine	mg/kg	ND	ND		30	
N-Nitrosodimethylamine	mg/kg	ND	ND		30	
N-Nitrosodiphenylamine	mg/kg	ND	ND		30	
Naphthalene	mg/kg	ND	ND		30	
Nitrobenzene	mg/kg	ND	ND		30	
Pentachlorophenol	mg/kg	ND	ND		30	
Phenanthrene	mg/kg	ND	ND		30	
Phenol	mg/kg	ND	ND		30	
Pyrene	mg/kg	ND	ND		30	
Pyridine	mg/kg	ND	ND		30	
2,4,6-Tribromophenol (S)	%	70	75			
2-Fluorobiphenyl (S)	%	59	63			
2-Fluorophenol (S)	%	50	53			
Nitrobenzene-d5 (S)	%	61	64			
Phenol-d6 (S)	%	54	57			
Terphenyl-d14 (S)	%	76	80			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

QC Batch: 1106406
QC Batch Method: ASTM D2974-87
Analysis Method: ASTM D2974-87
Analysis Description: Dry Weight/Percent Moisture
Laboratory: Pace Analytical Services - Ormond Beach

Associated Lab Samples: 92799827005

SAMPLE DUPLICATE: 6069666

Parameter	Units	92799827005 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	8.6	8.8	2	10	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799827

QC Batch: 939438
QC Batch Method: SW-846
Analysis Method: SW-846
Analysis Description: Dry Weight/Percent Moisture
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92799827001, 92799827002, 92799827003, 92799827004, 92799827006, 92799827007

SAMPLE DUPLICATE: 4827990

Parameter	Units	92799827001 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	21.4	21.7	2	25	N2

SAMPLE DUPLICATE: 4827991

Parameter	Units	92799829003 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	24.9	24.9	0	25	N2

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALIFIERS

Project: Fortress Wood Products
Pace Project No.: 92799827

DEFINITIONS

DF - Dilution Factor, if reported, represents the factor applied to the reported data due to dilution of the sample aliquot.

ND - Not Detected at or above adjusted reporting limit.

TNTC - Too Numerous To Count

J - Estimated concentration above the adjusted method detection limit and below the adjusted reporting limit.

MDL - Adjusted Method Detection Limit.

PQL - Practical Quantitation Limit.

RL - Reporting Limit - The lowest concentration value that meets project requirements for quantitative data with known precision and bias for a specific analyte in a specific matrix.

S - Surrogate

1,2-Diphenylhydrazine decomposes to and cannot be separated from Azobenzene using Method 8270. The result for each analyte is a combined concentration.

Consistent with EPA guidelines, unrounded data are displayed and have been used to calculate % recovery and RPD values.

LCS(D) - Laboratory Control Sample (Duplicate)

MS(D) - Matrix Spike (Duplicate)

DUP - Sample Duplicate

RPD - Relative Percent Difference

NC - Not Calculable.

SG - Silica Gel - Clean-Up

U - Indicates the compound was analyzed for, but not detected.

Acid preservation may not be appropriate for 2 Chloroethylvinyl ether.

A separate vial preserved to a pH of 4-5 is recommended in SW846 Chapter 4 for the analysis of Acrolein and Acrylonitrile by EPA Method 8260.

N-Nitrosodiphenylamine decomposes and cannot be separated from Diphenylamine using Method 8270. The result reported for each analyte is a combined concentration.

Reported results are not rounded until the final step prior to reporting. Therefore, calculated parameters that are typically reported as "Total" may vary slightly from the sum of the reported component parameters.

Pace Analytical is TNI accredited. Contact your Pace PM for the current list of accredited analytes.

TNI - The NELAC Institute.

BATCH QUALIFIERS

Batch: 939901

[1] Styrene did not meet the secondary source verification criteria for the initial calibration. The reported result should be considered an estimated value

Batch: 1104743

[1] Sample was diluted due to the presence of high levels of non-target analytes or other matrix interference.

ANALYTE QUALIFIERS

1g Sample was diluted due to the presence of high levels of non-target analytes or other matrix interference.

2g Styrene did not meet the secondary source verification criteria for the initial calibration. The reported result should be considered an estimated value

M1 Matrix spike recovery exceeded QC limits. Batch accepted based on laboratory control sample (LCS) recovery.

N2 The lab does not hold NELAC/TNI accreditation for this parameter but other accreditations/certifications may apply. A complete list of accreditations/certifications is available upon request.

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA CROSS REFERENCE TABLE

Project: Fortress Wood Products
Pace Project No.: 92799827

Lab ID	Sample ID	QC Batch Method	QC Batch	Analytical Method	Analytical Batch
92799827001	**B-14**	EPA 7199	939919	EPA 7199	940242
92799827002	**B-13**	EPA 7199	939919	EPA 7199	940242
92799827003	**B-12**	EPA 7199	939919	EPA 7199	940242
92799827004	**B-8**	EPA 7199	939919	EPA 7199	940242
92799827006	**B-7**	EPA 7199	939919	EPA 7199	940242
92799827007	**B-DUP**	EPA 7199	939919	EPA 7199	940242
92799827001	**B-14**	EPA 3050	1104665	EPA 6020	1104743
92799827002	**B-13**	EPA 3050	1104665	EPA 6020	1104743
92799827003	**B-12**	EPA 3050	1104665	EPA 6020	1104743
92799827004	**B-8**	EPA 3050	1104665	EPA 6020	1104743
92799827005	**B-8-B**	EPA 3050	1104665	EPA 6020	1104743
92799827006	**B-7**	EPA 3050	1104665	EPA 6020	1104743
92799827007	**B-DUP**	EPA 3050	1104665	EPA 6020	1104743
92799827001	**B-14**	EPA 7471	1104809	EPA 7471	1104826
92799827002	**B-13**	EPA 7471	1104810	EPA 7471	1105097
92799827003	**B-12**	EPA 7471	1104810	EPA 7471	1105097
92799827004	**B-8**	EPA 7471	1104810	EPA 7471	1105097
92799827005	**B-8-B**	EPA 7471	1104810	EPA 7471	1105097
92799827006	**B-7**	EPA 7471	1104810	EPA 7471	1105097
92799827007	**B-DUP**	EPA 7471	1104810	EPA 7471	1105097
92799827001	**B-14**	EPA 3546	939661	EPA 8270E	940244
92799827002	**B-13**	EPA 3546	939661	EPA 8270E	940244
92799827003	**B-12**	EPA 3546	939661	EPA 8270E	940244
92799827004	**B-8**	EPA 3546	939661	EPA 8270E	940244
92799827006	**B-7**	EPA 3546	939661	EPA 8270E	940244
92799827007	**B-DUP**	EPA 3546	939661	EPA 8270E	940244
92799827001	**B-14**	EPA 5035A/5030B	939546	EPA 8260D	939901
92799827002	**B-13**	EPA 5035A/5030B	939546	EPA 8260D	939901
92799827003	**B-12**	EPA 5035A/5030B	939546	EPA 8260D	939901
92799827004	**B-8**	EPA 5035A/5030B	939546	EPA 8260D	939901
92799827006	**B-7**	EPA 5035A/5030B	939546	EPA 8260D	939901
92799827007	**B-DUP**	EPA 5035A/5030B	939546	EPA 8260D	939901
92799827001	**B-14**	SW-846	939438		
92799827002	**B-13**	SW-846	939438		
92799827003	**B-12**	SW-846	939438		
92799827004	**B-8**	SW-846	939438		
92799827005	**B-8-B**	ASTM D2974-87	1106406		
92799827006	**B-7**	SW-846	939438		
92799827007	**B-DUP**	SW-846	939438		

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace® Location Requested (City/State):
Pace Analytical Charlotte
9800 Kincey Ave. Suite 100, Huntersville, NC 28078

CHAIN-OF-CUSTODY Analytical Request Document

Chain-of-Custody is a LEGAL DOCUMENT - Complete all relevant fields

LAB USE ONLY- Affix Workorder/Login Label Here

WO# : 92799827

92799827

Company Name:	ECS Southeast, LLC-Charlotte	Contact/Report To:	Emery Lovekamp
Street Address:	1812 Center Park Drive Suite D Charlotte, NC 28217	Phone #:	704-525-5152
		E-Mail:	elovekamp@ecslimited.com
		Cc E-Mail:	
Customer Project #:			
Project Name:	_____	Invoice To:	AP-ECS Charlotte
		Invoice E-Mail:	ecs-49@ecslimited.com
Site Collection Info/Facility ID (as applicable):		Purchase Order # (if applicable):	NEED
		Quote #:	

Time Zone Collected: [ ] AK [ ] PT [ ] MT [ ] CT [ ] ET

County / State origin of sample(s): North Carolina

Data Deliverables: [ ] Level II [ ] Level III [ ] Level IV [ ] EQUIS [ ] Other

Regulatory Program (DW, RCRA, etc.) as applicable: Reportable [ ] Yes [ ] No

Rush (Pre-approval required): [ ] Same Day [ ] 1 Day [ ] 2 Day [ ] 3 Day [ ] Other _____

DW PWSID # or WW Permit # as applicable:

Date Results Requested:

Field Filtered (if applicable): [ ] Yes [ ] No

Analysis:

* Matrix Codes (Insert in Matrix box below): Drinking Water (DW), Ground Water (GW), Waste Water (WW), Product (P), Soil/Solid (SS), Oil (OL), Wipe (WP), Tissue (TS), Bioassay (B), Vapor (V), Surface Water (SW), Sediment (SED), Sludge (SL), Caulk (CK), Leachate (LL), Biosolid (BS), Other (OT)

Specify Container Size **

Identify Container Preservative Type***

Analysis Requested

**Container Size: (1) 1L, (2) 500mL, (3) 250mL, (4) 125mL, (5) 100mL, (6) 40mL vial, (7) EnCore, (8) TerraCore, (9) 90mL, (10) Other

*** Preservative Types: (1) None, (2) HNO3, (3) H2SO4, (4) HCl, (5) NaOH, (6) Zn Acetate, (7) NaHSO4, (8) Sod. Thiosulfate, (9) Ascorbic Acid, (10) MeOH, (11) Other

Lab Use Only
Proj. Mgr: Angela Baioni
AcctNum / Client ID:
Table #:
Profile / Template: 18978
Prelog / Bottle Ord. ID: EZ 3265815

Customer Sample ID	Matrix *	Comp / Grab	Composite Start Date	Composite Start Time	Collected or Composite End Date	Collected or Composite End Time	# Cont.	Res. Chlorine Results	Res. Chlorine Units	8082 PCB	8260 VOC, dry weight	8270 SVOC, 7199 hex chrome	PCB congeners (HOLD)	PPL Metals 6020/7471	TCLP RCRA 8 Metals	Sample Comment	Preservation non-conformance identified for sample.
B-14	SS	G+C			6/2/25	1000					X	X		X			
B-13	SS	G+C			6/2/25	1140					X	X		X			
B-12	SS	G+C			6/2/25	1230					X	X		X			
B-8	SS	G+C			6/2/25	1350					X	X		X	[redacted]		
B-8-B	SS	G+C			6/2/25	1325									X		
B-7	SS	G+C			6/2/25	1430					X	X		X			
B-DUP	SS	G+C			6/2/25	—					X	X		X			

Additional Instructions from Pace®:

Collected By: (Printed Name) Seth Greene

Signature: Seth Greene

Customer Remarks / Special Conditions / Possible Hazards:

# Coolers:	Thermometer ID:	Correction Factor (°C):	Obs. Temp. (°C)	Corrected Temp. (°C)	On Ice:

Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Tracking Number:
Seth Greene / ECS	6/2/25 - 15:52	Olivia Bond	06/02/25 15:52	
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Delivered by: [ ] In-Person [ ] Courier
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	[ ] FedEx [ ] UPS [ ] Other
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Page: 1 of 5

Submitting a sample via this chain of custody constitutes acknowledgment and acceptance of the Pace® Terms and Conditions found at https://www.pacelabs.com/resource-library/resource/pace-terms-and-conditions/

ENV-FRM-CORQ-0019_v02_110123 ©

Pace	DC#_Title: ENV-FRM-HUN1-0083 v05_Sample Condition Upon Receipt
	Effective Date: 05/24/2024

Laboratory receiving samples:

Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☐ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☑

Sample Condition Upon Receipt

Client Name: ECS

Project #:

Courier: ☐ Commercial ☐ Fed Ex ☐ Pace ☐ UPS ☐ USPS ☐ Other ☑ Client

Custody Seal Present? ☐ Yes ☑ No Seals Intact? ☐ Yes ☐ No ☑ N/A

Date/Initials Person Examining Contents: SBK

Packing Material: ☑ Bubble Wrap ☑ Bubble Bags ☐ None ☑ Other

Biological Tissue Frozen? ☐ Yes ☐ No ☑ N/A

Thermometer: ☐ IR Gun ID: KR1002

Type of Ice: ☑ Wet ☐ Blue ☐ None

Cooler Temp: 1.7 Correction Factor: Add/Subtract (°C) 0.0

Temp should be above freezing to 6°C

☐ Samples out of temp criteria. Samples on ice, cooling process has begun

Cooler Temp Corrected (°C): 1.7

USDA Regulated Soil (☐ N/A, water sample)

Did samples originate in a quarantine zone within the United States: CA, NY, or SC (check maps)? ☐ Yes ☑ No

Did samples originate from a foreign source (internationally, including Hawaii and Puerto Rico)? ☐ Yes ☑ No

				Comments/Discrepancy:
Chain of Custody Present?	☑ Yes	☐ No	☐ N/A	1.
Samples Arrived within Hold Time?	☑ Yes	☐ No	☐ N/A	2.
Short Hold Time Analysis (<72 hr.)?	☐ Yes	☑ No	☐ N/A	3.
Rush Turn Around Time Requested?	☐ Yes	☑ No	☐ N/A	4.
Sufficient Volume?	☑ Yes	☐ No	☐ N/A	5.
Correct Containers Used?	☑ Yes	☐ No	☐ N/A	6.
-Pace Containers Used?	☑ Yes	☐ No	☐ N/A	
Containers Intact?	☑ Yes	☐ No	☐ N/A	7.
Dissolved analysis: Samples Field Filtered?	☐ Yes	☐ No	☑ N/A	8.
Sample Labels Match COC?	☑ Yes	☐ No	☐ N/A	9.
-Includes Date/Time/ID/Analysis Matrix: SL				
Headspace in VOA Vials (>5-6mm)?	☐ Yes	☐ No	☑ N/A	10.
Trip Blank Present?	☐ Yes	☐ No	☑ N/A	11.
Trip Blank Custody Seals Present?	☐ Yes	☐ No	☑ N/A	

COMMENTS/SAMPLE DISCREPANCY

Field Data Required? ☐ Yes ☐ No

Lot ID of split containers:

CLIENT NOTIFICATION/RESOLUTION

Person contacted: Date/Time:

Project Manager SCURF Review: Date:

Project Manager SRF Review: Date:

Pace	DC#_Title: ENV-FRM-HUN1-0083 v05_Sample Condition Upon Receipt
	Effective Date: 05/24/2024

*Check mark top half of box if pH and/or dechlorination is verified and within the acceptance range for preservation samples.
Exceptions: VOA, Coliform, TOC, Oil and Grease, DRO/8015 (water) DOC, LLHg
**Bottom half of box is to list number of bottles
***Check all unpreserved Nitrates for chlorine

Project #

Laboratory Receiving Location: Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☐ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☑

Client ECS Profile/EZ (Circle one) 326585 Notes

Item#	BP4U-125 mL Plastic Unpreserved (N/A) (Cl-)	BP3U-250 mL Plastic Unpreserved (N/A)	BP2U-500 mL Plastic Unpreserved (N/A)	BP1U-1 liter Plastic Unpreserved (N/A)		BP4S-125 mL Plastic H2SO4 (pH < 2) (Cl-)	BP3N-250 mL plastic HNO3 (pH < 2)	BP4Z-125 mL Plastic ZN Acetate & NaOH (>9)	BP4B-125 mL Plastic NaOH (pH > 12) (Cl-)	WGFU-Wide-mouthed Glass jar Unpreserved	AG1U-1 liter Amber Unpreserved (N/A) (Cl-)	AG1H-1 liter Amber HCl (pH < 2)	AG3U-250 mL Amber Unpreserved (N/A) (Cl-)	AG1S-1 liter Amber H2SO4 (pH < 2)	AG3S-250 mL Amber H2SO4 (pH < 2)	DG9A-40 mL Amber NH4Cl (N/A)(Cl-)	DG9H-40 mL VOA HCl (N/A)	VG9T-40 mL VOA Na2S2O3 (N/A)	VG9U-40 mL VOA Unpreserved (N/A)	DG9V-40 mL VOA H3PO4 (N/A)	KP7U-50 mL Plastic Unpreserved (N/A)	V/GK (3 vials per kit)-VPH/Gas kit (N/A)	SP5T-125 mL Sterile Plastic (N/A - lab)	SP2T-250 mL Sterile Plastic (N/A - lab)		BP3R-250 mL Plastic (NH2)2SO4 (9.3-9.7)	AG0U-100 mL Amber Unpreserved (N/A) (Cl-)	VSGU-20 mL Scintillation vials (N/A)	DG9U-40 mL Amber Unpreserved vials (N/A)
CC										X/SV													CH							
1										2													1							
2										2													1							
3										2													1							
4										2													1							
5													1																	
6										2													1							
7										2													1							
8																														
9																														
10																														
11																														
12																														

pH Adjustment Log for Preserved Samples

Sample ID	Type of Preservative	pH upon receipt	Date preservation adjusted	Time preservation adjusted	Amount of Preservative added	Lot #

Note. Whenever there is a discrepancy affecting North Carolina compliance samples, a copy of this form will be sent to the North Carolina DENR Certification Office (i.e. Out of hold, incorrect preservative, out of temp, incorrect containers

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

June 19, 2025

Emery Lovekamp
ECS Southeast, LLC-Charlotte
1812 Center Park Drive
Suite D
Charlotte, NC 28217

RE: Project: Fortress Wood Products
Pace Project No.: 92800079

Dear Emery Lovekamp:

Enclosed are the analytical results for sample(s) received by the laboratory on June 03, 2025. The results relate only to the samples included in this report. Results reported herein conform to the applicable TNI/NELAC Standards and the laboratory's Quality Manual, where applicable, unless otherwise noted in the body of the report.

The test results provided in this final report were generated by each of the following laboratories within the Pace Network:

- Pace Analytical Services - Charlotte
- Pace Analytical Services - Ormond Beach

If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Angela M. Baioni

Angela Baioni
angela.baioni@pacelabs.com
612-473-6801
Project Manager

Enclosures

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

CERTIFICATIONS

Project: Fortress Wood Products
Pace Project No.: 92800079

Pace Analytical Services Ormond Beach
8 East Tower Circle, Ormond Beach, FL 32174
Alaska DEC- CS/UST/LUST
Alabama Certification #: 41320
California Certification# 3096
Colorado Certification: FL NELAC Reciprocity
Connecticut Certification #: PH-0216
Delaware Certification: FL NELAC Reciprocity
DoD-ANAB #:ADE-3199
Florida Certification #: E83079
Georgia Certification #: 955
Guam Certification: FL NELAC Reciprocity
Hawaii Certification: FL NELAC Reciprocity
Illinois Certification #: 200068
Indiana Certification: FL NELAC Reciprocity
Kansas Certification #: E-10383
Kentucky Certification #: 90050
Louisiana Certification #: FL NELAC Reciprocity
Louisiana Environmental Certificate #: 05007
Maine Certification #: FL01264
Maryland Certification: #346
Massachusetts Certification #: M-FL1264
Michigan Certification #: 9911
Mississippi Certification: FL NELAC Reciprocity
Missouri Certification #: 236
Montana Certification #: Cert 0074
Nebraska Certification: NE-OS-28-14
Nevada Certification: FL NELAC Reciprocity
New Hampshire Certification #: 2958
New Jersey Certification #: FL022
New York Certification #: 11608
North Carolina Environmental Certificate #: 667
North Carolina Certification #: 12710
North Dakota Certification #: R-216
Ohio DEP 87780
Oklahoma Certification #: D9947
Pennsylvania Certification #: 68-00547
Puerto Rico Certification #: FL01264
South Carolina Certification: #96042001
Tennessee Certification #: TN02974
Texas Certification: FL NELAC Reciprocity
US Virgin Islands Certification: FL NELAC Reciprocity
Utah FL NELAC Reciprocity
Utah
Virginia Environmental Certification #: 460165
West Virginia Certification #: 9962C
Wisconsin Certification #: 399079670
Wyoming (EPA Region 8): FL NELAC Reciprocity

Pace Analytical Services Charlotte
South Carolina Laboratory ID: 99006
9800 Kincey Ave. Ste 100, Huntersville, NC 28078
North Carolina Drinking Water Certification #: 37706
North Carolina Field Services Certification #: 5342
North Carolina Wastewater Certification #: 12
South Carolina Laboratory ID: 99006
South Carolina Certification #: 99006001
South Carolina Drinking Water Cert. #: 99006003
Florida/NELAP Certification #: E87627
Kentucky UST Certification #: 84
Louisiana DoH Drinking Water #: LA029
Virginia/VELAP Certification #: 460221

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE SUMMARY

Project: Fortress Wood Products
Pace Project No.: 92800079

Lab ID	Sample ID	Matrix	Date Collected	Date Received
92800079001	**B-5**	Solid	06/03/25 09:25	06/03/25 15:45
92800079002	**B-5-C**	Solid	06/03/25 08:51	06/03/25 15:45
92800079003	**B-4**	Solid	06/03/25 10:00	06/03/25 15:45
92800079004	**B-4-C**	Solid	06/03/25 09:29	06/03/25 15:45
92800079005	**B-4-D**	Solid	06/03/25 09:35	06/03/25 15:45
92800079006	**B-2**	Solid	06/03/25 11:10	06/03/25 15:45
92800079007	**B-3**	Solid	06/03/25 11:35	06/03/25 15:45
92800079008	**B-6**	Solid	06/03/25 13:35	06/03/25 15:45
92800079009	**B-9**	Solid	06/03/25 14:15	06/03/25 15:45
92800079010	**B-10**	Solid	06/03/25 14:45	06/03/25 15:45

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE ANALYTE COUNT

Project: Fortress Wood Products
Pace Project No.: 92800079

Lab ID	Sample ID	Method	Analysts	Analytes Reported	Laboratory
92800079001	**B-5**	EPA 7199	VJM	1	PASI-C
		EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		EPA 8270E	SEM	75	PASI-C
		EPA 8260D	SAS	70	PASI-C
		SW-846	MCR1	1	PASI-C
92800079002	**B-5-C**	EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		ASTM D2974-87	NP1	1	PASI-O
92800079003	**B-4**	EPA 7199	VJM	1	PASI-C
		EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		EPA 8270E	SEM	75	PASI-C
		EPA 8260D	SAS	70	PASI-C
		SW-846	MCR1	1	PASI-C
92800079004	**B-4-C**	EPA 6020	BSL, EAP	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		ASTM D2974-87	NP1	1	PASI-O
92800079005	**B-4-D**	EPA 6020	BSL, EAP	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		ASTM D2974-87	NP1	1	PASI-O
92800079006	**B-2**	EPA 7199	VJM	1	PASI-C
		EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		EPA 8270E	SEM	75	PASI-C
		EPA 8260D	SAS	70	PASI-C
		SW-846	MCR1	1	PASI-C
92800079007	**B-3**	EPA 7199	VJM	1	PASI-C
		EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		EPA 8270E	SEM	75	PASI-C
		EPA 8260D	SAS	70	PASI-C
		SW-846	MCR1	1	PASI-C
92800079008	**B-6**	EPA 7199	VJM	1	PASI-C
		EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		EPA 8270E	SEM	75	PASI-C

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE ANALYTE COUNT

Project: Fortress Wood Products
Pace Project No.: 92800079

Lab ID	Sample ID	Method	Analysts	Analytes Reported	Laboratory
		EPA 8260D	SAS	70	PASI-C
		SW-846	MCR1	1	PASI-C
92800079009	**B-9**	EPA 7199	VJM	1	PASI-C
		EPA 6020	EAP	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		EPA 8270E	SEM	75	PASI-C
		EPA 8260D	SAS	70	PASI-C
		SW-846	MCR1	1	PASI-C
92800079010	**B-10**	EPA 7199	VJM	1	PASI-C
		EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		EPA 8270E	SEM	75	PASI-C
		EPA 8260D	SAS	70	PASI-C
		SW-846	MCR1	1	PASI-C

PASI-C = Pace Analytical Services - Charlotte
PASI-O = Pace Analytical Services - Ormond Beach

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-5 **Lab ID: 92800079001** Collected: 06/03/25 09:25 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199 Pace Analytical Services - Charlotte								
Chromium, Hexavalent	**1.6**	mg/kg	1.2	0.20	1	06/05/25 10:05	06/06/25 16:31	18540-29-9	
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050 Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	2.8	0.74	20	06/11/25 00:31	06/13/25 21:44	7440-36-0	N2
Arsenic	**1.9**	mg/kg	1.4	0.22	20	06/11/25 00:31	06/13/25 21:44	7440-38-2	
Beryllium	**0.32**	mg/kg	0.17	0.082	20	06/11/25 00:31	06/13/25 21:44	7440-41-7	
Cadmium	**0.38**	mg/kg	0.17	0.037	20	06/11/25 00:31	06/13/25 21:44	7440-43-9	
Chromium	**43.4**	mg/kg	1.4	0.81	20	06/11/25 00:31	06/13/25 21:44	7440-47-3	
Copper	**88.5**	mg/kg	2.8	0.72	20	06/11/25 00:31	06/13/25 21:44	7440-50-8	
Lead	**35.1**	mg/kg	1.4	0.52	20	06/11/25 00:31	06/13/25 21:44	7439-92-1	
Nickel	**19.3**	mg/kg	1.4	0.68	20	06/11/25 00:31	06/13/25 21:44	7440-02-0	
Selenium	ND	mg/kg	1.4	0.73	20	06/11/25 00:31	06/13/25 21:44	7782-49-2	
Silver	ND	mg/kg	0.17	0.054	20	06/11/25 00:31	06/13/25 21:44	7440-22-4	
Thallium	ND	mg/kg	1.4	0.25	20	06/11/25 00:31	06/13/25 21:44	7440-28-0	
Zinc	**209**	mg/kg	56.8	11.1	20	06/11/25 00:31	06/13/25 21:44	7440-66-6	
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471 Pace Analytical Services - Ormond Beach								
Mercury	**0.048**	mg/kg	0.0092	0.0046	1	06/11/25 09:21	06/11/25 11:39	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.40	0.14	1	06/09/25 17:27	06/10/25 18:55	83-32-9	
Acenaphthylene	ND	mg/kg	0.40	0.14	1	06/09/25 17:27	06/10/25 18:55	208-96-8	
Aniline	ND	mg/kg	0.40	0.16	1	06/09/25 17:27	06/10/25 18:55	62-53-3	
Anthracene	ND	mg/kg	0.40	0.13	1	06/09/25 17:27	06/10/25 18:55	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.40	0.13	1	06/09/25 17:27	06/10/25 18:55	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.40	0.14	1	06/09/25 17:27	06/10/25 18:55	50-32-8	
Benzo(b)fluoranthene	**0.17J**	mg/kg	0.40	0.13	1	06/09/25 17:27	06/10/25 18:55	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.40	0.16	1	06/09/25 17:27	06/10/25 18:55	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.40	0.14	1	06/09/25 17:27	06/10/25 18:55	207-08-9	
Benzoic Acid	ND	mg/kg	2.0	0.86	1	06/09/25 17:27	06/10/25 18:55	65-85-0	
Benzyl alcohol	ND	mg/kg	0.80	0.30	1	06/09/25 17:27	06/10/25 18:55	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.40	0.15	1	06/09/25 17:27	06/10/25 18:55	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.40	0.17	1	06/09/25 17:27	06/10/25 18:55	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	0.80	0.28	1	06/09/25 17:27	06/10/25 18:55	59-50-7	
4-Chloroaniline	ND	mg/kg	0.80	0.32	1	06/09/25 17:27	06/10/25 18:55	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.40	0.17	1	06/09/25 17:27	06/10/25 18:55	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.40	0.15	1	06/09/25 17:27	06/10/25 18:55	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.40	0.16	1	06/09/25 17:27	06/10/25 18:55	91-58-7	
2-Chlorophenol	ND	mg/kg	0.40	0.15	1	06/09/25 17:27	06/10/25 18:55	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.40	0.15	1	06/09/25 17:27	06/10/25 18:55	7005-72-3	
Chrysene	ND	mg/kg	0.40	0.15	1	06/09/25 17:27	06/10/25 18:55	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-5 **Lab ID: 92800079001** Collected: 06/03/25 09:25 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.40	0.15	1	06/09/25 17:27	06/10/25 18:55	53-70-3	
Dibenzofuran	ND	mg/kg	0.40	0.15	1	06/09/25 17:27	06/10/25 18:55	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.40	0.15	1	06/09/25 17:27	06/10/25 18:55	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.40	0.14	1	06/09/25 17:27	06/10/25 18:55	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.40	0.15	1	06/09/25 17:27	06/10/25 18:55	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	0.80	0.27	1	06/09/25 17:27	06/10/25 18:55	91-94-1	L2
2,4-Dichlorophenol	ND	mg/kg	0.40	0.16	1	06/09/25 17:27	06/10/25 18:55	120-83-2	
Diethylphthalate	ND	mg/kg	0.40	0.15	1	06/09/25 17:27	06/10/25 18:55	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.40	0.17	1	06/09/25 17:27	06/10/25 18:55	105-67-9	
Dimethylphthalate	ND	mg/kg	0.40	0.15	1	06/09/25 17:27	06/10/25 18:55	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.40	0.14	1	06/09/25 17:27	06/10/25 18:55	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	0.80	0.38	1	06/09/25 17:27	06/10/25 18:55	534-52-1	v1
2,4-Dinitrophenol	ND	mg/kg	2.0	1.2	1	06/09/25 17:27	06/10/25 18:55	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.40	0.15	1	06/09/25 17:27	06/10/25 18:55	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.40	0.15	1	06/09/25 17:27	06/10/25 18:55	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.40	0.16	1	06/09/25 17:27	06/10/25 18:55	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.40	0.16	1	06/09/25 17:27	06/10/25 18:55	117-81-7	
Fluoranthene	**0.20J**	mg/kg	0.40	0.14	1	06/09/25 17:27	06/10/25 18:55	206-44-0	
Fluorene	ND	mg/kg	0.40	0.14	1	06/09/25 17:27	06/10/25 18:55	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.40	0.17	1	06/09/25 17:27	06/10/25 18:55	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.40	0.16	1	06/09/25 17:27	06/10/25 18:55	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.40	0.23	1	06/09/25 17:27	06/10/25 18:55	77-47-4	
Hexachloroethane	ND	mg/kg	0.40	0.15	1	06/09/25 17:27	06/10/25 18:55	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.40	0.16	1	06/09/25 17:27	06/10/25 18:55	193-39-5	
Isophorone	ND	mg/kg	0.40	0.18	1	06/09/25 17:27	06/10/25 18:55	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.40	0.14	1	06/09/25 17:27	06/10/25 18:55	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.40	0.16	1	06/09/25 17:27	06/10/25 18:55	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.40	0.16	1	06/09/25 17:27	06/10/25 18:55	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.40	0.16	1	06/09/25 17:27	06/10/25 18:55	15831-10-4	
Naphthalene	ND	mg/kg	0.40	0.14	1	06/09/25 17:27	06/10/25 18:55	91-20-3	
2-Nitroaniline	ND	mg/kg	2.0	0.33	1	06/09/25 17:27	06/10/25 18:55	88-74-4	
3-Nitroaniline	ND	mg/kg	2.0	0.32	1	06/09/25 17:27	06/10/25 18:55	99-09-2	
4-Nitroaniline	ND	mg/kg	0.80	0.31	1	06/09/25 17:27	06/10/25 18:55	100-01-6	
Nitrobenzene	ND	mg/kg	0.40	0.19	1	06/09/25 17:27	06/10/25 18:55	98-95-3	
2-Nitrophenol	ND	mg/kg	0.40	0.17	1	06/09/25 17:27	06/10/25 18:55	88-75-5	
4-Nitrophenol	ND	mg/kg	2.0	0.78	1	06/09/25 17:27	06/10/25 18:55	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.40	0.14	1	06/09/25 17:27	06/10/25 18:55	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.40	0.15	1	06/09/25 17:27	06/10/25 18:55	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.40	0.14	1	06/09/25 17:27	06/10/25 18:55	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.40	0.19	1	06/09/25 17:27	06/10/25 18:55	108-60-1	
Pentachlorophenol	ND	mg/kg	0.80	0.39	1	06/09/25 17:27	06/10/25 18:55	87-86-5	
Phenanthrene	**0.29J**	mg/kg	0.40	0.13	1	06/09/25 17:27	06/10/25 18:55	85-01-8	
Phenol	ND	mg/kg	0.40	0.18	1	06/09/25 17:27	06/10/25 18:55	108-95-2	
Pyrene	**0.25J**	mg/kg	0.40	0.16	1	06/09/25 17:27	06/10/25 18:55	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-5 **Lab ID: 92800079001** Collected: 06/03/25 09:25 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.40	0.13	1	06/09/25 17:27	06/10/25 18:55	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.40	0.16	1	06/09/25 17:27	06/10/25 18:55	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.40	0.18	1	06/09/25 17:27	06/10/25 18:55	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.40	0.17	1	06/09/25 17:27	06/10/25 18:55	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	37	%	10-130		1	06/09/25 17:27	06/10/25 18:55	4165-60-0	
2-Fluorobiphenyl (S)	36	%	10-130		1	06/09/25 17:27	06/10/25 18:55	321-60-8	
Terphenyl-d14 (S)	46	%	10-130		1	06/09/25 17:27	06/10/25 18:55	1718-51-0	
Phenol-d6 (S)	35	%	10-130		1	06/09/25 17:27	06/10/25 18:55	13127-88-3	
2-Fluorophenol (S)	34	%	10-130		1	06/09/25 17:27	06/10/25 18:55	367-12-4	
2,4,6-Tribromophenol (S)	50	%	10-130		1	06/09/25 17:27	06/10/25 18:55	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.12	0.037	1	06/06/25 19:05	06/07/25 05:38	67-64-1	2g
Benzene	ND	mg/kg	0.0058	0.0023	1	06/06/25 19:05	06/07/25 05:38	71-43-2	2g
Bromobenzene	ND	mg/kg	0.0058	0.0019	1	06/06/25 19:05	06/07/25 05:38	108-86-1	2g
Bromochloromethane	ND	mg/kg	0.0058	0.0017	1	06/06/25 19:05	06/07/25 05:38	74-97-5	2g
Bromodichloromethane	ND	mg/kg	0.0058	0.0022	1	06/06/25 19:05	06/07/25 05:38	75-27-4	2g
Bromoform	ND	mg/kg	0.0058	0.0020	1	06/06/25 19:05	06/07/25 05:38	75-25-2	2g
Bromomethane	ND	mg/kg	0.023	0.018	1	06/06/25 19:05	06/07/25 05:38	74-83-9	2g
2-Butanone (MEK)	ND	mg/kg	0.12	0.028	1	06/06/25 19:05	06/07/25 05:38	78-93-3	2g
n-Butylbenzene	ND	mg/kg	0.0058	0.0037	1	06/06/25 19:05	06/07/25 05:38	104-51-8	2g
sec-Butylbenzene	ND	mg/kg	0.0058	0.0026	1	06/06/25 19:05	06/07/25 05:38	135-98-8	2g
tert-Butylbenzene	ND	mg/kg	0.0058	0.0021	1	06/06/25 19:05	06/07/25 05:38	98-06-6	2g
Carbon tetrachloride	ND	mg/kg	0.0058	0.0022	1	06/06/25 19:05	06/07/25 05:38	56-23-5	2g
Chlorobenzene	ND	mg/kg	0.0058	0.0033	1	06/06/25 19:05	06/07/25 05:38	108-90-7	2g
Chloroethane	**0.0052J**	mg/kg	0.012	0.0045	1	06/06/25 19:05	06/07/25 05:38	75-00-3	2g
Chloroform	ND	mg/kg	0.0058	0.0049	1	06/06/25 19:05	06/07/25 05:38	67-66-3	2g
Chloromethane	ND	mg/kg	0.012	0.0049	1	06/06/25 19:05	06/07/25 05:38	74-87-3	2g
2-Chlorotoluene	ND	mg/kg	0.0058	0.0021	1	06/06/25 19:05	06/07/25 05:38	95-49-8	2g
4-Chlorotoluene	ND	mg/kg	0.0058	0.0032	1	06/06/25 19:05	06/07/25 05:38	106-43-4	2g
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0058	0.0023	1	06/06/25 19:05	06/07/25 05:38	96-12-8	2g
Dibromochloromethane	ND	mg/kg	0.0058	0.0033	1	06/06/25 19:05	06/07/25 05:38	124-48-1	2g
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0058	0.0026	1	06/06/25 19:05	06/07/25 05:38	106-93-4	2g
Dibromomethane	ND	mg/kg	0.0058	0.0012	1	06/06/25 19:05	06/07/25 05:38	74-95-3	2g
1,2-Dichlorobenzene	ND	mg/kg	0.0058	0.0021	1	06/06/25 19:05	06/07/25 05:38	95-50-1	2g
1,3-Dichlorobenzene	ND	mg/kg	0.0058	0.0018	1	06/06/25 19:05	06/07/25 05:38	541-73-1	2g
1,4-Dichlorobenzene	ND	mg/kg	0.0058	0.0015	1	06/06/25 19:05	06/07/25 05:38	106-46-7	2g
Dichlorodifluoromethane	ND	mg/kg	0.012	0.0059	1	06/06/25 19:05	06/07/25 05:38	75-71-8	2g
1,1-Dichloroethane	ND	mg/kg	0.0058	0.0024	1	06/06/25 19:05	06/07/25 05:38	75-34-3	2g
1,2-Dichloroethane	ND	mg/kg	0.0058	0.0038	1	06/06/25 19:05	06/07/25 05:38	107-06-2	2g
1,1-Dichloroethene	ND	mg/kg	0.0058	0.0024	1	06/06/25 19:05	06/07/25 05:38	75-35-4	2g
cis-1,2-Dichloroethene	ND	mg/kg	0.0058	0.0020	1	06/06/25 19:05	06/07/25 05:38	156-59-2	2g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-5 **Lab ID: 92800079001** Collected: 06/03/25 09:25 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0058	0.0049	1	06/06/25 19:05	06/07/25 05:38	156-60-5	2g
1,2-Dichloropropane	ND	mg/kg	0.0058	0.0017	1	06/06/25 19:05	06/07/25 05:38	78-87-5	2g
1,3-Dichloropropane	ND	mg/kg	0.0058	0.0018	1	06/06/25 19:05	06/07/25 05:38	142-28-9	2g
2,2-Dichloropropane	ND	mg/kg	0.0058	0.0044	1	06/06/25 19:05	06/07/25 05:38	594-20-7	2g
1,1-Dichloropropene	ND	mg/kg	0.0058	0.0028	1	06/06/25 19:05	06/07/25 05:38	563-58-6	2g
cis-1,3-Dichloropropene	ND	mg/kg	0.0058	0.0016	1	06/06/25 19:05	06/07/25 05:38	10061-01-5	2g
trans-1,3-Dichloropropene	ND	mg/kg	0.0058	0.0020	1	06/06/25 19:05	06/07/25 05:38	10061-02-6	2g
Diisopropyl ether	ND	mg/kg	0.0058	0.0016	1	06/06/25 19:05	06/07/25 05:38	108-20-3	2g
Ethylbenzene	ND	mg/kg	0.0058	0.0027	1	06/06/25 19:05	06/07/25 05:38	100-41-4	2g
Hexachloro-1,3-butadiene	ND	mg/kg	0.012	0.0095	1	06/06/25 19:05	06/07/25 05:38	87-68-3	2g
2-Hexanone	ND	mg/kg	0.058	0.0056	1	06/06/25 19:05	06/07/25 05:38	591-78-6	2g
Isopropylbenzene (Cumene)	ND	mg/kg	0.0058	0.0020	1	06/06/25 19:05	06/07/25 05:38	98-82-8	2g
p-Isopropyltoluene	ND	mg/kg	0.0058	0.0029	1	06/06/25 19:05	06/07/25 05:38	99-87-6	2g
Methylene Chloride	ND	mg/kg	0.023	0.016	1	06/06/25 19:05	06/07/25 05:38	75-09-2	2g
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.058	0.0056	1	06/06/25 19:05	06/07/25 05:38	108-10-1	2g
Methyl-tert-butyl ether	ND	mg/kg	0.0058	0.0022	1	06/06/25 19:05	06/07/25 05:38	1634-04-4	2g
Naphthalene	ND	mg/kg	0.0058	0.0031	1	06/06/25 19:05	06/07/25 05:38	91-20-3	2g
n-Propylbenzene	ND	mg/kg	0.0058	0.0021	1	06/06/25 19:05	06/07/25 05:38	103-65-1	2g
Styrene	ND	mg/kg	0.0058	0.0015	1	06/06/25 19:05	06/07/25 05:38	100-42-5	2g
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0058	0.0022	1	06/06/25 19:05	06/07/25 05:38	630-20-6	2g
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0058	0.0015	1	06/06/25 19:05	06/07/25 05:38	79-34-5	2g
Tetrachloroethene	ND	mg/kg	0.0058	0.0018	1	06/06/25 19:05	06/07/25 05:38	127-18-4	2g
Toluene	ND	mg/kg	0.0058	0.0040	1	06/06/25 19:05	06/07/25 05:38	108-88-3	2g
1,2,3-Trichlorobenzene	ND	mg/kg	0.0058	0.0047	1	06/06/25 19:05	06/07/25 05:38	87-61-6	2g
1,2,4-Trichlorobenzene	ND	mg/kg	0.0058	0.0049	1	06/06/25 19:05	06/07/25 05:38	120-82-1	2g
1,1,1-Trichloroethane	ND	mg/kg	0.0058	0.0030	1	06/06/25 19:05	06/07/25 05:38	71-55-6	2g
1,1,2-Trichloroethane	ND	mg/kg	0.0058	0.0019	1	06/06/25 19:05	06/07/25 05:38	79-00-5	2g
Trichloroethene	ND	mg/kg	0.0058	0.0047	1	06/06/25 19:05	06/07/25 05:38	79-01-6	2g
Trichlorofluoromethane	ND	mg/kg	0.0058	0.0032	1	06/06/25 19:05	06/07/25 05:38	75-69-4	2g
1,2,3-Trichloropropane	ND	mg/kg	0.0058	0.0029	1	06/06/25 19:05	06/07/25 05:38	96-18-4	2g
1,2,4-Trimethylbenzene	ND	mg/kg	0.0058	0.0034	1	06/06/25 19:05	06/07/25 05:38	95-63-6	2g
1,3,5-Trimethylbenzene	ND	mg/kg	0.0058	0.0019	1	06/06/25 19:05	06/07/25 05:38	108-67-8	2g
Vinyl acetate	ND	mg/kg	0.058	0.012	1	06/06/25 19:05	06/07/25 05:38	108-05-4	2g
Vinyl chloride	ND	mg/kg	0.012	0.0029	1	06/06/25 19:05	06/07/25 05:38	75-01-4	2g
Xylene (Total)	ND	mg/kg	0.012	0.0033	1	06/06/25 19:05	06/07/25 05:38	1330-20-7	2g
m&p-Xylene	ND	mg/kg	0.012	0.0040	1	06/06/25 19:05	06/07/25 05:38	179601-23-1	2g
o-Xylene	ND	mg/kg	0.0058	0.0026	1	06/06/25 19:05	06/07/25 05:38	95-47-6	2g
Surrogates									
Toluene-d8 (S)	95	%	70-130		1	06/06/25 19:05	06/07/25 05:38	2037-26-5	2g
4-Bromofluorobenzene (S)	92	%	70-130		1	06/06/25 19:05	06/07/25 05:38	460-00-4	2g
1,2-Dichloroethane-d4 (S)	100	%	70-135		1	06/06/25 19:05	06/07/25 05:38	17060-07-0	2g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-5 **Lab ID: 92800079001** Collected: 06/03/25 09:25 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**17.1**	%	0.10	0.10	1		06/05/25 11:37		N2

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-5-C **Lab ID: 92800079002** Collected: 06/03/25 08:51 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050								
	Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	2.2	0.57	20	06/10/25 05:23	06/11/25 00:27	7440-36-0	1g,N2
Arsenic	**93.8**	mg/kg	1.1	0.17	20	06/10/25 05:23	06/11/25 00:27	7440-38-2	1g
Beryllium	ND	mg/kg	0.13	0.064	20	06/10/25 05:23	06/11/25 00:27	7440-41-7	1g
Cadmium	**0.34**	mg/kg	0.13	0.028	20	06/10/25 05:23	06/11/25 00:27	7440-43-9	1g
Chromium	**101**	mg/kg	1.1	0.63	20	06/10/25 05:23	06/11/25 00:27	7440-47-3	1g
Copper	**110**	mg/kg	2.2	0.56	20	06/10/25 05:23	06/11/25 00:27	7440-50-8	1g
Lead	**20.5**	mg/kg	1.1	0.40	20	06/10/25 05:23	06/11/25 00:27	7439-92-1	1g
Nickel	**11.4**	mg/kg	1.1	0.53	20	06/10/25 05:23	06/11/25 00:27	7440-02-0	1g
Selenium	ND	mg/kg	1.1	0.56	20	06/10/25 05:23	06/11/25 00:27	7782-49-2	1g
Silver	ND	mg/kg	0.13	0.042	20	06/10/25 05:23	06/11/25 00:27	7440-22-4	1g
Thallium	ND	mg/kg	1.1	0.19	20	06/10/25 05:23	06/11/25 00:27	7440-28-0	1g
Zinc	**85.2**	mg/kg	43.8	8.6	20	06/10/25 05:23	06/11/25 00:27	7440-66-6	1g
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471								
	Pace Analytical Services - Ormond Beach								
Mercury	**0.030**	mg/kg	0.0078	0.0039	1	06/11/25 09:21	06/11/25 11:42	7439-97-6	
Percent Moisture	Analytical Method: ASTM D2974-87								
	Pace Analytical Services - Ormond Beach								
Percent Moisture	**6.1**	%	0.10	0.10	1		06/19/25 07:24		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-4 **Lab ID: 92800079003** Collected: 06/03/25 10:00 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199 Pace Analytical Services - Charlotte								
Chromium, Hexavalent	ND	mg/kg	1.0	0.17	1	06/05/25 10:05	06/06/25 16:49	18540-29-9	
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050 Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	2.2	0.58	20	06/10/25 09:30	06/13/25 11:06	7440-36-0	N2
Arsenic	**6.3**	mg/kg	1.1	0.18	20	06/10/25 09:30	06/13/25 11:06	7440-38-2	
Beryllium	**0.47**	mg/kg	0.13	0.065	20	06/10/25 09:30	06/13/25 11:06	7440-41-7	
Cadmium	**0.37**	mg/kg	0.13	0.029	20	06/10/25 09:30	06/13/25 11:06	7440-43-9	
Chromium	**42.7**	mg/kg	1.1	0.64	20	06/10/25 09:30	06/13/25 11:06	7440-47-3	
Copper	**52.1**	mg/kg	2.2	0.57	20	06/10/25 09:30	06/13/25 11:06	7440-50-8	
Lead	**17.6**	mg/kg	1.1	0.41	20	06/10/25 09:30	06/13/25 11:06	7439-92-1	
Nickel	**19.7**	mg/kg	1.1	0.54	20	06/10/25 09:30	06/13/25 11:06	7440-02-0	
Selenium	**2.2**	mg/kg	1.1	0.58	20	06/10/25 09:30	06/13/25 11:06	7782-49-2	
Silver	ND	mg/kg	0.13	0.043	20	06/10/25 09:30	06/13/25 11:06	7440-22-4	
Thallium	ND	mg/kg	1.1	0.20	20	06/10/25 09:30	06/13/25 11:06	7440-28-0	
Zinc	**109**	mg/kg	44.8	8.7	20	06/10/25 09:30	06/13/25 11:06	7440-66-6	
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471 Pace Analytical Services - Ormond Beach								
Mercury	**0.27**	mg/kg	0.0093	0.0046	1	06/11/25 09:21	06/11/25 11:44	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.34	0.12	1	06/09/25 17:27	06/10/25 19:23	83-32-9	
Acenaphthylene	ND	mg/kg	0.34	0.12	1	06/09/25 17:27	06/10/25 19:23	208-96-8	
Aniline	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	62-53-3	
Anthracene	ND	mg/kg	0.34	0.11	1	06/09/25 17:27	06/10/25 19:23	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.34	0.11	1	06/09/25 17:27	06/10/25 19:23	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.34	0.12	1	06/09/25 17:27	06/10/25 19:23	50-32-8	
Benzo(b)fluoranthene	**0.15J**	mg/kg	0.34	0.11	1	06/09/25 17:27	06/10/25 19:23	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.34	0.12	1	06/09/25 17:27	06/10/25 19:23	207-08-9	
Benzoic Acid	ND	mg/kg	1.7	0.73	1	06/09/25 17:27	06/10/25 19:23	65-85-0	
Benzyl alcohol	ND	mg/kg	0.68	0.26	1	06/09/25 17:27	06/10/25 19:23	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.34	0.14	1	06/09/25 17:27	06/10/25 19:23	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	0.68	0.24	1	06/09/25 17:27	06/10/25 19:23	59-50-7	
4-Chloroaniline	ND	mg/kg	0.68	0.27	1	06/09/25 17:27	06/10/25 19:23	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.34	0.14	1	06/09/25 17:27	06/10/25 19:23	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.34	0.14	1	06/09/25 17:27	06/10/25 19:23	91-58-7	
2-Chlorophenol	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	7005-72-3	
Chrysene	ND	mg/kg	0.34	0.12	1	06/09/25 17:27	06/10/25 19:23	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-4 **Lab ID: 92800079003** Collected: 06/03/25 10:00 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	53-70-3	
Dibenzofuran	ND	mg/kg	0.34	0.12	1	06/09/25 17:27	06/10/25 19:23	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.34	0.12	1	06/09/25 17:27	06/10/25 19:23	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.34	0.12	1	06/09/25 17:27	06/10/25 19:23	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	0.68	0.23	1	06/09/25 17:27	06/10/25 19:23	91-94-1	L2
2,4-Dichlorophenol	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	120-83-2	
Diethylphthalate	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.34	0.14	1	06/09/25 17:27	06/10/25 19:23	105-67-9	
Dimethylphthalate	ND	mg/kg	0.34	0.12	1	06/09/25 17:27	06/10/25 19:23	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.34	0.11	1	06/09/25 17:27	06/10/25 19:23	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	0.68	0.32	1	06/09/25 17:27	06/10/25 19:23	534-52-1	v1
2,4-Dinitrophenol	ND	mg/kg	1.7	1.1	1	06/09/25 17:27	06/10/25 19:23	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	117-81-7	
Fluoranthene	**0.14J**	mg/kg	0.34	0.12	1	06/09/25 17:27	06/10/25 19:23	206-44-0	
Fluorene	ND	mg/kg	0.34	0.12	1	06/09/25 17:27	06/10/25 19:23	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.34	0.15	1	06/09/25 17:27	06/10/25 19:23	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.34	0.20	1	06/09/25 17:27	06/10/25 19:23	77-47-4	
Hexachloroethane	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	193-39-5	
Isophorone	ND	mg/kg	0.34	0.15	1	06/09/25 17:27	06/10/25 19:23	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.34	0.12	1	06/09/25 17:27	06/10/25 19:23	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.34	0.14	1	06/09/25 17:27	06/10/25 19:23	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.34	0.14	1	06/09/25 17:27	06/10/25 19:23	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.34	0.14	1	06/09/25 17:27	06/10/25 19:23	15831-10-4	
Naphthalene	ND	mg/kg	0.34	0.12	1	06/09/25 17:27	06/10/25 19:23	91-20-3	
2-Nitroaniline	ND	mg/kg	1.7	0.28	1	06/09/25 17:27	06/10/25 19:23	88-74-4	
3-Nitroaniline	ND	mg/kg	1.7	0.27	1	06/09/25 17:27	06/10/25 19:23	99-09-2	
4-Nitroaniline	ND	mg/kg	0.68	0.26	1	06/09/25 17:27	06/10/25 19:23	100-01-6	
Nitrobenzene	ND	mg/kg	0.34	0.16	1	06/09/25 17:27	06/10/25 19:23	98-95-3	
2-Nitrophenol	ND	mg/kg	0.34	0.15	1	06/09/25 17:27	06/10/25 19:23	88-75-5	
4-Nitrophenol	ND	mg/kg	1.7	0.66	1	06/09/25 17:27	06/10/25 19:23	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.34	0.11	1	06/09/25 17:27	06/10/25 19:23	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.34	0.12	1	06/09/25 17:27	06/10/25 19:23	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.34	0.16	1	06/09/25 17:27	06/10/25 19:23	108-60-1	
Pentachlorophenol	ND	mg/kg	0.68	0.33	1	06/09/25 17:27	06/10/25 19:23	87-86-5	
Phenanthrene	ND	mg/kg	0.34	0.11	1	06/09/25 17:27	06/10/25 19:23	85-01-8	
Phenol	ND	mg/kg	0.34	0.15	1	06/09/25 17:27	06/10/25 19:23	108-95-2	
Pyrene	**0.14J**	mg/kg	0.34	0.14	1	06/09/25 17:27	06/10/25 19:23	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-4 **Lab ID: 92800079003** Collected: 06/03/25 10:00 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.34	0.11	1	06/09/25 17:27	06/10/25 19:23	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.34	0.13	1	06/09/25 17:27	06/10/25 19:23	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.34	0.16	1	06/09/25 17:27	06/10/25 19:23	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.34	0.14	1	06/09/25 17:27	06/10/25 19:23	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	40	%	10-130		1	06/09/25 17:27	06/10/25 19:23	4165-60-0	
2-Fluorobiphenyl (S)	42	%	10-130		1	06/09/25 17:27	06/10/25 19:23	321-60-8	
Terphenyl-d14 (S)	46	%	10-130		1	06/09/25 17:27	06/10/25 19:23	1718-51-0	
Phenol-d6 (S)	38	%	10-130		1	06/09/25 17:27	06/10/25 19:23	13127-88-3	
2-Fluorophenol (S)	37	%	10-130		1	06/09/25 17:27	06/10/25 19:23	367-12-4	
2,4,6-Tribromophenol (S)	49	%	10-130		1	06/09/25 17:27	06/10/25 19:23	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.12	0.038	1	06/06/25 19:05	06/07/25 06:02	67-64-1	2g
Benzene	ND	mg/kg	0.0060	0.0024	1	06/06/25 19:05	06/07/25 06:02	71-43-2	2g
Bromobenzene	ND	mg/kg	0.0060	0.0019	1	06/06/25 19:05	06/07/25 06:02	108-86-1	2g
Bromochloromethane	ND	mg/kg	0.0060	0.0018	1	06/06/25 19:05	06/07/25 06:02	74-97-5	2g
Bromodichloromethane	ND	mg/kg	0.0060	0.0023	1	06/06/25 19:05	06/07/25 06:02	75-27-4	2g
Bromoform	ND	mg/kg	0.0060	0.0021	1	06/06/25 19:05	06/07/25 06:02	75-25-2	2g
Bromomethane	ND	mg/kg	0.024	0.018	1	06/06/25 19:05	06/07/25 06:02	74-83-9	2g
2-Butanone (MEK)	ND	mg/kg	0.12	0.029	1	06/06/25 19:05	06/07/25 06:02	78-93-3	2g
n-Butylbenzene	ND	mg/kg	0.0060	0.0038	1	06/06/25 19:05	06/07/25 06:02	104-51-8	2g
sec-Butylbenzene	ND	mg/kg	0.0060	0.0026	1	06/06/25 19:05	06/07/25 06:02	135-98-8	2g
tert-Butylbenzene	ND	mg/kg	0.0060	0.0021	1	06/06/25 19:05	06/07/25 06:02	98-06-6	2g
Carbon tetrachloride	ND	mg/kg	0.0060	0.0022	1	06/06/25 19:05	06/07/25 06:02	56-23-5	2g
Chlorobenzene	ND	mg/kg	0.0060	0.0034	1	06/06/25 19:05	06/07/25 06:02	108-90-7	2g
Chloroethane	ND	mg/kg	0.012	0.0046	1	06/06/25 19:05	06/07/25 06:02	75-00-3	2g
Chloroform	ND	mg/kg	0.0060	0.0050	1	06/06/25 19:05	06/07/25 06:02	67-66-3	2g
Chloromethane	ND	mg/kg	0.012	0.0050	1	06/06/25 19:05	06/07/25 06:02	74-87-3	2g
2-Chlorotoluene	ND	mg/kg	0.0060	0.0021	1	06/06/25 19:05	06/07/25 06:02	95-49-8	2g
4-Chlorotoluene	ND	mg/kg	0.0060	0.0033	1	06/06/25 19:05	06/07/25 06:02	106-43-4	2g
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0060	0.0023	1	06/06/25 19:05	06/07/25 06:02	96-12-8	2g
Dibromochloromethane	ND	mg/kg	0.0060	0.0033	1	06/06/25 19:05	06/07/25 06:02	124-48-1	2g
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0060	0.0026	1	06/06/25 19:05	06/07/25 06:02	106-93-4	2g
Dibromomethane	ND	mg/kg	0.0060	0.0013	1	06/06/25 19:05	06/07/25 06:02	74-95-3	2g
1,2-Dichlorobenzene	ND	mg/kg	0.0060	0.0021	1	06/06/25 19:05	06/07/25 06:02	95-50-1	2g
1,3-Dichlorobenzene	ND	mg/kg	0.0060	0.0018	1	06/06/25 19:05	06/07/25 06:02	541-73-1	2g
1,4-Dichlorobenzene	ND	mg/kg	0.0060	0.0015	1	06/06/25 19:05	06/07/25 06:02	106-46-7	2g
Dichlorodifluoromethane	ND	mg/kg	0.012	0.0061	1	06/06/25 19:05	06/07/25 06:02	75-71-8	2g
1,1-Dichloroethane	ND	mg/kg	0.0060	0.0025	1	06/06/25 19:05	06/07/25 06:02	75-34-3	2g
1,2-Dichloroethane	ND	mg/kg	0.0060	0.0039	1	06/06/25 19:05	06/07/25 06:02	107-06-2	2g
1,1-Dichloroethene	ND	mg/kg	0.0060	0.0025	1	06/06/25 19:05	06/07/25 06:02	75-35-4	2g
cis-1,2-Dichloroethene	ND	mg/kg	0.0060	0.0020	1	06/06/25 19:05	06/07/25 06:02	156-59-2	2g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-4 **Lab ID: 92800079003** Collected: 06/03/25 10:00 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0060	0.0051	1	06/06/25 19:05	06/07/25 06:02	156-60-5	2g
1,2-Dichloropropane	ND	mg/kg	0.0060	0.0018	1	06/06/25 19:05	06/07/25 06:02	78-87-5	2g
1,3-Dichloropropane	ND	mg/kg	0.0060	0.0019	1	06/06/25 19:05	06/07/25 06:02	142-28-9	2g
2,2-Dichloropropane	ND	mg/kg	0.0060	0.0045	1	06/06/25 19:05	06/07/25 06:02	594-20-7	2g
1,1-Dichloropropene	ND	mg/kg	0.0060	0.0029	1	06/06/25 19:05	06/07/25 06:02	563-58-6	2g
cis-1,3-Dichloropropene	ND	mg/kg	0.0060	0.0016	1	06/06/25 19:05	06/07/25 06:02	10061-01-5	2g
trans-1,3-Dichloropropene	ND	mg/kg	0.0060	0.0020	1	06/06/25 19:05	06/07/25 06:02	10061-02-6	2g
Diisopropyl ether	ND	mg/kg	0.0060	0.0016	1	06/06/25 19:05	06/07/25 06:02	108-20-3	2g
Ethylbenzene	ND	mg/kg	0.0060	0.0028	1	06/06/25 19:05	06/07/25 06:02	100-41-4	2g
Hexachloro-1,3-butadiene	ND	mg/kg	0.012	0.0097	1	06/06/25 19:05	06/07/25 06:02	87-68-3	2g
2-Hexanone	ND	mg/kg	0.060	0.0057	1	06/06/25 19:05	06/07/25 06:02	591-78-6	2g
Isopropylbenzene (Cumene)	ND	mg/kg	0.0060	0.0020	1	06/06/25 19:05	06/07/25 06:02	98-82-8	2g
p-Isopropyltoluene	ND	mg/kg	0.0060	0.0029	1	06/06/25 19:05	06/07/25 06:02	99-87-6	2g
Methylene Chloride	ND	mg/kg	0.024	0.016	1	06/06/25 19:05	06/07/25 06:02	75-09-2	2g
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.060	0.0057	1	06/06/25 19:05	06/07/25 06:02	108-10-1	2g
Methyl-tert-butyl ether	ND	mg/kg	0.0060	0.0022	1	06/06/25 19:05	06/07/25 06:02	1634-04-4	2g
Naphthalene	ND	mg/kg	0.0060	0.0031	1	06/06/25 19:05	06/07/25 06:02	91-20-3	2g
n-Propylbenzene	ND	mg/kg	0.0060	0.0021	1	06/06/25 19:05	06/07/25 06:02	103-65-1	2g
Styrene	ND	mg/kg	0.0060	0.0016	1	06/06/25 19:05	06/07/25 06:02	100-42-5	2g
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0060	0.0023	1	06/06/25 19:05	06/07/25 06:02	630-20-6	2g
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0060	0.0016	1	06/06/25 19:05	06/07/25 06:02	79-34-5	2g
Tetrachloroethene	ND	mg/kg	0.0060	0.0019	1	06/06/25 19:05	06/07/25 06:02	127-18-4	2g
Toluene	ND	mg/kg	0.0060	0.0041	1	06/06/25 19:05	06/07/25 06:02	108-88-3	2g
1,2,3-Trichlorobenzene	ND	mg/kg	0.0060	0.0048	1	06/06/25 19:05	06/07/25 06:02	87-61-6	2g
1,2,4-Trichlorobenzene	ND	mg/kg	0.0060	0.0050	1	06/06/25 19:05	06/07/25 06:02	120-82-1	2g
1,1,1-Trichloroethane	ND	mg/kg	0.0060	0.0031	1	06/06/25 19:05	06/07/25 06:02	71-55-6	2g
1,1,2-Trichloroethane	ND	mg/kg	0.0060	0.0020	1	06/06/25 19:05	06/07/25 06:02	79-00-5	2g
Trichloroethene	ND	mg/kg	0.0060	0.0048	1	06/06/25 19:05	06/07/25 06:02	79-01-6	2g
Trichlorofluoromethane	ND	mg/kg	0.0060	0.0033	1	06/06/25 19:05	06/07/25 06:02	75-69-4	2g
1,2,3-Trichloropropane	ND	mg/kg	0.0060	0.0030	1	06/06/25 19:05	06/07/25 06:02	96-18-4	2g
1,2,4-Trimethylbenzene	ND	mg/kg	0.0060	0.0035	1	06/06/25 19:05	06/07/25 06:02	95-63-6	2g
1,3,5-Trimethylbenzene	ND	mg/kg	0.0060	0.0020	1	06/06/25 19:05	06/07/25 06:02	108-67-8	2g
Vinyl acetate	ND	mg/kg	0.060	0.012	1	06/06/25 19:05	06/07/25 06:02	108-05-4	2g
Vinyl chloride	ND	mg/kg	0.012	0.0030	1	06/06/25 19:05	06/07/25 06:02	75-01-4	2g
Xylene (Total)	ND	mg/kg	0.012	0.0034	1	06/06/25 19:05	06/07/25 06:02	1330-20-7	2g
m&p-Xylene	ND	mg/kg	0.012	0.0041	1	06/06/25 19:05	06/07/25 06:02	179601-23-1	2g
o-Xylene	ND	mg/kg	0.0060	0.0026	1	06/06/25 19:05	06/07/25 06:02	95-47-6	2g
Surrogates									
Toluene-d8 (S)	94	%	70-130		1	06/06/25 19:05	06/07/25 06:02	2037-26-5	2g
4-Bromofluorobenzene (S)	92	%	70-130		1	06/06/25 19:05	06/07/25 06:02	460-00-4	2g
1,2-Dichloroethane-d4 (S)	96	%	70-135		1	06/06/25 19:05	06/07/25 06:02	17060-07-0	2g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-4 **Lab ID: 92800079003** Collected: 06/03/25 10:00 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**2.6**	%	0.10	0.10	1		06/05/25 11:38		N2

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-4-C **Lab ID: 92800079004** Collected: 06/03/25 09:29 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050								
	Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	27.4	7.1	200	06/10/25 05:23	06/13/25 16:24	7440-36-0	1g,D3, N2
Arsenic	**3.9**	mg/kg	1.4	0.22	20	06/10/25 05:23	06/11/25 00:41	7440-38-2	1g
Beryllium	**0.30**	mg/kg	0.16	0.079	20	06/10/25 05:23	06/11/25 00:41	7440-41-7	1g
Cadmium	**5.6**	mg/kg	0.16	0.036	20	06/10/25 05:23	06/11/25 00:41	7440-43-9	1g
Chromium	**45.7**	mg/kg	1.4	0.78	20	06/10/25 05:23	06/11/25 00:41	7440-47-3	1g
Copper	**199**	mg/kg	2.7	0.70	20	06/10/25 05:23	06/11/25 00:41	7440-50-8	1g
Lead	**439**	mg/kg	1.4	0.50	20	06/10/25 05:23	06/11/25 00:41	7439-92-1	1g
Nickel	**45.0**	mg/kg	1.4	0.66	20	06/10/25 05:23	06/11/25 00:41	7440-02-0	1g
Selenium	**1.4**	mg/kg	1.4	0.70	20	06/10/25 05:23	06/11/25 00:41	7782-49-2	1g
Silver	**0.30**	mg/kg	0.16	0.052	20	06/10/25 05:23	06/11/25 00:41	7440-22-4	1g
Thallium	ND	mg/kg	1.4	0.24	20	06/10/25 05:23	06/11/25 00:41	7440-28-0	1g
Zinc	**1150**	mg/kg	54.7	10.7	20	06/10/25 05:23	06/11/25 00:41	7440-66-6	1g
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471								
	Pace Analytical Services - Ormond Beach								
Mercury	**0.76**	mg/kg	0.039	0.019	5	06/11/25 09:21	06/11/25 15:40	7439-97-6	
Percent Moisture	Analytical Method: ASTM D2974-87								
	Pace Analytical Services - Ormond Beach								
Percent Moisture	**13.5**	%	0.10	0.10	1		06/19/25 07:24		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-4-D **Lab ID: 92800079005** Collected: 06/03/25 09:35 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050								
	Pace Analytical Services - Ormond Beach								
Antimony	**25.4**	mg/kg	2.7	0.71	20	06/10/25 05:23	06/11/25 00:45	7440-36-0	1g,N2
Arsenic	**10.4**	mg/kg	1.4	0.21	20	06/10/25 05:23	06/11/25 00:45	7440-38-2	1g
Beryllium	**0.28**	mg/kg	0.16	0.079	20	06/10/25 05:23	06/11/25 00:45	7440-41-7	1g
Cadmium	**13.2**	mg/kg	0.16	0.035	20	06/10/25 05:23	06/11/25 00:45	7440-43-9	1g
Chromium	**184**	mg/kg	1.4	0.78	20	06/10/25 05:23	06/11/25 00:45	7440-47-3	1g
Copper	**826**	mg/kg	13.6	3.5	100	06/10/25 05:23	06/13/25 16:33	7440-50-8	1g
Lead	**2070**	mg/kg	6.8	2.5	100	06/10/25 05:23	06/13/25 16:33	7439-92-1	1g
Nickel	**91.0**	mg/kg	1.4	0.66	20	06/10/25 05:23	06/11/25 00:45	7440-02-0	1g
Selenium	ND	mg/kg	1.4	0.70	20	06/10/25 05:23	06/11/25 00:45	7782-49-2	1g
Silver	**5.1**	mg/kg	0.16	0.052	20	06/10/25 05:23	06/11/25 00:45	7440-22-4	1g
Thallium	ND	mg/kg	1.4	0.24	20	06/10/25 05:23	06/11/25 00:45	7440-28-0	1g
Zinc	**2790**	mg/kg	54.4	10.6	20	06/10/25 05:23	06/11/25 00:45	7440-66-6	1g
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471								
	Pace Analytical Services - Ormond Beach								
Mercury	**1.4**	mg/kg	0.050	0.025	5	06/11/25 09:21	06/11/25 15:42	7439-97-6	
Percent Moisture	Analytical Method: ASTM D2974-87								
	Pace Analytical Services - Ormond Beach								
Percent Moisture	**14.7**	%	0.10	0.10	1		06/19/25 07:24		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-2 **Lab ID: 92800079006** Collected: 06/03/25 11:10 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199								
	Pace Analytical Services - Charlotte								
Chromium, Hexavalent	**1.3**	mg/kg	1.2	0.20	1	06/05/25 10:05	06/06/25 17:07	18540-29-9	
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050								
	Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	2.5	0.66	20	06/10/25 09:30	06/13/25 11:09	7440-36-0	N2
Arsenic	**1.7**	mg/kg	1.3	0.20	20	06/10/25 09:30	06/13/25 11:09	7440-38-2	
Beryllium	**0.33**	mg/kg	0.15	0.074	20	06/10/25 09:30	06/13/25 11:09	7440-41-7	
Cadmium	ND	mg/kg	0.15	0.033	20	06/10/25 09:30	06/13/25 11:09	7440-43-9	
Chromium	**32.1**	mg/kg	1.3	0.73	20	06/10/25 09:30	06/13/25 11:09	7440-47-3	
Copper	**42.5**	mg/kg	2.5	0.65	20	06/10/25 09:30	06/13/25 11:09	7440-50-8	
Lead	**23.6**	mg/kg	1.3	0.46	20	06/10/25 09:30	06/13/25 11:09	7439-92-1	
Nickel	**15.8**	mg/kg	1.3	0.61	20	06/10/25 09:30	06/13/25 11:09	7440-02-0	
Selenium	**1.3**	mg/kg	1.3	0.65	20	06/10/25 09:30	06/13/25 11:09	7782-49-2	
Silver	ND	mg/kg	0.15	0.048	20	06/10/25 09:30	06/13/25 11:09	7440-22-4	
Thallium	ND	mg/kg	1.3	0.22	20	06/10/25 09:30	06/13/25 11:09	7440-28-0	
Zinc	ND	mg/kg	50.9	9.9	20	06/10/25 09:30	06/13/25 11:09	7440-66-6	
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471								
	Pace Analytical Services - Ormond Beach								
Mercury	ND	mg/kg	0.0098	0.0049	1	06/11/25 09:21	06/11/25 11:51	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546								
	Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.41	0.14	1	06/09/25 17:27	06/10/25 19:50	83-32-9	
Acenaphthylene	ND	mg/kg	0.41	0.14	1	06/09/25 17:27	06/10/25 19:50	208-96-8	
Aniline	ND	mg/kg	0.41	0.16	1	06/09/25 17:27	06/10/25 19:50	62-53-3	
Anthracene	ND	mg/kg	0.41	0.13	1	06/09/25 17:27	06/10/25 19:50	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.41	0.14	1	06/09/25 17:27	06/10/25 19:50	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.41	0.14	1	06/09/25 17:27	06/10/25 19:50	50-32-8	
Benzo(b)fluoranthene	ND	mg/kg	0.41	0.14	1	06/09/25 17:27	06/10/25 19:50	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.41	0.16	1	06/09/25 17:27	06/10/25 19:50	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.41	0.14	1	06/09/25 17:27	06/10/25 19:50	207-08-9	
Benzoic Acid	ND	mg/kg	2.0	0.88	1	06/09/25 17:27	06/10/25 19:50	65-85-0	
Benzyl alcohol	ND	mg/kg	0.82	0.31	1	06/09/25 17:27	06/10/25 19:50	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.41	0.16	1	06/09/25 17:27	06/10/25 19:50	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.41	0.17	1	06/09/25 17:27	06/10/25 19:50	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	0.82	0.29	1	06/09/25 17:27	06/10/25 19:50	59-50-7	
4-Chloroaniline	ND	mg/kg	0.82	0.32	1	06/09/25 17:27	06/10/25 19:50	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.41	0.17	1	06/09/25 17:27	06/10/25 19:50	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.41	0.15	1	06/09/25 17:27	06/10/25 19:50	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.41	0.16	1	06/09/25 17:27	06/10/25 19:50	91-58-7	
2-Chlorophenol	ND	mg/kg	0.41	0.15	1	06/09/25 17:27	06/10/25 19:50	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.41	0.15	1	06/09/25 17:27	06/10/25 19:50	7005-72-3	
Chrysene	ND	mg/kg	0.41	0.15	1	06/09/25 17:27	06/10/25 19:50	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-2 **Lab ID: 92800079006** Collected: 06/03/25 11:10 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.41	0.16	1	06/09/25 17:27	06/10/25 19:50	53-70-3	
Dibenzofuran	ND	mg/kg	0.41	0.15	1	06/09/25 17:27	06/10/25 19:50	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.41	0.15	1	06/09/25 17:27	06/10/25 19:50	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.41	0.14	1	06/09/25 17:27	06/10/25 19:50	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.41	0.16	1	06/09/25 17:27	06/10/25 19:50	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	0.82	0.28	1	06/09/25 17:27	06/10/25 19:50	91-94-1	L2
2,4-Dichlorophenol	ND	mg/kg	0.41	0.16	1	06/09/25 17:27	06/10/25 19:50	120-83-2	
Diethylphthalate	ND	mg/kg	0.41	0.15	1	06/09/25 17:27	06/10/25 19:50	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.41	0.17	1	06/09/25 17:27	06/10/25 19:50	105-67-9	
Dimethylphthalate	ND	mg/kg	0.41	0.15	1	06/09/25 17:27	06/10/25 19:50	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.41	0.14	1	06/09/25 17:27	06/10/25 19:50	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	0.82	0.38	1	06/09/25 17:27	06/10/25 19:50	534-52-1	v1
2,4-Dinitrophenol	ND	mg/kg	2.0	1.3	1	06/09/25 17:27	06/10/25 19:50	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.41	0.16	1	06/09/25 17:27	06/10/25 19:50	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.41	0.15	1	06/09/25 17:27	06/10/25 19:50	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.41	0.16	1	06/09/25 17:27	06/10/25 19:50	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.41	0.16	1	06/09/25 17:27	06/10/25 19:50	117-81-7	
Fluoranthene	ND	mg/kg	0.41	0.14	1	06/09/25 17:27	06/10/25 19:50	206-44-0	
Fluorene	ND	mg/kg	0.41	0.14	1	06/09/25 17:27	06/10/25 19:50	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.41	0.18	1	06/09/25 17:27	06/10/25 19:50	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.41	0.16	1	06/09/25 17:27	06/10/25 19:50	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.41	0.23	1	06/09/25 17:27	06/10/25 19:50	77-47-4	
Hexachloroethane	ND	mg/kg	0.41	0.16	1	06/09/25 17:27	06/10/25 19:50	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.41	0.16	1	06/09/25 17:27	06/10/25 19:50	193-39-5	
Isophorone	ND	mg/kg	0.41	0.18	1	06/09/25 17:27	06/10/25 19:50	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.41	0.14	1	06/09/25 17:27	06/10/25 19:50	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.41	0.16	1	06/09/25 17:27	06/10/25 19:50	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.41	0.17	1	06/09/25 17:27	06/10/25 19:50	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.41	0.16	1	06/09/25 17:27	06/10/25 19:50	15831-10-4	
Naphthalene	ND	mg/kg	0.41	0.14	1	06/09/25 17:27	06/10/25 19:50	91-20-3	
2-Nitroaniline	ND	mg/kg	2.0	0.33	1	06/09/25 17:27	06/10/25 19:50	88-74-4	
3-Nitroaniline	ND	mg/kg	2.0	0.32	1	06/09/25 17:27	06/10/25 19:50	99-09-2	
4-Nitroaniline	ND	mg/kg	0.82	0.31	1	06/09/25 17:27	06/10/25 19:50	100-01-6	
Nitrobenzene	ND	mg/kg	0.41	0.19	1	06/09/25 17:27	06/10/25 19:50	98-95-3	
2-Nitrophenol	ND	mg/kg	0.41	0.18	1	06/09/25 17:27	06/10/25 19:50	88-75-5	
4-Nitrophenol	ND	mg/kg	2.0	0.79	1	06/09/25 17:27	06/10/25 19:50	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.41	0.14	1	06/09/25 17:27	06/10/25 19:50	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.41	0.15	1	06/09/25 17:27	06/10/25 19:50	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.41	0.14	1	06/09/25 17:27	06/10/25 19:50	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.41	0.19	1	06/09/25 17:27	06/10/25 19:50	108-60-1	
Pentachlorophenol	ND	mg/kg	0.82	0.40	1	06/09/25 17:27	06/10/25 19:50	87-86-5	
Phenanthrene	ND	mg/kg	0.41	0.13	1	06/09/25 17:27	06/10/25 19:50	85-01-8	
Phenol	ND	mg/kg	0.41	0.18	1	06/09/25 17:27	06/10/25 19:50	108-95-2	
Pyrene	ND	mg/kg	0.41	0.17	1	06/09/25 17:27	06/10/25 19:50	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-2 **Lab ID: 92800079006** Collected: 06/03/25 11:10 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.41	0.13	1	06/09/25 17:27	06/10/25 19:50	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.41	0.16	1	06/09/25 17:27	06/10/25 19:50	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.41	0.19	1	06/09/25 17:27	06/10/25 19:50	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.41	0.17	1	06/09/25 17:27	06/10/25 19:50	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	37	%	10-130		1	06/09/25 17:27	06/10/25 19:50	4165-60-0	
2-Fluorobiphenyl (S)	36	%	10-130		1	06/09/25 17:27	06/10/25 19:50	321-60-8	
Terphenyl-d14 (S)	56	%	10-130		1	06/09/25 17:27	06/10/25 19:50	1718-51-0	
Phenol-d6 (S)	35	%	10-130		1	06/09/25 17:27	06/10/25 19:50	13127-88-3	
2-Fluorophenol (S)	31	%	10-130		1	06/09/25 17:27	06/10/25 19:50	367-12-4	
2,4,6-Tribromophenol (S)	47	%	10-130		1	06/09/25 17:27	06/10/25 19:50	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.12	0.039	1	06/06/25 19:05	06/07/25 06:26	67-64-1	2g
Benzene	ND	mg/kg	0.0060	0.0024	1	06/06/25 19:05	06/07/25 06:26	71-43-2	2g
Bromobenzene	ND	mg/kg	0.0060	0.0020	1	06/06/25 19:05	06/07/25 06:26	108-86-1	2g
Bromochloromethane	ND	mg/kg	0.0060	0.0018	1	06/06/25 19:05	06/07/25 06:26	74-97-5	2g
Bromodichloromethane	ND	mg/kg	0.0060	0.0023	1	06/06/25 19:05	06/07/25 06:26	75-27-4	2g
Bromoform	ND	mg/kg	0.0060	0.0021	1	06/06/25 19:05	06/07/25 06:26	75-25-2	2g
Bromomethane	ND	mg/kg	0.024	0.019	1	06/06/25 19:05	06/07/25 06:26	74-83-9	2g
2-Butanone (MEK)	ND	mg/kg	0.12	0.029	1	06/06/25 19:05	06/07/25 06:26	78-93-3	2g
n-Butylbenzene	ND	mg/kg	0.0060	0.0038	1	06/06/25 19:05	06/07/25 06:26	104-51-8	2g
sec-Butylbenzene	ND	mg/kg	0.0060	0.0027	1	06/06/25 19:05	06/07/25 06:26	135-98-8	2g
tert-Butylbenzene	ND	mg/kg	0.0060	0.0022	1	06/06/25 19:05	06/07/25 06:26	98-06-6	2g
Carbon tetrachloride	ND	mg/kg	0.0060	0.0023	1	06/06/25 19:05	06/07/25 06:26	56-23-5	2g
Chlorobenzene	ND	mg/kg	0.0060	0.0035	1	06/06/25 19:05	06/07/25 06:26	108-90-7	2g
Chloroethane	ND	mg/kg	0.012	0.0047	1	06/06/25 19:05	06/07/25 06:26	75-00-3	2g
Chloroform	ND	mg/kg	0.0060	0.0051	1	06/06/25 19:05	06/07/25 06:26	67-66-3	2g
Chloromethane	ND	mg/kg	0.012	0.0051	1	06/06/25 19:05	06/07/25 06:26	74-87-3	2g
2-Chlorotoluene	ND	mg/kg	0.0060	0.0021	1	06/06/25 19:05	06/07/25 06:26	95-49-8	2g
4-Chlorotoluene	ND	mg/kg	0.0060	0.0034	1	06/06/25 19:05	06/07/25 06:26	106-43-4	2g
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0060	0.0023	1	06/06/25 19:05	06/07/25 06:26	96-12-8	2g
Dibromochloromethane	ND	mg/kg	0.0060	0.0034	1	06/06/25 19:05	06/07/25 06:26	124-48-1	2g
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0060	0.0027	1	06/06/25 19:05	06/07/25 06:26	106-93-4	2g
Dibromomethane	ND	mg/kg	0.0060	0.0013	1	06/06/25 19:05	06/07/25 06:26	74-95-3	2g
1,2-Dichlorobenzene	ND	mg/kg	0.0060	0.0022	1	06/06/25 19:05	06/07/25 06:26	95-50-1	2g
1,3-Dichlorobenzene	ND	mg/kg	0.0060	0.0019	1	06/06/25 19:05	06/07/25 06:26	541-73-1	2g
1,4-Dichlorobenzene	ND	mg/kg	0.0060	0.0016	1	06/06/25 19:05	06/07/25 06:26	106-46-7	2g
Dichlorodifluoromethane	ND	mg/kg	0.012	0.0062	1	06/06/25 19:05	06/07/25 06:26	75-71-8	2g
1,1-Dichloroethane	ND	mg/kg	0.0060	0.0025	1	06/06/25 19:05	06/07/25 06:26	75-34-3	2g
1,2-Dichloroethane	ND	mg/kg	0.0060	0.0040	1	06/06/25 19:05	06/07/25 06:26	107-06-2	2g
1,1-Dichloroethene	ND	mg/kg	0.0060	0.0025	1	06/06/25 19:05	06/07/25 06:26	75-35-4	2g
cis-1,2-Dichloroethene	ND	mg/kg	0.0060	0.0021	1	06/06/25 19:05	06/07/25 06:26	156-59-2	2g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-2 **Lab ID: 92800079006** Collected: 06/03/25 11:10 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0060	0.0051	1	06/06/25 19:05	06/07/25 06:26	156-60-5	2g
1,2-Dichloropropane	ND	mg/kg	0.0060	0.0018	1	06/06/25 19:05	06/07/25 06:26	78-87-5	2g
1,3-Dichloropropane	ND	mg/kg	0.0060	0.0019	1	06/06/25 19:05	06/07/25 06:26	142-28-9	2g
2,2-Dichloropropane	ND	mg/kg	0.0060	0.0046	1	06/06/25 19:05	06/07/25 06:26	594-20-7	2g
1,1-Dichloropropene	ND	mg/kg	0.0060	0.0029	1	06/06/25 19:05	06/07/25 06:26	563-58-6	2g
cis-1,3-Dichloropropene	ND	mg/kg	0.0060	0.0016	1	06/06/25 19:05	06/07/25 06:26	10061-01-5	2g
trans-1,3-Dichloropropene	ND	mg/kg	0.0060	0.0021	1	06/06/25 19:05	06/07/25 06:26	10061-02-6	2g
Diisopropyl ether	ND	mg/kg	0.0060	0.0016	1	06/06/25 19:05	06/07/25 06:26	108-20-3	2g
Ethylbenzene	ND	mg/kg	0.0060	0.0028	1	06/06/25 19:05	06/07/25 06:26	100-41-4	2g
Hexachloro-1,3-butadiene	ND	mg/kg	0.012	0.0099	1	06/06/25 19:05	06/07/25 06:26	87-68-3	2g
2-Hexanone	ND	mg/kg	0.060	0.0058	1	06/06/25 19:05	06/07/25 06:26	591-78-6	2g
Isopropylbenzene (Cumene)	ND	mg/kg	0.0060	0.0021	1	06/06/25 19:05	06/07/25 06:26	98-82-8	2g
p-Isopropyltoluene	ND	mg/kg	0.0060	0.0030	1	06/06/25 19:05	06/07/25 06:26	99-87-6	2g
Methylene Chloride	ND	mg/kg	0.024	0.017	1	06/06/25 19:05	06/07/25 06:26	75-09-2	2g
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.060	0.0058	1	06/06/25 19:05	06/07/25 06:26	108-10-1	2g
Methyl-tert-butyl ether	ND	mg/kg	0.0060	0.0023	1	06/06/25 19:05	06/07/25 06:26	1634-04-4	2g
Naphthalene	ND	mg/kg	0.0060	0.0032	1	06/06/25 19:05	06/07/25 06:26	91-20-3	2g
n-Propylbenzene	ND	mg/kg	0.0060	0.0022	1	06/06/25 19:05	06/07/25 06:26	103-65-1	2g
Styrene	ND	mg/kg	0.0060	0.0016	1	06/06/25 19:05	06/07/25 06:26	100-42-5	2g
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0060	0.0023	1	06/06/25 19:05	06/07/25 06:26	630-20-6	2g
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0060	0.0016	1	06/06/25 19:05	06/07/25 06:26	79-34-5	2g
Tetrachloroethene	ND	mg/kg	0.0060	0.0019	1	06/06/25 19:05	06/07/25 06:26	127-18-4	2g
Toluene	ND	mg/kg	0.0060	0.0042	1	06/06/25 19:05	06/07/25 06:26	108-88-3	2g
1,2,3-Trichlorobenzene	ND	mg/kg	0.0060	0.0049	1	06/06/25 19:05	06/07/25 06:26	87-61-6	2g
1,2,4-Trichlorobenzene	ND	mg/kg	0.0060	0.0051	1	06/06/25 19:05	06/07/25 06:26	120-82-1	2g
1,1,1-Trichloroethane	ND	mg/kg	0.0060	0.0031	1	06/06/25 19:05	06/07/25 06:26	71-55-6	2g
1,1,2-Trichloroethane	ND	mg/kg	0.0060	0.0020	1	06/06/25 19:05	06/07/25 06:26	79-00-5	2g
Trichloroethene	ND	mg/kg	0.0060	0.0049	1	06/06/25 19:05	06/07/25 06:26	79-01-6	2g
Trichlorofluoromethane	ND	mg/kg	0.0060	0.0033	1	06/06/25 19:05	06/07/25 06:26	75-69-4	2g
1,2,3-Trichloropropane	ND	mg/kg	0.0060	0.0031	1	06/06/25 19:05	06/07/25 06:26	96-18-4	2g
1,2,4-Trimethylbenzene	ND	mg/kg	0.0060	0.0036	1	06/06/25 19:05	06/07/25 06:26	95-63-6	2g
1,3,5-Trimethylbenzene	ND	mg/kg	0.0060	0.0020	1	06/06/25 19:05	06/07/25 06:26	108-67-8	2g
Vinyl acetate	ND	mg/kg	0.060	0.012	1	06/06/25 19:05	06/07/25 06:26	108-05-4	2g
Vinyl chloride	ND	mg/kg	0.012	0.0031	1	06/06/25 19:05	06/07/25 06:26	75-01-4	2g
Xylene (Total)	ND	mg/kg	0.012	0.0034	1	06/06/25 19:05	06/07/25 06:26	1330-20-7	2g
m&p-Xylene	ND	mg/kg	0.012	0.0041	1	06/06/25 19:05	06/07/25 06:26	179601-23-1	2g
o-Xylene	ND	mg/kg	0.0060	0.0027	1	06/06/25 19:05	06/07/25 06:26	95-47-6	2g
Surrogates									
Toluene-d8 (S)	94	%	70-130		1	06/06/25 19:05	06/07/25 06:26	2037-26-5	2g
4-Bromofluorobenzene (S)	94	%	70-130		1	06/06/25 19:05	06/07/25 06:26	460-00-4	2g
1,2-Dichloroethane-d4 (S)	96	%	70-135		1	06/06/25 19:05	06/07/25 06:26	17060-07-0	2g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-2 **Lab ID: 92800079006** Collected: 06/03/25 11:10 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**18.8**	%	0.10	0.10	1		06/05/25 11:38		N2

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-3 **Lab ID: 92800079007** Collected: 06/03/25 11:35 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199 Pace Analytical Services - Charlotte								
Chromium, Hexavalent	**0.72J**	mg/kg	1.4	0.23	1	06/05/25 10:05	06/06/25 17:24	18540-29-9	
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050 Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	2.9	0.74	20	06/10/25 09:30	06/13/25 11:11	7440-36-0	N2
Arsenic	**4.4**	mg/kg	1.4	0.23	20	06/10/25 09:30	06/13/25 11:11	7440-38-2	
Beryllium	**0.49**	mg/kg	0.17	0.083	20	06/10/25 09:30	06/13/25 11:11	7440-41-7	
Cadmium	**5.2**	mg/kg	0.17	0.037	20	06/10/25 09:30	06/13/25 11:11	7440-43-9	
Chromium	**60.1**	mg/kg	1.4	0.82	20	06/10/25 09:30	06/13/25 11:11	7440-47-3	
Copper	**103**	mg/kg	2.9	0.73	20	06/10/25 09:30	06/13/25 11:11	7440-50-8	
Lead	**427**	mg/kg	1.4	0.52	20	06/10/25 09:30	06/13/25 11:11	7439-92-1	
Nickel	**51.6**	mg/kg	1.4	0.69	20	06/10/25 09:30	06/13/25 11:11	7440-02-0	
Selenium	**2.1**	mg/kg	1.4	0.74	20	06/10/25 09:30	06/13/25 11:11	7782-49-2	
Silver	ND	mg/kg	0.17	0.054	20	06/10/25 09:30	06/13/25 11:11	7440-22-4	
Thallium	ND	mg/kg	1.4	0.25	20	06/10/25 09:30	06/13/25 11:11	7440-28-0	
Zinc	**1940**	mg/kg	57.3	11.2	20	06/10/25 09:30	06/13/25 11:11	7440-66-6	
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471 Pace Analytical Services - Ormond Beach								
Mercury	**0.076**	mg/kg	0.0097	0.0048	1	06/11/25 09:21	06/11/25 11:53	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.46	0.16	1	06/09/25 17:27	06/10/25 20:17	83-32-9	
Acenaphthylene	ND	mg/kg	0.46	0.16	1	06/09/25 17:27	06/10/25 20:17	208-96-8	
Aniline	ND	mg/kg	0.46	0.18	1	06/09/25 17:27	06/10/25 20:17	62-53-3	
Anthracene	ND	mg/kg	0.46	0.15	1	06/09/25 17:27	06/10/25 20:17	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.46	0.15	1	06/09/25 17:27	06/10/25 20:17	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.46	0.16	1	06/09/25 17:27	06/10/25 20:17	50-32-8	
Benzo(b)fluoranthene	ND	mg/kg	0.46	0.15	1	06/09/25 17:27	06/10/25 20:17	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.46	0.18	1	06/09/25 17:27	06/10/25 20:17	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.46	0.16	1	06/09/25 17:27	06/10/25 20:17	207-08-9	
Benzoic Acid	ND	mg/kg	2.3	0.98	1	06/09/25 17:27	06/10/25 20:17	65-85-0	
Benzyl alcohol	ND	mg/kg	0.91	0.35	1	06/09/25 17:27	06/10/25 20:17	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.46	0.18	1	06/09/25 17:27	06/10/25 20:17	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.46	0.19	1	06/09/25 17:27	06/10/25 20:17	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	0.91	0.32	1	06/09/25 17:27	06/10/25 20:17	59-50-7	
4-Chloroaniline	ND	mg/kg	0.91	0.36	1	06/09/25 17:27	06/10/25 20:17	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.46	0.19	1	06/09/25 17:27	06/10/25 20:17	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.46	0.17	1	06/09/25 17:27	06/10/25 20:17	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.46	0.18	1	06/09/25 17:27	06/10/25 20:17	91-58-7	
2-Chlorophenol	ND	mg/kg	0.46	0.17	1	06/09/25 17:27	06/10/25 20:17	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.46	0.17	1	06/09/25 17:27	06/10/25 20:17	7005-72-3	
Chrysene	ND	mg/kg	0.46	0.17	1	06/09/25 17:27	06/10/25 20:17	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-3 **Lab ID: 92800079007** Collected: 06/03/25 11:35 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.46	0.18	1	06/09/25 17:27	06/10/25 20:17	53-70-3	
Dibenzofuran	ND	mg/kg	0.46	0.16	1	06/09/25 17:27	06/10/25 20:17	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.46	0.16	1	06/09/25 17:27	06/10/25 20:17	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.46	0.16	1	06/09/25 17:27	06/10/25 20:17	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.46	0.17	1	06/09/25 17:27	06/10/25 20:17	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	0.91	0.31	1	06/09/25 17:27	06/10/25 20:17	91-94-1	L2
2,4-Dichlorophenol	ND	mg/kg	0.46	0.18	1	06/09/25 17:27	06/10/25 20:17	120-83-2	
Diethylphthalate	ND	mg/kg	0.46	0.17	1	06/09/25 17:27	06/10/25 20:17	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.46	0.19	1	06/09/25 17:27	06/10/25 20:17	105-67-9	
Dimethylphthalate	ND	mg/kg	0.46	0.17	1	06/09/25 17:27	06/10/25 20:17	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.46	0.15	1	06/09/25 17:27	06/10/25 20:17	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	0.91	0.43	1	06/09/25 17:27	06/10/25 20:17	534-52-1	v1
2,4-Dinitrophenol	ND	mg/kg	2.3	1.4	1	06/09/25 17:27	06/10/25 20:17	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.46	0.18	1	06/09/25 17:27	06/10/25 20:17	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.46	0.17	1	06/09/25 17:27	06/10/25 20:17	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.46	0.18	1	06/09/25 17:27	06/10/25 20:17	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.46	0.18	1	06/09/25 17:27	06/10/25 20:17	117-81-7	
Fluoranthene	**0.16J**	mg/kg	0.46	0.16	1	06/09/25 17:27	06/10/25 20:17	206-44-0	
Fluorene	ND	mg/kg	0.46	0.16	1	06/09/25 17:27	06/10/25 20:17	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.46	0.20	1	06/09/25 17:27	06/10/25 20:17	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.46	0.18	1	06/09/25 17:27	06/10/25 20:17	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.46	0.26	1	06/09/25 17:27	06/10/25 20:17	77-47-4	
Hexachloroethane	ND	mg/kg	0.46	0.17	1	06/09/25 17:27	06/10/25 20:17	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.46	0.18	1	06/09/25 17:27	06/10/25 20:17	193-39-5	
Isophorone	ND	mg/kg	0.46	0.20	1	06/09/25 17:27	06/10/25 20:17	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.46	0.16	1	06/09/25 17:27	06/10/25 20:17	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.46	0.18	1	06/09/25 17:27	06/10/25 20:17	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.46	0.19	1	06/09/25 17:27	06/10/25 20:17	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.46	0.18	1	06/09/25 17:27	06/10/25 20:17	15831-10-4	
Naphthalene	ND	mg/kg	0.46	0.16	1	06/09/25 17:27	06/10/25 20:17	91-20-3	
2-Nitroaniline	ND	mg/kg	2.3	0.37	1	06/09/25 17:27	06/10/25 20:17	88-74-4	
3-Nitroaniline	ND	mg/kg	2.3	0.36	1	06/09/25 17:27	06/10/25 20:17	99-09-2	
4-Nitroaniline	ND	mg/kg	0.91	0.35	1	06/09/25 17:27	06/10/25 20:17	100-01-6	
Nitrobenzene	ND	mg/kg	0.46	0.21	1	06/09/25 17:27	06/10/25 20:17	98-95-3	
2-Nitrophenol	ND	mg/kg	0.46	0.20	1	06/09/25 17:27	06/10/25 20:17	88-75-5	
4-Nitrophenol	ND	mg/kg	2.3	0.88	1	06/09/25 17:27	06/10/25 20:17	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.46	0.15	1	06/09/25 17:27	06/10/25 20:17	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.46	0.17	1	06/09/25 17:27	06/10/25 20:17	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.46	0.16	1	06/09/25 17:27	06/10/25 20:17	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.46	0.22	1	06/09/25 17:27	06/10/25 20:17	108-60-1	
Pentachlorophenol	ND	mg/kg	0.91	0.45	1	06/09/25 17:27	06/10/25 20:17	87-86-5	
Phenanthrene	ND	mg/kg	0.46	0.15	1	06/09/25 17:27	06/10/25 20:17	85-01-8	
Phenol	ND	mg/kg	0.46	0.20	1	06/09/25 17:27	06/10/25 20:17	108-95-2	
Pyrene	ND	mg/kg	0.46	0.19	1	06/09/25 17:27	06/10/25 20:17	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-3 **Lab ID: 92800079007** Collected: 06/03/25 11:35 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.46	0.14	1	06/09/25 17:27	06/10/25 20:17	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.46	0.18	1	06/09/25 17:27	06/10/25 20:17	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.46	0.21	1	06/09/25 17:27	06/10/25 20:17	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.46	0.19	1	06/09/25 17:27	06/10/25 20:17	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	43	%	10-130		1	06/09/25 17:27	06/10/25 20:17	4165-60-0	
2-Fluorobiphenyl (S)	42	%	10-130		1	06/09/25 17:27	06/10/25 20:17	321-60-8	
Terphenyl-d14 (S)	48	%	10-130		1	06/09/25 17:27	06/10/25 20:17	1718-51-0	
Phenol-d6 (S)	41	%	10-130		1	06/09/25 17:27	06/10/25 20:17	13127-88-3	
2-Fluorophenol (S)	39	%	10-130		1	06/09/25 17:27	06/10/25 20:17	367-12-4	
2,4,6-Tribromophenol (S)	49	%	10-130		1	06/09/25 17:27	06/10/25 20:17	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.16	0.051	1	06/06/25 19:22	06/07/25 03:31	67-64-1	
Benzene	ND	mg/kg	0.0080	0.0032	1	06/06/25 19:22	06/07/25 03:31	71-43-2	
Bromobenzene	ND	mg/kg	0.0080	0.0026	1	06/06/25 19:22	06/07/25 03:31	108-86-1	
Bromochloromethane	ND	mg/kg	0.0080	0.0024	1	06/06/25 19:22	06/07/25 03:31	74-97-5	
Bromodichloromethane	ND	mg/kg	0.0080	0.0031	1	06/06/25 19:22	06/07/25 03:31	75-27-4	
Bromoform	ND	mg/kg	0.0080	0.0028	1	06/06/25 19:22	06/07/25 03:31	75-25-2	
Bromomethane	ND	mg/kg	0.032	0.025	1	06/06/25 19:22	06/07/25 03:31	74-83-9	
2-Butanone (MEK)	**0.13J**	mg/kg	0.16	0.038	1	06/06/25 19:22	06/07/25 03:31	78-93-3	
n-Butylbenzene	ND	mg/kg	0.0080	0.0050	1	06/06/25 19:22	06/07/25 03:31	104-51-8	
sec-Butylbenzene	ND	mg/kg	0.0080	0.0035	1	06/06/25 19:22	06/07/25 03:31	135-98-8	
tert-Butylbenzene	ND	mg/kg	0.0080	0.0028	1	06/06/25 19:22	06/07/25 03:31	98-06-6	
Carbon tetrachloride	ND	mg/kg	0.0080	0.0030	1	06/06/25 19:22	06/07/25 03:31	56-23-5	
Chlorobenzene	ND	mg/kg	0.0080	0.0046	1	06/06/25 19:22	06/07/25 03:31	108-90-7	
Chloroethane	ND	mg/kg	0.016	0.0062	1	06/06/25 19:22	06/07/25 03:31	75-00-3	
Chloroform	ND	mg/kg	0.0080	0.0067	1	06/06/25 19:22	06/07/25 03:31	67-66-3	
Chloromethane	ND	mg/kg	0.016	0.0067	1	06/06/25 19:22	06/07/25 03:31	74-87-3	
2-Chlorotoluene	ND	mg/kg	0.0080	0.0028	1	06/06/25 19:22	06/07/25 03:31	95-49-8	
4-Chlorotoluene	ND	mg/kg	0.0080	0.0044	1	06/06/25 19:22	06/07/25 03:31	106-43-4	
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0080	0.0031	1	06/06/25 19:22	06/07/25 03:31	96-12-8	
Dibromochloromethane	ND	mg/kg	0.0080	0.0045	1	06/06/25 19:22	06/07/25 03:31	124-48-1	
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0080	0.0035	1	06/06/25 19:22	06/07/25 03:31	106-93-4	
Dibromomethane	ND	mg/kg	0.0080	0.0017	1	06/06/25 19:22	06/07/25 03:31	74-95-3	
1,2-Dichlorobenzene	ND	mg/kg	0.0080	0.0029	1	06/06/25 19:22	06/07/25 03:31	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.0080	0.0025	1	06/06/25 19:22	06/07/25 03:31	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.0080	0.0021	1	06/06/25 19:22	06/07/25 03:31	106-46-7	
Dichlorodifluoromethane	ND	mg/kg	0.016	0.0081	1	06/06/25 19:22	06/07/25 03:31	75-71-8	
1,1-Dichloroethane	ND	mg/kg	0.0080	0.0033	1	06/06/25 19:22	06/07/25 03:31	75-34-3	
1,2-Dichloroethane	ND	mg/kg	0.0080	0.0053	1	06/06/25 19:22	06/07/25 03:31	107-06-2	
1,1-Dichloroethene	ND	mg/kg	0.0080	0.0033	1	06/06/25 19:22	06/07/25 03:31	75-35-4	
cis-1,2-Dichloroethene	ND	mg/kg	0.0080	0.0027	1	06/06/25 19:22	06/07/25 03:31	156-59-2	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-3 **Lab ID: 92800079007** Collected: 06/03/25 11:35 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0080	0.0068	1	06/06/25 19:22	06/07/25 03:31	156-60-5	
1,2-Dichloropropane	ND	mg/kg	0.0080	0.0024	1	06/06/25 19:22	06/07/25 03:31	78-87-5	
1,3-Dichloropropane	ND	mg/kg	0.0080	0.0025	1	06/06/25 19:22	06/07/25 03:31	142-28-9	
2,2-Dichloropropane	ND	mg/kg	0.0080	0.0061	1	06/06/25 19:22	06/07/25 03:31	594-20-7	
1,1-Dichloropropene	ND	mg/kg	0.0080	0.0038	1	06/06/25 19:22	06/07/25 03:31	563-58-6	
cis-1,3-Dichloropropene	ND	mg/kg	0.0080	0.0022	1	06/06/25 19:22	06/07/25 03:31	10061-01-5	
trans-1,3-Dichloropropene	ND	mg/kg	0.0080	0.0027	1	06/06/25 19:22	06/07/25 03:31	10061-02-6	
Diisopropyl ether	ND	mg/kg	0.0080	0.0022	1	06/06/25 19:22	06/07/25 03:31	108-20-3	
Ethylbenzene	ND	mg/kg	0.0080	0.0037	1	06/06/25 19:22	06/07/25 03:31	100-41-4	
Hexachloro-1,3-butadiene	ND	mg/kg	0.016	0.013	1	06/06/25 19:22	06/07/25 03:31	87-68-3	
2-Hexanone	ND	mg/kg	0.080	0.0077	1	06/06/25 19:22	06/07/25 03:31	591-78-6	
Isopropylbenzene (Cumene)	ND	mg/kg	0.0080	0.0027	1	06/06/25 19:22	06/07/25 03:31	98-82-8	
p-Isopropyltoluene	ND	mg/kg	0.0080	0.0039	1	06/06/25 19:22	06/07/25 03:31	99-87-6	
Methylene Chloride	ND	mg/kg	0.032	0.022	1	06/06/25 19:22	06/07/25 03:31	75-09-2	
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.080	0.0077	1	06/06/25 19:22	06/07/25 03:31	108-10-1	
Methyl-tert-butyl ether	ND	mg/kg	0.0080	0.0030	1	06/06/25 19:22	06/07/25 03:31	1634-04-4	
Naphthalene	ND	mg/kg	0.0080	0.0042	1	06/06/25 19:22	06/07/25 03:31	91-20-3	
n-Propylbenzene	ND	mg/kg	0.0080	0.0028	1	06/06/25 19:22	06/07/25 03:31	103-65-1	
Styrene	ND	mg/kg	0.0080	0.0021	1	06/06/25 19:22	06/07/25 03:31	100-42-5	
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0080	0.0031	1	06/06/25 19:22	06/07/25 03:31	630-20-6	
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0080	0.0021	1	06/06/25 19:22	06/07/25 03:31	79-34-5	
Tetrachloroethene	ND	mg/kg	0.0080	0.0025	1	06/06/25 19:22	06/07/25 03:31	127-18-4	
Toluene	ND	mg/kg	0.0080	0.0055	1	06/06/25 19:22	06/07/25 03:31	108-88-3	
1,2,3-Trichlorobenzene	ND	mg/kg	0.0080	0.0065	1	06/06/25 19:22	06/07/25 03:31	87-61-6	
1,2,4-Trichlorobenzene	ND	mg/kg	0.0080	0.0067	1	06/06/25 19:22	06/07/25 03:31	120-82-1	
1,1,1-Trichloroethane	ND	mg/kg	0.0080	0.0042	1	06/06/25 19:22	06/07/25 03:31	71-55-6	
1,1,2-Trichloroethane	ND	mg/kg	0.0080	0.0027	1	06/06/25 19:22	06/07/25 03:31	79-00-5	
Trichloroethene	ND	mg/kg	0.0080	0.0064	1	06/06/25 19:22	06/07/25 03:31	79-01-6	
Trichlorofluoromethane	ND	mg/kg	0.0080	0.0044	1	06/06/25 19:22	06/07/25 03:31	75-69-4	
1,2,3-Trichloropropane	ND	mg/kg	0.0080	0.0040	1	06/06/25 19:22	06/07/25 03:31	96-18-4	
1,2,4-Trimethylbenzene	ND	mg/kg	0.0080	0.0047	1	06/06/25 19:22	06/07/25 03:31	95-63-6	
1,3,5-Trimethylbenzene	ND	mg/kg	0.0080	0.0027	1	06/06/25 19:22	06/07/25 03:31	108-67-8	
Vinyl acetate	ND	mg/kg	0.080	0.016	1	06/06/25 19:22	06/07/25 03:31	108-05-4	
Vinyl chloride	ND	mg/kg	0.016	0.0041	1	06/06/25 19:22	06/07/25 03:31	75-01-4	
Xylene (Total)	ND	mg/kg	0.016	0.0046	1	06/06/25 19:22	06/07/25 03:31	1330-20-7	
m&p-Xylene	ND	mg/kg	0.016	0.0055	1	06/06/25 19:22	06/07/25 03:31	179601-23-1	
o-Xylene	ND	mg/kg	0.0080	0.0035	1	06/06/25 19:22	06/07/25 03:31	95-47-6	
Surrogates									
Toluene-d8 (S)	98	%	70-130		1	06/06/25 19:22	06/07/25 03:31	2037-26-5	
4-Bromofluorobenzene (S)	99	%	70-130		1	06/06/25 19:22	06/07/25 03:31	460-00-4	
1,2-Dichloroethane-d4 (S)	105	%	70-135		1	06/06/25 19:22	06/07/25 03:31	17060-07-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-3 **Lab ID: 92800079007** Collected: 06/03/25 11:35 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**28.0**	%	0.10	0.10	1		06/05/25 11:38		N2

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-6 **Lab ID: 92800079008** Collected: 06/03/25 13:35 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199 Pace Analytical Services - Charlotte								
Chromium, Hexavalent	**0.81J**	mg/kg	1.1	0.19	1	06/05/25 10:05	06/06/25 17:42	18540-29-9	
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050 Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	2.8	0.72	20	06/10/25 05:23	06/11/25 00:49	7440-36-0	1g,N2
Arsenic	**3.6**	mg/kg	1.4	0.22	20	06/10/25 05:23	06/11/25 00:49	7440-38-2	1g
Beryllium	**0.19**	mg/kg	0.17	0.080	20	06/10/25 05:23	06/11/25 00:49	7440-41-7	1g
Cadmium	**5.7**	mg/kg	0.17	0.036	20	06/10/25 05:23	06/11/25 00:49	7440-43-9	1g
Chromium	**29.7**	mg/kg	1.4	0.79	20	06/10/25 05:23	06/11/25 00:49	7440-47-3	1g
Copper	**148**	mg/kg	2.8	0.71	20	06/10/25 05:23	06/11/25 00:49	7440-50-8	1g
Lead	**331**	mg/kg	1.4	0.50	20	06/10/25 05:23	06/11/25 00:49	7439-92-1	1g
Nickel	**33.1**	mg/kg	1.4	0.67	20	06/10/25 05:23	06/11/25 00:49	7440-02-0	1g
Selenium	ND	mg/kg	1.4	0.71	20	06/10/25 05:23	06/11/25 00:49	7782-49-2	1g
Silver	**0.40**	mg/kg	0.17	0.053	20	06/10/25 05:23	06/11/25 00:49	7440-22-4	1g
Thallium	ND	mg/kg	1.4	0.24	20	06/10/25 05:23	06/11/25 00:49	7440-28-0	1g
Zinc	**1260**	mg/kg	55.4	10.8	20	06/10/25 05:23	06/11/25 00:49	7440-66-6	1g
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471 Pace Analytical Services - Ormond Beach								
Mercury	**0.15**	mg/kg	0.0097	0.0049	1	06/11/25 09:21	06/11/25 11:55	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.39	0.14	1	06/09/25 17:27	06/10/25 20:44	83-32-9	
Acenaphthylene	ND	mg/kg	0.39	0.14	1	06/09/25 17:27	06/10/25 20:44	208-96-8	
Aniline	ND	mg/kg	0.39	0.15	1	06/09/25 17:27	06/10/25 20:44	62-53-3	
Anthracene	ND	mg/kg	0.39	0.13	1	06/09/25 17:27	06/10/25 20:44	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.39	0.13	1	06/09/25 17:27	06/10/25 20:44	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.39	0.13	1	06/09/25 17:27	06/10/25 20:44	50-32-8	
Benzo(b)fluoranthene	ND	mg/kg	0.39	0.13	1	06/09/25 17:27	06/10/25 20:44	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.39	0.15	1	06/09/25 17:27	06/10/25 20:44	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.39	0.14	1	06/09/25 17:27	06/10/25 20:44	207-08-9	
Benzoic Acid	ND	mg/kg	1.9	0.83	1	06/09/25 17:27	06/10/25 20:44	65-85-0	
Benzyl alcohol	ND	mg/kg	0.77	0.29	1	06/09/25 17:27	06/10/25 20:44	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.39	0.15	1	06/09/25 17:27	06/10/25 20:44	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.39	0.16	1	06/09/25 17:27	06/10/25 20:44	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	0.77	0.27	1	06/09/25 17:27	06/10/25 20:44	59-50-7	
4-Chloroaniline	ND	mg/kg	0.77	0.30	1	06/09/25 17:27	06/10/25 20:44	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.39	0.16	1	06/09/25 17:27	06/10/25 20:44	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.39	0.15	1	06/09/25 17:27	06/10/25 20:44	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.39	0.15	1	06/09/25 17:27	06/10/25 20:44	91-58-7	
2-Chlorophenol	ND	mg/kg	0.39	0.15	1	06/09/25 17:27	06/10/25 20:44	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.39	0.14	1	06/09/25 17:27	06/10/25 20:44	7005-72-3	
Chrysene	ND	mg/kg	0.39	0.14	1	06/09/25 17:27	06/10/25 20:44	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-6 **Lab ID: 92800079008** Collected: 06/03/25 13:35 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.39	0.15	1	06/09/25 17:27	06/10/25 20:44	53-70-3	
Dibenzofuran	ND	mg/kg	0.39	0.14	1	06/09/25 17:27	06/10/25 20:44	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.39	0.14	1	06/09/25 17:27	06/10/25 20:44	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.39	0.14	1	06/09/25 17:27	06/10/25 20:44	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.39	0.15	1	06/09/25 17:27	06/10/25 20:44	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	0.77	0.26	1	06/09/25 17:27	06/10/25 20:44	91-94-1	L2
2,4-Dichlorophenol	ND	mg/kg	0.39	0.15	1	06/09/25 17:27	06/10/25 20:44	120-83-2	
Diethylphthalate	ND	mg/kg	0.39	0.14	1	06/09/25 17:27	06/10/25 20:44	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.39	0.16	1	06/09/25 17:27	06/10/25 20:44	105-67-9	
Dimethylphthalate	ND	mg/kg	0.39	0.14	1	06/09/25 17:27	06/10/25 20:44	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.39	0.13	1	06/09/25 17:27	06/10/25 20:44	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	0.77	0.36	1	06/09/25 17:27	06/10/25 20:44	534-52-1	v1
2,4-Dinitrophenol	ND	mg/kg	1.9	1.2	1	06/09/25 17:27	06/10/25 20:44	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.39	0.15	1	06/09/25 17:27	06/10/25 20:44	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.39	0.14	1	06/09/25 17:27	06/10/25 20:44	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.39	0.15	1	06/09/25 17:27	06/10/25 20:44	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.39	0.15	1	06/09/25 17:27	06/10/25 20:44	117-81-7	
Fluoranthene	ND	mg/kg	0.39	0.13	1	06/09/25 17:27	06/10/25 20:44	206-44-0	
Fluorene	ND	mg/kg	0.39	0.14	1	06/09/25 17:27	06/10/25 20:44	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.39	0.17	1	06/09/25 17:27	06/10/25 20:44	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.39	0.15	1	06/09/25 17:27	06/10/25 20:44	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.39	0.22	1	06/09/25 17:27	06/10/25 20:44	77-47-4	
Hexachloroethane	ND	mg/kg	0.39	0.15	1	06/09/25 17:27	06/10/25 20:44	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.39	0.15	1	06/09/25 17:27	06/10/25 20:44	193-39-5	
Isophorone	ND	mg/kg	0.39	0.17	1	06/09/25 17:27	06/10/25 20:44	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.39	0.14	1	06/09/25 17:27	06/10/25 20:44	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.39	0.15	1	06/09/25 17:27	06/10/25 20:44	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.39	0.16	1	06/09/25 17:27	06/10/25 20:44	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.39	0.16	1	06/09/25 17:27	06/10/25 20:44	15831-10-4	
Naphthalene	ND	mg/kg	0.39	0.13	1	06/09/25 17:27	06/10/25 20:44	91-20-3	
2-Nitroaniline	ND	mg/kg	1.9	0.32	1	06/09/25 17:27	06/10/25 20:44	88-74-4	
3-Nitroaniline	ND	mg/kg	1.9	0.30	1	06/09/25 17:27	06/10/25 20:44	99-09-2	
4-Nitroaniline	ND	mg/kg	0.77	0.29	1	06/09/25 17:27	06/10/25 20:44	100-01-6	
Nitrobenzene	ND	mg/kg	0.39	0.18	1	06/09/25 17:27	06/10/25 20:44	98-95-3	
2-Nitrophenol	ND	mg/kg	0.39	0.17	1	06/09/25 17:27	06/10/25 20:44	88-75-5	
4-Nitrophenol	ND	mg/kg	1.9	0.75	1	06/09/25 17:27	06/10/25 20:44	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.39	0.13	1	06/09/25 17:27	06/10/25 20:44	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.39	0.15	1	06/09/25 17:27	06/10/25 20:44	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.39	0.14	1	06/09/25 17:27	06/10/25 20:44	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.39	0.18	1	06/09/25 17:27	06/10/25 20:44	108-60-1	
Pentachlorophenol	ND	mg/kg	0.77	0.38	1	06/09/25 17:27	06/10/25 20:44	87-86-5	
Phenanthrene	ND	mg/kg	0.39	0.13	1	06/09/25 17:27	06/10/25 20:44	85-01-8	
Phenol	ND	mg/kg	0.39	0.17	1	06/09/25 17:27	06/10/25 20:44	108-95-2	
Pyrene	ND	mg/kg	0.39	0.16	1	06/09/25 17:27	06/10/25 20:44	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-6 **Lab ID: 92800079008** Collected: 06/03/25 13:35 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.39	0.12	1	06/09/25 17:27	06/10/25 20:44	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.39	0.15	1	06/09/25 17:27	06/10/25 20:44	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.39	0.18	1	06/09/25 17:27	06/10/25 20:44	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.39	0.16	1	06/09/25 17:27	06/10/25 20:44	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	47	%	10-130		1	06/09/25 17:27	06/10/25 20:44	4165-60-0	
2-Fluorobiphenyl (S)	41	%	10-130		1	06/09/25 17:27	06/10/25 20:44	321-60-8	
Terphenyl-d14 (S)	61	%	10-130		1	06/09/25 17:27	06/10/25 20:44	1718-51-0	
Phenol-d6 (S)	47	%	10-130		1	06/09/25 17:27	06/10/25 20:44	13127-88-3	
2-Fluorophenol (S)	44	%	10-130		1	06/09/25 17:27	06/10/25 20:44	367-12-4	
2,4,6-Tribromophenol (S)	53	%	10-130		1	06/09/25 17:27	06/10/25 20:44	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.14	0.046	1	06/06/25 19:22	06/07/25 03:48	67-64-1	
Benzene	**0.011**	mg/kg	0.0072	0.0029	1	06/06/25 19:22	06/07/25 03:48	71-43-2	
Bromobenzene	ND	mg/kg	0.0072	0.0023	1	06/06/25 19:22	06/07/25 03:48	108-86-1	
Bromochloromethane	ND	mg/kg	0.0072	0.0021	1	06/06/25 19:22	06/07/25 03:48	74-97-5	
Bromodichloromethane	ND	mg/kg	0.0072	0.0028	1	06/06/25 19:22	06/07/25 03:48	75-27-4	
Bromoform	ND	mg/kg	0.0072	0.0025	1	06/06/25 19:22	06/07/25 03:48	75-25-2	
Bromomethane	ND	mg/kg	0.029	0.022	1	06/06/25 19:22	06/07/25 03:48	74-83-9	
2-Butanone (MEK)	ND	mg/kg	0.14	0.034	1	06/06/25 19:22	06/07/25 03:48	78-93-3	
n-Butylbenzene	**0.0055J**	mg/kg	0.0072	0.0045	1	06/06/25 19:22	06/07/25 03:48	104-51-8	
sec-Butylbenzene	ND	mg/kg	0.0072	0.0032	1	06/06/25 19:22	06/07/25 03:48	135-98-8	
tert-Butylbenzene	ND	mg/kg	0.0072	0.0026	1	06/06/25 19:22	06/07/25 03:48	98-06-6	
Carbon tetrachloride	ND	mg/kg	0.0072	0.0027	1	06/06/25 19:22	06/07/25 03:48	56-23-5	
Chlorobenzene	ND	mg/kg	0.0072	0.0041	1	06/06/25 19:22	06/07/25 03:48	108-90-7	
Chloroethane	ND	mg/kg	0.014	0.0055	1	06/06/25 19:22	06/07/25 03:48	75-00-3	
Chloroform	ND	mg/kg	0.0072	0.0060	1	06/06/25 19:22	06/07/25 03:48	67-66-3	
Chloromethane	ND	mg/kg	0.014	0.0060	1	06/06/25 19:22	06/07/25 03:48	74-87-3	
2-Chlorotoluene	ND	mg/kg	0.0072	0.0025	1	06/06/25 19:22	06/07/25 03:48	95-49-8	
4-Chlorotoluene	ND	mg/kg	0.0072	0.0040	1	06/06/25 19:22	06/07/25 03:48	106-43-4	
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0072	0.0028	1	06/06/25 19:22	06/07/25 03:48	96-12-8	
Dibromochloromethane	ND	mg/kg	0.0072	0.0040	1	06/06/25 19:22	06/07/25 03:48	124-48-1	
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0072	0.0032	1	06/06/25 19:22	06/07/25 03:48	106-93-4	
Dibromomethane	ND	mg/kg	0.0072	0.0015	1	06/06/25 19:22	06/07/25 03:48	74-95-3	
1,2-Dichlorobenzene	ND	mg/kg	0.0072	0.0026	1	06/06/25 19:22	06/07/25 03:48	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.0072	0.0022	1	06/06/25 19:22	06/07/25 03:48	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.0072	0.0019	1	06/06/25 19:22	06/07/25 03:48	106-46-7	
Dichlorodifluoromethane	ND	mg/kg	0.014	0.0073	1	06/06/25 19:22	06/07/25 03:48	75-71-8	
1,1-Dichloroethane	ND	mg/kg	0.0072	0.0030	1	06/06/25 19:22	06/07/25 03:48	75-34-3	
1,2-Dichloroethane	ND	mg/kg	0.0072	0.0047	1	06/06/25 19:22	06/07/25 03:48	107-06-2	
1,1-Dichloroethene	ND	mg/kg	0.0072	0.0030	1	06/06/25 19:22	06/07/25 03:48	75-35-4	
cis-1,2-Dichloroethene	ND	mg/kg	0.0072	0.0025	1	06/06/25 19:22	06/07/25 03:48	156-59-2	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-6 **Lab ID: 92800079008** Collected: 06/03/25 13:35 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0072	0.0061	1	06/06/25 19:22	06/07/25 03:48	156-60-5	
1,2-Dichloropropane	ND	mg/kg	0.0072	0.0021	1	06/06/25 19:22	06/07/25 03:48	78-87-5	
1,3-Dichloropropane	ND	mg/kg	0.0072	0.0022	1	06/06/25 19:22	06/07/25 03:48	142-28-9	
2,2-Dichloropropane	ND	mg/kg	0.0072	0.0054	1	06/06/25 19:22	06/07/25 03:48	594-20-7	
1,1-Dichloropropene	ND	mg/kg	0.0072	0.0034	1	06/06/25 19:22	06/07/25 03:48	563-58-6	
cis-1,3-Dichloropropene	ND	mg/kg	0.0072	0.0019	1	06/06/25 19:22	06/07/25 03:48	10061-01-5	
trans-1,3-Dichloropropene	ND	mg/kg	0.0072	0.0025	1	06/06/25 19:22	06/07/25 03:48	10061-02-6	
Diisopropyl ether	ND	mg/kg	0.0072	0.0019	1	06/06/25 19:22	06/07/25 03:48	108-20-3	
Ethylbenzene	**0.018**	mg/kg	0.0072	0.0033	1	06/06/25 19:22	06/07/25 03:48	100-41-4	
Hexachloro-1,3-butadiene	ND	mg/kg	0.014	0.012	1	06/06/25 19:22	06/07/25 03:48	87-68-3	
2-Hexanone	ND	mg/kg	0.072	0.0069	1	06/06/25 19:22	06/07/25 03:48	591-78-6	
Isopropylbenzene (Cumene)	**0.0060J**	mg/kg	0.0072	0.0024	1	06/06/25 19:22	06/07/25 03:48	98-82-8	
p-Isopropyltoluene	ND	mg/kg	0.0072	0.0035	1	06/06/25 19:22	06/07/25 03:48	99-87-6	
Methylene Chloride	ND	mg/kg	0.029	0.020	1	06/06/25 19:22	06/07/25 03:48	75-09-2	
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.072	0.0069	1	06/06/25 19:22	06/07/25 03:48	108-10-1	
Methyl-tert-butyl ether	ND	mg/kg	0.0072	0.0027	1	06/06/25 19:22	06/07/25 03:48	1634-04-4	
Naphthalene	**0.039**	mg/kg	0.0072	0.0038	1	06/06/25 19:22	06/07/25 03:48	91-20-3	
n-Propylbenzene	ND	mg/kg	0.0072	0.0026	1	06/06/25 19:22	06/07/25 03:48	103-65-1	
Styrene	ND	mg/kg	0.0072	0.0019	1	06/06/25 19:22	06/07/25 03:48	100-42-5	
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0072	0.0028	1	06/06/25 19:22	06/07/25 03:48	630-20-6	
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0072	0.0019	1	06/06/25 19:22	06/07/25 03:48	79-34-5	
Tetrachloroethene	**0.011**	mg/kg	0.0072	0.0023	1	06/06/25 19:22	06/07/25 03:48	127-18-4	
Toluene	**0.028**	mg/kg	0.0072	0.0049	1	06/06/25 19:22	06/07/25 03:48	108-88-3	
1,2,3-Trichlorobenzene	ND	mg/kg	0.0072	0.0058	1	06/06/25 19:22	06/07/25 03:48	87-61-6	
1,2,4-Trichlorobenzene	ND	mg/kg	0.0072	0.0060	1	06/06/25 19:22	06/07/25 03:48	120-82-1	
1,1,1-Trichloroethane	ND	mg/kg	0.0072	0.0037	1	06/06/25 19:22	06/07/25 03:48	71-55-6	
1,1,2-Trichloroethane	ND	mg/kg	0.0072	0.0024	1	06/06/25 19:22	06/07/25 03:48	79-00-5	
Trichloroethene	ND	mg/kg	0.0072	0.0058	1	06/06/25 19:22	06/07/25 03:48	79-01-6	
Trichlorofluoromethane	ND	mg/kg	0.0072	0.0039	1	06/06/25 19:22	06/07/25 03:48	75-69-4	
1,2,3-Trichloropropane	ND	mg/kg	0.0072	0.0036	1	06/06/25 19:22	06/07/25 03:48	96-18-4	
1,2,4-Trimethylbenzene	**0.050**	mg/kg	0.0072	0.0043	1	06/06/25 19:22	06/07/25 03:48	95-63-6	
1,3,5-Trimethylbenzene	**0.023**	mg/kg	0.0072	0.0024	1	06/06/25 19:22	06/07/25 03:48	108-67-8	
Vinyl acetate	ND	mg/kg	0.072	0.015	1	06/06/25 19:22	06/07/25 03:48	108-05-4	
Vinyl chloride	ND	mg/kg	0.014	0.0036	1	06/06/25 19:22	06/07/25 03:48	75-01-4	
Xylene (Total)	**0.090**	mg/kg	0.014	0.0041	1	06/06/25 19:22	06/07/25 03:48	1330-20-7	
m&p-Xylene	**0.061**	mg/kg	0.014	0.0049	1	06/06/25 19:22	06/07/25 03:48	179601-23-1	
o-Xylene	**0.028**	mg/kg	0.0072	0.0032	1	06/06/25 19:22	06/07/25 03:48	95-47-6	
Surrogates									
Toluene-d8 (S)	100	%	70-130		1	06/06/25 19:22	06/07/25 03:48	2037-26-5	
4-Bromofluorobenzene (S)	97	%	70-130		1	06/06/25 19:22	06/07/25 03:48	460-00-4	
1,2-Dichloroethane-d4 (S)	101	%	70-135		1	06/06/25 19:22	06/07/25 03:48	17060-07-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-6 **Lab ID: 92800079008** Collected: 06/03/25 13:35 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**14.2**	%	0.10	0.10	1		06/05/25 11:39		N2

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-9 **Lab ID: 92800079009** Collected: 06/03/25 14:15 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199 Pace Analytical Services - Charlotte								
Chromium, Hexavalent	**3.9**	mg/kg	1.5	0.25	1	06/05/25 10:05	06/06/25 18:00	18540-29-9	
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050 Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	3.4	0.89	20	06/10/25 05:23	06/13/25 16:37	7440-36-0	1g,N2
Arsenic	**2.9**	mg/kg	1.7	0.27	20	06/10/25 05:23	06/13/25 16:37	7440-38-2	1g
Beryllium	**0.82**	mg/kg	0.20	0.099	20	06/10/25 05:23	06/13/25 16:37	7440-41-7	1g
Cadmium	ND	mg/kg	0.20	0.044	20	06/10/25 05:23	06/13/25 16:37	7440-43-9	1g
Chromium	**76.4**	mg/kg	1.7	0.97	20	06/10/25 05:23	06/13/25 16:37	7440-47-3	1g
Copper	**73.2**	mg/kg	3.4	0.87	20	06/10/25 05:23	06/13/25 16:37	7440-50-8	1g
Lead	**4.8**	mg/kg	1.7	0.62	20	06/10/25 05:23	06/13/25 16:37	7439-92-1	1g
Nickel	**51.5**	mg/kg	1.7	0.82	20	06/10/25 05:23	06/13/25 16:37	7440-02-0	1g
Selenium	**7.6**	mg/kg	1.7	0.88	20	06/10/25 05:23	06/13/25 16:37	7782-49-2	1g
Silver	ND	mg/kg	0.20	0.065	20	06/10/25 05:23	06/13/25 16:37	7440-22-4	1g
Thallium	ND	mg/kg	1.7	0.30	20	06/10/25 05:23	06/13/25 16:37	7440-28-0	1g
Zinc	**72.1**	mg/kg	68.2	13.3	20	06/10/25 05:23	06/13/25 16:37	7440-66-6	1g
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471 Pace Analytical Services - Ormond Beach								
Mercury	**0.015**	mg/kg	0.013	0.0064	1	06/11/25 09:21	06/11/25 11:58	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.47	0.17	1	06/09/25 17:27	06/10/25 21:10	83-32-9	
Acenaphthylene	ND	mg/kg	0.47	0.17	1	06/09/25 17:27	06/10/25 21:10	208-96-8	
Aniline	ND	mg/kg	0.47	0.18	1	06/09/25 17:27	06/10/25 21:10	62-53-3	
Anthracene	ND	mg/kg	0.47	0.15	1	06/09/25 17:27	06/10/25 21:10	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.47	0.16	1	06/09/25 17:27	06/10/25 21:10	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.47	0.16	1	06/09/25 17:27	06/10/25 21:10	50-32-8	
Benzo(b)fluoranthene	ND	mg/kg	0.47	0.16	1	06/09/25 17:27	06/10/25 21:10	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.47	0.18	1	06/09/25 17:27	06/10/25 21:10	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.47	0.17	1	06/09/25 17:27	06/10/25 21:10	207-08-9	
Benzoic Acid	ND	mg/kg	2.4	1.0	1	06/09/25 17:27	06/10/25 21:10	65-85-0	
Benzyl alcohol	ND	mg/kg	0.95	0.36	1	06/09/25 17:27	06/10/25 21:10	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.47	0.18	1	06/09/25 17:27	06/10/25 21:10	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.47	0.20	1	06/09/25 17:27	06/10/25 21:10	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	0.95	0.33	1	06/09/25 17:27	06/10/25 21:10	59-50-7	
4-Chloroaniline	ND	mg/kg	0.95	0.37	1	06/09/25 17:27	06/10/25 21:10	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.47	0.20	1	06/09/25 17:27	06/10/25 21:10	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.47	0.18	1	06/09/25 17:27	06/10/25 21:10	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.47	0.19	1	06/09/25 17:27	06/10/25 21:10	91-58-7	
2-Chlorophenol	ND	mg/kg	0.47	0.18	1	06/09/25 17:27	06/10/25 21:10	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.47	0.18	1	06/09/25 17:27	06/10/25 21:10	7005-72-3	
Chrysene	ND	mg/kg	0.47	0.17	1	06/09/25 17:27	06/10/25 21:10	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-9 **Lab ID: 92800079009** Collected: 06/03/25 14:15 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.47	0.18	1	06/09/25 17:27	06/10/25 21:10	53-70-3	
Dibenzofuran	ND	mg/kg	0.47	0.17	1	06/09/25 17:27	06/10/25 21:10	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.47	0.17	1	06/09/25 17:27	06/10/25 21:10	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.47	0.17	1	06/09/25 17:27	06/10/25 21:10	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.47	0.18	1	06/09/25 17:27	06/10/25 21:10	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	0.95	0.32	1	06/09/25 17:27	06/10/25 21:10	91-94-1	L2
2,4-Dichlorophenol	ND	mg/kg	0.47	0.18	1	06/09/25 17:27	06/10/25 21:10	120-83-2	
Diethylphthalate	ND	mg/kg	0.47	0.17	1	06/09/25 17:27	06/10/25 21:10	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.47	0.20	1	06/09/25 17:27	06/10/25 21:10	105-67-9	
Dimethylphthalate	ND	mg/kg	0.47	0.17	1	06/09/25 17:27	06/10/25 21:10	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.47	0.16	1	06/09/25 17:27	06/10/25 21:10	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	0.95	0.44	1	06/09/25 17:27	06/10/25 21:10	534-52-1	v1
2,4-Dinitrophenol	ND	mg/kg	2.4	1.5	1	06/09/25 17:27	06/10/25 21:10	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.47	0.18	1	06/09/25 17:27	06/10/25 21:10	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.47	0.17	1	06/09/25 17:27	06/10/25 21:10	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.47	0.19	1	06/09/25 17:27	06/10/25 21:10	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.47	0.18	1	06/09/25 17:27	06/10/25 21:10	117-81-7	
Fluoranthene	ND	mg/kg	0.47	0.16	1	06/09/25 17:27	06/10/25 21:10	206-44-0	
Fluorene	ND	mg/kg	0.47	0.17	1	06/09/25 17:27	06/10/25 21:10	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.47	0.20	1	06/09/25 17:27	06/10/25 21:10	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.47	0.18	1	06/09/25 17:27	06/10/25 21:10	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.47	0.27	1	06/09/25 17:27	06/10/25 21:10	77-47-4	
Hexachloroethane	ND	mg/kg	0.47	0.18	1	06/09/25 17:27	06/10/25 21:10	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.47	0.19	1	06/09/25 17:27	06/10/25 21:10	193-39-5	
Isophorone	ND	mg/kg	0.47	0.21	1	06/09/25 17:27	06/10/25 21:10	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.47	0.17	1	06/09/25 17:27	06/10/25 21:10	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.47	0.19	1	06/09/25 17:27	06/10/25 21:10	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.47	0.19	1	06/09/25 17:27	06/10/25 21:10	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.47	0.19	1	06/09/25 17:27	06/10/25 21:10	15831-10-4	
Naphthalene	ND	mg/kg	0.47	0.16	1	06/09/25 17:27	06/10/25 21:10	91-20-3	
2-Nitroaniline	ND	mg/kg	2.4	0.39	1	06/09/25 17:27	06/10/25 21:10	88-74-4	
3-Nitroaniline	ND	mg/kg	2.4	0.37	1	06/09/25 17:27	06/10/25 21:10	99-09-2	
4-Nitroaniline	ND	mg/kg	0.95	0.36	1	06/09/25 17:27	06/10/25 21:10	100-01-6	
Nitrobenzene	ND	mg/kg	0.47	0.22	1	06/09/25 17:27	06/10/25 21:10	98-95-3	
2-Nitrophenol	ND	mg/kg	0.47	0.20	1	06/09/25 17:27	06/10/25 21:10	88-75-5	
4-Nitrophenol	ND	mg/kg	2.4	0.91	1	06/09/25 17:27	06/10/25 21:10	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.47	0.16	1	06/09/25 17:27	06/10/25 21:10	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.47	0.18	1	06/09/25 17:27	06/10/25 21:10	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.47	0.17	1	06/09/25 17:27	06/10/25 21:10	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.47	0.22	1	06/09/25 17:27	06/10/25 21:10	108-60-1	
Pentachlorophenol	ND	mg/kg	0.95	0.46	1	06/09/25 17:27	06/10/25 21:10	87-86-5	
Phenanthrene	ND	mg/kg	0.47	0.15	1	06/09/25 17:27	06/10/25 21:10	85-01-8	
Phenol	ND	mg/kg	0.47	0.21	1	06/09/25 17:27	06/10/25 21:10	108-95-2	
Pyrene	ND	mg/kg	0.47	0.19	1	06/09/25 17:27	06/10/25 21:10	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-9 **Lab ID: 92800079009** Collected: 06/03/25 14:15 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.47	0.15	1	06/09/25 17:27	06/10/25 21:10	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.47	0.19	1	06/09/25 17:27	06/10/25 21:10	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.47	0.22	1	06/09/25 17:27	06/10/25 21:10	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.47	0.19	1	06/09/25 17:27	06/10/25 21:10	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	46	%	10-130		1	06/09/25 17:27	06/10/25 21:10	4165-60-0	
2-Fluorobiphenyl (S)	41	%	10-130		1	06/09/25 17:27	06/10/25 21:10	321-60-8	
Terphenyl-d14 (S)	56	%	10-130		1	06/09/25 17:27	06/10/25 21:10	1718-51-0	
Phenol-d6 (S)	44	%	10-130		1	06/09/25 17:27	06/10/25 21:10	13127-88-3	
2-Fluorophenol (S)	43	%	10-130		1	06/09/25 17:27	06/10/25 21:10	367-12-4	
2,4,6-Tribromophenol (S)	52	%	10-130		1	06/09/25 17:27	06/10/25 21:10	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.16	0.052	1	06/06/25 19:22	06/07/25 04:24	67-64-1	
Benzene	ND	mg/kg	0.0082	0.0032	1	06/06/25 19:22	06/07/25 04:24	71-43-2	
Bromobenzene	ND	mg/kg	0.0082	0.0027	1	06/06/25 19:22	06/07/25 04:24	108-86-1	
Bromochloromethane	ND	mg/kg	0.0082	0.0024	1	06/06/25 19:22	06/07/25 04:24	74-97-5	
Bromodichloromethane	ND	mg/kg	0.0082	0.0031	1	06/06/25 19:22	06/07/25 04:24	75-27-4	
Bromoform	ND	mg/kg	0.0082	0.0029	1	06/06/25 19:22	06/07/25 04:24	75-25-2	
Bromomethane	ND	mg/kg	0.033	0.025	1	06/06/25 19:22	06/07/25 04:24	74-83-9	
2-Butanone (MEK)	ND	mg/kg	0.16	0.039	1	06/06/25 19:22	06/07/25 04:24	78-93-3	
n-Butylbenzene	ND	mg/kg	0.0082	0.0051	1	06/06/25 19:22	06/07/25 04:24	104-51-8	
sec-Butylbenzene	ND	mg/kg	0.0082	0.0036	1	06/06/25 19:22	06/07/25 04:24	135-98-8	
tert-Butylbenzene	ND	mg/kg	0.0082	0.0029	1	06/06/25 19:22	06/07/25 04:24	98-06-6	
Carbon tetrachloride	ND	mg/kg	0.0082	0.0030	1	06/06/25 19:22	06/07/25 04:24	56-23-5	
Chlorobenzene	ND	mg/kg	0.0082	0.0047	1	06/06/25 19:22	06/07/25 04:24	108-90-7	
Chloroethane	ND	mg/kg	0.016	0.0063	1	06/06/25 19:22	06/07/25 04:24	75-00-3	
Chloroform	ND	mg/kg	0.0082	0.0068	1	06/06/25 19:22	06/07/25 04:24	67-66-3	
Chloromethane	ND	mg/kg	0.016	0.0068	1	06/06/25 19:22	06/07/25 04:24	74-87-3	
2-Chlorotoluene	ND	mg/kg	0.0082	0.0029	1	06/06/25 19:22	06/07/25 04:24	95-49-8	
4-Chlorotoluene	ND	mg/kg	0.0082	0.0045	1	06/06/25 19:22	06/07/25 04:24	106-43-4	
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0082	0.0032	1	06/06/25 19:22	06/07/25 04:24	96-12-8	
Dibromochloromethane	ND	mg/kg	0.0082	0.0046	1	06/06/25 19:22	06/07/25 04:24	124-48-1	
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0082	0.0036	1	06/06/25 19:22	06/07/25 04:24	106-93-4	
Dibromomethane	ND	mg/kg	0.0082	0.0017	1	06/06/25 19:22	06/07/25 04:24	74-95-3	
1,2-Dichlorobenzene	ND	mg/kg	0.0082	0.0029	1	06/06/25 19:22	06/07/25 04:24	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.0082	0.0025	1	06/06/25 19:22	06/07/25 04:24	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.0082	0.0021	1	06/06/25 19:22	06/07/25 04:24	106-46-7	
Dichlorodifluoromethane	ND	mg/kg	0.016	0.0083	1	06/06/25 19:22	06/07/25 04:24	75-71-8	
1,1-Dichloroethane	ND	mg/kg	0.0082	0.0034	1	06/06/25 19:22	06/07/25 04:24	75-34-3	
1,2-Dichloroethane	ND	mg/kg	0.0082	0.0054	1	06/06/25 19:22	06/07/25 04:24	107-06-2	
1,1-Dichloroethene	ND	mg/kg	0.0082	0.0034	1	06/06/25 19:22	06/07/25 04:24	75-35-4	
cis-1,2-Dichloroethene	ND	mg/kg	0.0082	0.0028	1	06/06/25 19:22	06/07/25 04:24	156-59-2	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-9 **Lab ID: 92800079009** Collected: 06/03/25 14:15 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0082	0.0069	1	06/06/25 19:22	06/07/25 04:24	156-60-5	
1,2-Dichloropropane	ND	mg/kg	0.0082	0.0024	1	06/06/25 19:22	06/07/25 04:24	78-87-5	
1,3-Dichloropropane	ND	mg/kg	0.0082	0.0025	1	06/06/25 19:22	06/07/25 04:24	142-28-9	
2,2-Dichloropropane	ND	mg/kg	0.0082	0.0062	1	06/06/25 19:22	06/07/25 04:24	594-20-7	
1,1-Dichloropropene	ND	mg/kg	0.0082	0.0039	1	06/06/25 19:22	06/07/25 04:24	563-58-6	
cis-1,3-Dichloropropene	ND	mg/kg	0.0082	0.0022	1	06/06/25 19:22	06/07/25 04:24	10061-01-5	
trans-1,3-Dichloropropene	ND	mg/kg	0.0082	0.0028	1	06/06/25 19:22	06/07/25 04:24	10061-02-6	
Diisopropyl ether	ND	mg/kg	0.0082	0.0022	1	06/06/25 19:22	06/07/25 04:24	108-20-3	
Ethylbenzene	ND	mg/kg	0.0082	0.0038	1	06/06/25 19:22	06/07/25 04:24	100-41-4	
Hexachloro-1,3-butadiene	ND	mg/kg	0.016	0.013	1	06/06/25 19:22	06/07/25 04:24	87-68-3	
2-Hexanone	ND	mg/kg	0.082	0.0079	1	06/06/25 19:22	06/07/25 04:24	591-78-6	
Isopropylbenzene (Cumene)	ND	mg/kg	0.0082	0.0028	1	06/06/25 19:22	06/07/25 04:24	98-82-8	
p-Isopropyltoluene	ND	mg/kg	0.0082	0.0040	1	06/06/25 19:22	06/07/25 04:24	99-87-6	
Methylene Chloride	ND	mg/kg	0.033	0.022	1	06/06/25 19:22	06/07/25 04:24	75-09-2	
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.082	0.0079	1	06/06/25 19:22	06/07/25 04:24	108-10-1	
Methyl-tert-butyl ether	ND	mg/kg	0.0082	0.0030	1	06/06/25 19:22	06/07/25 04:24	1634-04-4	
Naphthalene	ND	mg/kg	0.0082	0.0043	1	06/06/25 19:22	06/07/25 04:24	91-20-3	
n-Propylbenzene	ND	mg/kg	0.0082	0.0029	1	06/06/25 19:22	06/07/25 04:24	103-65-1	
Styrene	ND	mg/kg	0.0082	0.0022	1	06/06/25 19:22	06/07/25 04:24	100-42-5	
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0082	0.0031	1	06/06/25 19:22	06/07/25 04:24	630-20-6	
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0082	0.0022	1	06/06/25 19:22	06/07/25 04:24	79-34-5	
Tetrachloroethene	ND	mg/kg	0.0082	0.0026	1	06/06/25 19:22	06/07/25 04:24	127-18-4	
Toluene	ND	mg/kg	0.0082	0.0056	1	06/06/25 19:22	06/07/25 04:24	108-88-3	
1,2,3-Trichlorobenzene	ND	mg/kg	0.0082	0.0066	1	06/06/25 19:22	06/07/25 04:24	87-61-6	
1,2,4-Trichlorobenzene	ND	mg/kg	0.0082	0.0068	1	06/06/25 19:22	06/07/25 04:24	120-82-1	
1,1,1-Trichloroethane	ND	mg/kg	0.0082	0.0042	1	06/06/25 19:22	06/07/25 04:24	71-55-6	
1,1,2-Trichloroethane	ND	mg/kg	0.0082	0.0027	1	06/06/25 19:22	06/07/25 04:24	79-00-5	
Trichloroethene	ND	mg/kg	0.0082	0.0066	1	06/06/25 19:22	06/07/25 04:24	79-01-6	
Trichlorofluoromethane	ND	mg/kg	0.0082	0.0045	1	06/06/25 19:22	06/07/25 04:24	75-69-4	
1,2,3-Trichloropropane	ND	mg/kg	0.0082	0.0041	1	06/06/25 19:22	06/07/25 04:24	96-18-4	
1,2,4-Trimethylbenzene	ND	mg/kg	0.0082	0.0048	1	06/06/25 19:22	06/07/25 04:24	95-63-6	
1,3,5-Trimethylbenzene	ND	mg/kg	0.0082	0.0027	1	06/06/25 19:22	06/07/25 04:24	108-67-8	
Vinyl acetate	ND	mg/kg	0.082	0.017	1	06/06/25 19:22	06/07/25 04:24	108-05-4	
Vinyl chloride	ND	mg/kg	0.016	0.0041	1	06/06/25 19:22	06/07/25 04:24	75-01-4	
Xylene (Total)	ND	mg/kg	0.016	0.0046	1	06/06/25 19:22	06/07/25 04:24	1330-20-7	
m&p-Xylene	ND	mg/kg	0.016	0.0056	1	06/06/25 19:22	06/07/25 04:24	179601-23-1	
o-Xylene	ND	mg/kg	0.0082	0.0036	1	06/06/25 19:22	06/07/25 04:24	95-47-6	
Surrogates									
Toluene-d8 (S)	100	%	70-130		1	06/06/25 19:22	06/07/25 04:24	2037-26-5	
4-Bromofluorobenzene (S)	96	%	70-130		1	06/06/25 19:22	06/07/25 04:24	460-00-4	
1,2-Dichloroethane-d4 (S)	104	%	70-135		1	06/06/25 19:22	06/07/25 04:24	17060-07-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-9 **Lab ID: 92800079009** Collected: 06/03/25 14:15 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**29.2**	%	0.10	0.10	1		06/05/25 11:39		N2

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-10 **Lab ID: 92800079010** Collected: 06/03/25 14:45 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199 Pace Analytical Services - Charlotte								
Chromium, Hexavalent	**0.94J**	mg/kg	1.1	0.18	1	06/05/25 10:05	06/06/25 18:18	18540-29-9	
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050 Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	2.7	0.70	20	06/10/25 05:23	06/11/25 00:58	7440-36-0	1g,N2
Arsenic	**1.6**	mg/kg	1.4	0.21	20	06/10/25 05:23	06/11/25 00:58	7440-38-2	1g
Beryllium	**0.25**	mg/kg	0.16	0.078	20	06/10/25 05:23	06/11/25 00:58	7440-41-7	1g
Cadmium	ND	mg/kg	0.16	0.035	20	06/10/25 05:23	06/11/25 00:58	7440-43-9	1g
Chromium	**69.0**	mg/kg	1.4	0.77	20	06/10/25 05:23	06/11/25 00:58	7440-47-3	1g
Copper	**52.8**	mg/kg	2.7	0.69	20	06/10/25 05:23	06/11/25 00:58	7440-50-8	1g
Lead	**8.8**	mg/kg	1.4	0.49	20	06/10/25 05:23	06/11/25 00:58	7439-92-1	1g
Nickel	**15.9**	mg/kg	1.4	0.65	20	06/10/25 05:23	06/11/25 00:58	7440-02-0	1g
Selenium	ND	mg/kg	1.4	0.69	20	06/10/25 05:23	06/11/25 00:58	7782-49-2	1g
Silver	ND	mg/kg	0.16	0.051	20	06/10/25 05:23	06/11/25 00:58	7440-22-4	1g
Thallium	ND	mg/kg	1.4	0.24	20	06/10/25 05:23	06/11/25 00:58	7440-28-0	1g
Zinc	ND	mg/kg	54.0	10.5	20	06/10/25 05:23	06/11/25 00:58	7440-66-6	1g
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471 Pace Analytical Services - Ormond Beach								
Mercury	**0.040**	mg/kg	0.0089	0.0045	1	06/11/25 09:21	06/11/25 12:00	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.38	0.13	1	06/09/25 17:27	06/10/25 21:37	83-32-9	
Acenaphthylene	ND	mg/kg	0.38	0.13	1	06/09/25 17:27	06/10/25 21:37	208-96-8	
Aniline	ND	mg/kg	0.38	0.15	1	06/09/25 17:27	06/10/25 21:37	62-53-3	
Anthracene	ND	mg/kg	0.38	0.12	1	06/09/25 17:27	06/10/25 21:37	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.38	0.13	1	06/09/25 17:27	06/10/25 21:37	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.38	0.13	1	06/09/25 17:27	06/10/25 21:37	50-32-8	
Benzo(b)fluoranthene	ND	mg/kg	0.38	0.13	1	06/09/25 17:27	06/10/25 21:37	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.38	0.15	1	06/09/25 17:27	06/10/25 21:37	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.38	0.13	1	06/09/25 17:27	06/10/25 21:37	207-08-9	
Benzoic Acid	ND	mg/kg	1.9	0.81	1	06/09/25 17:27	06/10/25 21:37	65-85-0	
Benzyl alcohol	ND	mg/kg	0.75	0.28	1	06/09/25 17:27	06/10/25 21:37	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.38	0.14	1	06/09/25 17:27	06/10/25 21:37	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.38	0.16	1	06/09/25 17:27	06/10/25 21:37	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	0.75	0.26	1	06/09/25 17:27	06/10/25 21:37	59-50-7	
4-Chloroaniline	ND	mg/kg	0.75	0.29	1	06/09/25 17:27	06/10/25 21:37	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.38	0.16	1	06/09/25 17:27	06/10/25 21:37	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.38	0.14	1	06/09/25 17:27	06/10/25 21:37	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.38	0.15	1	06/09/25 17:27	06/10/25 21:37	91-58-7	
2-Chlorophenol	ND	mg/kg	0.38	0.14	1	06/09/25 17:27	06/10/25 21:37	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.38	0.14	1	06/09/25 17:27	06/10/25 21:37	7005-72-3	
Chrysene	ND	mg/kg	0.38	0.14	1	06/09/25 17:27	06/10/25 21:37	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-10 **Lab ID: 92800079010** Collected: 06/03/25 14:45 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.38	0.14	1	06/09/25 17:27	06/10/25 21:37	53-70-3	
Dibenzofuran	ND	mg/kg	0.38	0.14	1	06/09/25 17:27	06/10/25 21:37	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.38	0.14	1	06/09/25 17:27	06/10/25 21:37	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.38	0.13	1	06/09/25 17:27	06/10/25 21:37	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.38	0.14	1	06/09/25 17:27	06/10/25 21:37	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	0.75	0.25	1	06/09/25 17:27	06/10/25 21:37	91-94-1	L2
2,4-Dichlorophenol	ND	mg/kg	0.38	0.15	1	06/09/25 17:27	06/10/25 21:37	120-83-2	
Diethylphthalate	ND	mg/kg	0.38	0.14	1	06/09/25 17:27	06/10/25 21:37	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.38	0.16	1	06/09/25 17:27	06/10/25 21:37	105-67-9	
Dimethylphthalate	ND	mg/kg	0.38	0.14	1	06/09/25 17:27	06/10/25 21:37	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.38	0.13	1	06/09/25 17:27	06/10/25 21:37	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	0.75	0.35	1	06/09/25 17:27	06/10/25 21:37	534-52-1	v1
2,4-Dinitrophenol	ND	mg/kg	1.9	1.2	1	06/09/25 17:27	06/10/25 21:37	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.38	0.14	1	06/09/25 17:27	06/10/25 21:37	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.38	0.14	1	06/09/25 17:27	06/10/25 21:37	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.38	0.15	1	06/09/25 17:27	06/10/25 21:37	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.38	0.15	1	06/09/25 17:27	06/10/25 21:37	117-81-7	
Fluoranthene	ND	mg/kg	0.38	0.13	1	06/09/25 17:27	06/10/25 21:37	206-44-0	
Fluorene	ND	mg/kg	0.38	0.13	1	06/09/25 17:27	06/10/25 21:37	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.38	0.16	1	06/09/25 17:27	06/10/25 21:37	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.38	0.15	1	06/09/25 17:27	06/10/25 21:37	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.38	0.22	1	06/09/25 17:27	06/10/25 21:37	77-47-4	
Hexachloroethane	ND	mg/kg	0.38	0.14	1	06/09/25 17:27	06/10/25 21:37	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.38	0.15	1	06/09/25 17:27	06/10/25 21:37	193-39-5	
Isophorone	ND	mg/kg	0.38	0.17	1	06/09/25 17:27	06/10/25 21:37	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.38	0.13	1	06/09/25 17:27	06/10/25 21:37	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.38	0.15	1	06/09/25 17:27	06/10/25 21:37	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.38	0.15	1	06/09/25 17:27	06/10/25 21:37	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.38	0.15	1	06/09/25 17:27	06/10/25 21:37	15831-10-4	
Naphthalene	ND	mg/kg	0.38	0.13	1	06/09/25 17:27	06/10/25 21:37	91-20-3	
2-Nitroaniline	ND	mg/kg	1.9	0.31	1	06/09/25 17:27	06/10/25 21:37	88-74-4	
3-Nitroaniline	ND	mg/kg	1.9	0.29	1	06/09/25 17:27	06/10/25 21:37	99-09-2	
4-Nitroaniline	ND	mg/kg	0.75	0.29	1	06/09/25 17:27	06/10/25 21:37	100-01-6	
Nitrobenzene	ND	mg/kg	0.38	0.17	1	06/09/25 17:27	06/10/25 21:37	98-95-3	
2-Nitrophenol	ND	mg/kg	0.38	0.16	1	06/09/25 17:27	06/10/25 21:37	88-75-5	
4-Nitrophenol	ND	mg/kg	1.9	0.73	1	06/09/25 17:27	06/10/25 21:37	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.38	0.13	1	06/09/25 17:27	06/10/25 21:37	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.38	0.14	1	06/09/25 17:27	06/10/25 21:37	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.38	0.13	1	06/09/25 17:27	06/10/25 21:37	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.38	0.18	1	06/09/25 17:27	06/10/25 21:37	108-60-1	
Pentachlorophenol	ND	mg/kg	0.75	0.37	1	06/09/25 17:27	06/10/25 21:37	87-86-5	
Phenanthrene	ND	mg/kg	0.38	0.12	1	06/09/25 17:27	06/10/25 21:37	85-01-8	
Phenol	ND	mg/kg	0.38	0.17	1	06/09/25 17:27	06/10/25 21:37	108-95-2	
Pyrene	ND	mg/kg	0.38	0.15	1	06/09/25 17:27	06/10/25 21:37	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-10 **Lab ID: 92800079010** Collected: 06/03/25 14:45 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.38	0.12	1	06/09/25 17:27	06/10/25 21:37	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.38	0.15	1	06/09/25 17:27	06/10/25 21:37	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.38	0.17	1	06/09/25 17:27	06/10/25 21:37	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.38	0.15	1	06/09/25 17:27	06/10/25 21:37	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	52	%	10-130		1	06/09/25 17:27	06/10/25 21:37	4165-60-0	
2-Fluorobiphenyl (S)	47	%	10-130		1	06/09/25 17:27	06/10/25 21:37	321-60-8	
Terphenyl-d14 (S)	64	%	10-130		1	06/09/25 17:27	06/10/25 21:37	1718-51-0	
Phenol-d6 (S)	52	%	10-130		1	06/09/25 17:27	06/10/25 21:37	13127-88-3	
2-Fluorophenol (S)	51	%	10-130		1	06/09/25 17:27	06/10/25 21:37	367-12-4	
2,4,6-Tribromophenol (S)	62	%	10-130		1	06/09/25 17:27	06/10/25 21:37	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.097	0.031	1	06/06/25 19:22	06/07/25 04:41	67-64-1	
Benzene	ND	mg/kg	0.0049	0.0019	1	06/06/25 19:22	06/07/25 04:41	71-43-2	
Bromobenzene	ND	mg/kg	0.0049	0.0016	1	06/06/25 19:22	06/07/25 04:41	108-86-1	
Bromochloromethane	ND	mg/kg	0.0049	0.0014	1	06/06/25 19:22	06/07/25 04:41	74-97-5	
Bromodichloromethane	ND	mg/kg	0.0049	0.0019	1	06/06/25 19:22	06/07/25 04:41	75-27-4	
Bromoform	ND	mg/kg	0.0049	0.0017	1	06/06/25 19:22	06/07/25 04:41	75-25-2	
Bromomethane	ND	mg/kg	0.019	0.015	1	06/06/25 19:22	06/07/25 04:41	74-83-9	
2-Butanone (MEK)	ND	mg/kg	0.097	0.023	1	06/06/25 19:22	06/07/25 04:41	78-93-3	
n-Butylbenzene	ND	mg/kg	0.0049	0.0031	1	06/06/25 19:22	06/07/25 04:41	104-51-8	
sec-Butylbenzene	ND	mg/kg	0.0049	0.0021	1	06/06/25 19:22	06/07/25 04:41	135-98-8	
tert-Butylbenzene	ND	mg/kg	0.0049	0.0017	1	06/06/25 19:22	06/07/25 04:41	98-06-6	
Carbon tetrachloride	ND	mg/kg	0.0049	0.0018	1	06/06/25 19:22	06/07/25 04:41	56-23-5	
Chlorobenzene	ND	mg/kg	0.0049	0.0028	1	06/06/25 19:22	06/07/25 04:41	108-90-7	
Chloroethane	ND	mg/kg	0.0097	0.0037	1	06/06/25 19:22	06/07/25 04:41	75-00-3	
Chloroform	ND	mg/kg	0.0049	0.0041	1	06/06/25 19:22	06/07/25 04:41	67-66-3	
Chloromethane	ND	mg/kg	0.0097	0.0041	1	06/06/25 19:22	06/07/25 04:41	74-87-3	
2-Chlorotoluene	ND	mg/kg	0.0049	0.0017	1	06/06/25 19:22	06/07/25 04:41	95-49-8	
4-Chlorotoluene	ND	mg/kg	0.0049	0.0027	1	06/06/25 19:22	06/07/25 04:41	106-43-4	
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0049	0.0019	1	06/06/25 19:22	06/07/25 04:41	96-12-8	
Dibromochloromethane	ND	mg/kg	0.0049	0.0027	1	06/06/25 19:22	06/07/25 04:41	124-48-1	
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0049	0.0021	1	06/06/25 19:22	06/07/25 04:41	106-93-4	
Dibromomethane	ND	mg/kg	0.0049	0.0010	1	06/06/25 19:22	06/07/25 04:41	74-95-3	
1,2-Dichlorobenzene	ND	mg/kg	0.0049	0.0017	1	06/06/25 19:22	06/07/25 04:41	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.0049	0.0015	1	06/06/25 19:22	06/07/25 04:41	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.0049	0.0013	1	06/06/25 19:22	06/07/25 04:41	106-46-7	
Dichlorodifluoromethane	ND	mg/kg	0.0097	0.0049	1	06/06/25 19:22	06/07/25 04:41	75-71-8	
1,1-Dichloroethane	ND	mg/kg	0.0049	0.0020	1	06/06/25 19:22	06/07/25 04:41	75-34-3	
1,2-Dichloroethane	ND	mg/kg	0.0049	0.0032	1	06/06/25 19:22	06/07/25 04:41	107-06-2	
1,1-Dichloroethene	ND	mg/kg	0.0049	0.0020	1	06/06/25 19:22	06/07/25 04:41	75-35-4	
cis-1,2-Dichloroethene	ND	mg/kg	0.0049	0.0017	1	06/06/25 19:22	06/07/25 04:41	156-59-2	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-10 **Lab ID: 92800079010** Collected: 06/03/25 14:45 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0049	0.0041	1	06/06/25 19:22	06/07/25 04:41	156-60-5	
1,2-Dichloropropane	ND	mg/kg	0.0049	0.0015	1	06/06/25 19:22	06/07/25 04:41	78-87-5	
1,3-Dichloropropane	ND	mg/kg	0.0049	0.0015	1	06/06/25 19:22	06/07/25 04:41	142-28-9	
2,2-Dichloropropane	ND	mg/kg	0.0049	0.0037	1	06/06/25 19:22	06/07/25 04:41	594-20-7	
1,1-Dichloropropene	ND	mg/kg	0.0049	0.0023	1	06/06/25 19:22	06/07/25 04:41	563-58-6	
cis-1,3-Dichloropropene	ND	mg/kg	0.0049	0.0013	1	06/06/25 19:22	06/07/25 04:41	10061-01-5	
trans-1,3-Dichloropropene	ND	mg/kg	0.0049	0.0017	1	06/06/25 19:22	06/07/25 04:41	10061-02-6	
Diisopropyl ether	ND	mg/kg	0.0049	0.0013	1	06/06/25 19:22	06/07/25 04:41	108-20-3	
Ethylbenzene	ND	mg/kg	0.0049	0.0023	1	06/06/25 19:22	06/07/25 04:41	100-41-4	
Hexachloro-1,3-butadiene	ND	mg/kg	0.0097	0.0079	1	06/06/25 19:22	06/07/25 04:41	87-68-3	
2-Hexanone	ND	mg/kg	0.049	0.0047	1	06/06/25 19:22	06/07/25 04:41	591-78-6	
Isopropylbenzene (Cumene)	ND	mg/kg	0.0049	0.0017	1	06/06/25 19:22	06/07/25 04:41	98-82-8	
p-Isopropyltoluene	ND	mg/kg	0.0049	0.0024	1	06/06/25 19:22	06/07/25 04:41	99-87-6	
Methylene Chloride	ND	mg/kg	0.019	0.013	1	06/06/25 19:22	06/07/25 04:41	75-09-2	
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.049	0.0047	1	06/06/25 19:22	06/07/25 04:41	108-10-1	
Methyl-tert-butyl ether	ND	mg/kg	0.0049	0.0018	1	06/06/25 19:22	06/07/25 04:41	1634-04-4	
Naphthalene	ND	mg/kg	0.0049	0.0026	1	06/06/25 19:22	06/07/25 04:41	91-20-3	
n-Propylbenzene	ND	mg/kg	0.0049	0.0017	1	06/06/25 19:22	06/07/25 04:41	103-65-1	
Styrene	ND	mg/kg	0.0049	0.0013	1	06/06/25 19:22	06/07/25 04:41	100-42-5	
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0049	0.0019	1	06/06/25 19:22	06/07/25 04:41	630-20-6	
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0049	0.0013	1	06/06/25 19:22	06/07/25 04:41	79-34-5	
Tetrachloroethene	ND	mg/kg	0.0049	0.0015	1	06/06/25 19:22	06/07/25 04:41	127-18-4	
Toluene	ND	mg/kg	0.0049	0.0033	1	06/06/25 19:22	06/07/25 04:41	108-88-3	
1,2,3-Trichlorobenzene	ND	mg/kg	0.0049	0.0039	1	06/06/25 19:22	06/07/25 04:41	87-61-6	
1,2,4-Trichlorobenzene	ND	mg/kg	0.0049	0.0041	1	06/06/25 19:22	06/07/25 04:41	120-82-1	
1,1,1-Trichloroethane	ND	mg/kg	0.0049	0.0025	1	06/06/25 19:22	06/07/25 04:41	71-55-6	
1,1,2-Trichloroethane	ND	mg/kg	0.0049	0.0016	1	06/06/25 19:22	06/07/25 04:41	79-00-5	
Trichloroethene	ND	mg/kg	0.0049	0.0039	1	06/06/25 19:22	06/07/25 04:41	79-01-6	
Trichlorofluoromethane	ND	mg/kg	0.0049	0.0027	1	06/06/25 19:22	06/07/25 04:41	75-69-4	
1,2,3-Trichloropropane	ND	mg/kg	0.0049	0.0025	1	06/06/25 19:22	06/07/25 04:41	96-18-4	
1,2,4-Trimethylbenzene	ND	mg/kg	0.0049	0.0029	1	06/06/25 19:22	06/07/25 04:41	95-63-6	
1,3,5-Trimethylbenzene	ND	mg/kg	0.0049	0.0016	1	06/06/25 19:22	06/07/25 04:41	108-67-8	
Vinyl acetate	ND	mg/kg	0.049	0.010	1	06/06/25 19:22	06/07/25 04:41	108-05-4	
Vinyl chloride	ND	mg/kg	0.0097	0.0025	1	06/06/25 19:22	06/07/25 04:41	75-01-4	
Xylene (Total)	ND	mg/kg	0.0097	0.0028	1	06/06/25 19:22	06/07/25 04:41	1330-20-7	
m&p-Xylene	ND	mg/kg	0.0097	0.0033	1	06/06/25 19:22	06/07/25 04:41	179601-23-1	
o-Xylene	ND	mg/kg	0.0049	0.0021	1	06/06/25 19:22	06/07/25 04:41	95-47-6	
Surrogates									
Toluene-d8 (S)	100	%	70-130		1	06/06/25 19:22	06/07/25 04:41	2037-26-5	
4-Bromofluorobenzene (S)	98	%	70-130		1	06/06/25 19:22	06/07/25 04:41	460-00-4	
1,2-Dichloroethane-d4 (S)	104	%	70-135		1	06/06/25 19:22	06/07/25 04:41	17060-07-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800079

Sample: B-10 **Lab ID: 92800079010** Collected: 06/03/25 14:45 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**12.1**	%	0.10	0.10	1		06/05/25 11:39		N2

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

QC Batch: 1104810 — Analysis Method: EPA 7471
QC Batch Method: EPA 7471 — Analysis Description: 7471 Mercury
Laboratory: Pace Analytical Services - Ormond Beach
Associated Lab Samples: 92800079001, 92800079002, 92800079003, 92800079004, 92800079005, 92800079006, 92800079007, 92800079008, 92800079009, 92800079010

METHOD BLANK: 6060167 — Matrix: Solid
Associated Lab Samples: 92800079001, 92800079002, 92800079003, 92800079004, 92800079005, 92800079006, 92800079007, 92800079008, 92800079009, 92800079010

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Mercury	mg/kg	ND	0.0093	0.0046	06/11/25 10:48	

LABORATORY CONTROL SAMPLE: 6060168

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Mercury	mg/kg	0.098	0.099	102	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6060169 6060170

Parameter	Units	35959546001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Mercury	mg/kg	0.55	0.372	0.351	0.69	0.76	37	60	80-120	10	20	M1

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

QC Batch: 1104665
QC Batch Method: EPA 3050
Analysis Method: EPA 6020
Analysis Description: 6020 MET SOLID
Laboratory: Pace Analytical Services - Ormond Beach
Associated Lab Samples: 92800079002, 92800079004, 92800079005, 92800079008, 92800079009, 92800079010

METHOD BLANK: 6059589 Matrix: Solid
Associated Lab Samples: 92800079002, 92800079004, 92800079005, 92800079008, 92800079009, 92800079010

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Antimony	mg/kg	ND	2.3	0.59	06/10/25 16:26	1g,N2
Arsenic	mg/kg	ND	1.1	0.18	06/10/25 16:26	1g
Beryllium	mg/kg	ND	0.14	0.065	06/10/25 16:26	1g
Cadmium	mg/kg	ND	0.14	0.029	06/10/25 16:26	1g
Chromium	mg/kg	ND	1.1	0.65	06/10/25 16:26	1g
Copper	mg/kg	ND	2.3	0.58	06/10/25 16:26	1g
Lead	mg/kg	ND	1.1	0.41	06/10/25 16:26	1g
Nickel	mg/kg	ND	1.1	0.54	06/10/25 16:26	1g
Selenium	mg/kg	ND	1.1	0.58	06/10/25 16:26	1g
Silver	mg/kg	ND	0.14	0.043	06/10/25 16:26	1g
Thallium	mg/kg	ND	1.1	0.20	06/10/25 16:26	1g
Zinc	mg/kg	ND	45.1	8.8	06/10/25 16:26	1g

LABORATORY CONTROL SAMPLE: 6059590

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Antimony	mg/kg	29.9	29.4	98	80-120	1g,N2
Arsenic	mg/kg	29.9	29.2	98	80-120	1g
Beryllium	mg/kg	3	2.9	97	80-120	1g
Cadmium	mg/kg	3	2.9	98	80-120	1g
Chromium	mg/kg	29.9	30.8	103	80-120	1g
Copper	mg/kg	29.9	30.3	101	80-120	1g
Lead	mg/kg	29.9	30.4	102	80-120	1g
Nickel	mg/kg	29.9	31.7	106	80-120	1g
Selenium	mg/kg	29.9	30.3	101	80-120	1g
Silver	mg/kg	3	3.2	107	80-120	1g
Thallium	mg/kg	29.9	29.5	99	80-120	1g
Zinc	mg/kg	150	143	96	80-120	1g

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6059591 6059592

Parameter	Units	35943072007 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Antimony	mg/kg	1.2U	66.2	65.9	58.6	59.5	88	89	75-125	1	20	1g,N2
Arsenic	mg/kg	1.2J	66.2	65.9	64.2	63.7	95	95	75-125	1	20	1g
Beryllium	mg/kg	0.13U	6.57	6.57	6.4	6.4	94	96	75-125	1	20	1g
Cadmium	mg/kg	2.5	6.57	6.57	9.0	8.8	98	94	75-125	3	20	1g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6059591 6059592

Parameter	Units	35943072007 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Chromium	mg/kg	54.4	66.2	65.9	116	115	94	92	75-125	1	20	1g
Copper	mg/kg	58.6	66.2	65.9	123	118	98	90	75-125	4	20	1g
Lead	mg/kg	6.8	66.2	65.9	71.9	72.0	98	99	75-125	0	20	1g
Nickel	mg/kg	49.1	66.2	65.9	115	116	100	101	75-125	0	20	1g
Selenium	mg/kg	1.2U	66.2	65.9	65.6	63.1	98	95	75-125	4	20	1g
Silver	mg/kg	1.0	6.57	6.57	7.5	7.9	98	104	75-125	5	20	1g
Thallium	mg/kg	0.44J	66.2	65.9	62.6	62.6	94	94	75-125	0	20	1g
Zinc	mg/kg	276	331	331	600	579	98	92	75-125	3	20	1g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

QC Batch: 1104735
QC Batch Method: EPA 3050
Analysis Method: EPA 6020
Analysis Description: 6020 MET SOLID
Laboratory: Pace Analytical Services - Ormond Beach
Associated Lab Samples: 92800079003, 92800079006, 92800079007

METHOD BLANK: 6059812 Matrix: Solid
Associated Lab Samples: 92800079003, 92800079006, 92800079007

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Antimony	mg/kg	ND	2.4	0.63	06/13/25 10:00	N2
Arsenic	mg/kg	ND	1.2	0.19	06/13/25 10:00	
Beryllium	mg/kg	ND	0.15	0.071	06/13/25 10:00	
Cadmium	mg/kg	ND	0.15	0.032	06/13/25 10:00	
Chromium	mg/kg	ND	1.2	0.70	06/13/25 10:00	
Copper	mg/kg	ND	2.4	0.62	06/13/25 10:00	
Lead	mg/kg	ND	1.2	0.44	06/13/25 10:00	
Nickel	mg/kg	ND	1.2	0.59	06/13/25 10:00	
Selenium	mg/kg	ND	1.2	0.63	06/13/25 10:00	
Silver	mg/kg	ND	0.15	0.046	06/13/25 10:00	
Thallium	mg/kg	ND	1.2	0.21	06/13/25 10:00	
Zinc	mg/kg	ND	48.8	9.5	06/13/25 10:00	

LABORATORY CONTROL SAMPLE: 6059813

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Antimony	mg/kg	28.6	29.6	104	80-120	N2
Arsenic	mg/kg	28.6	29.2	102	80-120	
Beryllium	mg/kg	2.9	3.1	108	80-120	
Cadmium	mg/kg	2.9	3.0	104	80-120	
Chromium	mg/kg	28.6	30.4	106	80-120	
Copper	mg/kg	28.6	30.4	106	80-120	
Lead	mg/kg	28.6	32.7	115	80-120	
Nickel	mg/kg	28.6	31.9	112	80-120	
Selenium	mg/kg	28.6	28.3	99	80-120	
Silver	mg/kg	2.9	3.1	108	80-120	
Thallium	mg/kg	28.6	31.7	111	80-120	
Zinc	mg/kg	143	154	108	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6059814 6059815

Parameter	Units	35960668009 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Antimony	mg/kg	0.66U	31.2	32	32.0	32.4	102	101	75-125	1	20	N2
Arsenic	mg/kg	0.99J	31.2	32	29.9	30.5	93	92	75-125	2	20	
Beryllium	mg/kg	0.074U	3.16	3.16	2.7	2.7	83	83	75-125	1	20	
Cadmium	mg/kg	0.066J	3.16	3.16	3.2	3.2	99	98	75-125	1	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6059814 6059815

Parameter	Units	35960668009 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Chromium	mg/kg	5.9	31.2	32	35.9	36.3	96	95	75-125	1	20	
Copper	mg/kg	2.2J	31.2	32	32.9	32.9	98	96	75-125	0	20	
Lead	mg/kg	2.2	31.2	32	34.6	34.6	104	102	75-125	0	20	
Nickel	mg/kg	1.6	31.2	32	31.1	31.9	94	95	75-125	3	20	
Selenium	mg/kg	0.66U	31.2	32	30.8	31.0	98	96	75-125	1	20	
Silver	mg/kg	0.049U	3.16	3.16	3.1	3.1	98	97	75-125	1	20	
Thallium	mg/kg	0.22U	31.2	32	32.8	33.6	105	105	75-125	2	20	
Zinc	mg/kg	10.6J	157	160	159	160	95	93	75-125	1	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

QC Batch: 1104982
QC Batch Method: EPA 3050
Analysis Method: EPA 6020
Analysis Description: 6020 MET SOLID
Laboratory: Pace Analytical Services - Ormond Beach

Associated Lab Samples: 92800079001

METHOD BLANK: 6061365 Matrix: Solid
Associated Lab Samples: 92800079001

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Antimony	mg/kg	ND	2.4	0.63	06/13/25 21:38	N2
Arsenic	mg/kg	ND	1.2	0.19	06/13/25 21:38	
Beryllium	mg/kg	ND	0.14	0.070	06/13/25 21:38	
Cadmium	mg/kg	ND	0.14	0.031	06/13/25 21:38	
Chromium	mg/kg	ND	1.2	0.69	06/13/25 21:38	
Copper	mg/kg	ND	2.4	0.61	06/13/25 21:38	
Lead	mg/kg	ND	1.2	0.44	06/13/25 21:38	
Nickel	mg/kg	ND	1.2	0.58	06/13/25 21:38	
Selenium	mg/kg	ND	1.2	0.62	06/13/25 21:38	
Silver	mg/kg	ND	0.14	0.046	06/13/25 21:38	
Thallium	mg/kg	ND	1.2	0.21	06/13/25 21:38	
Zinc	mg/kg	ND	48.1	9.4	06/13/25 21:38	

LABORATORY CONTROL SAMPLE: 6061366

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Antimony	mg/kg	29.5	29.7	101	80-120	N2
Arsenic	mg/kg	29.5	30.9	105	80-120	
Beryllium	mg/kg	2.9	3.0	102	80-120	
Cadmium	mg/kg	2.9	3.1	104	80-120	
Chromium	mg/kg	29.5	31.4	107	80-120	
Copper	mg/kg	29.5	30.3	103	80-120	
Lead	mg/kg	29.5	34.1	116	80-120	
Nickel	mg/kg	29.5	33.2	113	80-120	
Selenium	mg/kg	29.5	28.4	96	80-120	
Silver	mg/kg	2.9	3.2	108	80-120	
Thallium	mg/kg	29.5	33.2	113	80-120	
Zinc	mg/kg	147	151	102	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6061367 6061368

Parameter	Units	92800449001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Antimony	mg/kg	ND	38.8	38.5	10.9	10.6	28	28	75-125	2	20	M1,N2
Arsenic	mg/kg	2.6	38.8	38.5	23.5	24.1	54	56	75-125	2	20	M1
Beryllium	mg/kg	2.2	3.86	3.86	5.9	6.3	97	107	75-125	5	20	
Cadmium	mg/kg	ND	3.86	3.86	4.1	4.0	103	102	75-125	2	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6061367 6061368

Parameter	Units	92800449001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Chromium	mg/kg	44.4	38.8	38.5	77.6	85.9	86	108	75-125	10	20	
Copper	mg/kg	314	38.8	38.5	411	456	250	369	75-125	10	20	M1
Lead	mg/kg	4.0	38.8	38.5	47.4	47.1	112	112	75-125	1	20	
Nickel	mg/kg	29.6	38.8	38.5	76.9	84.0	122	142	75-125	9	20	M1
Selenium	mg/kg	7.1	38.8	38.5	29.2	30.3	57	60	75-125	4	20	M1
Silver	mg/kg	ND	3.86	3.86	4.1	4.1	106	107	75-125	0	20	
Thallium	mg/kg	ND	38.8	38.5	42.0	42.1	108	109	75-125	0	20	
Zinc	mg/kg	78.5	193	192	289	299	109	114	75-125	3	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

QC Batch: 940173
QC Batch Method: EPA 5035A/5030B
Analysis Method: EPA 8260D
Analysis Description: 8260D 5035A 5030B
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92800079001, 92800079003, 92800079006

METHOD BLANK: 4832202 Matrix: Solid
Associated Lab Samples: 92800079001, 92800079003, 92800079006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	ND	0.0050	0.0019	06/06/25 22:47	2g
1,1,1-Trichloroethane	mg/kg	ND	0.0050	0.0026	06/06/25 22:47	2g
1,1,2,2-Tetrachloroethane	mg/kg	ND	0.0050	0.0013	06/06/25 22:47	2g
1,1,2-Trichloroethane	mg/kg	ND	0.0050	0.0017	06/06/25 22:47	2g
1,1-Dichloroethane	mg/kg	ND	0.0050	0.0021	06/06/25 22:47	2g
1,1-Dichloroethene	mg/kg	ND	0.0050	0.0021	06/06/25 22:47	2g
1,1-Dichloropropene	mg/kg	ND	0.0050	0.0024	06/06/25 22:47	2g
1,2,3-Trichlorobenzene	mg/kg	ND	0.0050	0.0040	06/06/25 22:47	2g
1,2,3-Trichloropropane	mg/kg	ND	0.0050	0.0025	06/06/25 22:47	2g
1,2,4-Trichlorobenzene	mg/kg	ND	0.0050	0.0042	06/06/25 22:47	2g
1,2,4-Trimethylbenzene	mg/kg	ND	0.0050	0.0030	06/06/25 22:47	2g
1,2-Dibromo-3-chloropropane	mg/kg	ND	0.0050	0.0019	06/06/25 22:47	2g
1,2-Dibromoethane (EDB)	mg/kg	ND	0.0050	0.0022	06/06/25 22:47	2g
1,2-Dichlorobenzene	mg/kg	ND	0.0050	0.0018	06/06/25 22:47	2g
1,2-Dichloroethane	mg/kg	ND	0.0050	0.0033	06/06/25 22:47	2g
1,2-Dichloropropane	mg/kg	ND	0.0050	0.0015	06/06/25 22:47	2g
1,3,5-Trimethylbenzene	mg/kg	ND	0.0050	0.0017	06/06/25 22:47	2g
1,3-Dichlorobenzene	mg/kg	ND	0.0050	0.0016	06/06/25 22:47	2g
1,3-Dichloropropane	mg/kg	ND	0.0050	0.0016	06/06/25 22:47	2g
1,4-Dichlorobenzene	mg/kg	ND	0.0050	0.0013	06/06/25 22:47	2g
2,2-Dichloropropane	mg/kg	ND	0.0050	0.0038	06/06/25 22:47	2g
2-Butanone (MEK)	mg/kg	ND	0.10	0.024	06/06/25 22:47	2g
2-Chlorotoluene	mg/kg	ND	0.0050	0.0018	06/06/25 22:47	2g
2-Hexanone	mg/kg	ND	0.050	0.0048	06/06/25 22:47	2g
4-Chlorotoluene	mg/kg	ND	0.0050	0.0028	06/06/25 22:47	2g
4-Methyl-2-pentanone (MIBK)	mg/kg	ND	0.050	0.0048	06/06/25 22:47	2g
Acetone	mg/kg	ND	0.10	0.032	06/06/25 22:47	2g
Benzene	mg/kg	ND	0.0050	0.0020	06/06/25 22:47	2g
Bromobenzene	mg/kg	ND	0.0050	0.0016	06/06/25 22:47	2g
Bromochloromethane	mg/kg	ND	0.0050	0.0015	06/06/25 22:47	2g
Bromodichloromethane	mg/kg	ND	0.0050	0.0019	06/06/25 22:47	2g
Bromoform	mg/kg	ND	0.0050	0.0018	06/06/25 22:47	2g
Bromomethane	mg/kg	ND	0.020	0.016	06/06/25 22:47	2g
Carbon tetrachloride	mg/kg	ND	0.0050	0.0019	06/06/25 22:47	2g
Chlorobenzene	mg/kg	ND	0.0050	0.0029	06/06/25 22:47	2g
Chloroethane	mg/kg	ND	0.010	0.0039	06/06/25 22:47	2g
Chloroform	mg/kg	ND	0.0050	0.0042	06/06/25 22:47	2g
Chloromethane	mg/kg	ND	0.010	0.0042	06/06/25 22:47	2g
cis-1,2-Dichloroethene	mg/kg	ND	0.0050	0.0017	06/06/25 22:47	2g
cis-1,3-Dichloropropene	mg/kg	ND	0.0050	0.0014	06/06/25 22:47	2g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

METHOD BLANK: 4832202 Matrix: Solid
Associated Lab Samples: 92800079001, 92800079003, 92800079006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Dibromochloromethane	mg/kg	ND	0.0050	0.0028	06/06/25 22:47	2g
Dibromomethane	mg/kg	ND	0.0050	0.0011	06/06/25 22:47	2g
Dichlorodifluoromethane	mg/kg	ND	0.010	0.0051	06/06/25 22:47	2g
Diisopropyl ether	mg/kg	ND	0.0050	0.0014	06/06/25 22:47	2g
Ethylbenzene	mg/kg	ND	0.0050	0.0023	06/06/25 22:47	2g
Hexachloro-1,3-butadiene	mg/kg	ND	0.010	0.0082	06/06/25 22:47	2g
Isopropylbenzene (Cumene)	mg/kg	ND	0.0050	0.0017	06/06/25 22:47	2g
m&p-Xylene	mg/kg	ND	0.010	0.0034	06/06/25 22:47	2g
Methyl-tert-butyl ether	mg/kg	ND	0.0050	0.0019	06/06/25 22:47	2g
Methylene Chloride	mg/kg	ND	0.020	0.014	06/06/25 22:47	2g
n-Butylbenzene	mg/kg	ND	0.0050	0.0032	06/06/25 22:47	2g
n-Propylbenzene	mg/kg	ND	0.0050	0.0018	06/06/25 22:47	2g
Naphthalene	mg/kg	ND	0.0050	0.0026	06/06/25 22:47	2g
o-Xylene	mg/kg	ND	0.0050	0.0022	06/06/25 22:47	2g
p-Isopropyltoluene	mg/kg	ND	0.0050	0.0025	06/06/25 22:47	2g
sec-Butylbenzene	mg/kg	ND	0.0050	0.0022	06/06/25 22:47	2g
Styrene	mg/kg	ND	0.0050	0.0013	06/06/25 22:47	2g
tert-Butylbenzene	mg/kg	ND	0.0050	0.0018	06/06/25 22:47	2g
Tetrachloroethene	mg/kg	ND	0.0050	0.0016	06/06/25 22:47	2g
Toluene	mg/kg	ND	0.0050	0.0034	06/06/25 22:47	2g
trans-1,2-Dichloroethene	mg/kg	ND	0.0050	0.0042	06/06/25 22:47	2g
trans-1,3-Dichloropropene	mg/kg	ND	0.0050	0.0017	06/06/25 22:47	2g
Trichloroethene	mg/kg	ND	0.0050	0.0040	06/06/25 22:47	2g
Trichlorofluoromethane	mg/kg	ND	0.0050	0.0028	06/06/25 22:47	2g
Vinyl acetate	mg/kg	ND	0.050	0.010	06/06/25 22:47	2g
Vinyl chloride	mg/kg	ND	0.010	0.0025	06/06/25 22:47	2g
Xylene (Total)	mg/kg	ND	0.010	0.0028	06/06/25 22:47	2g
1,2-Dichloroethane-d4 (S)	%	104	70-135		06/06/25 22:47	2g
4-Bromofluorobenzene (S)	%	91	70-130		06/06/25 22:47	2g
Toluene-d8 (S)	%	96	70-130		06/06/25 22:47	2g

LABORATORY CONTROL SAMPLE: 4832203

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	0.5	0.56	111	70-130	2g
1,1,1-Trichloroethane	mg/kg	0.5	0.46	91	68-130	2g
1,1,2,2-Tetrachloroethane	mg/kg	0.5	0.50	100	70-130	2g
1,1,2-Trichloroethane	mg/kg	0.5	0.50	100	70-130	2g
1,1-Dichloroethane	mg/kg	0.5	0.41	81	70-130	2g
1,1-Dichloroethene	mg/kg	0.5	0.45	90	67-139	2g
1,1-Dichloropropene	mg/kg	0.5	0.43	86	68-132	2g
1,2,3-Trichlorobenzene	mg/kg	0.5	0.54	109	68-130	2g
1,2,3-Trichloropropane	mg/kg	0.5	0.43	86	70-130	2g
1,2,4-Trichlorobenzene	mg/kg	0.5	0.53	106	67-130	2g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

LABORATORY CONTROL SAMPLE: 4832203

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,2,4-Trimethylbenzene	mg/kg	0.5	0.47	94	70-130	2g
1,2-Dibromo-3-chloropropane	mg/kg	0.5	0.53	106	68-130	2g
1,2-Dibromoethane (EDB)	mg/kg	0.5	0.51	102	70-130	2g
1,2-Dichlorobenzene	mg/kg	0.5	0.51	103	70-130	2g
1,2-Dichloroethane	mg/kg	0.5	0.42	84	68-130	2g
1,2-Dichloropropane	mg/kg	0.5	0.44	88	70-130	2g
1,3,5-Trimethylbenzene	mg/kg	0.5	0.52	104	70-130	2g
1,3-Dichlorobenzene	mg/kg	0.5	0.52	104	70-130	2g
1,3-Dichloropropane	mg/kg	0.5	0.48	96	70-130	2g
1,4-Dichlorobenzene	mg/kg	0.5	0.49	99	70-130	2g
2,2-Dichloropropane	mg/kg	0.5	0.42	84	49-137	2g
2-Butanone (MEK)	mg/kg	1	0.88	88	59-136	2g
2-Chlorotoluene	mg/kg	0.5	0.50	99	70-130	2g
2-Hexanone	mg/kg	1	1.1	105	63-143	2g
4-Chlorotoluene	mg/kg	0.5	0.50	101	70-130	2g
4-Methyl-2-pentanone (MIBK)	mg/kg	1	1.0	101	67-134	2g
Acetone	mg/kg	1	0.79	79	59-132	2g
Benzene	mg/kg	0.5	0.47	94	70-130	2g
Bromobenzene	mg/kg	0.5	0.52	104	70-130	2g
Bromochloromethane	mg/kg	0.5	0.48	97	70-130	2g
Bromodichloromethane	mg/kg	0.5	0.47	94	70-130	2g
Bromoform	mg/kg	0.5	0.60	120	70-130	2g
Bromomethane	mg/kg	0.5	0.40	81	36-180	2g
Carbon tetrachloride	mg/kg	0.5	0.55	110	69-133	2g
Chlorobenzene	mg/kg	0.5	0.51	103	70-130	2g
Chloroethane	mg/kg	0.5	0.44	87	61-147	2g
Chloroform	mg/kg	0.5	0.42	84	69-130	2g
Chloromethane	mg/kg	0.5	0.50	99	66-154	2g
cis-1,2-Dichloroethene	mg/kg	0.5	0.43	87	69-130	2g
cis-1,3-Dichloropropene	mg/kg	0.5	0.50	101	70-130	2g
Dibromochloromethane	mg/kg	0.5	0.56	112	70-130	2g
Dibromomethane	mg/kg	0.5	0.59	118	70-130	2g
Dichlorodifluoromethane	mg/kg	0.5	0.53	107	40-194	2g
Diisopropyl ether	mg/kg	0.5	0.41	81	64-130	2g
Ethylbenzene	mg/kg	0.5	0.50	100	69-130	2g
Hexachloro-1,3-butadiene	mg/kg	0.5	0.55	111	59-134	2g
Isopropylbenzene (Cumene)	mg/kg	0.5	0.60	120	70-130	2g
m&p-Xylene	mg/kg	1	1.1	107	70-130	2g
Methyl-tert-butyl ether	mg/kg	0.5	0.39	78	66-130	2g
Methylene Chloride	mg/kg	0.5	0.42	84	67-130	2g
n-Butylbenzene	mg/kg	0.5	0.47	95	66-130	2g
n-Propylbenzene	mg/kg	0.5	0.49	98	70-130	2g
Naphthalene	mg/kg	0.5	0.53	105	70-130	2g
o-Xylene	mg/kg	0.5	0.48	96	70-130	2g
p-Isopropyltoluene	mg/kg	0.5	0.51	103	69-130	2g
sec-Butylbenzene	mg/kg	0.5	0.50	99	70-130	2g
Styrene	mg/kg	0.5	0.48	96	70-130	2g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

LABORATORY CONTROL SAMPLE: 4832203

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
tert-Butylbenzene	mg/kg	0.5	0.45	90	61-130	2g
Tetrachloroethene	mg/kg	0.5	0.42	83	70-130	2g
Toluene	mg/kg	0.5	0.48	97	70-130	2g
trans-1,2-Dichloroethene	mg/kg	0.5	0.45	91	68-133	2g
trans-1,3-Dichloropropene	mg/kg	0.5	0.49	98	70-130	2g
Trichloroethene	mg/kg	0.5	0.53	105	70-130	2g
Trichlorofluoromethane	mg/kg	0.5	0.50	100	59-147	2g
Vinyl acetate	mg/kg	1	0.94	94	67-136	2g
Vinyl chloride	mg/kg	0.5	0.44	88	59-148	2g
Xylene (Total)	mg/kg	1.5	1.5	103	70-130	2g
1,2-Dichloroethane-d4 (S)	%			88	70-135	2g
4-Bromofluorobenzene (S)	%			103	70-130	2g
Toluene-d8 (S)	%			97	70-130	2g

MATRIX SPIKE SAMPLE: 4832204

Parameter	Units	92800151007 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	ND	0.66	0.55	83	10-174	2g
1,1,1-Trichloroethane	mg/kg	ND	0.66	0.49	74	10-178	2g
1,1,2,2-Tetrachloroethane	mg/kg	ND	0.66	0.45	68	10-164	2g
1,1,2-Trichloroethane	mg/kg	ND	0.66	0.50	75	10-167	2g
1,1-Dichloroethane	mg/kg	ND	0.66	0.39	59	10-175	2g
1,1-Dichloroethene	mg/kg	ND	0.66	0.43	65	10-189	2g
1,1-Dichloropropene	mg/kg	ND	0.66	0.45	69	10-179	2g
1,2,3-Trichlorobenzene	mg/kg	ND	0.66	0.42	63	10-154	2g
1,2,3-Trichloropropane	mg/kg	ND	0.66	0.65	99	10-157	2g
1,2,4-Trichlorobenzene	mg/kg	ND	0.66	0.45	68	10-156	2g
1,2,4-Trimethylbenzene	mg/kg	ND	0.66	0.41	62	10-169	2g
1,2-Dibromo-3-chloropropane	mg/kg	ND	0.66	0.42	63	10-148	2g
1,2-Dibromoethane (EDB)	mg/kg	ND	0.66	0.50	76	10-166	2g
1,2-Dichlorobenzene	mg/kg	ND	0.66	0.51	78	10-166	2g
1,2-Dichloroethane	mg/kg	ND	0.66	0.48	73	10-171	2g
1,2-Dichloropropane	mg/kg	ND	0.66	0.44	67	10-175	2g
1,3,5-Trimethylbenzene	mg/kg	ND	0.66	0.46	70	10-171	2g
1,3-Dichlorobenzene	mg/kg	ND	0.66	0.50	76	10-166	2g
1,3-Dichloropropane	mg/kg	ND	0.66	0.48	72	10-167	2g
1,4-Dichlorobenzene	mg/kg	ND	0.66	0.44	67	10-163	2g
2,2-Dichloropropane	mg/kg	ND	0.66	0.40	61	10-158	2g
2-Butanone (MEK)	mg/kg	ND	1.3	0.45	34	10-156	2g
2-Chlorotoluene	mg/kg	ND	0.66	0.46	70	10-167	2g
2-Hexanone	mg/kg	ND	1.3	0.75	57	10-159	2g
4-Chlorotoluene	mg/kg	ND	0.66	0.51	77	10-167	2g
4-Methyl-2-pentanone (MIBK)	mg/kg	ND	1.3	0.87	65	10-162	2g
Acetone	mg/kg	ND	1.3	0.39	29	10-131	2g
Benzene	mg/kg	ND	0.66	0.49	74	10-175	2g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

MATRIX SPIKE SAMPLE: 4832204

Parameter	Units	92800151007 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Bromobenzene	mg/kg	ND	0.66	0.51	77	10-166	2g
Bromochloromethane	mg/kg	ND	0.66	0.52	78	10-173	2g
Bromodichloromethane	mg/kg	ND	0.66	0.46	70	10-169	2g
Bromoform	mg/kg	ND	0.66	0.51	77	10-165	2g
Bromomethane	mg/kg	ND	0.66	0.56	84	10-130	2g
Carbon tetrachloride	mg/kg	ND	0.66	0.59	89	10-182	2g
Chlorobenzene	mg/kg	ND	0.66	0.49	74	10-171	2g
Chloroethane	mg/kg	ND	0.66	0.37	56	10-130	2g
Chloroform	mg/kg	ND	0.66	0.45	68	10-171	2g
Chloromethane	mg/kg	ND	0.66	0.60	90	10-200	2g
cis-1,2-Dichloroethene	mg/kg	ND	0.66	0.47	72	10-172	2g
cis-1,3-Dichloropropene	mg/kg	ND	0.66	0.45	69	10-160	2g
Dibromochloromethane	mg/kg	ND	0.66	0.52	79	10-168	2g
Dibromomethane	mg/kg	ND	0.66	0.62	93	10-173	2g
Dichlorodifluoromethane	mg/kg	ND	0.66	0.56	84	10-200	2g
Diisopropyl ether	mg/kg	ND	0.66	0.40	61	10-169	2g
Ethylbenzene	mg/kg	ND	0.66	0.49	74	10-169	2g
Hexachloro-1,3-butadiene	mg/kg	ND	0.66	0.50	76	10-190	2g
Isopropylbenzene (Cumene)	mg/kg	ND	0.66	0.56	84	10-179	2g
m&p-Xylene	mg/kg	ND	1.3	0.99	75	10-174	2g
Methyl-tert-butyl ether	mg/kg	ND	0.66	0.44	67	10-157	2g
Methylene Chloride	mg/kg	ND	0.66	0.48	71	10-177	2g
n-Butylbenzene	mg/kg	ND	0.66	0.41	62	10-174	2g
n-Propylbenzene	mg/kg	ND	0.66	0.47	72	10-170	2g
Naphthalene	mg/kg	ND	0.66	0.43	65	10-155	2g
o-Xylene	mg/kg	ND	0.66	0.47	71	10-175	2g
p-Isopropyltoluene	mg/kg	ND	0.66	0.47	71	10-174	2g
sec-Butylbenzene	mg/kg	ND	0.66	0.48	73	10-177	2g
Styrene	mg/kg	ND	0.66	0.44	67	10-174	2g
tert-Butylbenzene	mg/kg	ND	0.66	0.45	68	10-142	2g
Tetrachloroethene	mg/kg	ND	0.66	0.37	57	10-166	2g
Toluene	mg/kg	ND	0.66	0.47	72	10-173	2g
trans-1,2-Dichloroethene	mg/kg	ND	0.66	0.46	69	10-173	2g
trans-1,3-Dichloropropene	mg/kg	ND	0.66	0.47	71	10-159	2g
Trichloroethene	mg/kg	ND	0.66	0.53	80	10-181	2g
Trichlorofluoromethane	mg/kg	ND	0.66	0.13	19	10-130	2g
Vinyl acetate	mg/kg	ND	1.3	0.76	58	10-158	2g
Vinyl chloride	mg/kg	ND	0.66	0.51	78	10-189	2g
Xylene (Total)	mg/kg	ND	2	1.5	74	10-174	2g
1,2-Dichloroethane-d4 (S)	%				88	70-135	2g
4-Bromofluorobenzene (S)	%				102	70-130	2g
Toluene-d8 (S)	%				95	70-130	2g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

SAMPLE DUPLICATE: 4832205

Parameter	Units	92800212001 Result	Dup Result	RPD	Max RPD	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	ND	ND		30	2g
1,1,1-Trichloroethane	mg/kg	ND	ND		30	2g
1,1,2,2-Tetrachloroethane	mg/kg	ND	ND		30	2g
1,1,2-Trichloroethane	mg/kg	ND	ND		30	2g
1,1-Dichloroethane	mg/kg	ND	ND		30	2g
1,1-Dichloroethene	mg/kg	ND	ND		30	2g
1,1-Dichloropropene	mg/kg	ND	ND		30	2g
1,2,3-Trichlorobenzene	mg/kg	ND	ND		30	2g
1,2,3-Trichloropropane	mg/kg	ND	ND		30	2g
1,2,4-Trichlorobenzene	mg/kg	ND	ND		30	2g
1,2,4-Trimethylbenzene	mg/kg	ND	ND		30	2g
1,2-Dibromo-3-chloropropane	mg/kg	ND	ND		30	2g
1,2-Dibromoethane (EDB)	mg/kg	ND	ND		30	2g
1,2-Dichlorobenzene	mg/kg	ND	ND		30	2g
1,2-Dichloroethane	mg/kg	ND	ND		30	2g
1,2-Dichloropropane	mg/kg	ND	ND		30	2g
1,3,5-Trimethylbenzene	mg/kg	ND	ND		30	2g
1,3-Dichlorobenzene	mg/kg	ND	ND		30	2g
1,3-Dichloropropane	mg/kg	ND	ND		30	2g
1,4-Dichlorobenzene	mg/kg	ND	ND		30	2g
2,2-Dichloropropane	mg/kg	ND	ND		30	2g
2-Butanone (MEK)	mg/kg	ND	ND		30	2g
2-Chlorotoluene	mg/kg	ND	ND		30	2g
2-Hexanone	mg/kg	ND	ND		30	2g
4-Chlorotoluene	mg/kg	ND	ND		30	2g
4-Methyl-2-pentanone (MIBK)	mg/kg	ND	ND		30	2g
Acetone	mg/kg	ND	ND		30	2g
Benzene	mg/kg	ND	ND		30	2g
Bromobenzene	mg/kg	ND	ND		30	2g
Bromochloromethane	mg/kg	ND	ND		30	2g
Bromodichloromethane	mg/kg	ND	ND		30	2g
Bromoform	mg/kg	ND	ND		30	2g
Bromomethane	mg/kg	ND	ND		30	2g
Carbon tetrachloride	mg/kg	ND	ND		30	2g
Chlorobenzene	mg/kg	ND	ND		30	2g
Chloroethane	mg/kg	ND	ND		30	2g
Chloroform	mg/kg	ND	ND		30	2g
Chloromethane	mg/kg	ND	ND		30	2g
cis-1,2-Dichloroethene	mg/kg	ND	ND		30	2g
cis-1,3-Dichloropropene	mg/kg	ND	ND		30	2g
Dibromochloromethane	mg/kg	ND	ND		30	2g
Dibromomethane	mg/kg	ND	ND		30	2g
Dichlorodifluoromethane	mg/kg	ND	ND		30	2g
Diisopropyl ether	mg/kg	ND	ND		30	2g
Ethylbenzene	mg/kg	ND	ND		30	2g
Hexachloro-1,3-butadiene	mg/kg	ND	ND		30	2g
Isopropylbenzene (Cumene)	mg/kg	ND	ND		30	2g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

SAMPLE DUPLICATE: 4832205

Parameter	Units	92800212001 Result	Dup Result	RPD	Max RPD	Qualifiers
m&p-Xylene	mg/kg	ND	ND		30	2g
Methyl-tert-butyl ether	mg/kg	ND	ND		30	2g
Methylene Chloride	mg/kg	ND	ND		30	2g
n-Butylbenzene	mg/kg	ND	ND		30	2g
n-Propylbenzene	mg/kg	ND	ND		30	2g
Naphthalene	mg/kg	ND	ND		30	2g
o-Xylene	mg/kg	ND	ND		30	2g
p-Isopropyltoluene	mg/kg	ND	ND		30	2g
sec-Butylbenzene	mg/kg	ND	ND		30	2g
Styrene	mg/kg	ND	ND		30	2g
tert-Butylbenzene	mg/kg	ND	ND		30	2g
Tetrachloroethene	mg/kg	ND	ND		30	2g
Toluene	mg/kg	ND	ND		30	2g
trans-1,2-Dichloroethene	mg/kg	ND	ND		30	2g
trans-1,3-Dichloropropene	mg/kg	ND	ND		30	2g
Trichloroethene	mg/kg	ND	ND		30	2g
Trichlorofluoromethane	mg/kg	ND	ND		30	2g
Vinyl acetate	mg/kg	ND	ND		30	2g
Vinyl chloride	mg/kg	ND	ND		30	2g
Xylene (Total)	mg/kg	ND	ND		30	2g
1,2-Dichloroethane-d4 (S)	%	102	107			2g
4-Bromofluorobenzene (S)	%	94	93			2g
Toluene-d8 (S)	%	96	94			2g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

QC Batch: 940175
QC Batch Method: EPA 5035A/5030B
Analysis Method: EPA 8260D
Analysis Description: 8260D 5035A 5030B
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92800079007, 92800079008, 92800079009, 92800079010

METHOD BLANK: 4832210 Matrix: Solid
Associated Lab Samples: 92800079007, 92800079008, 92800079009, 92800079010

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	ND	0.0050	0.0019	06/06/25 21:21	
1,1,1-Trichloroethane	mg/kg	ND	0.0050	0.0026	06/06/25 21:21	
1,1,2,2-Tetrachloroethane	mg/kg	ND	0.0050	0.0013	06/06/25 21:21	
1,1,2-Trichloroethane	mg/kg	ND	0.0050	0.0017	06/06/25 21:21	
1,1-Dichloroethane	mg/kg	ND	0.0050	0.0021	06/06/25 21:21	
1,1-Dichloroethene	mg/kg	ND	0.0050	0.0021	06/06/25 21:21	
1,1-Dichloropropene	mg/kg	ND	0.0050	0.0024	06/06/25 21:21	
1,2,3-Trichlorobenzene	mg/kg	ND	0.0050	0.0040	06/06/25 21:21	
1,2,3-Trichloropropane	mg/kg	ND	0.0050	0.0025	06/06/25 21:21	
1,2,4-Trichlorobenzene	mg/kg	ND	0.0050	0.0042	06/06/25 21:21	
1,2,4-Trimethylbenzene	mg/kg	ND	0.0050	0.0030	06/06/25 21:21	
1,2-Dibromo-3-chloropropane	mg/kg	ND	0.0050	0.0019	06/06/25 21:21	
1,2-Dibromoethane (EDB)	mg/kg	ND	0.0050	0.0022	06/06/25 21:21	
1,2-Dichlorobenzene	mg/kg	ND	0.0050	0.0018	06/06/25 21:21	
1,2-Dichloroethane	mg/kg	ND	0.0050	0.0033	06/06/25 21:21	
1,2-Dichloropropane	mg/kg	ND	0.0050	0.0015	06/06/25 21:21	
1,3,5-Trimethylbenzene	mg/kg	ND	0.0050	0.0017	06/06/25 21:21	
1,3-Dichlorobenzene	mg/kg	ND	0.0050	0.0016	06/06/25 21:21	
1,3-Dichloropropane	mg/kg	ND	0.0050	0.0016	06/06/25 21:21	
1,4-Dichlorobenzene	mg/kg	ND	0.0050	0.0013	06/06/25 21:21	
2,2-Dichloropropane	mg/kg	ND	0.0050	0.0038	06/06/25 21:21	
2-Butanone (MEK)	mg/kg	ND	0.10	0.024	06/06/25 21:21	
2-Chlorotoluene	mg/kg	ND	0.0050	0.0018	06/06/25 21:21	
2-Hexanone	mg/kg	ND	0.050	0.0048	06/06/25 21:21	
4-Chlorotoluene	mg/kg	ND	0.0050	0.0028	06/06/25 21:21	
4-Methyl-2-pentanone (MIBK)	mg/kg	ND	0.050	0.0048	06/06/25 21:21	
Acetone	mg/kg	ND	0.10	0.032	06/06/25 21:21	
Benzene	mg/kg	ND	0.0050	0.0020	06/06/25 21:21	
Bromobenzene	mg/kg	ND	0.0050	0.0016	06/06/25 21:21	
Bromochloromethane	mg/kg	ND	0.0050	0.0015	06/06/25 21:21	
Bromodichloromethane	mg/kg	ND	0.0050	0.0019	06/06/25 21:21	
Bromoform	mg/kg	ND	0.0050	0.0018	06/06/25 21:21	
Bromomethane	mg/kg	ND	0.020	0.016	06/06/25 21:21	
Carbon tetrachloride	mg/kg	ND	0.0050	0.0019	06/06/25 21:21	
Chlorobenzene	mg/kg	ND	0.0050	0.0029	06/06/25 21:21	
Chloroethane	mg/kg	ND	0.010	0.0039	06/06/25 21:21	
Chloroform	mg/kg	ND	0.0050	0.0042	06/06/25 21:21	
Chloromethane	mg/kg	ND	0.010	0.0042	06/06/25 21:21	
cis-1,2-Dichloroethene	mg/kg	ND	0.0050	0.0017	06/06/25 21:21	
cis-1,3-Dichloropropene	mg/kg	ND	0.0050	0.0014	06/06/25 21:21	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

METHOD BLANK: 4832210 Matrix: Solid
Associated Lab Samples: 92800079007, 92800079008, 92800079009, 92800079010

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Dibromochloromethane	mg/kg	ND	0.0050	0.0028	06/06/25 21:21	
Dibromomethane	mg/kg	ND	0.0050	0.0011	06/06/25 21:21	
Dichlorodifluoromethane	mg/kg	ND	0.010	0.0051	06/06/25 21:21	
Diisopropyl ether	mg/kg	ND	0.0050	0.0014	06/06/25 21:21	
Ethylbenzene	mg/kg	ND	0.0050	0.0023	06/06/25 21:21	
Hexachloro-1,3-butadiene	mg/kg	ND	0.010	0.0082	06/06/25 21:21	
Isopropylbenzene (Cumene)	mg/kg	ND	0.0050	0.0017	06/06/25 21:21	
m&p-Xylene	mg/kg	ND	0.010	0.0034	06/06/25 21:21	
Methyl-tert-butyl ether	mg/kg	ND	0.0050	0.0019	06/06/25 21:21	
Methylene Chloride	mg/kg	ND	0.020	0.014	06/06/25 21:21	
n-Butylbenzene	mg/kg	ND	0.0050	0.0032	06/06/25 21:21	
n-Propylbenzene	mg/kg	ND	0.0050	0.0018	06/06/25 21:21	
Naphthalene	mg/kg	ND	0.0050	0.0026	06/06/25 21:21	
o-Xylene	mg/kg	ND	0.0050	0.0022	06/06/25 21:21	
p-Isopropyltoluene	mg/kg	ND	0.0050	0.0025	06/06/25 21:21	
sec-Butylbenzene	mg/kg	ND	0.0050	0.0022	06/06/25 21:21	
Styrene	mg/kg	ND	0.0050	0.0013	06/06/25 21:21	
tert-Butylbenzene	mg/kg	ND	0.0050	0.0018	06/06/25 21:21	
Tetrachloroethene	mg/kg	ND	0.0050	0.0016	06/06/25 21:21	
Toluene	mg/kg	ND	0.0050	0.0034	06/06/25 21:21	
trans-1,2-Dichloroethene	mg/kg	ND	0.0050	0.0042	06/06/25 21:21	
trans-1,3-Dichloropropene	mg/kg	ND	0.0050	0.0017	06/06/25 21:21	
Trichloroethene	mg/kg	ND	0.0050	0.0040	06/06/25 21:21	
Trichlorofluoromethane	mg/kg	ND	0.0050	0.0028	06/06/25 21:21	
Vinyl acetate	mg/kg	ND	0.050	0.010	06/06/25 21:21	
Vinyl chloride	mg/kg	ND	0.010	0.0025	06/06/25 21:21	
Xylene (Total)	mg/kg	ND	0.010	0.0028	06/06/25 21:21	
1,2-Dichloroethane-d4 (S)	%	113	70-135		06/06/25 21:21	
4-Bromofluorobenzene (S)	%	99	70-130		06/06/25 21:21	
Toluene-d8 (S)	%	99	70-130		06/06/25 21:21	

LABORATORY CONTROL SAMPLE: 4832211

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	0.5	0.51	101	70-130	
1,1,1-Trichloroethane	mg/kg	0.5	0.46	92	68-130	
1,1,2,2-Tetrachloroethane	mg/kg	0.5	0.48	95	70-130	
1,1,2-Trichloroethane	mg/kg	0.5	0.48	95	70-130	
1,1-Dichloroethane	mg/kg	0.5	0.42	85	70-130	
1,1-Dichloroethene	mg/kg	0.5	0.46	92	67-139	
1,1-Dichloropropene	mg/kg	0.5	0.42	83	68-132	
1,2,3-Trichlorobenzene	mg/kg	0.5	0.50	100	68-130	
1,2,3-Trichloropropane	mg/kg	0.5	0.51	103	70-130	
1,2,4-Trichlorobenzene	mg/kg	0.5	0.48	95	67-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

LABORATORY CONTROL SAMPLE: 4832211

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,2,4-Trimethylbenzene	mg/kg	0.5	0.48	96	70-130	
1,2-Dibromo-3-chloropropane	mg/kg	0.5	0.49	99	68-130	
1,2-Dibromoethane (EDB)	mg/kg	0.5	0.49	99	70-130	
1,2-Dichlorobenzene	mg/kg	0.5	0.46	93	70-130	
1,2-Dichloroethane	mg/kg	0.5	0.47	95	68-130	
1,2-Dichloropropane	mg/kg	0.5	0.43	85	70-130	
1,3,5-Trimethylbenzene	mg/kg	0.5	0.47	94	70-130	
1,3-Dichlorobenzene	mg/kg	0.5	0.47	93	70-130	
1,3-Dichloropropane	mg/kg	0.5	0.46	93	70-130	
1,4-Dichlorobenzene	mg/kg	0.5	0.48	95	70-130	
2,2-Dichloropropane	mg/kg	0.5	0.45	90	49-137	
2-Butanone (MEK)	mg/kg	1	0.92	92	59-136	
2-Chlorotoluene	mg/kg	0.5	0.47	93	70-130	
2-Hexanone	mg/kg	1	0.98	98	63-143	
4-Chlorotoluene	mg/kg	0.5	0.48	96	70-130	
4-Methyl-2-pentanone (MIBK)	mg/kg	1	0.95	95	67-134	
Acetone	mg/kg	1	0.99	99	59-132	
Benzene	mg/kg	0.5	0.47	93	70-130	
Bromobenzene	mg/kg	0.5	0.49	97	70-130	
Bromochloromethane	mg/kg	0.5	0.47	94	70-130	
Bromodichloromethane	mg/kg	0.5	0.50	100	70-130	
Bromoform	mg/kg	0.5	0.56	111	70-130	
Bromomethane	mg/kg	0.5	0.43	85	36-180	
Carbon tetrachloride	mg/kg	0.5	0.48	95	69-133	
Chlorobenzene	mg/kg	0.5	0.46	93	70-130	
Chloroethane	mg/kg	0.5	0.40	79	61-147	
Chloroform	mg/kg	0.5	0.44	88	69-130	
Chloromethane	mg/kg	0.5	0.42	85	66-154	
cis-1,2-Dichloroethene	mg/kg	0.5	0.42	84	69-130	
cis-1,3-Dichloropropene	mg/kg	0.5	0.46	93	70-130	
Dibromochloromethane	mg/kg	0.5	0.52	104	70-130	
Dibromomethane	mg/kg	0.5	0.54	108	70-130	
Dichlorodifluoromethane	mg/kg	0.5	0.55	110	40-194	
Diisopropyl ether	mg/kg	0.5	0.41	81	64-130	
Ethylbenzene	mg/kg	0.5	0.43	87	69-130	
Hexachloro-1,3-butadiene	mg/kg	0.5	0.42	85	59-134	
Isopropylbenzene (Cumene)	mg/kg	0.5	0.53	106	70-130	
m&p-Xylene	mg/kg	1	0.96	96	70-130	
Methyl-tert-butyl ether	mg/kg	0.5	0.42	85	66-130	
Methylene Chloride	mg/kg	0.5	0.40	80	67-130	
n-Butylbenzene	mg/kg	0.5	0.45	89	66-130	
n-Propylbenzene	mg/kg	0.5	0.46	91	70-130	
Naphthalene	mg/kg	0.5	0.50	99	70-130	
o-Xylene	mg/kg	0.5	0.50	99	70-130	
p-Isopropyltoluene	mg/kg	0.5	0.46	92	69-130	
sec-Butylbenzene	mg/kg	0.5	0.47	94	70-130	
Styrene	mg/kg	0.5	0.50	101	70-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

LABORATORY CONTROL SAMPLE: 4832211

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
tert-Butylbenzene	mg/kg	0.5	0.45	91	61-130	
Tetrachloroethene	mg/kg	0.5	0.42	84	70-130	
Toluene	mg/kg	0.5	0.44	88	70-130	
trans-1,2-Dichloroethene	mg/kg	0.5	0.44	88	68-133	
trans-1,3-Dichloropropene	mg/kg	0.5	0.47	94	70-130	
Trichloroethene	mg/kg	0.5	0.49	97	70-130	
Trichlorofluoromethane	mg/kg	0.5	0.48	97	59-147	
Vinyl acetate	mg/kg	1	0.99	99	67-136	
Vinyl chloride	mg/kg	0.5	0.40	79	59-148	
Xylene (Total)	mg/kg	1.5	1.5	97	70-130	
1,2-Dichloroethane-d4 (S)	%			101	70-135	
4-Bromofluorobenzene (S)	%			102	70-130	
Toluene-d8 (S)	%			98	70-130	

MATRIX SPIKE SAMPLE: 4832212

Parameter	Units	92800079007 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	ND	0.81	0.50	63	10-174	
1,1,1-Trichloroethane	mg/kg	ND	0.81	0.49	62	10-178	
1,1,2,2-Tetrachloroethane	mg/kg	ND	0.81	0.39	49	10-164	
1,1,2-Trichloroethane	mg/kg	ND	0.81	0.43	54	10-167	
1,1-Dichloroethane	mg/kg	ND	0.81	0.44	56	10-175	
1,1-Dichloroethene	mg/kg	ND	0.81	0.49	61	10-189	
1,1-Dichloropropene	mg/kg	ND	0.81	0.41	51	10-179	
1,2,3-Trichlorobenzene	mg/kg	ND	0.81	0.36	45	10-154	
1,2,3-Trichloropropane	mg/kg	ND	0.81	0.41	51	10-157	
1,2,4-Trichlorobenzene	mg/kg	ND	0.81	0.39	49	10-156	
1,2,4-Trimethylbenzene	mg/kg	ND	0.81	0.42	53	10-169	
1,2-Dibromo-3-chloropropane	mg/kg	ND	0.81	0.39	49	10-148	
1,2-Dibromoethane (EDB)	mg/kg	ND	0.81	0.44	55	10-166	
1,2-Dichlorobenzene	mg/kg	ND	0.81	0.42	53	10-166	
1,2-Dichloroethane	mg/kg	ND	0.81	0.46	57	10-171	
1,2-Dichloropropane	mg/kg	ND	0.81	0.42	53	10-175	
1,3,5-Trimethylbenzene	mg/kg	ND	0.81	0.42	53	10-171	
1,3-Dichlorobenzene	mg/kg	ND	0.81	0.40	50	10-166	
1,3-Dichloropropane	mg/kg	ND	0.81	0.41	52	10-167	
1,4-Dichlorobenzene	mg/kg	ND	0.81	0.43	54	10-163	
2,2-Dichloropropane	mg/kg	ND	0.81	0.41	51	10-158	
2-Butanone (MEK)	mg/kg	0.13J	1.7	0.71	37	10-156	
2-Chlorotoluene	mg/kg	ND	0.81	0.42	52	10-167	
2-Hexanone	mg/kg	ND	1.7	0.68	42	10-159	
4-Chlorotoluene	mg/kg	ND	0.81	0.41	52	10-167	
4-Methyl-2-pentanone (MIBK)	mg/kg	ND	1.7	0.71	44	10-162	
Acetone	mg/kg	ND	1.7	0.69	43	10-131	
Benzene	mg/kg	ND	0.81	0.49	62	10-175	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

MATRIX SPIKE SAMPLE: 4832212

Parameter	Units	92800079007 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Bromobenzene	mg/kg	ND	0.81	0.44	55	10-166	
Bromochloromethane	mg/kg	ND	0.81	0.45	56	10-173	
Bromodichloromethane	mg/kg	ND	0.81	0.46	57	10-169	
Bromoform	mg/kg	ND	0.81	0.46	57	10-165	
Bromomethane	mg/kg	ND	0.81	0.23	29	10-130	
Carbon tetrachloride	mg/kg	ND	0.81	0.40	51	10-182	
Chlorobenzene	mg/kg	ND	0.81	0.45	57	10-171	
Chloroethane	mg/kg	ND	0.81	0.26	32	10-130	
Chloroform	mg/kg	ND	0.81	0.46	58	10-171	
Chloromethane	mg/kg	ND	0.81	0.50	63	10-200	
cis-1,2-Dichloroethene	mg/kg	ND	0.81	0.44	54	10-172	
cis-1,3-Dichloropropene	mg/kg	ND	0.81	0.42	52	10-160	
Dibromochloromethane	mg/kg	ND	0.81	0.44	55	10-168	
Dibromomethane	mg/kg	ND	0.81	0.49	61	10-173	
Dichlorodifluoromethane	mg/kg	ND	0.81	0.55	69	10-200	
Diisopropyl ether	mg/kg	ND	0.81	0.39	49	10-169	
Ethylbenzene	mg/kg	ND	0.81	0.42	52	10-169	
Hexachloro-1,3-butadiene	mg/kg	ND	0.81	0.42	53	10-190	
Isopropylbenzene (Cumene)	mg/kg	ND	0.81	0.49	61	10-179	
m&p-Xylene	mg/kg	ND	1.7	0.88	55	10-174	
Methyl-tert-butyl ether	mg/kg	ND	0.81	0.38	47	10-157	
Methylene Chloride	mg/kg	ND	0.81	0.25	29	10-177	
n-Butylbenzene	mg/kg	ND	0.81	0.38	47	10-174	
n-Propylbenzene	mg/kg	ND	0.81	0.41	51	10-170	
Naphthalene	mg/kg	ND	0.81	0.36	45	10-155	
o-Xylene	mg/kg	ND	0.81	0.46	58	10-175	
p-Isopropyltoluene	mg/kg	ND	0.81	0.40	51	10-174	
sec-Butylbenzene	mg/kg	ND	0.81	0.43	54	10-177	
Styrene	mg/kg	ND	0.81	0.45	56	10-174	
tert-Butylbenzene	mg/kg	ND	0.81	0.43	54	10-142	
Tetrachloroethene	mg/kg	ND	0.81	0.41	51	10-166	
Toluene	mg/kg	ND	0.81	0.45	56	10-173	
trans-1,2-Dichloroethene	mg/kg	ND	0.81	0.45	57	10-173	
trans-1,3-Dichloropropene	mg/kg	ND	0.81	0.40	50	10-159	
Trichloroethene	mg/kg	ND	0.81	0.50	62	10-181	
Trichlorofluoromethane	mg/kg	ND	0.81	0.34	42	10-130	
Vinyl acetate	mg/kg	ND	1.7	0.78	49	10-158	
Vinyl chloride	mg/kg	ND	0.81	0.40	50	10-189	
Xylene (Total)	mg/kg	ND	2.4	1.3	56	10-174	
1,2-Dichloroethane-d4 (S)	%				98	70-135	
4-Bromofluorobenzene (S)	%				97	70-130	
Toluene-d8 (S)	%				99	70-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

SAMPLE DUPLICATE: 4832213

Parameter	Units	92800079008 Result	Dup Result	RPD	Max RPD	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	ND	ND		30	
1,1,1-Trichloroethane	mg/kg	ND	ND		30	
1,1,2,2-Tetrachloroethane	mg/kg	ND	ND		30	
1,1,2-Trichloroethane	mg/kg	ND	ND		30	
1,1-Dichloroethane	mg/kg	ND	ND		30	
1,1-Dichloroethene	mg/kg	ND	ND		30	
1,1-Dichloropropene	mg/kg	ND	ND		30	
1,2,3-Trichlorobenzene	mg/kg	ND	ND		30	
1,2,3-Trichloropropane	mg/kg	ND	ND		30	
1,2,4-Trichlorobenzene	mg/kg	ND	ND		30	
1,2,4-Trimethylbenzene	mg/kg	0.050	0.055	9	30	
1,2-Dibromo-3-chloropropane	mg/kg	ND	ND		30	
1,2-Dibromoethane (EDB)	mg/kg	ND	ND		30	
1,2-Dichlorobenzene	mg/kg	ND	ND		30	
1,2-Dichloroethane	mg/kg	ND	ND		30	
1,2-Dichloropropane	mg/kg	ND	ND		30	
1,3,5-Trimethylbenzene	mg/kg	0.023	0.023	3	30	
1,3-Dichlorobenzene	mg/kg	ND	ND		30	
1,3-Dichloropropane	mg/kg	ND	ND		30	
1,4-Dichlorobenzene	mg/kg	ND	ND		30	
2,2-Dichloropropane	mg/kg	ND	ND		30	
2-Butanone (MEK)	mg/kg	ND	ND		30	
2-Chlorotoluene	mg/kg	ND	ND		30	
2-Hexanone	mg/kg	ND	ND		30	
4-Chlorotoluene	mg/kg	ND	ND		30	
4-Methyl-2-pentanone (MIBK)	mg/kg	ND	ND		30	
Acetone	mg/kg	ND	ND		30	
Benzene	mg/kg	0.011	0.012	3	30	
Bromobenzene	mg/kg	ND	ND		30	
Bromochloromethane	mg/kg	ND	ND		30	
Bromodichloromethane	mg/kg	ND	ND		30	
Bromoform	mg/kg	ND	ND		30	
Bromomethane	mg/kg	ND	ND		30	
Carbon tetrachloride	mg/kg	ND	ND		30	
Chlorobenzene	mg/kg	ND	ND		30	
Chloroethane	mg/kg	ND	ND		30	
Chloroform	mg/kg	ND	ND		30	
Chloromethane	mg/kg	ND	ND		30	
cis-1,2-Dichloroethene	mg/kg	ND	ND		30	
cis-1,3-Dichloropropene	mg/kg	ND	ND		30	
Dibromochloromethane	mg/kg	ND	ND		30	
Dibromomethane	mg/kg	ND	ND		30	
Dichlorodifluoromethane	mg/kg	ND	ND		30	
Diisopropyl ether	mg/kg	ND	ND		30	
Ethylbenzene	mg/kg	0.018	0.018	1	30	
Hexachloro-1,3-butadiene	mg/kg	ND	ND		30	
Isopropylbenzene (Cumene)	mg/kg	0.0060J	0.0064J		30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

SAMPLE DUPLICATE: 4832213

Parameter	Units	92800079008 Result	Dup Result	RPD	Max RPD	Qualifiers
m&p-Xylene	mg/kg	0.061	0.065	6	30	
Methyl-tert-butyl ether	mg/kg	ND	ND		30	
Methylene Chloride	mg/kg	ND	ND		30	
n-Butylbenzene	mg/kg	0.0055J	0.0058J		30	
n-Propylbenzene	mg/kg	ND	ND		30	
Naphthalene	mg/kg	0.039	0.041	3	30	
o-Xylene	mg/kg	0.028	0.029	4	30	
p-Isopropyltoluene	mg/kg	ND	ND		30	
sec-Butylbenzene	mg/kg	ND	ND		30	
Styrene	mg/kg	ND	ND		30	
tert-Butylbenzene	mg/kg	ND	ND		30	
Tetrachloroethene	mg/kg	0.011	0.010	5	30	
Toluene	mg/kg	0.028	0.028	1	30	
trans-1,2-Dichloroethene	mg/kg	ND	ND		30	
trans-1,3-Dichloropropene	mg/kg	ND	ND		30	
Trichloroethene	mg/kg	ND	ND		30	
Trichlorofluoromethane	mg/kg	ND	ND		30	
Vinyl acetate	mg/kg	ND	ND		30	
Vinyl chloride	mg/kg	ND	ND		30	
Xylene (Total)	mg/kg	0.090	0.094	5	30	
1,2-Dichloroethane-d4 (S)	%	101	102			
4-Bromofluorobenzene (S)	%	97	99			
Toluene-d8 (S)	%	100	97			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

QC Batch: 939919 | Analysis Method: EPA 7199
QC Batch Method: EPA 7199 | Analysis Description: 7199 Chromium, Hexavalent
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92800079001, 92800079003, 92800079006, 92800079007, 92800079008, 92800079009, 92800079010

METHOD BLANK: 4830575 Matrix: Solid
Associated Lab Samples: 92800079001, 92800079003, 92800079006, 92800079007, 92800079008, 92800079009, 92800079010

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Chromium, Hexavalent	mg/kg	ND	1.0	0.17	06/06/25 09:44	

LABORATORY CONTROL SAMPLE: 4830576

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Chromium, Hexavalent	mg/kg	10.4	10.6	102	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 4830577 4830578

Parameter	Units	92799827001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Chromium, Hexavalent	mg/kg	1.4	13.2	13.2	14.3	14.6	97	99	75-125	2	20	

MATRIX SPIKE SAMPLE: 4830579

Parameter	Units	92799827002 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Chromium, Hexavalent	mg/kg	1.3J	1460	1740	119	75-125	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

QC Batch: 940742 | Analysis Method: EPA 8270E
QC Batch Method: EPA 3546 | Analysis Description: 8270E Solid MSSV Microwave
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92800079001, 92800079003, 92800079006, 92800079007, 92800079008, 92800079009, 92800079010

METHOD BLANK: 4834942 Matrix: Solid
Associated Lab Samples: 92800079001, 92800079003, 92800079006, 92800079007, 92800079008, 92800079009, 92800079010

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,2,4-Trichlorobenzene	mg/kg	ND	0.33	0.13	06/10/25 06:30	
1,2-Dichlorobenzene	mg/kg	ND	0.33	0.12	06/10/25 06:30	
1,3-Dichlorobenzene	mg/kg	ND	0.33	0.12	06/10/25 06:30	
1,4-Dichlorobenzene	mg/kg	ND	0.33	0.13	06/10/25 06:30	
1-Methylnaphthalene	mg/kg	ND	0.33	0.12	06/10/25 06:30	
2,2'-Oxybis(1-chloropropane)	mg/kg	ND	0.33	0.16	06/10/25 06:30	
2,4,5-Trichlorophenol	mg/kg	ND	0.33	0.15	06/10/25 06:30	
2,4,6-Trichlorophenol	mg/kg	ND	0.33	0.14	06/10/25 06:30	
2,4-Dichlorophenol	mg/kg	ND	0.33	0.13	06/10/25 06:30	
2,4-Dimethylphenol	mg/kg	ND	0.33	0.14	06/10/25 06:30	
2,4-Dinitrophenol	mg/kg	ND	1.7	1.0	06/10/25 06:30	
2,4-Dinitrotoluene	mg/kg	ND	0.33	0.13	06/10/25 06:30	
2,6-Dinitrotoluene	mg/kg	ND	0.33	0.12	06/10/25 06:30	
2-Chloronaphthalene	mg/kg	ND	0.33	0.13	06/10/25 06:30	
2-Chlorophenol	mg/kg	ND	0.33	0.13	06/10/25 06:30	
2-Methylnaphthalene	mg/kg	ND	0.33	0.13	06/10/25 06:30	
2-Methylphenol(o-Cresol)	mg/kg	ND	0.33	0.14	06/10/25 06:30	
2-Nitroaniline	mg/kg	ND	1.7	0.27	06/10/25 06:30	
2-Nitrophenol	mg/kg	ND	0.33	0.14	06/10/25 06:30	
3&4-Methylphenol(m&p Cresol)	mg/kg	ND	0.33	0.13	06/10/25 06:30	
3,3'-Dichlorobenzidine	mg/kg	ND	0.67	0.23	06/10/25 06:30	
3-Nitroaniline	mg/kg	ND	1.7	0.26	06/10/25 06:30	
4,6-Dinitro-2-methylphenol	mg/kg	ND	0.67	0.31	06/10/25 06:30	v1
4-Bromophenylphenyl ether	mg/kg	ND	0.33	0.13	06/10/25 06:30	
4-Chloro-3-methylphenol	mg/kg	ND	0.67	0.23	06/10/25 06:30	
4-Chloroaniline	mg/kg	ND	0.67	0.26	06/10/25 06:30	
4-Chlorophenylphenyl ether	mg/kg	ND	0.33	0.12	06/10/25 06:30	
4-Nitroaniline	mg/kg	ND	0.67	0.25	06/10/25 06:30	
4-Nitrophenol	mg/kg	ND	1.7	0.64	06/10/25 06:30	
Acenaphthene	mg/kg	ND	0.33	0.12	06/10/25 06:30	
Acenaphthylene	mg/kg	ND	0.33	0.12	06/10/25 06:30	
Aniline	mg/kg	ND	0.33	0.13	06/10/25 06:30	
Anthracene	mg/kg	ND	0.33	0.11	06/10/25 06:30	
Benzo(a)anthracene	mg/kg	ND	0.33	0.11	06/10/25 06:30	
Benzo(a)pyrene	mg/kg	ND	0.33	0.12	06/10/25 06:30	
Benzo(b)fluoranthene	mg/kg	ND	0.33	0.11	06/10/25 06:30	
Benzo(g,h,i)perylene	mg/kg	ND	0.33	0.13	06/10/25 06:30	
Benzo(k)fluoranthene	mg/kg	ND	0.33	0.12	06/10/25 06:30	
Benzoic Acid	mg/kg	ND	1.7	0.72	06/10/25 06:30	
Benzyl alcohol	mg/kg	ND	0.67	0.25	06/10/25 06:30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

METHOD BLANK: 4834942 Matrix: Solid
Associated Lab Samples: 92800079001, 92800079003, 92800079006, 92800079007, 92800079008, 92800079009, 92800079010

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
bis(2-Chloroethoxy)methane	mg/kg	ND	0.33	0.14	06/10/25 06:30	
bis(2-Chloroethyl) ether	mg/kg	ND	0.33	0.13	06/10/25 06:30	
bis(2-Ethylhexyl)phthalate	mg/kg	ND	0.33	0.13	06/10/25 06:30	
Butylbenzylphthalate	mg/kg	ND	0.33	0.14	06/10/25 06:30	
Chrysene	mg/kg	ND	0.33	0.12	06/10/25 06:30	
Di-n-butylphthalate	mg/kg	ND	0.33	0.11	06/10/25 06:30	
Di-n-octylphthalate	mg/kg	ND	0.33	0.13	06/10/25 06:30	
Dibenz(a,h)anthracene	mg/kg	ND	0.33	0.13	06/10/25 06:30	
Dibenzofuran	mg/kg	ND	0.33	0.12	06/10/25 06:30	
Diethylphthalate	mg/kg	ND	0.33	0.12	06/10/25 06:30	
Dimethylphthalate	mg/kg	ND	0.33	0.12	06/10/25 06:30	
Fluoranthene	mg/kg	ND	0.33	0.11	06/10/25 06:30	
Fluorene	mg/kg	ND	0.33	0.12	06/10/25 06:30	
Hexachloro-1,3-butadiene	mg/kg	ND	0.33	0.14	06/10/25 06:30	
Hexachlorobenzene	mg/kg	ND	0.33	0.13	06/10/25 06:30	
Hexachlorocyclopentadiene	mg/kg	ND	0.33	0.19	06/10/25 06:30	
Hexachloroethane	mg/kg	ND	0.33	0.13	06/10/25 06:30	
Indeno(1,2,3-cd)pyrene	mg/kg	ND	0.33	0.13	06/10/25 06:30	
Isophorone	mg/kg	ND	0.33	0.15	06/10/25 06:30	
N-Nitroso-di-n-propylamine	mg/kg	ND	0.33	0.13	06/10/25 06:30	
N-Nitrosodimethylamine	mg/kg	ND	0.33	0.11	06/10/25 06:30	
N-Nitrosodiphenylamine	mg/kg	ND	0.33	0.12	06/10/25 06:30	
Naphthalene	mg/kg	ND	0.33	0.11	06/10/25 06:30	
Nitrobenzene	mg/kg	ND	0.33	0.15	06/10/25 06:30	
Pentachlorophenol	mg/kg	ND	0.67	0.33	06/10/25 06:30	
Phenanthrene	mg/kg	ND	0.33	0.11	06/10/25 06:30	
Phenol	mg/kg	ND	0.33	0.15	06/10/25 06:30	
Pyrene	mg/kg	ND	0.33	0.14	06/10/25 06:30	
Pyridine	mg/kg	ND	0.33	0.11	06/10/25 06:30	
2,4,6-Tribromophenol (S)	%	58	10-130		06/10/25 06:30	
2-Fluorobiphenyl (S)	%	49	10-130		06/10/25 06:30	
2-Fluorophenol (S)	%	46	10-130		06/10/25 06:30	
Nitrobenzene-d5 (S)	%	47	10-130		06/10/25 06:30	
Phenol-d6 (S)	%	49	10-130		06/10/25 06:30	
Terphenyl-d14 (S)	%	57	10-130		06/10/25 06:30	

LABORATORY CONTROL SAMPLE: 4834943

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,2,4-Trichlorobenzene	mg/kg	1.7	0.98	59	40-130	
1,2-Dichlorobenzene	mg/kg	1.7	0.94	56	37-130	
1,3-Dichlorobenzene	mg/kg	1.7	0.93	56	36-130	
1,4-Dichlorobenzene	mg/kg	1.7	0.92	55	36-130	
1-Methylnaphthalene	mg/kg	1.7	1.0	61	46-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

LABORATORY CONTROL SAMPLE: 4834943

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
2,2'-Oxybis(1-chloropropane)	mg/kg	1.7	0.92	55	12-130	
2,4,5-Trichlorophenol	mg/kg	1.7	1.0	61	49-130	
2,4,6-Trichlorophenol	mg/kg	1.7	1.0	63	48-130	
2,4-Dichlorophenol	mg/kg	1.7	1.0	60	45-130	
2,4-Dimethylphenol	mg/kg	1.7	0.96	58	45-130	
2,4-Dinitrophenol	mg/kg	8.3	5.4	64	23-130	
2,4-Dinitrotoluene	mg/kg	1.7	1.1	64	50-130	
2,6-Dinitrotoluene	mg/kg	1.7	1.1	65	53-130	
2-Chloronaphthalene	mg/kg	1.7	0.98	59	46-130	
2-Chlorophenol	mg/kg	1.7	0.95	57	39-130	
2-Methylnaphthalene	mg/kg	1.7	0.99	60	45-130	
2-Methylphenol(o-Cresol)	mg/kg	1.7	0.97	58	38-130	
2-Nitroaniline	mg/kg	3.3	1.8	53	43-130	
2-Nitrophenol	mg/kg	1.7	1.1	65	43-130	
3&4-Methylphenol(m&p Cresol)	mg/kg	1.7	0.96	58	34-130	
3,3'-Dichlorobenzidine	mg/kg	3.3	1.9	56	68-130	L2
3-Nitroaniline	mg/kg	3.3	1.7	52	36-130	
4,6-Dinitro-2-methylphenol	mg/kg	3.3	2.2	67	38-130	v1
4-Bromophenylphenyl ether	mg/kg	1.7	1.1	64	52-130	
4-Chloro-3-methylphenol	mg/kg	3.3	2.0	60	45-130	
4-Chloroaniline	mg/kg	3.3	1.8	55	41-130	
4-Chlorophenylphenyl ether	mg/kg	1.7	1.0	61	46-130	
4-Nitroaniline	mg/kg	3.3	1.8	55	40-130	
4-Nitrophenol	mg/kg	8.3	4.6	55	34-130	
Acenaphthene	mg/kg	1.7	0.97	59	47-130	
Acenaphthylene	mg/kg	1.7	1.0	61	50-130	
Aniline	mg/kg	1.7	0.85	51	33-130	
Anthracene	mg/kg	1.7	1.0	61	46-130	
Benzo(a)anthracene	mg/kg	1.7	1.0	62	49-130	
Benzo(a)pyrene	mg/kg	1.7	1.1	64	45-130	
Benzo(b)fluoranthene	mg/kg	1.7	1.1	63	45-130	
Benzo(g,h,i)perylene	mg/kg	1.7	1.0	62	44-130	
Benzo(k)fluoranthene	mg/kg	1.7	1.1	64	46-130	
Benzoic Acid	mg/kg	8.3	2.7	33	14-130	
Benzyl alcohol	mg/kg	3.3	1.9	57	39-130	
bis(2-Chloroethoxy)methane	mg/kg	1.7	0.97	58	41-130	
bis(2-Chloroethyl) ether	mg/kg	1.7	0.95	57	34-130	
bis(2-Ethylhexyl)phthalate	mg/kg	1.7	1.1	65	39-130	
Butylbenzylphthalate	mg/kg	1.7	1.1	64	48-130	
Chrysene	mg/kg	1.7	1.0	61	50-130	
Di-n-butylphthalate	mg/kg	1.7	1.0	61	46-130	
Di-n-octylphthalate	mg/kg	1.7	1.1	65	49-130	
Dibenz(a,h)anthracene	mg/kg	1.7	1.0	62	46-130	
Dibenzofuran	mg/kg	1.7	0.99	60	49-130	
Diethylphthalate	mg/kg	1.7	1.0	60	49-130	
Dimethylphthalate	mg/kg	1.7	1.0	60	50-130	
Fluoranthene	mg/kg	1.7	0.97	59	49-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

LABORATORY CONTROL SAMPLE: 4834943

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Fluorene	mg/kg	1.7	0.98	59	47-130	
Hexachloro-1,3-butadiene	mg/kg	1.7	1.0	62	36-130	
Hexachlorobenzene	mg/kg	1.7	1.1	63	52-130	
Hexachlorocyclopentadiene	mg/kg	1.7	1.1	64	10-130	
Hexachloroethane	mg/kg	1.7	0.92	55	36-130	
Indeno(1,2,3-cd)pyrene	mg/kg	1.7	0.98	59	44-130	
Isophorone	mg/kg	1.7	0.98	59	40-130	
N-Nitroso-di-n-propylamine	mg/kg	1.7	0.98	59	34-130	
N-Nitrosodimethylamine	mg/kg	1.7	0.90	54	29-130	
N-Nitrosodiphenylamine	mg/kg	1.7	1.0	61	47-130	
Naphthalene	mg/kg	1.7	0.97	58	43-130	
Nitrobenzene	mg/kg	1.7	0.93	56	41-130	
Pentachlorophenol	mg/kg	3.3	2.1	62	35-130	
Phenanthrene	mg/kg	1.7	1.0	62	50-130	
Phenol	mg/kg	1.7	1.0	61	39-130	
Pyrene	mg/kg	1.7	1.1	65	51-130	
Pyridine	mg/kg	1.7	0.71	43	21-130	
2,4,6-Tribromophenol (S)	%			69	10-130	
2-Fluorobiphenyl (S)	%			58	10-130	
2-Fluorophenol (S)	%			54	10-130	
Nitrobenzene-d5 (S)	%			55	10-130	
Phenol-d6 (S)	%			57	10-130	
Terphenyl-d14 (S)	%			64	10-130	

MATRIX SPIKE SAMPLE: 4834944

Parameter	Units	92800212003 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
1,2,4-Trichlorobenzene	mg/kg	ND	2.2	1.4	66	22-130	
1,2-Dichlorobenzene	mg/kg	ND	2.2	1.3	59	22-130	
1,3-Dichlorobenzene	mg/kg	ND	2.2	1.2	55	22-130	
1,4-Dichlorobenzene	mg/kg	ND	2.2	1.2	56	21-130	
1-Methylnaphthalene	mg/kg	ND	2.2	1.5	69	27-130	
2,2'-Oxybis(1-chloropropane)	mg/kg	ND	2.2	1.4	65	10-130	
2,4,5-Trichlorophenol	mg/kg	ND	2.2	1.6	73	18-130	
2,4,6-Trichlorophenol	mg/kg	ND	2.2	1.6	74	17-130	
2,4-Dichlorophenol	mg/kg	ND	2.2	1.6	72	19-130	
2,4-Dimethylphenol	mg/kg	ND	2.2	1.5	70	17-130	
2,4-Dinitrophenol	mg/kg	ND	10.8	8.4	78	10-130	
2,4-Dinitrotoluene	mg/kg	ND	2.2	1.6	75	31-130	
2,6-Dinitrotoluene	mg/kg	ND	2.2	1.6	75	33-130	
2-Chloronaphthalene	mg/kg	ND	2.2	1.5	69	26-130	
2-Chlorophenol	mg/kg	ND	2.2	1.5	67	19-130	
2-Methylnaphthalene	mg/kg	ND	2.2	1.5	69	26-130	
2-Methylphenol(o-Cresol)	mg/kg	ND	2.2	1.5	70	19-130	
2-Nitroaniline	mg/kg	ND	4.4	2.7	62	29-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

MATRIX SPIKE SAMPLE: 4834944

Parameter	Units	92800212003 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
2-Nitrophenol	mg/kg	ND	2.2	1.7	78	16-130	
3&4-Methylphenol(m&p Cresol)	mg/kg	ND	2.2	1.5	68	14-130	
3,3'-Dichlorobenzidine	mg/kg	ND	4.4	2.9	67	16-130	
3-Nitroaniline	mg/kg	ND	4.4	2.9	66	28-130	
4,6-Dinitro-2-methylphenol	mg/kg	ND	4.4	3.5	81	10-131	v1
4-Bromophenylphenyl ether	mg/kg	ND	2.2	1.6	72	32-130	
4-Chloro-3-methylphenol	mg/kg	ND	4.4	3.0	70	26-130	
4-Chloroaniline	mg/kg	ND	4.4	2.8	66	19-130	
4-Chlorophenylphenyl ether	mg/kg	ND	2.2	1.5	70	29-130	
4-Nitroaniline	mg/kg	ND	4.4	2.9	67	22-130	
4-Nitrophenol	mg/kg	ND	10.8	7.0	65	10-130	
Acenaphthene	mg/kg	ND	2.2	1.5	68	29-130	
Acenaphthylene	mg/kg	ND	2.2	1.5	71	27-130	
Aniline	mg/kg	ND	2.2	1.3	58	10-130	
Anthracene	mg/kg	ND	2.2	1.5	68	26-130	
Benzo(a)anthracene	mg/kg	ND	2.2	1.5	70	31-130	
Benzo(a)pyrene	mg/kg	ND	2.2	1.5	71	24-130	
Benzo(b)fluoranthene	mg/kg	ND	2.2	1.5	69	12-137	
Benzo(g,h,i)perylene	mg/kg	ND	2.2	1.5	70	16-130	
Benzo(k)fluoranthene	mg/kg	ND	2.2	1.6	72	27-130	
Benzoic Acid	mg/kg	ND	10.8	2.2	20	10-130	
Benzyl alcohol	mg/kg	ND	4.4	2.9	66	25-130	
bis(2-Chloroethoxy)methane	mg/kg	ND	2.2	1.5	69	26-130	
bis(2-Chloroethyl) ether	mg/kg	ND	2.2	1.5	68	23-130	
bis(2-Ethylhexyl)phthalate	mg/kg	ND	2.2	1.6	73	20-130	
Butylbenzylphthalate	mg/kg	ND	2.2	1.5	71	28-130	
Chrysene	mg/kg	ND	2.2	1.5	70	29-130	
Di-n-butylphthalate	mg/kg	ND	2.2	1.5	69	29-130	
Di-n-octylphthalate	mg/kg	ND	2.2	1.6	74	30-130	
Dibenz(a,h)anthracene	mg/kg	ND	2.2	1.5	71	27-130	
Dibenzofuran	mg/kg	ND	2.2	1.5	69	33-130	
Diethylphthalate	mg/kg	ND	2.2	1.5	70	34-130	
Dimethylphthalate	mg/kg	ND	2.2	1.5	71	35-130	
Fluoranthene	mg/kg	ND	2.2	1.4	67	26-130	
Fluorene	mg/kg	ND	2.2	1.4	67	27-130	
Hexachloro-1,3-butadiene	mg/kg	ND	2.2	1.4	65	19-130	
Hexachlorobenzene	mg/kg	ND	2.2	1.5	71	31-130	
Hexachlorocyclopentadiene	mg/kg	ND	2.2	1.5	70	10-130	
Hexachloroethane	mg/kg	ND	2.2	1.2	54	21-130	
Indeno(1,2,3-cd)pyrene	mg/kg	ND	2.2	1.4	65	16-130	
Isophorone	mg/kg	ND	2.2	1.5	69	29-130	
N-Nitroso-di-n-propylamine	mg/kg	ND	2.2	1.5	69	22-130	
N-Nitrosodimethylamine	mg/kg	ND	2.2	1.4	64	15-130	
N-Nitrosodiphenylamine	mg/kg	ND	2.2	1.5	71	30-130	
Naphthalene	mg/kg	ND	2.2	1.5	67	24-130	
Nitrobenzene	mg/kg	ND	2.2	1.4	66	25-130	
Pentachlorophenol	mg/kg	ND	4.4	3.4	78	10-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

MATRIX SPIKE SAMPLE: 4834944

Parameter	Units	92800212003 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Phenanthrene	mg/kg	ND	2.2	1.5	68	28-130	
Phenol	mg/kg	ND	2.2	1.5	70	18-130	
Pyrene	mg/kg	ND	2.2	1.6	72	27-130	
Pyridine	mg/kg	ND	2.2	0.29J	13	10-130	
2,4,6-Tribromophenol (S)	%				79	10-130	
2-Fluorobiphenyl (S)	%				62	10-130	
2-Fluorophenol (S)	%				63	10-130	
Nitrobenzene-d5 (S)	%				63	10-130	
Phenol-d6 (S)	%				64	10-130	
Terphenyl-d14 (S)	%				64	10-130	

SAMPLE DUPLICATE: 4834945

Parameter	Units	92799777001 Result	Dup Result	RPD	Max RPD	Qualifiers
1,2,4-Trichlorobenzene	mg/kg	<149 ug/kg	ND		30	
1,2-Dichlorobenzene	mg/kg	<136 ug/kg	ND		30	
1,3-Dichlorobenzene	mg/kg	<134 ug/kg	ND		30	
1,4-Dichlorobenzene	mg/kg	<144 ug/kg	ND		30	
1-Methylnaphthalene	mg/kg	241J ug/kg	0.22J		30	
2,2'-Oxybis(1-chloropropane)	mg/kg	<180 ug/kg	ND		30	
2,4,5-Trichlorophenol	mg/kg	<173 ug/kg	ND		30	
2,4,6-Trichlorophenol	mg/kg	<156 ug/kg	ND		30	
2,4-Dichlorophenol	mg/kg	<148 ug/kg	ND		30	
2,4-Dimethylphenol	mg/kg	<157 ug/kg	ND		30	
2,4-Dinitrophenol	mg/kg	<1170 ug/kg	ND		30	
2,4-Dinitrotoluene	mg/kg	<145 ug/kg	ND		30	
2,6-Dinitrotoluene	mg/kg	<138 ug/kg	ND		30	
2-Chloronaphthalene	mg/kg	<150 ug/kg	ND		30	
2-Chlorophenol	mg/kg	<142 ug/kg	ND		30	
2-Methylnaphthalene	mg/kg	458 ug/kg	0.41	12	30	
2-Methylphenol(o-Cresol)	mg/kg	<154 ug/kg	ND		30	
2-Nitroaniline	mg/kg	<309 ug/kg	ND		30	
2-Nitrophenol	mg/kg	<164 ug/kg	ND		30	
3&4-Methylphenol(m&p Cresol)	mg/kg	<152 ug/kg	ND		30	
3,3'-Dichlorobenzidine	mg/kg	<255 ug/kg	ND		30	
3-Nitroaniline	mg/kg	<296 ug/kg	ND		30	
4,6-Dinitro-2-methylphenol	mg/kg	<352 ug/kg	ND		30	v1
4-Bromophenylphenyl ether	mg/kg	<145 ug/kg	ND		30	
4-Chloro-3-methylphenol	mg/kg	<266 ug/kg	ND		30	
4-Chloroaniline	mg/kg	<296 ug/kg	ND		30	
4-Chlorophenylphenyl ether	mg/kg	<141 ug/kg	ND		30	
4-Nitroaniline	mg/kg	<287 ug/kg	ND		30	
4-Nitrophenol	mg/kg	<730 ug/kg	ND		30	
Acenaphthene	mg/kg	<133 ug/kg	ND		30	
Acenaphthylene	mg/kg	<133 ug/kg	ND		30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

SAMPLE DUPLICATE: 4834945

Parameter	Units	92799777001 Result	Dup Result	RPD	Max RPD	Qualifiers
Aniline	mg/kg	<148 ug/kg	ND		30	
Anthracene	mg/kg	<124 ug/kg	ND		30	
Benzo(a)anthracene	mg/kg	<126 ug/kg	ND		30	
Benzo(a)pyrene	mg/kg	<130 ug/kg	ND		30	
Benzo(b)fluoranthene	mg/kg	<126 ug/kg	ND		30	
Benzo(g,h,i)perylene	mg/kg	<146 ug/kg	ND		30	
Benzo(k)fluoranthene	mg/kg	<133 ug/kg	ND		30	
Benzoic Acid	mg/kg	<811 ug/kg	ND		30	
Benzyl alcohol	mg/kg	<286 ug/kg	ND		30	
bis(2-Chloroethoxy)methane	mg/kg	<157 ug/kg	ND		30	
bis(2-Chloroethyl) ether	mg/kg	<142 ug/kg	ND		30	
bis(2-Ethylhexyl)phthalate	mg/kg	<146 ug/kg	ND		30	
Butylbenzylphthalate	mg/kg	<159 ug/kg	ND		30	
Chrysene	mg/kg	<137 ug/kg	ND		30	
Di-n-butylphthalate	mg/kg	<127 ug/kg	ND		30	
Di-n-octylphthalate	mg/kg	<149 ug/kg	ND		30	
Dibenz(a,h)anthracene	mg/kg	<145 ug/kg	ND		30	
Dibenzofuran	mg/kg	<136 ug/kg	ND		30	
Diethylphthalate	mg/kg	<138 ug/kg	ND		30	
Dimethylphthalate	mg/kg	<137 ug/kg	ND		30	
Fluoranthene	mg/kg	<129 ug/kg	ND		30	
Fluorene	mg/kg	<133 ug/kg	ND		30	
Hexachloro-1,3-butadiene	mg/kg	<164 ug/kg	ND		30	
Hexachlorobenzene	mg/kg	<148 ug/kg	ND		30	
Hexachlorocyclopentadiene	mg/kg	<216 ug/kg	ND		30	
Hexachloroethane	mg/kg	<144 ug/kg	ND		30	
Indeno(1,2,3-cd)pyrene	mg/kg	<149 ug/kg	ND		30	
Isophorone	mg/kg	<168 ug/kg	ND		30	
N-Nitroso-di-n-propylamine	mg/kg	<142 ug/kg	ND		30	
N-Nitrosodimethylamine	mg/kg	<127 ug/kg	ND		30	
N-Nitrosodiphenylamine	mg/kg	<134 ug/kg	ND		30	
Naphthalene	mg/kg	1140 ug/kg	1.1	3	30	
Nitrobenzene	mg/kg	<175 ug/kg	ND		30	
Pentachlorophenol	mg/kg	<370 ug/kg	ND		30	
Phenanthrene	mg/kg	<124 ug/kg	ND		30	
Phenol	mg/kg	<168 ug/kg	ND		30	
Pyrene	mg/kg	<153 ug/kg	ND		30	
Pyridine	mg/kg	<119 ug/kg	ND		30	
2,4,6-Tribromophenol (S)	%	59	56			
2-Fluorobiphenyl (S)	%	45	43			
2-Fluorophenol (S)	%	45	43			
Nitrobenzene-d5 (S)	%	46	44			
Phenol-d6 (S)	%	46	44			
Terphenyl-d14 (S)	%	51	49			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

QC Batch: 1107065
QC Batch Method: ASTM D2974-87
Analysis Method: ASTM D2974-87
Analysis Description: Dry Weight/Percent Moisture
Laboratory: Pace Analytical Services - Ormond Beach
Associated Lab Samples: 92800079002, 92800079004, 92800079005

SAMPLE DUPLICATE: 6073511

Parameter	Units	92800079002 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	6.1	5.8	4	10	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800079

QC Batch: 939770
QC Batch Method: SW-846
Analysis Method: SW-846
Analysis Description: Dry Weight/Percent Moisture
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92800079001, 92800079003, 92800079006, 92800079007, 92800079008, 92800079009, 92800079010

SAMPLE DUPLICATE: 4829879

Parameter	Units	92800079001 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	17.1	15.3	11	25	N2

SAMPLE DUPLICATE: 4829880

Parameter	Units	92800143016 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	10.4	10.0	3	25	N2

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALIFIERS

Project: Fortress Wood Products
Pace Project No.: 92800079

DEFINITIONS

DF - Dilution Factor, if reported, represents the factor applied to the reported data due to dilution of the sample aliquot.

ND - Not Detected at or above adjusted reporting limit.

TNTC - Too Numerous To Count

J - Estimated concentration above the adjusted method detection limit and below the adjusted reporting limit.

MDL - Adjusted Method Detection Limit.

PQL - Practical Quantitation Limit.

RL - Reporting Limit - The lowest concentration value that meets project requirements for quantitative data with known precision and bias for a specific analyte in a specific matrix.

S - Surrogate

1,2-Diphenylhydrazine decomposes to and cannot be separated from Azobenzene using Method 8270. The result for each analyte is a combined concentration.

Consistent with EPA guidelines, unrounded data are displayed and have been used to calculate % recovery and RPD values.

LCS(D) - Laboratory Control Sample (Duplicate)

MS(D) - Matrix Spike (Duplicate)

DUP - Sample Duplicate

RPD - Relative Percent Difference

NC - Not Calculable.

SG - Silica Gel - Clean-Up

U - Indicates the compound was analyzed for, but not detected.

Acid preservation may not be appropriate for 2 Chloroethylvinyl ether.

A separate vial preserved to a pH of 4-5 is recommended in SW846 Chapter 4 for the analysis of Acrolein and Acrylonitrile by EPA Method 8260.

N-Nitrosodiphenylamine decomposes and cannot be separated from Diphenylamine using Method 8270. The result reported for each analyte is a combined concentration.

Reported results are not rounded until the final step prior to reporting. Therefore, calculated parameters that are typically reported as "Total" may vary slightly from the sum of the reported component parameters.

Pace Analytical is TNI accredited. Contact your Pace PM for the current list of accredited analytes.

TNI - The NELAC Institute.

BATCH QUALIFIERS

Batch: 940531

[1] Styrene did not meet the secondary source verification criteria for the initial calibration. The reported result should be considered an estimated value

Batch: 1104743

[1] Sample was diluted due to the presence of high levels of non-target analytes or other matrix interference.

ANALYTE QUALIFIERS

1g	Sample was diluted due to the presence of high levels of non-target analytes or other matrix interference.
2g	Styrene did not meet the secondary source verification criteria for the initial calibration. The reported result should be considered an estimated value
D3	Sample was diluted due to the presence of high levels of non-target analytes or other matrix interference.
L2	Analyte recovery in the laboratory control sample (LCS) was below QC limits. Results for this analyte in associated samples may be biased low.
M1	Matrix spike recovery exceeded QC limits. Batch accepted based on laboratory control sample (LCS) recovery.
N2	The lab does not hold NELAC/TNI accreditation for this parameter but other accreditations/certifications may apply. A complete list of accreditations/certifications is available upon request.
v1	The continuing calibration verification was above the method acceptance limit. Any detection for the analyte in the associated samples may have a high bias.

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA CROSS REFERENCE TABLE

Project: Fortress Wood Products
Pace Project No.: 92800079

Lab ID	Sample ID	QC Batch Method	QC Batch	Analytical Method	Analytical Batch
92800079001	**B-5**	EPA 7199	939919	EPA 7199	940242
92800079003	**B-4**	EPA 7199	939919	EPA 7199	940242
92800079006	**B-2**	EPA 7199	939919	EPA 7199	940242
92800079007	**B-3**	EPA 7199	939919	EPA 7199	940242
92800079008	**B-6**	EPA 7199	939919	EPA 7199	940242
92800079009	**B-9**	EPA 7199	939919	EPA 7199	940242
92800079010	**B-10**	EPA 7199	939919	EPA 7199	940242
92800079001	**B-5**	EPA 3050	1104982	EPA 6020	1105005
92800079002	**B-5-C**	EPA 3050	1104665	EPA 6020	1104743
92800079003	**B-4**	EPA 3050	1104735	EPA 6020	1104873
92800079004	**B-4-C**	EPA 3050	1104665	EPA 6020	1104743
92800079005	**B-4-D**	EPA 3050	1104665	EPA 6020	1104743
92800079006	**B-2**	EPA 3050	1104735	EPA 6020	1104873
92800079007	**B-3**	EPA 3050	1104735	EPA 6020	1104873
92800079008	**B-6**	EPA 3050	1104665	EPA 6020	1104743
92800079009	**B-9**	EPA 3050	1104665	EPA 6020	1104743
92800079010	**B-10**	EPA 3050	1104665	EPA 6020	1104743
92800079001	**B-5**	EPA 7471	1104810	EPA 7471	1105097
92800079002	**B-5-C**	EPA 7471	1104810	EPA 7471	1105097
92800079003	**B-4**	EPA 7471	1104810	EPA 7471	1105097
92800079004	**B-4-C**	EPA 7471	1104810	EPA 7471	1105097
92800079005	**B-4-D**	EPA 7471	1104810	EPA 7471	1105097
92800079006	**B-2**	EPA 7471	1104810	EPA 7471	1105097
92800079007	**B-3**	EPA 7471	1104810	EPA 7471	1105097
92800079008	**B-6**	EPA 7471	1104810	EPA 7471	1105097
92800079009	**B-9**	EPA 7471	1104810	EPA 7471	1105097
92800079010	**B-10**	EPA 7471	1104810	EPA 7471	1105097
92800079001	**B-5**	EPA 3546	940742	EPA 8270E	940834
92800079003	**B-4**	EPA 3546	940742	EPA 8270E	940834
92800079006	**B-2**	EPA 3546	940742	EPA 8270E	940834
92800079007	**B-3**	EPA 3546	940742	EPA 8270E	940834
92800079008	**B-6**	EPA 3546	940742	EPA 8270E	940834
92800079009	**B-9**	EPA 3546	940742	EPA 8270E	940834
92800079010	**B-10**	EPA 3546	940742	EPA 8270E	940834
92800079001	**B-5**	EPA 5035A/5030B	940173	EPA 8260D	940531
92800079003	**B-4**	EPA 5035A/5030B	940173	EPA 8260D	940531
92800079006	**B-2**	EPA 5035A/5030B	940173	EPA 8260D	940531
92800079007	**B-3**	EPA 5035A/5030B	940175	EPA 8260D	940530
92800079008	**B-6**	EPA 5035A/5030B	940175	EPA 8260D	940530
92800079009	**B-9**	EPA 5035A/5030B	940175	EPA 8260D	940530
92800079010	**B-10**	EPA 5035A/5030B	940175	EPA 8260D	940530
92800079001	**B-5**	SW-846	939770		
92800079002	**B-5-C**	ASTM D2974-87	1107065		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA CROSS REFERENCE TABLE

Project: Fortress Wood Products
Pace Project No.: 92800079

Lab ID	Sample ID	QC Batch Method	QC Batch	Analytical Method	Analytical Batch
92800079003	**B-4**	SW-846	939770		
92800079004	**B-4-C**	ASTM D2974-87	1107065		
92800079005	**B-4-D**	ASTM D2974-87	1107065		
92800079006	**B-2**	SW-846	939770		
92800079007	**B-3**	SW-846	939770		
92800079008	**B-6**	SW-846	939770		
92800079009	**B-9**	SW-846	939770		
92800079010	**B-10**	SW-846	939770		

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace® Location Requested (City/State):
Pace Analytical Charlotte
9800 Kincey Ave. Suite 100, Huntersville, NC 28078

CHAIN-OF-CUSTODY Analytical Request Document

Chain-of-Custody is a LEGAL DOCUMENT - Complete all relevant fields

WO# : 92800079

Company Name:	ECS Southeast, LLC-Charlotte	Contact/Report To:	Emery Lovekamp
Street Address:	1812 Center Park Drive Suite D Charlotte, NC 28217	Phone #:	704-525-5152
		E-Mail:	elovekamp@ecslimited.com
		Cc E-Mail:	
Customer Project #:			
Project Name:	_____	Invoice To:	AP-ECS Charlotte
		Invoice E-Mail:	ecs-49@ecslimited.com
Site Collection Info/Facility ID (as applicable):		Purchase Order # (if applicable):	NEED
		Quote #:	

Time Zone Collected: [ ] AK [ ] PT [ ] MT [ ] CT [ ] ET

County / State origin of sample(s): North Carolina

Data Deliverables: [ ] Level II [ ] Level III [ ] Level IV [ ] EQUIS [ ] Other

Regulatory Program (DW, RCRA, etc.) as applicable: Reportable [ ] Yes [ ] No

Rush (Pre-approval required): [ ] Same Day [ ] 1 Day [ ] 2 Day [ ] 3 Day [ ] Other _____

DW PWSID # or WW Permit # as applicable:

Date Results Requested:

Field Filtered (if applicable): [ ] Yes [ ] No

Analysis:

* Matrix Codes (Insert in Matrix box below): Drinking Water (DW), Ground Water (GW), Waste Water (WW), Product (P), Soil/Solid (SS), Oil (OL), Wipe (WP), Tissue (TS), Bioassay (B), Vapor (V), Surface Water (SW), Sediment (SED), Sludge (SL), Caulk (CK), Leachate (LL), Biosolid (BS), Other (OT)

Customer Sample ID	Matrix *	Comp / Grab	Composite Start Date	Composite Start Time	Collected or Composite End Date	Collected or Composite End Time	# Cont.	Res. Chlorine Results	Res. Chlorine Units	8082 PCB	8260 VOC, dry weight	8270 SVOC, 7199 hex chrome	PCB congeners (HOLD)	PPL Metals 6020/7471	TCLP RCRA 8 Metals	Sample Comment
B-5	SS	G+C			6/3/25	925					X	X		X		
B-5-C	SS	G			6/3/25	851									X	
B-4	SS	G+C			6/3/25	1000					X	X		X		
B-4-C	SS	G			6/3/25	929									X	
B-4-D	SS	G			6/3/25	935									X	
B-2	SS	G+C			6/3/25	1110					X	X		X		
B-3	SS	G+C			6/3/25	1135					X	X		X		
B-6	SS	G+C			6/3/25	1335					X	X		X		
B-9	SS	G+C			6/3/25	1415					X	X		X		
B-10	SS	G+C			6/3/25	1445					X	X		X		

Specify Container Size **

Identify Container Preservative Type***

Analysis Requested

** Container Size: (1) 1L, (2) 500mL, (3) 250mL, (4) 125mL, (5) 100mL, (6) 40mL vial, (7) EnCore, (8) TerraCore, (9) 90mL, (10) Other

*** Preservative Types: (1) None, (2) HNO3, (3) H2SO4, (4) HCl, (5) NaOH, (6) Zn Acetate, (7) NaHSO4, (8) Sod. Thiosulfate, (9) Ascorbic Acid, (10) MeOH, (11) Other

Lab Use Only

Proj. Mgr: Angela Baioni

AcctNum / Client ID:

Table #:

Profile / Template: 18978

Prelog / Bottle Ord. ID: EZ 3265815

Preservation non-conformance identified for sample.

Additional Instructions from Pace®:

Collected By: (Printed Name) Seth Greene

Signature: Seth Greene

Customer Remarks / Special Conditions / Possible Hazards:

# Coolers:	Thermometer ID:	Correction Factor (°C):	Obs. Temp. (°C)	Corrected Temp. (°C)	On Ice:

Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Tracking Number:
Seth Greene / ECS	6/3/25 - 1545	Erica Bond	06/05/25 1545	
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Delivered by: [ ] In-Person [ ] Courier [ ] FedEx [ ] UPS [ ] Other
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Page: 2 of 5

Submitting a sample via this chain of custody constitutes acknowledgment and acceptance of the Pace® Terms and Conditions found at https://www.pacelabs.com/resource-library/resource/pace-terms-and-conditions/

Pace	DC#_Title: ENV-FRM-HUN1-0083 v05_Sample Condition Upon Receipt
	Effective Date: 05/24/2024

Laboratory receiving samples:

Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☐ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☑

Sample Condition Upon Receipt

Client Name: FCS

Project #:

Courier: ☐ Commercial ☐ Fed Ex ☐ UPS ☐ USPS ☑ Client ☐ Pace ☐ Other:

Custody Seal Present? ☐ Yes ☑ No **Seals Intact?** ☐ Yes ☐ No ☑ N/A

Date/Initials Person Examining Contents: SL

Packing Material: ☑ Bubble Wrap ☑ Bubble Bags ☐ None ☑ Other

Biological Tissue Frozen? ☐ Yes ☐ No ☑ N/A

Thermometer: ☐ IR Gun ID: KIT002

Type of Ice: ☑ Wet ☐ Blue ☐ None

Cooler Temp: 2.1 **Correction Factor:** Add/Subtract (°C) 0.0

Temp should be above freezing to 6°C

☐ Samples out of temp criteria. Samples on ice, cooling process has begun

Cooler Temp Corrected (°C): 2.1

USDA Regulated Soil (☐ N/A, water sample)

Did samples originate in a quarantine zone within the United States: CA, NY, or SC (check maps)? ☐ Yes ☑ No

Did samples originate from a foreign source (internationally, including Hawaii and Puerto Rico)? ☐ Yes ☑ No

				Comments/Discrepancy:
Chain of Custody Present?	☑ Yes	☐ No	☐ N/A	1.
Samples Arrived within Hold Time?	☑ Yes	☐ No	☐ N/A	2.
Short Hold Time Analysis (<72 hr.)?	☐ Yes	☑ No	☐ N/A	3.
Rush Turn Around Time Requested?	☐ Yes	☑ No	☐ N/A	4.
Sufficient Volume?	☑ Yes	☐ No	☐ N/A	5.
Correct Containers Used?	☑ Yes	☐ No	☐ N/A	6.
-Pace Containers Used?	☑ Yes	☐ No	☐ N/A	
Containers Intact?	☑ Yes	☐ No	☐ N/A	7.
Dissolved analysis: Samples Field Filtered?	☐ Yes	☐ No	☑ N/A	8.
Sample Labels Match COC? -Includes Date/Time/ID/Analysis Matrix: SL	☑ Yes	☐ No	☐ N/A	9.
Headspace in VOA Vials (>5-6mm)?	☐ Yes	☐ No	☑ N/A	10.
Trip Blank Present?	☐ Yes	☐ No	☑ N/A	11.
Trip Blank Custody Seals Present?	☐ Yes	☐ No	☑ N/A	

COMMENTS/SAMPLE DISCREPANCY

Field Data Required? ☐ Yes ☐ No

Lot ID of split containers:

CLIENT NOTIFICATION/RESOLUTION

Person contacted: _____ Date/Time: _____

Project Manager SCURF Review: _____ **Date:** _____

Project Manager SRF Review: _____ **Date:** _____

Pace	DC#_Title: ENV-FRM-HUN1-0083 v05_Sample Condition Upon Receipt
	Effective Date: 05/24/2024

*Check mark top half of box if pH and/or dechlorination is verified and within the acceptance range for preservation samples.
Exceptions: VOA, Coliform, TOC, Oil and Grease, DRO/8015 (water) DOC, LLHg
**Bottom half of box is to list number of bottles
***Check all unpreserved Nitrates for chlorine

Project #

Laboratory Receiving Location: Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☐ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☑

Client FCS Profile/EZ (circle one) 3265815 Notes

Item#	BP4U-125 mL Plastic Unpreserved (N/A) (Cl-)	BP3U-250 mL Plastic Unpreserved (N/A)	BP2U-500 mL Plastic Unpreserved (N/A)	BP1U-1 liter Plastic Unpreserved (N/A)		BP4S-125 mL Plastic H2SO4 (pH < 2) (Cl-)	BP3N-250 mL plastic HNO3 (pH < 2)	BP4Z-125 mL Plastic ZN Acetate & NaOH (>9)	BP4B-125 mL Plastic NaOH (pH > 12) (Cl-)	WGFU-Wide-mouthed Glass jar Unpreserved	AG1U-1 liter Amber Unpreserved (N/A) (Cl-)	AG1H-1 liter Amber HCl (pH < 2)	AG3U-250 mL Amber Unpreserved (N/A) (Cl-)	AG1S-1 liter Amber H2SO4 (pH < 2)	AG3S-250 mL Amber H2SO4 (pH < 2)	DG94-40 mL Amber NH4Cl (N/A)(Cl-)	DG9H-40 mL VOA HCl (N/A)	VG9T-40 mL VOA Na2S2O3 (N/A)	VG9U-40 mL VOA Unpreserved (N/A)	DG9V-40 mL VOA H3PO4 (N/A)	KP7U-50 mL Plastic Unpreserved (N/A)	V/GK (3 vials per kit)-VPH/Gas kit (N/A)	SP5T-125 mL Sterile Plastic (N/A - lab)	SP2T-250 mL Sterile Plastic (N/A - lab)		BP3R-250 mL Plastic (NH4)2SO4 (9 3-9 7)	AG0U-100 mL Amber Unpreserved (N/A) (Cl-)	VSGU-20 mL Scintillation vials (N/A)	DG9U-40 mL Amber Unpreserved vials (N/A)
CC										SU CH			SU											CH						
1										2														1						
2													1																	
3										2														1						
4													\																	
5													1																	
6										2														1						
7										2														1						
8										2														1						
9										2														1						
10										2														1						
11																														
12																														

pH Adjustment Log for Preserved Samples

Sample ID	Type of Preservative	pH upon receipt	Date preservation adjusted	Time preservation adjusted	Amount of Preservative added	Lot #

Note: Whenever there is a discrepancy affecting North Carolina compliance samples, a copy of this form will be sent to the North Carolina DENR Certification Office (i.e Out of hold, incorrect preservative, out of temp, incorrect containers

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

June 17, 2025

Emery Lovekamp
ECS Southeast, LLC-Charlotte
1812 Center Park Drive
Suite D
Charlotte, NC 28217

RE: Project: Fortress Wood Products
Pace Project No.: 92800619

Dear Emery Lovekamp:

Enclosed are the analytical results for sample(s) received by the laboratory on June 05, 2025. The results relate only to the samples included in this report. Results reported herein conform to the applicable TNI/NELAC Standards and the laboratory's Quality Manual, where applicable, unless otherwise noted in the body of the report.

The test results provided in this final report were generated by each of the following laboratories within the Pace Network:

- Pace Analytical Services - Charlotte
- Pace Analytical Services - Ormond Beach

If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Angela M. Baioni

Angela Baioni
angela.baioni@pacelabs.com
612-473-6801
Project Manager

Enclosures

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

CERTIFICATIONS

Project: Fortress Wood Products
Pace Project No.: 92800619

Pace Analytical Services Ormond Beach
8 East Tower Circle, Ormond Beach, FL 32174
Alaska DEC- CS/UST/LUST
Alabama Certification #: 41320
California Certification# 3096
Colorado Certification: FL NELAC Reciprocity
Connecticut Certification #: PH-0216
Delaware Certification: FL NELAC Reciprocity
DoD-ANAB #:ADE-3199
Florida Certification #: E83079
Georgia Certification #: 955
Guam Certification: FL NELAC Reciprocity
Hawaii Certification: FL NELAC Reciprocity
Illinois Certification #: 200068
Indiana Certification: FL NELAC Reciprocity
Kansas Certification #: E-10383
Kentucky Certification #: 90050
Louisiana Certification #: FL NELAC Reciprocity
Louisiana Environmental Certificate #: 05007
Maine Certification #: FL01264
Maryland Certification: #346
Massachusetts Certification #: M-FL1264
Michigan Certification #: 9911
Mississippi Certification: FL NELAC Reciprocity
Missouri Certification #: 236
Montana Certification #: Cert 0074
Nebraska Certification: NE-OS-28-14
Nevada Certification: FL NELAC Reciprocity
New Hampshire Certification #: 2958
New Jersey Certification #: FL022
New York Certification #: 11608
North Carolina Environmental Certificate #: 667
North Carolina Certification #: 12710
North Dakota Certification #: R-216
Ohio DEP 87780
Oklahoma Certification #: D9947
Pennsylvania Certification #: 68-00547
Puerto Rico Certification #: FL01264
South Carolina Certification: #96042001
Tennessee Certification #: TN02974
Texas Certification: FL NELAC Reciprocity
US Virgin Islands Certification: FL NELAC Reciprocity
Utah FL NELAC Reciprocity
Utah
Virginia Environmental Certification #: 460165
West Virginia Certification #: 9962C
Wisconsin Certification #: 399079670
Wyoming (EPA Region 8): FL NELAC Reciprocity

Pace Analytical Services Charlotte
South Carolina Laboratory ID: 99006
9800 Kincey Ave. Ste 100, Huntersville, NC 28078
North Carolina Drinking Water Certification #: 37706
North Carolina Field Services Certification #: 5342
North Carolina Wastewater Certification #: 12
South Carolina Laboratory ID: 99006
South Carolina Certification #: 99006001
South Carolina Drinking Water Cert. #: 99006003
Florida/NELAP Certification #: E87627
Kentucky UST Certification #: 84
Louisiana DoH Drinking Water #: LA029
Virginia/VELAP Certification #: 460221

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE SUMMARY

Project: Fortress Wood Products
Pace Project No.: 92800619

Lab ID	Sample ID	Matrix	Date Collected	Date Received
92800619001	**B-11**	Solid	06/04/25 12:40	06/05/25 11:40
92800619002	**BG-1**	Solid	06/04/25 13:35	06/05/25 11:40
92800619003	**BG-2**	Solid	06/04/25 13:40	06/05/25 11:40
92800619004	**BG-3**	Solid	06/04/25 13:45	06/05/25 11:40
92800619005	**B-1-A**	Solid	06/04/25 15:55	06/05/25 11:40
92800619006	**B-1**	Solid	06/04/25 16:00	06/05/25 11:40

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE ANALYTE COUNT

Project: Fortress Wood Products
Pace Project No.: 92800619

Lab ID	Sample ID	Method	Analysts	Analytes Reported	Laboratory
92800619001	**B-11**	EPA 7199	VJM	1	PASI-C
		EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		EPA 8270E	SEM	75	PASI-C
		EPA 8260D	SAS	70	PASI-C
		SW-846	KDF	1	PASI-C
92800619002	**BG-1**	EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		ASTM D2974-87	NP1	1	PASI-O
92800619003	**BG-2**	EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		ASTM D2974-87	NP1	1	PASI-O
92800619004	**BG-3**	EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		ASTM D2974-87	NP1	1	PASI-O
92800619005	**B-1-A**	EPA 6010	ASB	7	PASI-O
		EPA 7470	JNK	1	PASI-O
92800619006	**B-1**	EPA 7199	VJM	1	PASI-C
		EPA 6020	BSL	12	PASI-O
		EPA 7471	JNK	1	PASI-O
		EPA 8270E	SEM	75	PASI-C
		EPA 8260D	SAS	70	PASI-C
		SW-846	KDF	1	PASI-C

PASI-C = Pace Analytical Services - Charlotte
PASI-O = Pace Analytical Services - Ormond Beach

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800619

Sample: B-11 **Lab ID: 92800619001** Collected: 06/04/25 12:40 Received: 06/05/25 11:40 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199 Pace Analytical Services - Charlotte								
Chromium, Hexavalent	**0.27J**	mg/kg	1.2	0.21	1	06/10/25 09:51	06/11/25 18:36	18540-29-9	
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050 Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	2.8	0.74	20	06/11/25 00:31	06/13/25 22:19	7440-36-0	N2
Arsenic	**2.4**	mg/kg	1.4	0.22	20	06/11/25 00:31	06/13/25 22:19	7440-38-2	
Beryllium	**0.30**	mg/kg	0.17	0.082	20	06/11/25 00:31	06/13/25 22:19	7440-41-7	
Cadmium	ND	mg/kg	0.17	0.037	20	06/11/25 00:31	06/13/25 22:19	7440-43-9	
Chromium	**42.7**	mg/kg	1.4	0.81	20	06/11/25 00:31	06/13/25 22:19	7440-47-3	
Copper	**31.8**	mg/kg	2.8	0.72	20	06/11/25 00:31	06/13/25 22:19	7440-50-8	
Lead	**8.7**	mg/kg	1.4	0.52	20	06/11/25 00:31	06/13/25 22:19	7439-92-1	
Nickel	**14.9**	mg/kg	1.4	0.68	20	06/11/25 00:31	06/13/25 22:19	7440-02-0	
Selenium	ND	mg/kg	1.4	0.73	20	06/11/25 00:31	06/13/25 22:19	7782-49-2	
Silver	ND	mg/kg	0.17	0.054	20	06/11/25 00:31	06/13/25 22:19	7440-22-4	
Thallium	ND	mg/kg	1.4	0.25	20	06/11/25 00:31	06/13/25 22:19	7440-28-0	
Zinc	ND	mg/kg	56.8	11.1	20	06/11/25 00:31	06/13/25 22:19	7440-66-6	
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471 Pace Analytical Services - Ormond Beach								
Mercury	**0.022**	mg/kg	0.011	0.0057	1	06/16/25 09:45	06/16/25 12:13	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.42	0.15	1	06/16/25 12:14	06/17/25 09:59	83-32-9	
Acenaphthylene	ND	mg/kg	0.42	0.15	1	06/16/25 12:14	06/17/25 09:59	208-96-8	
Aniline	ND	mg/kg	0.42	0.16	1	06/16/25 12:14	06/17/25 09:59	62-53-3	
Anthracene	ND	mg/kg	0.42	0.14	1	06/16/25 12:14	06/17/25 09:59	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.42	0.14	1	06/16/25 12:14	06/17/25 09:59	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.42	0.14	1	06/16/25 12:14	06/17/25 09:59	50-32-8	
Benzo(b)fluoranthene	ND	mg/kg	0.42	0.14	1	06/16/25 12:14	06/17/25 09:59	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.42	0.16	1	06/16/25 12:14	06/17/25 09:59	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.42	0.15	1	06/16/25 12:14	06/17/25 09:59	207-08-9	
Benzoic Acid	ND	mg/kg	2.1	0.90	1	06/16/25 12:14	06/17/25 09:59	65-85-0	
Benzyl alcohol	ND	mg/kg	0.84	0.32	1	06/16/25 12:14	06/17/25 09:59	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.42	0.16	1	06/16/25 12:14	06/17/25 09:59	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.42	0.18	1	06/16/25 12:14	06/17/25 09:59	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	0.84	0.29	1	06/16/25 12:14	06/17/25 09:59	59-50-7	
4-Chloroaniline	ND	mg/kg	0.84	0.33	1	06/16/25 12:14	06/17/25 09:59	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.42	0.17	1	06/16/25 12:14	06/17/25 09:59	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.42	0.16	1	06/16/25 12:14	06/17/25 09:59	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.42	0.17	1	06/16/25 12:14	06/17/25 09:59	91-58-7	
2-Chlorophenol	ND	mg/kg	0.42	0.16	1	06/16/25 12:14	06/17/25 09:59	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.42	0.16	1	06/16/25 12:14	06/17/25 09:59	7005-72-3	
Chrysene	ND	mg/kg	0.42	0.15	1	06/16/25 12:14	06/17/25 09:59	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800619

Sample: B-11 **Lab ID: 92800619001** Collected: 06/04/25 12:40 Received: 06/05/25 11:40 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.42	0.16	1	06/16/25 12:14	06/17/25 09:59	53-70-3	
Dibenzofuran	ND	mg/kg	0.42	0.15	1	06/16/25 12:14	06/17/25 09:59	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.42	0.15	1	06/16/25 12:14	06/17/25 09:59	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.42	0.15	1	06/16/25 12:14	06/17/25 09:59	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.42	0.16	1	06/16/25 12:14	06/17/25 09:59	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	0.84	0.28	1	06/16/25 12:14	06/17/25 09:59	91-94-1	
2,4-Dichlorophenol	ND	mg/kg	0.42	0.16	1	06/16/25 12:14	06/17/25 09:59	120-83-2	
Diethylphthalate	ND	mg/kg	0.42	0.15	1	06/16/25 12:14	06/17/25 09:59	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.42	0.17	1	06/16/25 12:14	06/17/25 09:59	105-67-9	
Dimethylphthalate	ND	mg/kg	0.42	0.15	1	06/16/25 12:14	06/17/25 09:59	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.42	0.14	1	06/16/25 12:14	06/17/25 09:59	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	0.84	0.39	1	06/16/25 12:14	06/17/25 09:59	534-52-1	
2,4-Dinitrophenol	ND	mg/kg	2.1	1.3	1	06/16/25 12:14	06/17/25 09:59	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.42	0.16	1	06/16/25 12:14	06/17/25 09:59	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.42	0.15	1	06/16/25 12:14	06/17/25 09:59	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.42	0.16	1	06/16/25 12:14	06/17/25 09:59	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.42	0.16	1	06/16/25 12:14	06/17/25 09:59	117-81-7	
Fluoranthene	ND	mg/kg	0.42	0.14	1	06/16/25 12:14	06/17/25 09:59	206-44-0	
Fluorene	ND	mg/kg	0.42	0.15	1	06/16/25 12:14	06/17/25 09:59	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.42	0.18	1	06/16/25 12:14	06/17/25 09:59	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.42	0.16	1	06/16/25 12:14	06/17/25 09:59	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.42	0.24	1	06/16/25 12:14	06/17/25 09:59	77-47-4	
Hexachloroethane	ND	mg/kg	0.42	0.16	1	06/16/25 12:14	06/17/25 09:59	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.42	0.16	1	06/16/25 12:14	06/17/25 09:59	193-39-5	
Isophorone	ND	mg/kg	0.42	0.19	1	06/16/25 12:14	06/17/25 09:59	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.42	0.15	1	06/16/25 12:14	06/17/25 09:59	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.42	0.17	1	06/16/25 12:14	06/17/25 09:59	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.42	0.17	1	06/16/25 12:14	06/17/25 09:59	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.42	0.17	1	06/16/25 12:14	06/17/25 09:59	15831-10-4	
Naphthalene	ND	mg/kg	0.42	0.14	1	06/16/25 12:14	06/17/25 09:59	91-20-3	
2-Nitroaniline	ND	mg/kg	2.1	0.34	1	06/16/25 12:14	06/17/25 09:59	88-74-4	
3-Nitroaniline	ND	mg/kg	2.1	0.33	1	06/16/25 12:14	06/17/25 09:59	99-09-2	
4-Nitroaniline	ND	mg/kg	0.84	0.32	1	06/16/25 12:14	06/17/25 09:59	100-01-6	
Nitrobenzene	ND	mg/kg	0.42	0.19	1	06/16/25 12:14	06/17/25 09:59	98-95-3	
2-Nitrophenol	ND	mg/kg	0.42	0.18	1	06/16/25 12:14	06/17/25 09:59	88-75-5	
4-Nitrophenol	ND	mg/kg	2.1	0.81	1	06/16/25 12:14	06/17/25 09:59	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.42	0.14	1	06/16/25 12:14	06/17/25 09:59	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.42	0.16	1	06/16/25 12:14	06/17/25 09:59	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.42	0.15	1	06/16/25 12:14	06/17/25 09:59	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.42	0.20	1	06/16/25 12:14	06/17/25 09:59	108-60-1	
Pentachlorophenol	ND	mg/kg	0.84	0.41	1	06/16/25 12:14	06/17/25 09:59	87-86-5	
Phenanthrene	ND	mg/kg	0.42	0.14	1	06/16/25 12:14	06/17/25 09:59	85-01-8	
Phenol	ND	mg/kg	0.42	0.19	1	06/16/25 12:14	06/17/25 09:59	108-95-2	
Pyrene	ND	mg/kg	0.42	0.17	1	06/16/25 12:14	06/17/25 09:59	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800619

Sample: B-11 **Lab ID: 92800619001** Collected: 06/04/25 12:40 Received: 06/05/25 11:40 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.42	0.13	1	06/16/25 12:14	06/17/25 09:59	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.42	0.16	1	06/16/25 12:14	06/17/25 09:59	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.42	0.19	1	06/16/25 12:14	06/17/25 09:59	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.42	0.17	1	06/16/25 12:14	06/17/25 09:59	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	44	%	10-130		1	06/16/25 12:14	06/17/25 09:59	4165-60-0	
2-Fluorobiphenyl (S)	38	%	10-130		1	06/16/25 12:14	06/17/25 09:59	321-60-8	
Terphenyl-d14 (S)	62	%	10-130		1	06/16/25 12:14	06/17/25 09:59	1718-51-0	
Phenol-d6 (S)	36	%	10-130		1	06/16/25 12:14	06/17/25 09:59	13127-88-3	
2-Fluorophenol (S)	31	%	10-130		1	06/16/25 12:14	06/17/25 09:59	367-12-4	
2,4,6-Tribromophenol (S)	53	%	10-130		1	06/16/25 12:14	06/17/25 09:59	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.14	0.046	1	06/06/25 19:05	06/07/25 04:49	67-64-1	1g
Benzene	ND	mg/kg	0.0071	0.0028	1	06/06/25 19:05	06/07/25 04:49	71-43-2	1g
Bromobenzene	ND	mg/kg	0.0071	0.0023	1	06/06/25 19:05	06/07/25 04:49	108-86-1	1g
Bromochloromethane	ND	mg/kg	0.0071	0.0021	1	06/06/25 19:05	06/07/25 04:49	74-97-5	1g
Bromodichloromethane	ND	mg/kg	0.0071	0.0027	1	06/06/25 19:05	06/07/25 04:49	75-27-4	1g
Bromoform	ND	mg/kg	0.0071	0.0025	1	06/06/25 19:05	06/07/25 04:49	75-25-2	1g
Bromomethane	ND	mg/kg	0.028	0.022	1	06/06/25 19:05	06/07/25 04:49	74-83-9	1g
2-Butanone (MEK)	ND	mg/kg	0.14	0.034	1	06/06/25 19:05	06/07/25 04:49	78-93-3	1g
n-Butylbenzene	ND	mg/kg	0.0071	0.0045	1	06/06/25 19:05	06/07/25 04:49	104-51-8	1g
sec-Butylbenzene	ND	mg/kg	0.0071	0.0031	1	06/06/25 19:05	06/07/25 04:49	135-98-8	1g
tert-Butylbenzene	ND	mg/kg	0.0071	0.0025	1	06/06/25 19:05	06/07/25 04:49	98-06-6	1g
Carbon tetrachloride	ND	mg/kg	0.0071	0.0027	1	06/06/25 19:05	06/07/25 04:49	56-23-5	1g
Chlorobenzene	ND	mg/kg	0.0071	0.0041	1	06/06/25 19:05	06/07/25 04:49	108-90-7	1g
Chloroethane	ND	mg/kg	0.014	0.0055	1	06/06/25 19:05	06/07/25 04:49	75-00-3	1g
Chloroform	ND	mg/kg	0.0071	0.0059	1	06/06/25 19:05	06/07/25 04:49	67-66-3	1g
Chloromethane	ND	mg/kg	0.014	0.0060	1	06/06/25 19:05	06/07/25 04:49	74-87-3	1g
2-Chlorotoluene	ND	mg/kg	0.0071	0.0025	1	06/06/25 19:05	06/07/25 04:49	95-49-8	1g
4-Chlorotoluene	ND	mg/kg	0.0071	0.0039	1	06/06/25 19:05	06/07/25 04:49	106-43-4	1g
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0071	0.0028	1	06/06/25 19:05	06/07/25 04:49	96-12-8	1g
Dibromochloromethane	ND	mg/kg	0.0071	0.0040	1	06/06/25 19:05	06/07/25 04:49	124-48-1	1g
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0071	0.0031	1	06/06/25 19:05	06/07/25 04:49	106-93-4	1g
Dibromomethane	ND	mg/kg	0.0071	0.0015	1	06/06/25 19:05	06/07/25 04:49	74-95-3	1g
1,2-Dichlorobenzene	ND	mg/kg	0.0071	0.0026	1	06/06/25 19:05	06/07/25 04:49	95-50-1	1g
1,3-Dichlorobenzene	ND	mg/kg	0.0071	0.0022	1	06/06/25 19:05	06/07/25 04:49	541-73-1	1g
1,4-Dichlorobenzene	ND	mg/kg	0.0071	0.0018	1	06/06/25 19:05	06/07/25 04:49	106-46-7	1g
Dichlorodifluoromethane	ND	mg/kg	0.014	0.0072	1	06/06/25 19:05	06/07/25 04:49	75-71-8	1g
1,1-Dichloroethane	ND	mg/kg	0.0071	0.0029	1	06/06/25 19:05	06/07/25 04:49	75-34-3	1g
1,2-Dichloroethane	ND	mg/kg	0.0071	0.0047	1	06/06/25 19:05	06/07/25 04:49	107-06-2	1g
1,1-Dichloroethene	ND	mg/kg	0.0071	0.0029	1	06/06/25 19:05	06/07/25 04:49	75-35-4	1g
cis-1,2-Dichloroethene	ND	mg/kg	0.0071	0.0024	1	06/06/25 19:05	06/07/25 04:49	156-59-2	1g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800619

Sample: B-11 **Lab ID: 92800619001** Collected: 06/04/25 12:40 Received: 06/05/25 11:40 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0071	0.0060	1	06/06/25 19:05	06/07/25 04:49	156-60-5	1g
1,2-Dichloropropane	ND	mg/kg	0.0071	0.0021	1	06/06/25 19:05	06/07/25 04:49	78-87-5	1g
1,3-Dichloropropane	ND	mg/kg	0.0071	0.0022	1	06/06/25 19:05	06/07/25 04:49	142-28-9	1g
2,2-Dichloropropane	ND	mg/kg	0.0071	0.0054	1	06/06/25 19:05	06/07/25 04:49	594-20-7	1g
1,1-Dichloropropene	ND	mg/kg	0.0071	0.0034	1	06/06/25 19:05	06/07/25 04:49	563-58-6	1g
cis-1,3-Dichloropropene	ND	mg/kg	0.0071	0.0019	1	06/06/25 19:05	06/07/25 04:49	10061-01-5	1g
trans-1,3-Dichloropropene	ND	mg/kg	0.0071	0.0024	1	06/06/25 19:05	06/07/25 04:49	10061-02-6	1g
Diisopropyl ether	ND	mg/kg	0.0071	0.0019	1	06/06/25 19:05	06/07/25 04:49	108-20-3	1g
Ethylbenzene	ND	mg/kg	0.0071	0.0033	1	06/06/25 19:05	06/07/25 04:49	100-41-4	1g
Hexachloro-1,3-butadiene	ND	mg/kg	0.014	0.012	1	06/06/25 19:05	06/07/25 04:49	87-68-3	1g
2-Hexanone	ND	mg/kg	0.071	0.0068	1	06/06/25 19:05	06/07/25 04:49	591-78-6	1g
Isopropylbenzene (Cumene)	ND	mg/kg	0.0071	0.0024	1	06/06/25 19:05	06/07/25 04:49	98-82-8	1g
p-Isopropyltoluene	ND	mg/kg	0.0071	0.0035	1	06/06/25 19:05	06/07/25 04:49	99-87-6	1g
Methylene Chloride	ND	mg/kg	0.028	0.019	1	06/06/25 19:05	06/07/25 04:49	75-09-2	1g
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.071	0.0068	1	06/06/25 19:05	06/07/25 04:49	108-10-1	1g
Methyl-tert-butyl ether	ND	mg/kg	0.0071	0.0027	1	06/06/25 19:05	06/07/25 04:49	1634-04-4	1g
Naphthalene	ND	mg/kg	0.0071	0.0037	1	06/06/25 19:05	06/07/25 04:49	91-20-3	1g
n-Propylbenzene	ND	mg/kg	0.0071	0.0025	1	06/06/25 19:05	06/07/25 04:49	103-65-1	1g
Styrene	ND	mg/kg	0.0071	0.0019	1	06/06/25 19:05	06/07/25 04:49	100-42-5	1g
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0071	0.0027	1	06/06/25 19:05	06/07/25 04:49	630-20-6	1g
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0071	0.0019	1	06/06/25 19:05	06/07/25 04:49	79-34-5	1g
Tetrachloroethene	ND	mg/kg	0.0071	0.0022	1	06/06/25 19:05	06/07/25 04:49	127-18-4	1g
Toluene	ND	mg/kg	0.0071	0.0049	1	06/06/25 19:05	06/07/25 04:49	108-88-3	1g
1,2,3-Trichlorobenzene	ND	mg/kg	0.0071	0.0057	1	06/06/25 19:05	06/07/25 04:49	87-61-6	1g
1,2,4-Trichlorobenzene	ND	mg/kg	0.0071	0.0060	1	06/06/25 19:05	06/07/25 04:49	120-82-1	1g
1,1,1-Trichloroethane	ND	mg/kg	0.0071	0.0037	1	06/06/25 19:05	06/07/25 04:49	71-55-6	1g
1,1,2-Trichloroethane	ND	mg/kg	0.0071	0.0024	1	06/06/25 19:05	06/07/25 04:49	79-00-5	1g
Trichloroethene	ND	mg/kg	0.0071	0.0057	1	06/06/25 19:05	06/07/25 04:49	79-01-6	1g
Trichlorofluoromethane	ND	mg/kg	0.0071	0.0039	1	06/06/25 19:05	06/07/25 04:49	75-69-4	1g
1,2,3-Trichloropropane	ND	mg/kg	0.0071	0.0036	1	06/06/25 19:05	06/07/25 04:49	96-18-4	1g
1,2,4-Trimethylbenzene	ND	mg/kg	0.0071	0.0042	1	06/06/25 19:05	06/07/25 04:49	95-63-6	1g
1,3,5-Trimethylbenzene	ND	mg/kg	0.0071	0.0024	1	06/06/25 19:05	06/07/25 04:49	108-67-8	1g
Vinyl acetate	ND	mg/kg	0.071	0.015	1	06/06/25 19:05	06/07/25 04:49	108-05-4	1g
Vinyl chloride	ND	mg/kg	0.014	0.0036	1	06/06/25 19:05	06/07/25 04:49	75-01-4	1g
Xylene (Total)	ND	mg/kg	0.014	0.0040	1	06/06/25 19:05	06/07/25 04:49	1330-20-7	1g
m&p-Xylene	ND	mg/kg	0.014	0.0049	1	06/06/25 19:05	06/07/25 04:49	179601-23-1	1g
o-Xylene	ND	mg/kg	0.0071	0.0031	1	06/06/25 19:05	06/07/25 04:49	95-47-6	1g
Surrogates									
Toluene-d8 (S)	96	%	70-130		1	06/06/25 19:05	06/07/25 04:49	2037-26-5	1g
4-Bromofluorobenzene (S)	96	%	70-130		1	06/06/25 19:05	06/07/25 04:49	460-00-4	1g
1,2-Dichloroethane-d4 (S)	94	%	70-135		1	06/06/25 19:05	06/07/25 04:49	17060-07-0	1g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800619

Sample: B-11 **Lab ID: 92800619001** Collected: 06/04/25 12:40 Received: 06/05/25 11:40 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**21.5**	%	0.10	0.10	1		06/05/25 15:09		N2

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800619

Sample: BG-1 **Lab ID: 92800619002** Collected: 06/04/25 13:35 Received: 06/05/25 11:40 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050								
	Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	3.0	0.78	20	06/11/25 00:31	06/13/25 22:22	7440-36-0	N2
Arsenic	**2.7**	mg/kg	1.5	0.24	20	06/11/25 00:31	06/13/25 22:22	7440-38-2	
Beryllium	**0.34**	mg/kg	0.18	0.087	20	06/11/25 00:31	06/13/25 22:22	7440-41-7	
Cadmium	ND	mg/kg	0.18	0.039	20	06/11/25 00:31	06/13/25 22:22	7440-43-9	
Chromium	**23.6**	mg/kg	1.5	0.86	20	06/11/25 00:31	06/13/25 22:22	7440-47-3	
Copper	**14.3**	mg/kg	3.0	0.76	20	06/11/25 00:31	06/13/25 22:22	7440-50-8	
Lead	**19.2**	mg/kg	1.5	0.54	20	06/11/25 00:31	06/13/25 22:22	7439-92-1	
Nickel	**7.7**	mg/kg	1.5	0.72	20	06/11/25 00:31	06/13/25 22:22	7440-02-0	
Selenium	ND	mg/kg	1.5	0.77	20	06/11/25 00:31	06/13/25 22:22	7782-49-2	
Silver	ND	mg/kg	0.18	0.057	20	06/11/25 00:31	06/13/25 22:22	7440-22-4	
Thallium	ND	mg/kg	1.5	0.26	20	06/11/25 00:31	06/13/25 22:22	7440-28-0	
Zinc	ND	mg/kg	59.8	11.7	20	06/11/25 00:31	06/13/25 22:22	7440-66-6	
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471								
	Pace Analytical Services - Ormond Beach								
Mercury	**0.030**	mg/kg	0.014	0.0071	1	06/16/25 09:45	06/16/25 12:15	7439-97-6	
Percent Moisture	Analytical Method: ASTM D2974-87								
	Pace Analytical Services - Ormond Beach								
Percent Moisture	**31.0**	%	0.10	0.10	1		06/16/25 08:12		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800619

Sample: BG-2 **Lab ID: 92800619003** Collected: 06/04/25 13:40 Received: 06/05/25 11:40 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050								
	Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	2.8	0.73	20	06/11/25 00:31	06/13/25 22:24	7440-36-0	N2
Arsenic	**2.6**	mg/kg	1.4	0.22	20	06/11/25 00:31	06/13/25 22:24	7440-38-2	
Beryllium	**0.26**	mg/kg	0.17	0.081	20	06/11/25 00:31	06/13/25 22:24	7440-41-7	
Cadmium	ND	mg/kg	0.17	0.036	20	06/11/25 00:31	06/13/25 22:24	7440-43-9	
Chromium	**28.0**	mg/kg	1.4	0.80	20	06/11/25 00:31	06/13/25 22:24	7440-47-3	
Copper	**23.4**	mg/kg	2.8	0.71	20	06/11/25 00:31	06/13/25 22:24	7440-50-8	
Lead	**22.9**	mg/kg	1.4	0.51	20	06/11/25 00:31	06/13/25 22:24	7439-92-1	
Nickel	**9.3**	mg/kg	1.4	0.67	20	06/11/25 00:31	06/13/25 22:24	7440-02-0	
Selenium	ND	mg/kg	1.4	0.72	20	06/11/25 00:31	06/13/25 22:24	7782-49-2	
Silver	ND	mg/kg	0.17	0.053	20	06/11/25 00:31	06/13/25 22:24	7440-22-4	
Thallium	ND	mg/kg	1.4	0.25	20	06/11/25 00:31	06/13/25 22:24	7440-28-0	
Zinc	ND	mg/kg	55.8	10.9	20	06/11/25 00:31	06/13/25 22:24	7440-66-6	
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471								
	Pace Analytical Services - Ormond Beach								
Mercury	**0.043**	mg/kg	0.0097	0.0049	1	06/16/25 09:45	06/16/25 12:17	7439-97-6	
Percent Moisture	Analytical Method: ASTM D2974-87								
	Pace Analytical Services - Ormond Beach								
Percent Moisture	**29.7**	%	0.10	0.10	1		06/16/25 08:12		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800619

Sample: BG-3 **Lab ID: 92800619004** Collected: 06/04/25 13:45 Received: 06/05/25 11:40 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050								
	Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	2.6	0.68	20	06/11/25 00:31	06/13/25 22:27	7440-36-0	N2
Arsenic	**1.5**	mg/kg	1.3	0.21	20	06/11/25 00:31	06/13/25 22:27	7440-38-2	
Beryllium	**0.30**	mg/kg	0.16	0.076	20	06/11/25 00:31	06/13/25 22:27	7440-41-7	
Cadmium	ND	mg/kg	0.16	0.034	20	06/11/25 00:31	06/13/25 22:27	7440-43-9	
Chromium	**40.1**	mg/kg	1.3	0.75	20	06/11/25 00:31	06/13/25 22:27	7440-47-3	
Copper	**28.7**	mg/kg	2.6	0.67	20	06/11/25 00:31	06/13/25 22:27	7440-50-8	
Lead	**8.7**	mg/kg	1.3	0.48	20	06/11/25 00:31	06/13/25 22:27	7439-92-1	
Nickel	**14.8**	mg/kg	1.3	0.63	20	06/11/25 00:31	06/13/25 22:27	7440-02-0	
Selenium	ND	mg/kg	1.3	0.68	20	06/11/25 00:31	06/13/25 22:27	7782-49-2	
Silver	ND	mg/kg	0.16	0.050	20	06/11/25 00:31	06/13/25 22:27	7440-22-4	
Thallium	ND	mg/kg	1.3	0.23	20	06/11/25 00:31	06/13/25 22:27	7440-28-0	
Zinc	ND	mg/kg	52.7	10.3	20	06/11/25 00:31	06/13/25 22:27	7440-66-6	
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471								
	Pace Analytical Services - Ormond Beach								
Mercury	**0.020**	mg/kg	0.0095	0.0048	1	06/16/25 09:45	06/16/25 12:20	7439-97-6	
Percent Moisture	Analytical Method: ASTM D2974-87								
	Pace Analytical Services - Ormond Beach								
Percent Moisture	**14.9**	%	0.10	0.10	1		06/16/25 08:12		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800619

Sample: B-1-A **Lab ID: 92800619005** Collected: 06/04/25 15:55 Received: 06/05/25 11:40 Matrix: Solid

Results reported on a "wet-weight" basis

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
6010 MET ICP, TCLP	Analytical Method: EPA 6010 Preparation Method: EPA 3010 Leachate Method/Date: EPA 1311; 06/11/25 13:37 Pace Analytical Services - Ormond Beach								
Arsenic	ND	mg/L	0.10	0.034	1	06/12/25 11:43	06/13/25 10:12	7440-38-2	
Barium	**1.9**	mg/L	0.10	0.0084	1	06/12/25 11:43	06/13/25 10:12	7440-39-3	
Cadmium	**0.072**	mg/L	0.010	0.0033	1	06/12/25 11:43	06/13/25 10:12	7440-43-9	
Chromium	ND	mg/L	0.050	0.017	1	06/12/25 11:43	06/13/25 10:12	7440-47-3	
Lead	**0.33**	mg/L	0.10	0.021	1	06/12/25 11:43	06/13/25 10:12	7439-92-1	
Selenium	ND	mg/L	0.15	0.039	1	06/12/25 11:43	06/13/25 10:12	7782-49-2	
Silver	ND	mg/L	0.050	0.010	1	06/12/25 11:43	06/13/25 10:12	7440-22-4	
7470 Mercury, TCLP	Analytical Method: EPA 7470 Preparation Method: EPA 7470 Leachate Method/Date: EPA 1311; 06/11/25 13:37 Pace Analytical Services - Ormond Beach								
Mercury	ND	mg/L	0.0020	0.0014	1	06/12/25 11:34	06/12/25 15:29	7439-97-6	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800619

Sample: B-1 **Lab ID: 92800619006** Collected: 06/04/25 16:00 Received: 06/05/25 11:40 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199 Pace Analytical Services - Charlotte								
Chromium, Hexavalent	ND	mg/kg	1.1	0.19	1	06/10/25 09:51	06/11/25 20:41	18540-29-9	
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3050 Pace Analytical Services - Ormond Beach								
Antimony	ND	mg/kg	2.5	0.65	20	06/11/25 00:31	06/13/25 22:30	7440-36-0	N2
Arsenic	**18.7**	mg/kg	1.2	0.20	20	06/11/25 00:31	06/13/25 22:30	7440-38-2	
Beryllium	**0.26**	mg/kg	0.15	0.072	20	06/11/25 00:31	06/13/25 22:30	7440-41-7	
Cadmium	**5.6**	mg/kg	0.15	0.032	20	06/11/25 00:31	06/13/25 22:30	7440-43-9	
Chromium	**63.2**	mg/kg	1.2	0.71	20	06/11/25 00:31	06/13/25 22:30	7440-47-3	
Copper	**254**	mg/kg	2.5	0.63	20	06/11/25 00:31	06/13/25 22:30	7440-50-8	
Lead	**468**	mg/kg	1.2	0.45	20	06/11/25 00:31	06/13/25 22:30	7439-92-1	
Nickel	**44.3**	mg/kg	1.2	0.60	20	06/11/25 00:31	06/13/25 22:30	7440-02-0	
Selenium	ND	mg/kg	1.2	0.64	20	06/11/25 00:31	06/13/25 22:30	7782-49-2	
Silver	**0.18**	mg/kg	0.15	0.047	20	06/11/25 00:31	06/13/25 22:30	7440-22-4	
Thallium	ND	mg/kg	1.2	0.22	20	06/11/25 00:31	06/13/25 22:30	7440-28-0	
Zinc	**1230**	mg/kg	49.7	9.7	20	06/11/25 00:31	06/13/25 22:30	7440-66-6	
7471 Mercury	Analytical Method: EPA 7471 Preparation Method: EPA 7471 Pace Analytical Services - Ormond Beach								
Mercury	**0.26**	mg/kg	0.0078	0.0039	1	06/16/25 09:45	06/16/25 12:22	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.38	0.13	1	06/16/25 12:14	06/17/25 10:25	83-32-9	
Acenaphthylene	ND	mg/kg	0.38	0.13	1	06/16/25 12:14	06/17/25 10:25	208-96-8	
Aniline	ND	mg/kg	0.38	0.15	1	06/16/25 12:14	06/17/25 10:25	62-53-3	
Anthracene	ND	mg/kg	0.38	0.12	1	06/16/25 12:14	06/17/25 10:25	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.38	0.13	1	06/16/25 12:14	06/17/25 10:25	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.38	0.13	1	06/16/25 12:14	06/17/25 10:25	50-32-8	
Benzo(b)fluoranthene	ND	mg/kg	0.38	0.13	1	06/16/25 12:14	06/17/25 10:25	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.38	0.15	1	06/16/25 12:14	06/17/25 10:25	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.38	0.13	1	06/16/25 12:14	06/17/25 10:25	207-08-9	
Benzoic Acid	ND	mg/kg	1.9	0.81	1	06/16/25 12:14	06/17/25 10:25	65-85-0	
Benzyl alcohol	ND	mg/kg	0.75	0.29	1	06/16/25 12:14	06/17/25 10:25	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.38	0.14	1	06/16/25 12:14	06/17/25 10:25	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.38	0.16	1	06/16/25 12:14	06/17/25 10:25	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	0.75	0.26	1	06/16/25 12:14	06/17/25 10:25	59-50-7	
4-Chloroaniline	ND	mg/kg	0.75	0.30	1	06/16/25 12:14	06/17/25 10:25	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.38	0.16	1	06/16/25 12:14	06/17/25 10:25	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.38	0.14	1	06/16/25 12:14	06/17/25 10:25	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.38	0.15	1	06/16/25 12:14	06/17/25 10:25	91-58-7	
2-Chlorophenol	ND	mg/kg	0.38	0.14	1	06/16/25 12:14	06/17/25 10:25	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.38	0.14	1	06/16/25 12:14	06/17/25 10:25	7005-72-3	
Chrysene	ND	mg/kg	0.38	0.14	1	06/16/25 12:14	06/17/25 10:25	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800619

Sample: B-1 **Lab ID: 92800619006** Collected: 06/04/25 16:00 Received: 06/05/25 11:40 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.38	0.14	1	06/16/25 12:14	06/17/25 10:25	53-70-3	
Dibenzofuran	ND	mg/kg	0.38	0.14	1	06/16/25 12:14	06/17/25 10:25	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.38	0.14	1	06/16/25 12:14	06/17/25 10:25	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.38	0.13	1	06/16/25 12:14	06/17/25 10:25	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.38	0.14	1	06/16/25 12:14	06/17/25 10:25	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	0.75	0.25	1	06/16/25 12:14	06/17/25 10:25	91-94-1	
2,4-Dichlorophenol	ND	mg/kg	0.38	0.15	1	06/16/25 12:14	06/17/25 10:25	120-83-2	
Diethylphthalate	ND	mg/kg	0.38	0.14	1	06/16/25 12:14	06/17/25 10:25	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.38	0.16	1	06/16/25 12:14	06/17/25 10:25	105-67-9	
Dimethylphthalate	ND	mg/kg	0.38	0.14	1	06/16/25 12:14	06/17/25 10:25	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.38	0.13	1	06/16/25 12:14	06/17/25 10:25	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	0.75	0.35	1	06/16/25 12:14	06/17/25 10:25	534-52-1	
2,4-Dinitrophenol	ND	mg/kg	1.9	1.2	1	06/16/25 12:14	06/17/25 10:25	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.38	0.14	1	06/16/25 12:14	06/17/25 10:25	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.38	0.14	1	06/16/25 12:14	06/17/25 10:25	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.38	0.15	1	06/16/25 12:14	06/17/25 10:25	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.38	0.15	1	06/16/25 12:14	06/17/25 10:25	117-81-7	
Fluoranthene	ND	mg/kg	0.38	0.13	1	06/16/25 12:14	06/17/25 10:25	206-44-0	
Fluorene	ND	mg/kg	0.38	0.13	1	06/16/25 12:14	06/17/25 10:25	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.38	0.16	1	06/16/25 12:14	06/17/25 10:25	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.38	0.15	1	06/16/25 12:14	06/17/25 10:25	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.38	0.22	1	06/16/25 12:14	06/17/25 10:25	77-47-4	
Hexachloroethane	ND	mg/kg	0.38	0.14	1	06/16/25 12:14	06/17/25 10:25	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.38	0.15	1	06/16/25 12:14	06/17/25 10:25	193-39-5	
Isophorone	ND	mg/kg	0.38	0.17	1	06/16/25 12:14	06/17/25 10:25	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.38	0.13	1	06/16/25 12:14	06/17/25 10:25	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.38	0.15	1	06/16/25 12:14	06/17/25 10:25	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.38	0.15	1	06/16/25 12:14	06/17/25 10:25	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.38	0.15	1	06/16/25 12:14	06/17/25 10:25	15831-10-4	
Naphthalene	ND	mg/kg	0.38	0.13	1	06/16/25 12:14	06/17/25 10:25	91-20-3	
2-Nitroaniline	ND	mg/kg	1.9	0.31	1	06/16/25 12:14	06/17/25 10:25	88-74-4	
3-Nitroaniline	ND	mg/kg	1.9	0.30	1	06/16/25 12:14	06/17/25 10:25	99-09-2	
4-Nitroaniline	ND	mg/kg	0.75	0.29	1	06/16/25 12:14	06/17/25 10:25	100-01-6	
Nitrobenzene	ND	mg/kg	0.38	0.17	1	06/16/25 12:14	06/17/25 10:25	98-95-3	
2-Nitrophenol	ND	mg/kg	0.38	0.16	1	06/16/25 12:14	06/17/25 10:25	88-75-5	
4-Nitrophenol	ND	mg/kg	1.9	0.73	1	06/16/25 12:14	06/17/25 10:25	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.38	0.13	1	06/16/25 12:14	06/17/25 10:25	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.38	0.14	1	06/16/25 12:14	06/17/25 10:25	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.38	0.13	1	06/16/25 12:14	06/17/25 10:25	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.38	0.18	1	06/16/25 12:14	06/17/25 10:25	108-60-1	
Pentachlorophenol	ND	mg/kg	0.75	0.37	1	06/16/25 12:14	06/17/25 10:25	87-86-5	
Phenanthrene	ND	mg/kg	0.38	0.12	1	06/16/25 12:14	06/17/25 10:25	85-01-8	
Phenol	ND	mg/kg	0.38	0.17	1	06/16/25 12:14	06/17/25 10:25	108-95-2	
Pyrene	ND	mg/kg	0.38	0.15	1	06/16/25 12:14	06/17/25 10:25	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800619

Sample: B-1 **Lab ID: 92800619006** Collected: 06/04/25 16:00 Received: 06/05/25 11:40 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.38	0.12	1	06/16/25 12:14	06/17/25 10:25	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.38	0.15	1	06/16/25 12:14	06/17/25 10:25	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.38	0.17	1	06/16/25 12:14	06/17/25 10:25	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.38	0.16	1	06/16/25 12:14	06/17/25 10:25	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	32	%	10-130		1	06/16/25 12:14	06/17/25 10:25	4165-60-0	
2-Fluorobiphenyl (S)	29	%	10-130		1	06/16/25 12:14	06/17/25 10:25	321-60-8	
Terphenyl-d14 (S)	52	%	10-130		1	06/16/25 12:14	06/17/25 10:25	1718-51-0	
Phenol-d6 (S)	32	%	10-130		1	06/16/25 12:14	06/17/25 10:25	13127-88-3	
2-Fluorophenol (S)	29	%	10-130		1	06/16/25 12:14	06/17/25 10:25	367-12-4	
2,4,6-Tribromophenol (S)	43	%	10-130		1	06/16/25 12:14	06/17/25 10:25	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.13	0.042	1	06/06/25 19:05	06/07/25 05:13	67-64-1	1g
Benzene	ND	mg/kg	0.0065	0.0026	1	06/06/25 19:05	06/07/25 05:13	71-43-2	1g
Bromobenzene	ND	mg/kg	0.0065	0.0021	1	06/06/25 19:05	06/07/25 05:13	108-86-1	1g
Bromochloromethane	ND	mg/kg	0.0065	0.0019	1	06/06/25 19:05	06/07/25 05:13	74-97-5	1g
Bromodichloromethane	ND	mg/kg	0.0065	0.0025	1	06/06/25 19:05	06/07/25 05:13	75-27-4	1g
Bromoform	ND	mg/kg	0.0065	0.0023	1	06/06/25 19:05	06/07/25 05:13	75-25-2	1g
Bromomethane	ND	mg/kg	0.026	0.020	1	06/06/25 19:05	06/07/25 05:13	74-83-9	1g
2-Butanone (MEK)	ND	mg/kg	0.13	0.031	1	06/06/25 19:05	06/07/25 05:13	78-93-3	1g
n-Butylbenzene	**0.0049J**	mg/kg	0.0065	0.0041	1	06/06/25 19:05	06/07/25 05:13	104-51-8	1g
sec-Butylbenzene	ND	mg/kg	0.0065	0.0029	1	06/06/25 19:05	06/07/25 05:13	135-98-8	1g
tert-Butylbenzene	ND	mg/kg	0.0065	0.0023	1	06/06/25 19:05	06/07/25 05:13	98-06-6	1g
Carbon tetrachloride	ND	mg/kg	0.0065	0.0024	1	06/06/25 19:05	06/07/25 05:13	56-23-5	1g
Chlorobenzene	ND	mg/kg	0.0065	0.0037	1	06/06/25 19:05	06/07/25 05:13	108-90-7	1g
Chloroethane	ND	mg/kg	0.013	0.0050	1	06/06/25 19:05	06/07/25 05:13	75-00-3	1g
Chloroform	ND	mg/kg	0.0065	0.0054	1	06/06/25 19:05	06/07/25 05:13	67-66-3	1g
Chloromethane	ND	mg/kg	0.013	0.0054	1	06/06/25 19:05	06/07/25 05:13	74-87-3	1g
2-Chlorotoluene	ND	mg/kg	0.0065	0.0023	1	06/06/25 19:05	06/07/25 05:13	95-49-8	1g
4-Chlorotoluene	ND	mg/kg	0.0065	0.0036	1	06/06/25 19:05	06/07/25 05:13	106-43-4	1g
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0065	0.0025	1	06/06/25 19:05	06/07/25 05:13	96-12-8	1g
Dibromochloromethane	ND	mg/kg	0.0065	0.0036	1	06/06/25 19:05	06/07/25 05:13	124-48-1	1g
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0065	0.0029	1	06/06/25 19:05	06/07/25 05:13	106-93-4	1g
Dibromomethane	ND	mg/kg	0.0065	0.0014	1	06/06/25 19:05	06/07/25 05:13	74-95-3	1g
1,2-Dichlorobenzene	ND	mg/kg	0.0065	0.0023	1	06/06/25 19:05	06/07/25 05:13	95-50-1	1g
1,3-Dichlorobenzene	ND	mg/kg	0.0065	0.0020	1	06/06/25 19:05	06/07/25 05:13	541-73-1	1g
1,4-Dichlorobenzene	ND	mg/kg	0.0065	0.0017	1	06/06/25 19:05	06/07/25 05:13	106-46-7	1g
Dichlorodifluoromethane	ND	mg/kg	0.013	0.0066	1	06/06/25 19:05	06/07/25 05:13	75-71-8	1g
1,1-Dichloroethane	ND	mg/kg	0.0065	0.0027	1	06/06/25 19:05	06/07/25 05:13	75-34-3	1g
1,2-Dichloroethane	ND	mg/kg	0.0065	0.0043	1	06/06/25 19:05	06/07/25 05:13	107-06-2	1g
1,1-Dichloroethene	ND	mg/kg	0.0065	0.0027	1	06/06/25 19:05	06/07/25 05:13	75-35-4	1g
cis-1,2-Dichloroethene	ND	mg/kg	0.0065	0.0022	1	06/06/25 19:05	06/07/25 05:13	156-59-2	1g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800619

Sample: B-1 **Lab ID: 92800619006** Collected: 06/04/25 16:00 Received: 06/05/25 11:40 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0065	0.0055	1	06/06/25 19:05	06/07/25 05:13	156-60-5	1g
1,2-Dichloropropane	ND	mg/kg	0.0065	0.0019	1	06/06/25 19:05	06/07/25 05:13	78-87-5	1g
1,3-Dichloropropane	ND	mg/kg	0.0065	0.0020	1	06/06/25 19:05	06/07/25 05:13	142-28-9	1g
2,2-Dichloropropane	ND	mg/kg	0.0065	0.0049	1	06/06/25 19:05	06/07/25 05:13	594-20-7	1g
1,1-Dichloropropene	ND	mg/kg	0.0065	0.0031	1	06/06/25 19:05	06/07/25 05:13	563-58-6	1g
cis-1,3-Dichloropropene	ND	mg/kg	0.0065	0.0018	1	06/06/25 19:05	06/07/25 05:13	10061-01-5	1g
trans-1,3-Dichloropropene	ND	mg/kg	0.0065	0.0022	1	06/06/25 19:05	06/07/25 05:13	10061-02-6	1g
Diisopropyl ether	ND	mg/kg	0.0065	0.0018	1	06/06/25 19:05	06/07/25 05:13	108-20-3	1g
Ethylbenzene	**0.021**	mg/kg	0.0065	0.0030	1	06/06/25 19:05	06/07/25 05:13	100-41-4	1g
Hexachloro-1,3-butadiene	ND	mg/kg	0.013	0.011	1	06/06/25 19:05	06/07/25 05:13	87-68-3	1g
2-Hexanone	ND	mg/kg	0.065	0.0063	1	06/06/25 19:05	06/07/25 05:13	591-78-6	1g
Isopropylbenzene (Cumene)	ND	mg/kg	0.0065	0.0022	1	06/06/25 19:05	06/07/25 05:13	98-82-8	1g
p-Isopropyltoluene	**0.0038J**	mg/kg	0.0065	0.0032	1	06/06/25 19:05	06/07/25 05:13	99-87-6	1g
Methylene Chloride	ND	mg/kg	0.026	0.018	1	06/06/25 19:05	06/07/25 05:13	75-09-2	1g
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.065	0.0063	1	06/06/25 19:05	06/07/25 05:13	108-10-1	1g
Methyl-tert-butyl ether	ND	mg/kg	0.0065	0.0024	1	06/06/25 19:05	06/07/25 05:13	1634-04-4	1g
Naphthalene	**0.019**	mg/kg	0.0065	0.0034	1	06/06/25 19:05	06/07/25 05:13	91-20-3	1g
n-Propylbenzene	ND	mg/kg	0.0065	0.0023	1	06/06/25 19:05	06/07/25 05:13	103-65-1	1g
Styrene	ND	mg/kg	0.0065	0.0017	1	06/06/25 19:05	06/07/25 05:13	100-42-5	1g
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0065	0.0025	1	06/06/25 19:05	06/07/25 05:13	630-20-6	1g
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0065	0.0017	1	06/06/25 19:05	06/07/25 05:13	79-34-5	1g
Tetrachloroethene	ND	mg/kg	0.0065	0.0020	1	06/06/25 19:05	06/07/25 05:13	127-18-4	1g
Toluene	**0.049**	mg/kg	0.0065	0.0045	1	06/06/25 19:05	06/07/25 05:13	108-88-3	1g
1,2,3-Trichlorobenzene	ND	mg/kg	0.0065	0.0052	1	06/06/25 19:05	06/07/25 05:13	87-61-6	1g
1,2,4-Trichlorobenzene	ND	mg/kg	0.0065	0.0054	1	06/06/25 19:05	06/07/25 05:13	120-82-1	1g
1,1,1-Trichloroethane	ND	mg/kg	0.0065	0.0034	1	06/06/25 19:05	06/07/25 05:13	71-55-6	1g
1,1,2-Trichloroethane	ND	mg/kg	0.0065	0.0022	1	06/06/25 19:05	06/07/25 05:13	79-00-5	1g
Trichloroethene	ND	mg/kg	0.0065	0.0052	1	06/06/25 19:05	06/07/25 05:13	79-01-6	1g
Trichlorofluoromethane	ND	mg/kg	0.0065	0.0036	1	06/06/25 19:05	06/07/25 05:13	75-69-4	1g
1,2,3-Trichloropropane	ND	mg/kg	0.0065	0.0033	1	06/06/25 19:05	06/07/25 05:13	96-18-4	1g
1,2,4-Trimethylbenzene	**0.028**	mg/kg	0.0065	0.0039	1	06/06/25 19:05	06/07/25 05:13	95-63-6	1g
1,3,5-Trimethylbenzene	**0.029**	mg/kg	0.0065	0.0022	1	06/06/25 19:05	06/07/25 05:13	108-67-8	1g
Vinyl acetate	ND	mg/kg	0.065	0.013	1	06/06/25 19:05	06/07/25 05:13	108-05-4	1g
Vinyl chloride	ND	mg/kg	0.013	0.0033	1	06/06/25 19:05	06/07/25 05:13	75-01-4	1g
Xylene (Total)	**0.18**	mg/kg	0.013	0.0037	1	06/06/25 19:05	06/07/25 05:13	1330-20-7	1g
m&p-Xylene	**0.11**	mg/kg	0.013	0.0044	1	06/06/25 19:05	06/07/25 05:13	179601-23-1	1g
o-Xylene	**0.066**	mg/kg	0.0065	0.0029	1	06/06/25 19:05	06/07/25 05:13	95-47-6	1g
Surrogates									
Toluene-d8 (S)	96	%	70-130		1	06/06/25 19:05	06/07/25 05:13	2037-26-5	1g
4-Bromofluorobenzene (S)	96	%	70-130		1	06/06/25 19:05	06/07/25 05:13	460-00-4	1g
1,2-Dichloroethane-d4 (S)	98	%	70-135		1	06/06/25 19:05	06/07/25 05:13	17060-07-0	1g

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800619

Sample: B-1 **Lab ID: 92800619006** Collected: 06/04/25 16:00 Received: 06/05/25 11:40 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**11.8**	%	0.10	0.10	1		06/05/25 15:09		N2

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

QC Batch: 1105355
QC Batch Method: EPA 7470
Analysis Method: EPA 7470
Analysis Description: 7470 Mercury TCLP
Laboratory: Pace Analytical Services - Ormond Beach
Associated Lab Samples: 92800619005

METHOD BLANK: 6061869 Matrix: Water
Associated Lab Samples: 92800619005

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Mercury	mg/L	ND	0.00020	0.00014	06/12/25 15:02	

LABORATORY CONTROL SAMPLE: 6064038

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Mercury	mg/L	0.002	0.0022	109	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6064039 6064040

Parameter	Units	92797667001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Mercury	mg/L	ND	0.02	0.02	0.021	0.022	104	106	75-125	2	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

QC Batch: 1106176 | Analysis Method: EPA 7471
QC Batch Method: EPA 7471 | Analysis Description: 7471 Mercury
Laboratory: Pace Analytical Services - Ormond Beach
Associated Lab Samples: 92800619001, 92800619002, 92800619003, 92800619004, 92800619006

METHOD BLANK: 6068623 Matrix: Solid
Associated Lab Samples: 92800619001, 92800619002, 92800619003, 92800619004, 92800619006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Mercury	mg/kg	ND	0.0095	0.0048	06/16/25 11:34	

LABORATORY CONTROL SAMPLE: 6068624

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Mercury	mg/kg	0.09	0.090	100	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6068625 6068626

Parameter	Units	92800214001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Mercury	mg/kg	0.69	5.31	5.42	4.4	4.1	70	64	80-120	6	20	M1

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

QC Batch: 1105419
QC Batch Method: EPA 3010
Analysis Method: EPA 6010
Analysis Description: 6010 MET TCLP
Laboratory: Pace Analytical Services - Ormond Beach
Associated Lab Samples: 92800619005

METHOD BLANK: 6061869 Matrix: Water
Associated Lab Samples: 92800619005

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Arsenic	mg/L	ND	0.010	0.0034	06/13/25 08:42	
Barium	mg/L	ND	0.010	0.00084	06/13/25 08:42	
Cadmium	mg/L	ND	0.0010	0.00033	06/13/25 08:42	
Chromium	mg/L	ND	0.0050	0.0017	06/13/25 08:42	
Lead	mg/L	ND	0.010	0.0021	06/13/25 08:42	
Selenium	mg/L	ND	0.015	0.0039	06/13/25 08:42	
Silver	mg/L	ND	0.0050	0.0010	06/13/25 08:42	

LABORATORY CONTROL SAMPLE: 6064377

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Arsenic	mg/L	0.25	0.27	106	80-120	
Barium	mg/L	0.25	0.24	98	80-120	
Cadmium	mg/L	0.025	0.025	99	80-120	
Chromium	mg/L	0.25	0.25	101	80-120	
Lead	mg/L	0.25	0.24	94	80-120	
Selenium	mg/L	0.25	0.27	109	80-120	
Silver	mg/L	0.025	0.028	113	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6064378 6064379

Parameter	Units	92799776001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Arsenic	mg/L	ND	2.5	2.5	2.5	2.5	99	101	75-125	2	20	
Barium	mg/L	0.18	2.5	2.5	2.7	2.8	101	104	75-125	2	20	
Cadmium	mg/L	ND	0.25	0.25	0.25	0.25	100	101	75-125	2	20	
Chromium	mg/L	ND	2.5	2.5	2.5	2.6	101	103	75-125	2	20	
Lead	mg/L	ND	2.5	2.5	2.5	2.5	100	102	75-125	1	20	
Selenium	mg/L	ND	2.5	2.5	2.5	2.5	99	101	75-125	2	20	
Silver	mg/L	ND	0.25	0.25	0.26	0.26	103	105	75-125	2	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

QC Batch: 1104982
QC Batch Method: EPA 3050
Analysis Method: EPA 6020
Analysis Description: 6020 MET SOLID
Laboratory: Pace Analytical Services - Ormond Beach
Associated Lab Samples: 92800619001, 92800619002, 92800619003, 92800619004, 92800619006

METHOD BLANK: 6061365 Matrix: Solid
Associated Lab Samples: 92800619001, 92800619002, 92800619003, 92800619004, 92800619006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Antimony	mg/kg	ND	2.4	0.63	06/13/25 21:38	N2
Arsenic	mg/kg	ND	1.2	0.19	06/13/25 21:38	
Beryllium	mg/kg	ND	0.14	0.070	06/13/25 21:38	
Cadmium	mg/kg	ND	0.14	0.031	06/13/25 21:38	
Chromium	mg/kg	ND	1.2	0.69	06/13/25 21:38	
Copper	mg/kg	ND	2.4	0.61	06/13/25 21:38	
Lead	mg/kg	ND	1.2	0.44	06/13/25 21:38	
Nickel	mg/kg	ND	1.2	0.58	06/13/25 21:38	
Selenium	mg/kg	ND	1.2	0.62	06/13/25 21:38	
Silver	mg/kg	ND	0.14	0.046	06/13/25 21:38	
Thallium	mg/kg	ND	1.2	0.21	06/13/25 21:38	
Zinc	mg/kg	ND	48.1	9.4	06/13/25 21:38	

LABORATORY CONTROL SAMPLE: 6061366

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Antimony	mg/kg	29.5	29.7	101	80-120	N2
Arsenic	mg/kg	29.5	30.9	105	80-120	
Beryllium	mg/kg	2.9	3.0	102	80-120	
Cadmium	mg/kg	2.9	3.1	104	80-120	
Chromium	mg/kg	29.5	31.4	107	80-120	
Copper	mg/kg	29.5	30.3	103	80-120	
Lead	mg/kg	29.5	34.1	116	80-120	
Nickel	mg/kg	29.5	33.2	113	80-120	
Selenium	mg/kg	29.5	28.4	96	80-120	
Silver	mg/kg	2.9	3.2	108	80-120	
Thallium	mg/kg	29.5	33.2	113	80-120	
Zinc	mg/kg	147	151	102	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6061367 6061368

Parameter	Units	92800449001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Antimony	mg/kg	ND	38.8	38.5	10.9	10.6	28	28	75-125	2	20	M1,N2
Arsenic	mg/kg	2.6	38.8	38.5	23.5	24.1	54	56	75-125	2	20	M1
Beryllium	mg/kg	2.2	3.86	3.86	5.9	6.3	97	107	75-125	5	20	
Cadmium	mg/kg	ND	3.86	3.86	4.1	4.0	103	102	75-125	2	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6061367 6061368

Parameter	Units	92800449001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Chromium	mg/kg	44.4	38.8	38.5	77.6	85.9	86	108	75-125	10	20	
Copper	mg/kg	314	38.8	38.5	411	456	250	369	75-125	10	20	M1
Lead	mg/kg	4.0	38.8	38.5	47.4	47.1	112	112	75-125	1	20	
Nickel	mg/kg	29.6	38.8	38.5	76.9	84.0	122	142	75-125	9	20	M1
Selenium	mg/kg	7.1	38.8	38.5	29.2	30.3	57	60	75-125	4	20	M1
Silver	mg/kg	ND	3.86	3.86	4.1	4.1	106	107	75-125	0	20	
Thallium	mg/kg	ND	38.8	38.5	42.0	42.1	108	109	75-125	0	20	
Zinc	mg/kg	78.5	193	192	289	299	109	114	75-125	3	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

QC Batch: 940173
QC Batch Method: EPA 5035A/5030B
Analysis Method: EPA 8260D
Analysis Description: 8260D 5035A 5030B
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92800619001, 92800619006

METHOD BLANK: 4832202 Matrix: Solid
Associated Lab Samples: 92800619001, 92800619006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	ND	0.0050	0.0019	06/06/25 22:47	1g
1,1,1-Trichloroethane	mg/kg	ND	0.0050	0.0026	06/06/25 22:47	1g
1,1,2,2-Tetrachloroethane	mg/kg	ND	0.0050	0.0013	06/06/25 22:47	1g
1,1,2-Trichloroethane	mg/kg	ND	0.0050	0.0017	06/06/25 22:47	1g
1,1-Dichloroethane	mg/kg	ND	0.0050	0.0021	06/06/25 22:47	1g
1,1-Dichloroethene	mg/kg	ND	0.0050	0.0021	06/06/25 22:47	1g
1,1-Dichloropropene	mg/kg	ND	0.0050	0.0024	06/06/25 22:47	1g
1,2,3-Trichlorobenzene	mg/kg	ND	0.0050	0.0040	06/06/25 22:47	1g
1,2,3-Trichloropropane	mg/kg	ND	0.0050	0.0025	06/06/25 22:47	1g
1,2,4-Trichlorobenzene	mg/kg	ND	0.0050	0.0042	06/06/25 22:47	1g
1,2,4-Trimethylbenzene	mg/kg	ND	0.0050	0.0030	06/06/25 22:47	1g
1,2-Dibromo-3-chloropropane	mg/kg	ND	0.0050	0.0019	06/06/25 22:47	1g
1,2-Dibromoethane (EDB)	mg/kg	ND	0.0050	0.0022	06/06/25 22:47	1g
1,2-Dichlorobenzene	mg/kg	ND	0.0050	0.0018	06/06/25 22:47	1g
1,2-Dichloroethane	mg/kg	ND	0.0050	0.0033	06/06/25 22:47	1g
1,2-Dichloropropane	mg/kg	ND	0.0050	0.0015	06/06/25 22:47	1g
1,3,5-Trimethylbenzene	mg/kg	ND	0.0050	0.0017	06/06/25 22:47	1g
1,3-Dichlorobenzene	mg/kg	ND	0.0050	0.0016	06/06/25 22:47	1g
1,3-Dichloropropane	mg/kg	ND	0.0050	0.0016	06/06/25 22:47	1g
1,4-Dichlorobenzene	mg/kg	ND	0.0050	0.0013	06/06/25 22:47	1g
2,2-Dichloropropane	mg/kg	ND	0.0050	0.0038	06/06/25 22:47	1g
2-Butanone (MEK)	mg/kg	ND	0.10	0.024	06/06/25 22:47	1g
2-Chlorotoluene	mg/kg	ND	0.0050	0.0018	06/06/25 22:47	1g
2-Hexanone	mg/kg	ND	0.050	0.0048	06/06/25 22:47	1g
4-Chlorotoluene	mg/kg	ND	0.0050	0.0028	06/06/25 22:47	1g
4-Methyl-2-pentanone (MIBK)	mg/kg	ND	0.050	0.0048	06/06/25 22:47	1g
Acetone	mg/kg	ND	0.10	0.032	06/06/25 22:47	1g
Benzene	mg/kg	ND	0.0050	0.0020	06/06/25 22:47	1g
Bromobenzene	mg/kg	ND	0.0050	0.0016	06/06/25 22:47	1g
Bromochloromethane	mg/kg	ND	0.0050	0.0015	06/06/25 22:47	1g
Bromodichloromethane	mg/kg	ND	0.0050	0.0019	06/06/25 22:47	1g
Bromoform	mg/kg	ND	0.0050	0.0018	06/06/25 22:47	1g
Bromomethane	mg/kg	ND	0.020	0.016	06/06/25 22:47	1g
Carbon tetrachloride	mg/kg	ND	0.0050	0.0019	06/06/25 22:47	1g
Chlorobenzene	mg/kg	ND	0.0050	0.0029	06/06/25 22:47	1g
Chloroethane	mg/kg	ND	0.010	0.0039	06/06/25 22:47	1g
Chloroform	mg/kg	ND	0.0050	0.0042	06/06/25 22:47	1g
Chloromethane	mg/kg	ND	0.010	0.0042	06/06/25 22:47	1g
cis-1,2-Dichloroethene	mg/kg	ND	0.0050	0.0017	06/06/25 22:47	1g
cis-1,3-Dichloropropene	mg/kg	ND	0.0050	0.0014	06/06/25 22:47	1g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

METHOD BLANK: 4832202 Matrix: Solid
Associated Lab Samples: 92800619001, 92800619006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Dibromochloromethane	mg/kg	ND	0.0050	0.0028	06/06/25 22:47	1g
Dibromomethane	mg/kg	ND	0.0050	0.0011	06/06/25 22:47	1g
Dichlorodifluoromethane	mg/kg	ND	0.010	0.0051	06/06/25 22:47	1g
Diisopropyl ether	mg/kg	ND	0.0050	0.0014	06/06/25 22:47	1g
Ethylbenzene	mg/kg	ND	0.0050	0.0023	06/06/25 22:47	1g
Hexachloro-1,3-butadiene	mg/kg	ND	0.010	0.0082	06/06/25 22:47	1g
Isopropylbenzene (Cumene)	mg/kg	ND	0.0050	0.0017	06/06/25 22:47	1g
m&p-Xylene	mg/kg	ND	0.010	0.0034	06/06/25 22:47	1g
Methyl-tert-butyl ether	mg/kg	ND	0.0050	0.0019	06/06/25 22:47	1g
Methylene Chloride	mg/kg	ND	0.020	0.014	06/06/25 22:47	1g
n-Butylbenzene	mg/kg	ND	0.0050	0.0032	06/06/25 22:47	1g
n-Propylbenzene	mg/kg	ND	0.0050	0.0018	06/06/25 22:47	1g
Naphthalene	mg/kg	ND	0.0050	0.0026	06/06/25 22:47	1g
o-Xylene	mg/kg	ND	0.0050	0.0022	06/06/25 22:47	1g
p-Isopropyltoluene	mg/kg	ND	0.0050	0.0025	06/06/25 22:47	1g
sec-Butylbenzene	mg/kg	ND	0.0050	0.0022	06/06/25 22:47	1g
Styrene	mg/kg	ND	0.0050	0.0013	06/06/25 22:47	1g
tert-Butylbenzene	mg/kg	ND	0.0050	0.0018	06/06/25 22:47	1g
Tetrachloroethene	mg/kg	ND	0.0050	0.0016	06/06/25 22:47	1g
Toluene	mg/kg	ND	0.0050	0.0034	06/06/25 22:47	1g
trans-1,2-Dichloroethene	mg/kg	ND	0.0050	0.0042	06/06/25 22:47	1g
trans-1,3-Dichloropropene	mg/kg	ND	0.0050	0.0017	06/06/25 22:47	1g
Trichloroethene	mg/kg	ND	0.0050	0.0040	06/06/25 22:47	1g
Trichlorofluoromethane	mg/kg	ND	0.0050	0.0028	06/06/25 22:47	1g
Vinyl acetate	mg/kg	ND	0.050	0.010	06/06/25 22:47	1g
Vinyl chloride	mg/kg	ND	0.010	0.0025	06/06/25 22:47	1g
Xylene (Total)	mg/kg	ND	0.010	0.0028	06/06/25 22:47	1g
1,2-Dichloroethane-d4 (S)	%	104	70-135		06/06/25 22:47	1g
4-Bromofluorobenzene (S)	%	91	70-130		06/06/25 22:47	1g
Toluene-d8 (S)	%	96	70-130		06/06/25 22:47	1g

LABORATORY CONTROL SAMPLE: 4832203

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	0.5	0.56	111	70-130	1g
1,1,1-Trichloroethane	mg/kg	0.5	0.46	91	68-130	1g
1,1,2,2-Tetrachloroethane	mg/kg	0.5	0.50	100	70-130	1g
1,1,2-Trichloroethane	mg/kg	0.5	0.50	100	70-130	1g
1,1-Dichloroethane	mg/kg	0.5	0.41	81	70-130	1g
1,1-Dichloroethene	mg/kg	0.5	0.45	90	67-139	1g
1,1-Dichloropropene	mg/kg	0.5	0.43	86	68-132	1g
1,2,3-Trichlorobenzene	mg/kg	0.5	0.54	109	68-130	1g
1,2,3-Trichloropropane	mg/kg	0.5	0.43	86	70-130	1g
1,2,4-Trichlorobenzene	mg/kg	0.5	0.53	106	67-130	1g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

LABORATORY CONTROL SAMPLE: 4832203

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,2,4-Trimethylbenzene	mg/kg	0.5	0.47	94	70-130	1g
1,2-Dibromo-3-chloropropane	mg/kg	0.5	0.53	106	68-130	1g
1,2-Dibromoethane (EDB)	mg/kg	0.5	0.51	102	70-130	1g
1,2-Dichlorobenzene	mg/kg	0.5	0.51	103	70-130	1g
1,2-Dichloroethane	mg/kg	0.5	0.42	84	68-130	1g
1,2-Dichloropropane	mg/kg	0.5	0.44	88	70-130	1g
1,3,5-Trimethylbenzene	mg/kg	0.5	0.52	104	70-130	1g
1,3-Dichlorobenzene	mg/kg	0.5	0.52	104	70-130	1g
1,3-Dichloropropane	mg/kg	0.5	0.48	96	70-130	1g
1,4-Dichlorobenzene	mg/kg	0.5	0.49	99	70-130	1g
2,2-Dichloropropane	mg/kg	0.5	0.42	84	49-137	1g
2-Butanone (MEK)	mg/kg	1	0.88	88	59-136	1g
2-Chlorotoluene	mg/kg	0.5	0.50	99	70-130	1g
2-Hexanone	mg/kg	1	1.1	105	63-143	1g
4-Chlorotoluene	mg/kg	0.5	0.50	101	70-130	1g
4-Methyl-2-pentanone (MIBK)	mg/kg	1	1.0	101	67-134	1g
Acetone	mg/kg	1	0.79	79	59-132	1g
Benzene	mg/kg	0.5	0.47	94	70-130	1g
Bromobenzene	mg/kg	0.5	0.52	104	70-130	1g
Bromochloromethane	mg/kg	0.5	0.48	97	70-130	1g
Bromodichloromethane	mg/kg	0.5	0.47	94	70-130	1g
Bromoform	mg/kg	0.5	0.60	120	70-130	1g
Bromomethane	mg/kg	0.5	0.40	81	36-180	1g
Carbon tetrachloride	mg/kg	0.5	0.55	110	69-133	1g
Chlorobenzene	mg/kg	0.5	0.51	103	70-130	1g
Chloroethane	mg/kg	0.5	0.44	87	61-147	1g
Chloroform	mg/kg	0.5	0.42	84	69-130	1g
Chloromethane	mg/kg	0.5	0.50	99	66-154	1g
cis-1,2-Dichloroethene	mg/kg	0.5	0.43	87	69-130	1g
cis-1,3-Dichloropropene	mg/kg	0.5	0.50	101	70-130	1g
Dibromochloromethane	mg/kg	0.5	0.56	112	70-130	1g
Dibromomethane	mg/kg	0.5	0.59	118	70-130	1g
Dichlorodifluoromethane	mg/kg	0.5	0.53	107	40-194	1g
Diisopropyl ether	mg/kg	0.5	0.41	81	64-130	1g
Ethylbenzene	mg/kg	0.5	0.50	100	69-130	1g
Hexachloro-1,3-butadiene	mg/kg	0.5	0.55	111	59-134	1g
Isopropylbenzene (Cumene)	mg/kg	0.5	0.60	120	70-130	1g
m&p-Xylene	mg/kg	1	1.1	107	70-130	1g
Methyl-tert-butyl ether	mg/kg	0.5	0.39	78	66-130	1g
Methylene Chloride	mg/kg	0.5	0.42	84	67-130	1g
n-Butylbenzene	mg/kg	0.5	0.47	95	66-130	1g
n-Propylbenzene	mg/kg	0.5	0.49	98	70-130	1g
Naphthalene	mg/kg	0.5	0.53	105	70-130	1g
o-Xylene	mg/kg	0.5	0.48	96	70-130	1g
p-Isopropyltoluene	mg/kg	0.5	0.51	103	69-130	1g
sec-Butylbenzene	mg/kg	0.5	0.50	99	70-130	1g
Styrene	mg/kg	0.5	0.48	96	70-130	1g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

LABORATORY CONTROL SAMPLE: 4832203

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
tert-Butylbenzene	mg/kg	0.5	0.45	90	61-130	1g
Tetrachloroethene	mg/kg	0.5	0.42	83	70-130	1g
Toluene	mg/kg	0.5	0.48	97	70-130	1g
trans-1,2-Dichloroethene	mg/kg	0.5	0.45	91	68-133	1g
trans-1,3-Dichloropropene	mg/kg	0.5	0.49	98	70-130	1g
Trichloroethene	mg/kg	0.5	0.53	105	70-130	1g
Trichlorofluoromethane	mg/kg	0.5	0.50	100	59-147	1g
Vinyl acetate	mg/kg	1	0.94	94	67-136	1g
Vinyl chloride	mg/kg	0.5	0.44	88	59-148	1g
Xylene (Total)	mg/kg	1.5	1.5	103	70-130	1g
1,2-Dichloroethane-d4 (S)	%			88	70-135	1g
4-Bromofluorobenzene (S)	%			103	70-130	1g
Toluene-d8 (S)	%			97	70-130	1g

MATRIX SPIKE SAMPLE: 4832204

Parameter	Units	92800151007 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	ND	0.66	0.55	83	10-174	1g
1,1,1-Trichloroethane	mg/kg	ND	0.66	0.49	74	10-178	1g
1,1,2,2-Tetrachloroethane	mg/kg	ND	0.66	0.45	68	10-164	1g
1,1,2-Trichloroethane	mg/kg	ND	0.66	0.50	75	10-167	1g
1,1-Dichloroethane	mg/kg	ND	0.66	0.39	59	10-175	1g
1,1-Dichloroethene	mg/kg	ND	0.66	0.43	65	10-189	1g
1,1-Dichloropropene	mg/kg	ND	0.66	0.45	69	10-179	1g
1,2,3-Trichlorobenzene	mg/kg	ND	0.66	0.42	63	10-154	1g
1,2,3-Trichloropropane	mg/kg	ND	0.66	0.65	99	10-157	1g
1,2,4-Trichlorobenzene	mg/kg	ND	0.66	0.45	68	10-156	1g
1,2,4-Trimethylbenzene	mg/kg	ND	0.66	0.41	62	10-169	1g
1,2-Dibromo-3-chloropropane	mg/kg	ND	0.66	0.42	63	10-148	1g
1,2-Dibromoethane (EDB)	mg/kg	ND	0.66	0.50	76	10-166	1g
1,2-Dichlorobenzene	mg/kg	ND	0.66	0.51	78	10-166	1g
1,2-Dichloroethane	mg/kg	ND	0.66	0.48	73	10-171	1g
1,2-Dichloropropane	mg/kg	ND	0.66	0.44	67	10-175	1g
1,3,5-Trimethylbenzene	mg/kg	ND	0.66	0.46	70	10-171	1g
1,3-Dichlorobenzene	mg/kg	ND	0.66	0.50	76	10-166	1g
1,3-Dichloropropane	mg/kg	ND	0.66	0.48	72	10-167	1g
1,4-Dichlorobenzene	mg/kg	ND	0.66	0.44	67	10-163	1g
2,2-Dichloropropane	mg/kg	ND	0.66	0.40	61	10-158	1g
2-Butanone (MEK)	mg/kg	ND	1.3	0.45	34	10-156	1g
2-Chlorotoluene	mg/kg	ND	0.66	0.46	70	10-167	1g
2-Hexanone	mg/kg	ND	1.3	0.75	57	10-159	1g
4-Chlorotoluene	mg/kg	ND	0.66	0.51	77	10-167	1g
4-Methyl-2-pentanone (MIBK)	mg/kg	ND	1.3	0.87	65	10-162	1g
Acetone	mg/kg	ND	1.3	0.39	29	10-131	1g
Benzene	mg/kg	ND	0.66	0.49	74	10-175	1g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

MATRIX SPIKE SAMPLE: 4832204

Parameter	Units	92800151007 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Bromobenzene	mg/kg	ND	0.66	0.51	77	10-166	1g
Bromochloromethane	mg/kg	ND	0.66	0.52	78	10-173	1g
Bromodichloromethane	mg/kg	ND	0.66	0.46	70	10-169	1g
Bromoform	mg/kg	ND	0.66	0.51	77	10-165	1g
Bromomethane	mg/kg	ND	0.66	0.56	84	10-130	1g
Carbon tetrachloride	mg/kg	ND	0.66	0.59	89	10-182	1g
Chlorobenzene	mg/kg	ND	0.66	0.49	74	10-171	1g
Chloroethane	mg/kg	ND	0.66	0.37	56	10-130	1g
Chloroform	mg/kg	ND	0.66	0.45	68	10-171	1g
Chloromethane	mg/kg	ND	0.66	0.60	90	10-200	1g
cis-1,2-Dichloroethene	mg/kg	ND	0.66	0.47	72	10-172	1g
cis-1,3-Dichloropropene	mg/kg	ND	0.66	0.45	69	10-160	1g
Dibromochloromethane	mg/kg	ND	0.66	0.52	79	10-168	1g
Dibromomethane	mg/kg	ND	0.66	0.62	93	10-173	1g
Dichlorodifluoromethane	mg/kg	ND	0.66	0.56	84	10-200	1g
Diisopropyl ether	mg/kg	ND	0.66	0.40	61	10-169	1g
Ethylbenzene	mg/kg	ND	0.66	0.49	74	10-169	1g
Hexachloro-1,3-butadiene	mg/kg	ND	0.66	0.50	76	10-190	1g
Isopropylbenzene (Cumene)	mg/kg	ND	0.66	0.56	84	10-179	1g
m&p-Xylene	mg/kg	ND	1.3	0.99	75	10-174	1g
Methyl-tert-butyl ether	mg/kg	ND	0.66	0.44	67	10-157	1g
Methylene Chloride	mg/kg	ND	0.66	0.48	71	10-177	1g
n-Butylbenzene	mg/kg	ND	0.66	0.41	62	10-174	1g
n-Propylbenzene	mg/kg	ND	0.66	0.47	72	10-170	1g
Naphthalene	mg/kg	ND	0.66	0.43	65	10-155	1g
o-Xylene	mg/kg	ND	0.66	0.47	71	10-175	1g
p-Isopropyltoluene	mg/kg	ND	0.66	0.47	71	10-174	1g
sec-Butylbenzene	mg/kg	ND	0.66	0.48	73	10-177	1g
Styrene	mg/kg	ND	0.66	0.44	67	10-174	1g
tert-Butylbenzene	mg/kg	ND	0.66	0.45	68	10-142	1g
Tetrachloroethene	mg/kg	ND	0.66	0.37	57	10-166	1g
Toluene	mg/kg	ND	0.66	0.47	72	10-173	1g
trans-1,2-Dichloroethene	mg/kg	ND	0.66	0.46	69	10-173	1g
trans-1,3-Dichloropropene	mg/kg	ND	0.66	0.47	71	10-159	1g
Trichloroethene	mg/kg	ND	0.66	0.53	80	10-181	1g
Trichlorofluoromethane	mg/kg	ND	0.66	0.13	19	10-130	1g
Vinyl acetate	mg/kg	ND	1.3	0.76	58	10-158	1g
Vinyl chloride	mg/kg	ND	0.66	0.51	78	10-189	1g
Xylene (Total)	mg/kg	ND	2	1.5	74	10-174	1g
1,2-Dichloroethane-d4 (S)	%				88	70-135	1g
4-Bromofluorobenzene (S)	%				102	70-130	1g
Toluene-d8 (S)	%				95	70-130	1g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

SAMPLE DUPLICATE: 4832205

Parameter	Units	92800212001 Result	Dup Result	RPD	Max RPD	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	ND	ND		30	1g
1,1,1-Trichloroethane	mg/kg	ND	ND		30	1g
1,1,2,2-Tetrachloroethane	mg/kg	ND	ND		30	1g
1,1,2-Trichloroethane	mg/kg	ND	ND		30	1g
1,1-Dichloroethane	mg/kg	ND	ND		30	1g
1,1-Dichloroethene	mg/kg	ND	ND		30	1g
1,1-Dichloropropene	mg/kg	ND	ND		30	1g
1,2,3-Trichlorobenzene	mg/kg	ND	ND		30	1g
1,2,3-Trichloropropane	mg/kg	ND	ND		30	1g
1,2,4-Trichlorobenzene	mg/kg	ND	ND		30	1g
1,2,4-Trimethylbenzene	mg/kg	ND	ND		30	1g
1,2-Dibromo-3-chloropropane	mg/kg	ND	ND		30	1g
1,2-Dibromoethane (EDB)	mg/kg	ND	ND		30	1g
1,2-Dichlorobenzene	mg/kg	ND	ND		30	1g
1,2-Dichloroethane	mg/kg	ND	ND		30	1g
1,2-Dichloropropane	mg/kg	ND	ND		30	1g
1,3,5-Trimethylbenzene	mg/kg	ND	ND		30	1g
1,3-Dichlorobenzene	mg/kg	ND	ND		30	1g
1,3-Dichloropropane	mg/kg	ND	ND		30	1g
1,4-Dichlorobenzene	mg/kg	ND	ND		30	1g
2,2-Dichloropropane	mg/kg	ND	ND		30	1g
2-Butanone (MEK)	mg/kg	ND	ND		30	1g
2-Chlorotoluene	mg/kg	ND	ND		30	1g
2-Hexanone	mg/kg	ND	ND		30	1g
4-Chlorotoluene	mg/kg	ND	ND		30	1g
4-Methyl-2-pentanone (MIBK)	mg/kg	ND	ND		30	1g
Acetone	mg/kg	ND	ND		30	1g
Benzene	mg/kg	ND	ND		30	1g
Bromobenzene	mg/kg	ND	ND		30	1g
Bromochloromethane	mg/kg	ND	ND		30	1g
Bromodichloromethane	mg/kg	ND	ND		30	1g
Bromoform	mg/kg	ND	ND		30	1g
Bromomethane	mg/kg	ND	ND		30	1g
Carbon tetrachloride	mg/kg	ND	ND		30	1g
Chlorobenzene	mg/kg	ND	ND		30	1g
Chloroethane	mg/kg	ND	ND		30	1g
Chloroform	mg/kg	ND	ND		30	1g
Chloromethane	mg/kg	ND	ND		30	1g
cis-1,2-Dichloroethene	mg/kg	ND	ND		30	1g
cis-1,3-Dichloropropene	mg/kg	ND	ND		30	1g
Dibromochloromethane	mg/kg	ND	ND		30	1g
Dibromomethane	mg/kg	ND	ND		30	1g
Dichlorodifluoromethane	mg/kg	ND	ND		30	1g
Diisopropyl ether	mg/kg	ND	ND		30	1g
Ethylbenzene	mg/kg	ND	ND		30	1g
Hexachloro-1,3-butadiene	mg/kg	ND	ND		30	1g
Isopropylbenzene (Cumene)	mg/kg	ND	ND		30	1g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

SAMPLE DUPLICATE: 4832205

Parameter	Units	92800212001 Result	Dup Result	RPD	Max RPD	Qualifiers
m&p-Xylene	mg/kg	ND	ND		30	1g
Methyl-tert-butyl ether	mg/kg	ND	ND		30	1g
Methylene Chloride	mg/kg	ND	ND		30	1g
n-Butylbenzene	mg/kg	ND	ND		30	1g
n-Propylbenzene	mg/kg	ND	ND		30	1g
Naphthalene	mg/kg	ND	ND		30	1g
o-Xylene	mg/kg	ND	ND		30	1g
p-Isopropyltoluene	mg/kg	ND	ND		30	1g
sec-Butylbenzene	mg/kg	ND	ND		30	1g
Styrene	mg/kg	ND	ND		30	1g
tert-Butylbenzene	mg/kg	ND	ND		30	1g
Tetrachloroethene	mg/kg	ND	ND		30	1g
Toluene	mg/kg	ND	ND		30	1g
trans-1,2-Dichloroethene	mg/kg	ND	ND		30	1g
trans-1,3-Dichloropropene	mg/kg	ND	ND		30	1g
Trichloroethene	mg/kg	ND	ND		30	1g
Trichlorofluoromethane	mg/kg	ND	ND		30	1g
Vinyl acetate	mg/kg	ND	ND		30	1g
Vinyl chloride	mg/kg	ND	ND		30	1g
Xylene (Total)	mg/kg	ND	ND		30	1g
1,2-Dichloroethane-d4 (S)	%	102	107			1g
4-Bromofluorobenzene (S)	%	94	93			1g
Toluene-d8 (S)	%	96	94			1g

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

QC Batch: 940841
QC Batch Method: EPA 7199
Analysis Method: EPA 7199
Analysis Description: 7199 Chromium, Hexavalent
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92800619001, 92800619006

METHOD BLANK: 4835211 Matrix: Solid
Associated Lab Samples: 92800619001, 92800619006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Chromium, Hexavalent	mg/kg	ND	1.0	0.18	06/11/25 12:25	

LABORATORY CONTROL SAMPLE: 4835212

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Chromium, Hexavalent	mg/kg	10.4	10.9	105	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 4835213 4835214

Parameter	Units	92800780017 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Chromium, Hexavalent	mg/kg	ND	13.1	13.1	13.1	12.6	100	96	75-125	4	20	

MATRIX SPIKE SAMPLE: 4835215

Parameter	Units	92800780018 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Chromium, Hexavalent	mg/kg	ND	1570	1690	108	75-125	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

QC Batch: 942092
QC Batch Method: EPA 3546
Analysis Method: EPA 8270E
Analysis Description: 8270E Solid MSSV Microwave
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92800619001, 92800619006

METHOD BLANK: 4841807 Matrix: Solid
Associated Lab Samples: 92800619001, 92800619006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,2,4-Trichlorobenzene	mg/kg	ND	0.33	0.13	06/17/25 06:28	
1,2-Dichlorobenzene	mg/kg	ND	0.33	0.12	06/17/25 06:28	
1,3-Dichlorobenzene	mg/kg	ND	0.33	0.12	06/17/25 06:28	
1,4-Dichlorobenzene	mg/kg	ND	0.33	0.13	06/17/25 06:28	
1-Methylnaphthalene	mg/kg	ND	0.33	0.12	06/17/25 06:28	
2,2'-Oxybis(1-chloropropane)	mg/kg	ND	0.33	0.16	06/17/25 06:28	
2,4,5-Trichlorophenol	mg/kg	ND	0.33	0.15	06/17/25 06:28	
2,4,6-Trichlorophenol	mg/kg	ND	0.33	0.14	06/17/25 06:28	
2,4-Dichlorophenol	mg/kg	ND	0.33	0.13	06/17/25 06:28	
2,4-Dimethylphenol	mg/kg	ND	0.33	0.14	06/17/25 06:28	
2,4-Dinitrophenol	mg/kg	ND	1.7	1.0	06/17/25 06:28	
2,4-Dinitrotoluene	mg/kg	ND	0.33	0.13	06/17/25 06:28	
2,6-Dinitrotoluene	mg/kg	ND	0.33	0.12	06/17/25 06:28	
2-Chloronaphthalene	mg/kg	ND	0.33	0.13	06/17/25 06:28	
2-Chlorophenol	mg/kg	ND	0.33	0.12	06/17/25 06:28	
2-Methylnaphthalene	mg/kg	ND	0.33	0.13	06/17/25 06:28	
2-Methylphenol(o-Cresol)	mg/kg	ND	0.33	0.14	06/17/25 06:28	
2-Nitroaniline	mg/kg	ND	1.7	0.27	06/17/25 06:28	
2-Nitrophenol	mg/kg	ND	0.33	0.14	06/17/25 06:28	
3&4-Methylphenol(m&p Cresol)	mg/kg	ND	0.33	0.13	06/17/25 06:28	
3,3'-Dichlorobenzidine	mg/kg	ND	0.66	0.22	06/17/25 06:28	
3-Nitroaniline	mg/kg	ND	1.7	0.26	06/17/25 06:28	
4,6-Dinitro-2-methylphenol	mg/kg	ND	0.66	0.31	06/17/25 06:28	
4-Bromophenylphenyl ether	mg/kg	ND	0.33	0.13	06/17/25 06:28	
4-Chloro-3-methylphenol	mg/kg	ND	0.66	0.23	06/17/25 06:28	
4-Chloroaniline	mg/kg	ND	0.66	0.26	06/17/25 06:28	
4-Chlorophenylphenyl ether	mg/kg	ND	0.33	0.12	06/17/25 06:28	
4-Nitroaniline	mg/kg	ND	0.66	0.25	06/17/25 06:28	
4-Nitrophenol	mg/kg	ND	1.7	0.64	06/17/25 06:28	
Acenaphthene	mg/kg	ND	0.33	0.12	06/17/25 06:28	
Acenaphthylene	mg/kg	ND	0.33	0.12	06/17/25 06:28	
Aniline	mg/kg	ND	0.33	0.13	06/17/25 06:28	
Anthracene	mg/kg	ND	0.33	0.11	06/17/25 06:28	
Benzo(a)anthracene	mg/kg	ND	0.33	0.11	06/17/25 06:28	
Benzo(a)pyrene	mg/kg	ND	0.33	0.11	06/17/25 06:28	
Benzo(b)fluoranthene	mg/kg	ND	0.33	0.11	06/17/25 06:28	
Benzo(g,h,i)perylene	mg/kg	ND	0.33	0.13	06/17/25 06:28	
Benzo(k)fluoranthene	mg/kg	ND	0.33	0.12	06/17/25 06:28	
Benzoic Acid	mg/kg	ND	1.7	0.71	06/17/25 06:28	
Benzyl alcohol	mg/kg	ND	0.66	0.25	06/17/25 06:28	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

METHOD BLANK: 4841807 Matrix: Solid
Associated Lab Samples: 92800619001, 92800619006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
bis(2-Chloroethoxy)methane	mg/kg	ND	0.33	0.14	06/17/25 06:28	
bis(2-Chloroethyl) ether	mg/kg	ND	0.33	0.12	06/17/25 06:28	
bis(2-Ethylhexyl)phthalate	mg/kg	ND	0.33	0.13	06/17/25 06:28	
Butylbenzylphthalate	mg/kg	ND	0.33	0.14	06/17/25 06:28	
Chrysene	mg/kg	ND	0.33	0.12	06/17/25 06:28	
Di-n-butylphthalate	mg/kg	ND	0.33	0.11	06/17/25 06:28	
Di-n-octylphthalate	mg/kg	ND	0.33	0.13	06/17/25 06:28	
Dibenz(a,h)anthracene	mg/kg	ND	0.33	0.13	06/17/25 06:28	
Dibenzofuran	mg/kg	ND	0.33	0.12	06/17/25 06:28	
Diethylphthalate	mg/kg	ND	0.33	0.12	06/17/25 06:28	
Dimethylphthalate	mg/kg	ND	0.33	0.12	06/17/25 06:28	
Fluoranthene	mg/kg	ND	0.33	0.11	06/17/25 06:28	
Fluorene	mg/kg	ND	0.33	0.12	06/17/25 06:28	
Hexachloro-1,3-butadiene	mg/kg	ND	0.33	0.14	06/17/25 06:28	
Hexachlorobenzene	mg/kg	ND	0.33	0.13	06/17/25 06:28	
Hexachlorocyclopentadiene	mg/kg	ND	0.33	0.19	06/17/25 06:28	
Hexachloroethane	mg/kg	ND	0.33	0.13	06/17/25 06:28	
Indeno(1,2,3-cd)pyrene	mg/kg	ND	0.33	0.13	06/17/25 06:28	
Isophorone	mg/kg	ND	0.33	0.15	06/17/25 06:28	
N-Nitroso-di-n-propylamine	mg/kg	ND	0.33	0.12	06/17/25 06:28	
N-Nitrosodimethylamine	mg/kg	ND	0.33	0.11	06/17/25 06:28	
N-Nitrosodiphenylamine	mg/kg	ND	0.33	0.12	06/17/25 06:28	
Naphthalene	mg/kg	ND	0.33	0.11	06/17/25 06:28	
Nitrobenzene	mg/kg	ND	0.33	0.15	06/17/25 06:28	
Pentachlorophenol	mg/kg	ND	0.66	0.32	06/17/25 06:28	
Phenanthrene	mg/kg	ND	0.33	0.11	06/17/25 06:28	
Phenol	mg/kg	ND	0.33	0.15	06/17/25 06:28	
Pyrene	mg/kg	ND	0.33	0.13	06/17/25 06:28	
Pyridine	mg/kg	ND	0.33	0.10	06/17/25 06:28	
2,4,6-Tribromophenol (S)	%	55	10-130		06/17/25 06:28	
2-Fluorobiphenyl (S)	%	46	10-130		06/17/25 06:28	
2-Fluorophenol (S)	%	47	10-130		06/17/25 06:28	
Nitrobenzene-d5 (S)	%	47	10-130		06/17/25 06:28	
Phenol-d6 (S)	%	48	10-130		06/17/25 06:28	
Terphenyl-d14 (S)	%	67	10-130		06/17/25 06:28	

LABORATORY CONTROL SAMPLE: 4841808

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,2,4-Trichlorobenzene	mg/kg	1.7	0.86	51	40-130	
1,2-Dichlorobenzene	mg/kg	1.7	0.87	51	37-130	
1,3-Dichlorobenzene	mg/kg	1.7	0.85	51	36-130	
1,4-Dichlorobenzene	mg/kg	1.7	0.86	51	36-130	
1-Methylnaphthalene	mg/kg	1.7	0.93	55	46-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

LABORATORY CONTROL SAMPLE: 4841808

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
2,2'-Oxybis(1-chloropropane)	mg/kg	1.7	0.90	53	12-130	
2,4,5-Trichlorophenol	mg/kg	1.7	1.0	59	49-130	
2,4,6-Trichlorophenol	mg/kg	1.7	0.94	56	48-130	
2,4-Dichlorophenol	mg/kg	1.7	0.93	55	45-130	
2,4-Dimethylphenol	mg/kg	1.7	0.91	54	45-130	
2,4-Dinitrophenol	mg/kg	8.4	6.0	71	23-130	
2,4-Dinitrotoluene	mg/kg	1.7	1.2	69	50-130	
2,6-Dinitrotoluene	mg/kg	1.7	1.1	65	53-130	
2-Chloronaphthalene	mg/kg	1.7	0.89	53	46-130	
2-Chlorophenol	mg/kg	1.7	0.89	53	39-130	
2-Methylnaphthalene	mg/kg	1.7	0.93	55	45-130	
2-Methylphenol(o-Cresol)	mg/kg	1.7	0.92	54	38-130	
2-Nitroaniline	mg/kg	3.4	2.3	67	43-130	
2-Nitrophenol	mg/kg	1.7	0.88	52	43-130	
3&4-Methylphenol(m&p Cresol)	mg/kg	1.7	0.96	57	34-130	
3,3'-Dichlorobenzidine	mg/kg	3.4	2.3	68	68-130	
3-Nitroaniline	mg/kg	3.4	2.2	65	36-130	
4,6-Dinitro-2-methylphenol	mg/kg	3.4	2.2	66	38-130	
4-Bromophenylphenyl ether	mg/kg	1.7	1.1	63	52-130	
4-Chloro-3-methylphenol	mg/kg	3.4	2.1	63	45-130	
4-Chloroaniline	mg/kg	3.4	1.8	55	41-130	
4-Chlorophenylphenyl ether	mg/kg	1.7	1.0	61	46-130	
4-Nitroaniline	mg/kg	3.4	2.4	71	40-130	
4-Nitrophenol	mg/kg	8.4	6.0	72	34-130	
Acenaphthene	mg/kg	1.7	0.95	56	47-130	
Acenaphthylene	mg/kg	1.7	0.97	58	50-130	
Aniline	mg/kg	1.7	0.86	51	33-130	
Anthracene	mg/kg	1.7	1.1	66	46-130	
Benzo(a)anthracene	mg/kg	1.7	1.2	70	49-130	
Benzo(a)pyrene	mg/kg	1.7	1.2	71	45-130	
Benzo(b)fluoranthene	mg/kg	1.7	1.2	69	45-130	
Benzo(g,h,i)perylene	mg/kg	1.7	1.3	74	44-130	
Benzo(k)fluoranthene	mg/kg	1.7	1.2	70	46-130	
Benzoic Acid	mg/kg	8.4	4.6	55	14-130	
Benzyl alcohol	mg/kg	3.4	1.9	57	39-130	
bis(2-Chloroethoxy)methane	mg/kg	1.7	0.94	56	41-130	
bis(2-Chloroethyl) ether	mg/kg	1.7	0.90	53	34-130	
bis(2-Ethylhexyl)phthalate	mg/kg	1.7	1.2	69	39-130	
Butylbenzylphthalate	mg/kg	1.7	1.2	68	48-130	
Chrysene	mg/kg	1.7	1.2	72	50-130	
Di-n-butylphthalate	mg/kg	1.7	1.2	70	46-130	
Di-n-octylphthalate	mg/kg	1.7	1.2	72	49-130	
Dibenz(a,h)anthracene	mg/kg	1.7	1.3	74	46-130	
Dibenzofuran	mg/kg	1.7	0.98	58	49-130	
Diethylphthalate	mg/kg	1.7	1.1	68	49-130	
Dimethylphthalate	mg/kg	1.7	1.1	66	50-130	
Fluoranthene	mg/kg	1.7	1.2	70	49-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

LABORATORY CONTROL SAMPLE: 4841808

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Fluorene	mg/kg	1.7	1.0	61	47-130	
Hexachloro-1,3-butadiene	mg/kg	1.7	0.87	51	36-130	
Hexachlorobenzene	mg/kg	1.7	1.1	64	52-130	
Hexachlorocyclopentadiene	mg/kg	1.7	0.74	44	10-130	
Hexachloroethane	mg/kg	1.7	0.87	51	36-130	
Indeno(1,2,3-cd)pyrene	mg/kg	1.7	1.2	69	44-130	
Isophorone	mg/kg	1.7	0.98	58	40-130	
N-Nitroso-di-n-propylamine	mg/kg	1.7	1.0	60	34-130	
N-Nitrosodimethylamine	mg/kg	1.7	0.89	53	29-130	
N-Nitrosodiphenylamine	mg/kg	1.7	1.1	64	47-130	
Naphthalene	mg/kg	1.7	0.87	52	43-130	
Nitrobenzene	mg/kg	1.7	0.89	53	41-130	
Pentachlorophenol	mg/kg	3.4	2.1	61	35-130	
Phenanthrene	mg/kg	1.7	1.1	67	50-130	
Phenol	mg/kg	1.7	0.93	55	39-130	
Pyrene	mg/kg	1.7	1.1	67	51-130	
Pyridine	mg/kg	1.7	0.75	44	21-130	
2,4,6-Tribromophenol (S)	%			67	10-130	
2-Fluorobiphenyl (S)	%			52	10-130	
2-Fluorophenol (S)	%			52	10-130	
Nitrobenzene-d5 (S)	%			51	10-130	
Phenol-d6 (S)	%			56	10-130	
Terphenyl-d14 (S)	%			65	10-130	

MATRIX SPIKE SAMPLE: 4841809

Parameter	Units	92800746003 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
1,2,4-Trichlorobenzene	mg/kg	ND	2.1	0.57	28	22-130	
1,2-Dichlorobenzene	mg/kg	ND	2.1	0.50	25	22-130	
1,3-Dichlorobenzene	mg/kg	ND	2.1	0.49	24	22-130	
1,4-Dichlorobenzene	mg/kg	ND	2.1	0.50	24	21-130	
1-Methylnaphthalene	mg/kg	ND	2.1	0.78	35	27-130	
2,2'-Oxybis(1-chloropropane)	mg/kg	ND	2.1	0.50	24	10-130	
2,4,5-Trichlorophenol	mg/kg	ND	2.1	0.88	43	18-130	
2,4,6-Trichlorophenol	mg/kg	ND	2.1	0.80	39	17-130	
2,4-Dichlorophenol	mg/kg	ND	2.1	0.70	34	19-130	
2,4-Dimethylphenol	mg/kg	ND	2.1	0.56	27	17-130	
2,4-Dinitrophenol	mg/kg	ND	10.3	2.6	26	10-130	
2,4-Dinitrotoluene	mg/kg	ND	2.1	1.1	53	31-130	
2,6-Dinitrotoluene	mg/kg	ND	2.1	0.91	44	33-130	
2-Chloronaphthalene	mg/kg	ND	2.1	0.76	37	26-130	
2-Chlorophenol	mg/kg	ND	2.1	0.52	25	19-130	
2-Methylnaphthalene	mg/kg	ND	2.1	0.74	31	26-130	
2-Methylphenol(o-Cresol)	mg/kg	ND	2.1	0.58	28	19-130	
2-Nitroaniline	mg/kg	ND	4.2	1.6J	40	29-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

MATRIX SPIKE SAMPLE: 4841809

Parameter	Units	92800746003 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
2-Nitrophenol	mg/kg	ND	2.1	0.59	29	16-130	
3&4-Methylphenol(m&p Cresol)	mg/kg	ND	2.1	0.59	29	14-130	
3,3'-Dichlorobenzidine	mg/kg	ND	4.2	2.1	52	16-130	
3-Nitroaniline	mg/kg	ND	4.2	1.8J	45	28-130	
4,6-Dinitro-2-methylphenol	mg/kg	ND	4.2	1.6	40	10-131	
4-Bromophenylphenyl ether	mg/kg	ND	2.1	1.1	53	32-130	
4-Chloro-3-methylphenol	mg/kg	ND	4.2	1.7	42	26-130	
4-Chloroaniline	mg/kg	ND	4.2	1.2	30	19-130	
4-Chlorophenylphenyl ether	mg/kg	ND	2.1	1.0	50	29-130	
4-Nitroaniline	mg/kg	ND	4.2	2.1	51	22-130	
4-Nitrophenol	mg/kg	ND	10.3	5.3	52	10-130	
Acenaphthene	mg/kg	ND	2.1	0.90	44	29-130	
Acenaphthylene	mg/kg	ND	2.1	0.87	43	27-130	
Aniline	mg/kg	ND	2.1	0.52	25	10-130	
Anthracene	mg/kg	ND	2.1	1.1	54	26-130	
Benzo(a)anthracene	mg/kg	ND	2.1	1.1	53	31-130	
Benzo(a)pyrene	mg/kg	ND	2.1	1.1	53	24-130	
Benzo(b)fluoranthene	mg/kg	ND	2.1	1.0	51	12-137	
Benzo(g,h,i)perylene	mg/kg	ND	2.1	1.1	55	16-130	
Benzo(k)fluoranthene	mg/kg	ND	2.1	1.1	53	27-130	
Benzoic Acid	mg/kg	ND	10.3	ND	3	10-130	M1
Benzyl alcohol	mg/kg	ND	4.2	1.2	28	25-130	
bis(2-Chloroethoxy)methane	mg/kg	ND	2.1	0.60	29	26-130	
bis(2-Chloroethyl) ether	mg/kg	ND	2.1	0.52	25	23-130	
bis(2-Ethylhexyl)phthalate	mg/kg	ND	2.1	1.1	52	20-130	
Butylbenzylphthalate	mg/kg	ND	2.1	1.2	57	28-130	
Chrysene	mg/kg	ND	2.1	1.1	55	29-130	
Di-n-butylphthalate	mg/kg	ND	2.1	1.1	52	29-130	
Di-n-octylphthalate	mg/kg	ND	2.1	1.0	51	30-130	
Dibenz(a,h)anthracene	mg/kg	ND	2.1	1.1	54	27-130	
Dibenzofuran	mg/kg	ND	2.1	0.92	45	33-130	
Diethylphthalate	mg/kg	ND	2.1	1.0	50	34-130	
Dimethylphthalate	mg/kg	ND	2.1	0.92	45	35-130	
Fluoranthene	mg/kg	ND	2.1	1.0	51	26-130	
Fluorene	mg/kg	ND	2.1	0.99	48	27-130	
Hexachloro-1,3-butadiene	mg/kg	ND	2.1	0.59	29	19-130	
Hexachlorobenzene	mg/kg	ND	2.1	1.1	52	31-130	
Hexachlorocyclopentadiene	mg/kg	ND	2.1	0.47	23	10-130	
Hexachloroethane	mg/kg	ND	2.1	0.45	22	21-130	
Indeno(1,2,3-cd)pyrene	mg/kg	ND	2.1	1.0	51	16-130	
Isophorone	mg/kg	ND	2.1	0.59	29	29-130	
N-Nitroso-di-n-propylamine	mg/kg	ND	2.1	0.48	24	22-130	
N-Nitrosodimethylamine	mg/kg	ND	2.1	0.50	24	15-130	
N-Nitrosodiphenylamine	mg/kg	ND	2.1	1.1	53	30-130	
Naphthalene	mg/kg	ND	2.1	0.63	26	24-130	
Nitrobenzene	mg/kg	ND	2.1	0.55	27	25-130	
Pentachlorophenol	mg/kg	ND	4.2	1.8	43	10-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

MATRIX SPIKE SAMPLE: 4841809

Parameter	Units	92800746003 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Phenanthrene	mg/kg	ND	2.1	1.1	53	28-130	
Phenol	mg/kg	ND	2.1	0.55	27	18-130	
Pyrene	mg/kg	ND	2.1	1.2	59	27-130	
Pyridine	mg/kg	ND	2.1	0.49	24	10-130	
2,4,6-Tribromophenol (S)	%				52	10-130	
2-Fluorobiphenyl (S)	%				34	10-130	
2-Fluorophenol (S)	%				24	10-130	
Nitrobenzene-d5 (S)	%				26	10-130	
Phenol-d6 (S)	%				27	10-130	
Terphenyl-d14 (S)	%				54	10-130	

SAMPLE DUPLICATE: 4841810

Parameter	Units	92800746004 Result	Dup Result	RPD	Max RPD	Qualifiers
1,2,4-Trichlorobenzene	mg/kg	ND	ND		30	
1,2-Dichlorobenzene	mg/kg	ND	ND		30	
1,3-Dichlorobenzene	mg/kg	ND	ND		30	
1,4-Dichlorobenzene	mg/kg	ND	ND		30	
1-Methylnaphthalene	mg/kg	ND	ND		30	
2,2'-Oxybis(1-chloropropane)	mg/kg	ND	ND		30	
2,4,5-Trichlorophenol	mg/kg	ND	ND		30	
2,4,6-Trichlorophenol	mg/kg	ND	ND		30	
2,4-Dichlorophenol	mg/kg	ND	ND		30	
2,4-Dimethylphenol	mg/kg	ND	ND		30	
2,4-Dinitrophenol	mg/kg	ND	ND		30	
2,4-Dinitrotoluene	mg/kg	ND	ND		30	
2,6-Dinitrotoluene	mg/kg	ND	ND		30	
2-Chloronaphthalene	mg/kg	ND	ND		30	
2-Chlorophenol	mg/kg	ND	ND		30	
2-Methylnaphthalene	mg/kg	ND	0.19J		30	
2-Methylphenol(o-Cresol)	mg/kg	ND	ND		30	
2-Nitroaniline	mg/kg	ND	ND		30	
2-Nitrophenol	mg/kg	ND	ND		30	
3&4-Methylphenol(m&p Cresol)	mg/kg	ND	ND		30	
3,3'-Dichlorobenzidine	mg/kg	ND	ND		30	
3-Nitroaniline	mg/kg	ND	ND		30	
4,6-Dinitro-2-methylphenol	mg/kg	ND	ND		30	
4-Bromophenylphenyl ether	mg/kg	ND	ND		30	
4-Chloro-3-methylphenol	mg/kg	ND	ND		30	
4-Chloroaniline	mg/kg	ND	ND		30	
4-Chlorophenylphenyl ether	mg/kg	ND	ND		30	
4-Nitroaniline	mg/kg	ND	ND		30	
4-Nitrophenol	mg/kg	ND	ND		30	
Acenaphthene	mg/kg	ND	ND		30	
Acenaphthylene	mg/kg	ND	ND		30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

SAMPLE DUPLICATE: 4841810

Parameter	Units	92800746004 Result	Dup Result	RPD	Max RPD	Qualifiers
Aniline	mg/kg	ND	ND		30	
Anthracene	mg/kg	ND	ND		30	
Benzo(a)anthracene	mg/kg	ND	ND		30	
Benzo(a)pyrene	mg/kg	ND	ND		30	
Benzo(b)fluoranthene	mg/kg	ND	ND		30	
Benzo(g,h,i)perylene	mg/kg	ND	ND		30	
Benzo(k)fluoranthene	mg/kg	ND	ND		30	
Benzoic Acid	mg/kg	ND	ND		30	
Benzyl alcohol	mg/kg	ND	ND		30	
bis(2-Chloroethoxy)methane	mg/kg	ND	ND		30	
bis(2-Chloroethyl) ether	mg/kg	ND	ND		30	
bis(2-Ethylhexyl)phthalate	mg/kg	ND	ND		30	
Butylbenzylphthalate	mg/kg	ND	ND		30	
Chrysene	mg/kg	ND	ND		30	
Di-n-butylphthalate	mg/kg	ND	ND		30	
Di-n-octylphthalate	mg/kg	ND	ND		30	
Dibenz(a,h)anthracene	mg/kg	ND	ND		30	
Dibenzofuran	mg/kg	ND	ND		30	
Diethylphthalate	mg/kg	ND	ND		30	
Dimethylphthalate	mg/kg	ND	ND		30	
Fluoranthene	mg/kg	ND	ND		30	
Fluorene	mg/kg	ND	ND		30	
Hexachloro-1,3-butadiene	mg/kg	ND	ND		30	
Hexachlorobenzene	mg/kg	ND	ND		30	
Hexachlorocyclopentadiene	mg/kg	ND	ND		30	
Hexachloroethane	mg/kg	ND	ND		30	
Indeno(1,2,3-cd)pyrene	mg/kg	ND	ND		30	
Isophorone	mg/kg	ND	ND		30	
N-Nitroso-di-n-propylamine	mg/kg	ND	ND		30	
N-Nitrosodimethylamine	mg/kg	ND	ND		30	
N-Nitrosodiphenylamine	mg/kg	ND	ND		30	
Naphthalene	mg/kg	ND	0.16J		30	
Nitrobenzene	mg/kg	ND	ND		30	
Pentachlorophenol	mg/kg	ND	ND		30	
Phenanthrene	mg/kg	ND	ND		30	
Phenol	mg/kg	ND	ND		30	
Pyrene	mg/kg	ND	ND		30	
Pyridine	mg/kg	ND	ND		30	
2,4,6-Tribromophenol (S)	%	59	58			
2-Fluorobiphenyl (S)	%	44	38			
2-Fluorophenol (S)	%	35	30			
Nitrobenzene-d5 (S)	%	44	32			
Phenol-d6 (S)	%	41	38			
Terphenyl-d14 (S)	%	66	66			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

QC Batch: 1106159
QC Batch Method: ASTM D2974-87
Analysis Method: ASTM D2974-87
Analysis Description: Dry Weight/Percent Moisture
Laboratory: Pace Analytical Services - Ormond Beach
Associated Lab Samples: 92800619002, 92800619003, 92800619004

SAMPLE DUPLICATE: 6068596

Parameter	Units	35960666017 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	11.2	12.7	13	10	D6

SAMPLE DUPLICATE: 6068597

Parameter	Units	35962321003 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	16.9	17.0	1	10	

SAMPLE DUPLICATE: 6068598

Parameter	Units	35962407002 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	7.0	7.2	3	10	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800619

QC Batch: 940071
QC Batch Method: SW-846
Analysis Method: SW-846
Analysis Description: Dry Weight/Percent Moisture
Laboratory: Pace Analytical Services - Charlotte

Associated Lab Samples: 92800619001, 92800619006

SAMPLE DUPLICATE: 4831610

Parameter	Units	92800333003 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	16.6	17.1	3	25	N2

SAMPLE DUPLICATE: 4831611

Parameter	Units	92800525008 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	11.5	12.2	6	25	N2

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALIFIERS

Project: Fortress Wood Products
Pace Project No.: 92800619

DEFINITIONS

DF - Dilution Factor, if reported, represents the factor applied to the reported data due to dilution of the sample aliquot.

ND - Not Detected at or above adjusted reporting limit.

TNTC - Too Numerous To Count

J - Estimated concentration above the adjusted method detection limit and below the adjusted reporting limit.

MDL - Adjusted Method Detection Limit.

PQL - Practical Quantitation Limit.

RL - Reporting Limit - The lowest concentration value that meets project requirements for quantitative data with known precision and bias for a specific analyte in a specific matrix.

S - Surrogate

1,2-Diphenylhydrazine decomposes to and cannot be separated from Azobenzene using Method 8270. The result for each analyte is a combined concentration.

Consistent with EPA guidelines, unrounded data are displayed and have been used to calculate % recovery and RPD values.

LCS(D) - Laboratory Control Sample (Duplicate)

MS(D) - Matrix Spike (Duplicate)

DUP - Sample Duplicate

RPD - Relative Percent Difference

NC - Not Calculable.

SG - Silica Gel - Clean-Up

U - Indicates the compound was analyzed for, but not detected.

Acid preservation may not be appropriate for 2 Chloroethylvinyl ether.

A separate vial preserved to a pH of 4-5 is recommended in SW846 Chapter 4 for the analysis of Acrolein and Acrylonitrile by EPA Method 8260.

N-Nitrosodiphenylamine decomposes and cannot be separated from Diphenylamine using Method 8270. The result reported for each analyte is a combined concentration.

Reported results are not rounded until the final step prior to reporting. Therefore, calculated parameters that are typically reported as "Total" may vary slightly from the sum of the reported component parameters.

Pace Analytical is TNI accredited. Contact your Pace PM for the current list of accredited analytes.

TNI - The NELAC Institute.

BATCH QUALIFIERS

Batch: 940531

[1]	Styrene did not meet the secondary source verification criteria for the initial calibration. The reported result should be considered an estimated value

ANALYTE QUALIFIERS

1g	Styrene did not meet the secondary source verification criteria for the initial calibration. The reported result should be considered an estimated value
D6	The precision between the sample and sample duplicate exceeded laboratory control limits.
M1	Matrix spike recovery exceeded QC limits. Batch accepted based on laboratory control sample (LCS) recovery.
N2	The lab does not hold NELAC/TNI accreditation for this parameter but other accreditations/certifications may apply. A complete list of accreditations/certifications is available upon request.

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA CROSS REFERENCE TABLE

Project: Fortress Wood Products
Pace Project No.: 92800619

Lab ID	Sample ID	QC Batch Method	QC Batch	Analytical Method	Analytical Batch
92800619001	**B-11**	EPA 7199	940841	EPA 7199	941052
92800619006	**B-1**	EPA 7199	940841	EPA 7199	941052
92800619005	**B-1-A**	EPA 3010	1105419	EPA 6010	1105546
92800619001	**B-11**	EPA 3050	1104982	EPA 6020	1105005
92800619002	**BG-1**	EPA 3050	1104982	EPA 6020	1105005
92800619003	**BG-2**	EPA 3050	1104982	EPA 6020	1105005
92800619004	**BG-3**	EPA 3050	1104982	EPA 6020	1105005
92800619006	**B-1**	EPA 3050	1104982	EPA 6020	1105005
92800619005	**B-1-A**	EPA 7470	1105355	EPA 7470	1105422
92800619001	**B-11**	EPA 7471	1106176	EPA 7471	1106220
92800619002	**BG-1**	EPA 7471	1106176	EPA 7471	1106220
92800619003	**BG-2**	EPA 7471	1106176	EPA 7471	1106220
92800619004	**BG-3**	EPA 7471	1106176	EPA 7471	1106220
92800619006	**B-1**	EPA 7471	1106176	EPA 7471	1106220
92800619001	**B-11**	EPA 3546	942092	EPA 8270E	942309
92800619006	**B-1**	EPA 3546	942092	EPA 8270E	942309
92800619001	**B-11**	EPA 5035A/5030B	940173	EPA 8260D	940531
92800619006	**B-1**	EPA 5035A/5030B	940173	EPA 8260D	940531
92800619001	**B-11**	SW-846	940071		
92800619002	**BG-1**	ASTM D2974-87	1106159		
92800619003	**BG-2**	ASTM D2974-87	1106159		
92800619004	**BG-3**	ASTM D2974-87	1106159		
92800619006	**B-1**	SW-846	940071		

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace

DC#_Title: ENV-FRM-HUNT-0003 v03_Sample Condition Upon Receipt

Effective Date: 05/24/2024

Laboratory receiving samples:

Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☑ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☐

Sample Condition Upon Receipt

Client Name: ECS Southeast LLC-Charlotte

Project #:

WO# : 92800619

92800619

Courier: ☐ Commercial ☐ Fed Ex ☑ Pace ☐ UPS ☐ USPS ☐ Other:____ ☐ Client

Custody Seal Present? ☐ Yes ☑ No Seals Intact? ☐ Yes ☐ No ☑ N/A

Date/Initials Person Examining Contents: NA 6/5/25

Packing Material: ☐ Bubble Wrap ☑ Bubble Bags ☐ None ☐ Other

Biological Tissue Frozen? ☐ Yes ☐ No ☑ N/A

Thermometer: ☑ IR Gun ID: 92683 Type of Ice: ☑ Wet ☐ Blue ☐ None

Cooler Temp: 2.9 Correction Factor: Add/Subtract (°C) 0

Temp should be above freezing to 6°C

☐ Samples out of temp criteria. Samples on ice, cooling process has begun

Cooler Temp Corrected (°C): 2.9

USDA Regulated Soil (☐ N/A, water sample)

Did samples originate in a quarantine zone within the United States: CA, NY, or SC (check maps)? ☐ Yes ☑ No

Did samples originate from a foreign source (internationally, including Hawaii and Puerto Rico)? ☐ Yes ☑ No

				Comments/Discrepancy:
Chain of Custody Present?	☑ Yes	☐ No	☐ N/A	1.
Samples Arrived within Hold Time?	☑ Yes	☐ No	☐ N/A	2.
Short Hold Time Analysis (<72 hr.)?	☐ Yes	☑ No	☐ N/A	3.
Rush Turn Around Time Requested?	☐ Yes	☑ No	☐ N/A	4.
Sufficient Volume?	☑ Yes	☐ No	☐ N/A	5.
Correct Containers Used?	☑ Yes	☐ No	☐ N/A	6.
-Pace Containers Used?	☑ Yes	☐ No	☐ N/A	
Containers Intact?	☑ Yes	☐ No	☐ N/A	7.
Dissolved analysis: Samples Field Filtered?	☐ Yes	☑ No	☐ N/A	8.
Sample Labels Match COC?	☑ Yes	☐ No	☐ N/A	9.
-Includes Date/Time/ID/Analysis Matrix: SL				
Headspace in VOA Vials (>5-6mm)?	☐ Yes	☐ No	☑ N/A	10.
Trip Blank Present?	☐ Yes	☐ No	☑ N/A	11.
Trip Blank Custody Seals Present?	☐ Yes	☐ No	☑ N/A	

COMMENTS/SAMPLE DISCREPANCY

Field Data Required? ☐ Yes ☐ No

Lot ID of split containers:

CLIENT NOTIFICATION/RESOLUTION

Person contacted: Date/Time:

Project Manager SCURF Review: Date:

Project Manager SRF Review: Date:

WO#: 92800619
PM: AMB Due Date: 06/12/25
CLIENT: 92-ECS

*Check mark top half of box if pH and/or dechlorination is verified and within the acceptance range for preservation samples.
Exceptions: VOA, Coliform, TOC, Oil and Grease, DRO/8015 (water) DOC, LLHg
**Bottom half of box is to list number of bottles
***Check all unpreserved Nitrates for chlorine

Project #

Laboratory Receiving location: Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☑ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☐

Client ECS Southeast Profile #22 (Circle one) 3265815 Notes

Item#	BP4U-125 mL Plastic Unpreserved (N/A) (CL)	BP3U-250 mL Plastic Unpreserved (N/A)	BP2U-500 mL Plastic Unpreserved (N/A)	BP1U-1 liter Plastic Unpreserved (N/A)	WGFU	BP4S-125 mL Plastic H2SO4 (pH < 2) (CL)	BP3N-250 mL plastic HNO3 (pH < 2)	BP4Z-125 mL Plastic ZN Acetate & NaOH (>9)	BP4B-125 mL Plastic NaOH (pH > 12) (CL)	WGFU-Wide-mouthed Glass jar Unpreserved	AG1U-1 liter Amber Unpreserved (N/A) (CL)	AG1H-1 liter Amber HCl (pH < 2)	AG3U-250 mL Amber Unpreserved (N/A) (CL)	AG1S-1 liter Amber H2SO4 (pH < 2)	AG3S-250 mL Amber H2SO4 (pH < 2)	DG94-40 mL Amber NH4Cl (N/A)(CL)	DG9H-40 mL VOA HCl (N/A)	VG9T-40 mL VOA Na2S2O3 (N/A)	VG9U-40 mL VOA Unpreserved (N/A)	DG9V-40 mL VOA H3PO4 (N/A)	KP7U-50 mL Plastic Unpreserved (N/A)	V/GK (3 vials per kit)-VPH/Gas kit (N/A)	SP5T-125 mL Sterile Plastic (N/A - lab)	SP2T-250 mL Sterile Plastic (N/A - lab)		BP3R-250 mL Plastic (NH4)2SO4 (9.3-9.7)	AG0U-100 mL Amber Unpreserved (N/A) (CL)	VSGU-20 mL Scintillation vials (N/A)	DG9U-40 mL Amber Unpreserved vials (N/A)
CC					SI					CH			SI									CH								
1					1					1												3								
2					1																									
3					1																									
4					1																									
5													1																	
6					1					1												3								
7																														
8																														
9																														
10																														
11																														
12																														

pH Adjustment Log for Preserved Samples

Sample ID	Type of Preservative	pH upon receipt	Date preservation adjusted	Time preservation adjusted	Amount of Preservative added	Lot #

Note: Whenever there is a discrepancy affecting North Carolina compliance samples, a copy of this form will be sent to the North Carolina DENR Certification Office (i.e. Out of hold, incorrect preservative, out of temp, incorrect containers.

2

Pace® Location Requested (City/State):
Pace Analytical Charlotte
9800 Kincey Ave. Suite 100, Huntersville, NC 28078

CHAIN-OF-CUSTODY Analytical Request Document

Chain-of-Custody is a LEGAL DOCUMENT - Complete all relevant fields

LAB USE ONLY- Affix Workorder/Login Label Here

Scan QR Code for instructions

Company Name:	ECS Southeast, LLC-Charlotte	Contact/Report To:	Emery Lovekamp
Street Address:	1812 Center Park Drive Suite D Charlotte, NC 28217	Phone #:	704-525-5152
		E-Mail:	elovekamp@ecslimited.com
		Cc E-Mail:	
Customer Project #:	24413-C	Invoice To:	AP-ECS Charlotte
Project Name:	FORTRESS WOOD PRODUCTS	Invoice E-Mail:	ecs-49@ecslimited.com
Site Collection Info/Facility ID (as applicable):	GUILFORD GUILFORD COUNTY	Purchase Order # (if applicable):	NEED
		Quote #:	

Time Zone Collected: [ ] AK [ ] PT [ ] MT [ ] CT [X] ET

County / State origin of sample(s): North Carolina GUILFORD CO

Data Deliverables:
[ ] Level II [ ] Level III [ ] Level IV
[ ] EQUIS
[ ] Other

Regulatory Program (DW, RCRA, etc.) as applicable: BROWNFIELDS

Reportable [ ] Yes [ ] No

Rush (Pre-approval required):
[ ] Same Day [ ] 1 Day [ ] 2 Day [ ] 3 Day [ ] Other _____

DW PWSID # or WW Permit # as applicable:

Date Results Requested: STANDARD

Field Filtered (if applicable): [ ] Yes [X] No

Analysis:

* Matrix Codes (Insert in Matrix box below): Drinking Water (DW), Ground Water (GW), Waste Water (WW), Product (P), Soil/Solid (SS), Oil (OL), Wipe (WP), Tissue (TS), Bioassay (B), Vapor (V), Surface Water (SW),Sediment (SED), Sludge (SL), Caulk (CK), Leachate (LL), Biosolid (BS), Other (OT)

Specify Container Size **

Identify Container Preservative Type***

**Container Size: (1) 1L, (2) 500mL, (3) 250mL, (4) 125mL, (5) 100mL, (6) 40mL vial, (7) EnCore, (8) TerraCore, (9) 90mL, (10) Other

*** Preservative Types: (1) None, (2) HNO3, (3) H2SO4, (4) HCl, (5) NaOH, (6) Zn Acetate, (7) NaHSO4, (8) Sod. Thiosulfate, (9) Ascorbic Acid, (10) MeOH, (11) Other

Customer Sample ID	Matrix *	Comp / Grab	Composite Start Date	Composite Start Time	Collected or Composite End Date	Collected or Composite End Time	# Cont.	Res. Chlorine Results	Res. Chlorine Units	8082 PCB	8260 VOC, dry weight	8270 SVOC, 7199 hex chrome	PCB congeners (HOLD)	PPL Metals 6020/7471	TCLP RCRA 8 Metals					Sample Comment	Preservation non-conformance identified for sample.
B-11	SS	G+C			6/4/25	1240	5				X	X		X							
BG-1		G				1335	1							X							
BG-2		G				1340	1							X							
BG-3		G				1345	1							X							
B-1-A		G				1555	1								X						
B-1		G-C				1600	5				X	X		X							

Lab Use Only
Proj. Mgr: Angela Baioni
AcctNum / Client ID:
Table #:
Profile / Template: 18978
Prelog / Bottle Ord. ID: EZ 3265815

Additional Instructions from Pace®:
REPORT TO MDLS

Collected By: (Printed Name) EMERY LOVEKAMP
Signature:

Customer Remarks / Special Conditions / Possible Hazards:

# Coolers:	Thermometer ID:	Correction Factor (°C):	Obs. Temp. (°C)	Corrected Temp. (°C)	On Ice:

Relinquished by/Company: (Signature) ECS	Date/Time: 6/4/25 1615	Received by/Company: (Signature)	Date/Time: 6/5/25 0700	Tracking Number:
Relinquished by/Company: (Signature)	Date/Time: 6/5/25 1140	Received by/Company: (Signature) PACE MDL	Date/Time: 6/5/25 1140	Delivered by: [ ] In- Person [X] Courier
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	[ ] FedEx [ ] UPS [ ] Other
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Page: 4 of 5

Submitting a sample via this chain of custody constitutes acknowledgment and acceptance of the Pace® Terms and Conditions found at https://www.pacelabs.com/resource-library/resource/pace-terms-and-conditions/

ENV-FRM-CORQ-0019_v02_110123 ©

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

July 16, 2025

Emery Lovekamp
ECS Southeast, LLC-Charlotte
1812 Center Park Drive
Suite D
Charlotte, NC 28217

RE: Project: Fortress Wood Products (resamp
Pace Project No.: 92806480

Dear Emery Lovekamp:

Enclosed are the analytical results for sample(s) received by the laboratory on July 09, 2025. The results relate only to the samples included in this report. Results reported herein conform to the applicable TNI/NELAC Standards and the laboratory's Quality Manual, where applicable, unless otherwise noted in the body of the report.

The test results provided in this final report were generated by each of the following laboratories within the Pace Network:

- Pace Analytical Services - Ormond Beach

If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Angela M. Baioni

Angela Baioni
angela.baioni@pacelabs.com
612-473-6801
Project Manager

Enclosures

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

CERTIFICATIONS

Project: Fortress Wood Products (resamp
Pace Project No.: 92806480

Pace Analytical Services Ormond Beach
8 East Tower Circle, Ormond Beach, FL 32174
Alaska DEC- CS/UST/LUST
Alabama Certification #: 41320
California Certification# 3096
Colorado Certification: FL NELAC Reciprocity
Connecticut Certification #: PH-0216
Delaware Certification: FL NELAC Reciprocity
DoD-ANAB #:ADE-3199
Florida Certification #: E83079
Georgia Certification #: 955
Guam Certification: FL NELAC Reciprocity
Hawaii Certification: FL NELAC Reciprocity
Illinois Certification #: 200068
Indiana Certification: FL NELAC Reciprocity
Kansas Certification #: E-10383
Kentucky Certification #: 90050
Louisiana Certification #: FL NELAC Reciprocity
Louisiana Environmental Certificate #: 05007
Maine Certification #: FL01264
Maryland Certification: #346
Massachusetts Certification #: M-FL1264
Michigan Certification #: 9911
Mississippi Certification: FL NELAC Reciprocity
Missouri Certification #: 236
Montana Certification #: Cert 0074
Nebraska Certification: NE-OS-28-14
Nevada Certification: FL NELAC Reciprocity
New Hampshire Certification #: 2958
New Jersey Certification #: FL022
New York Certification #: 11608
North Carolina Environmental Certificate #: 667
North Carolina Certification #: 12710
North Dakota Certification #: R-216
Ohio DEP 87780
Oklahoma Certification #: D9947
Pennsylvania Certification #: 68-00547
Puerto Rico Certification #: FL01264
South Carolina Certification: #96042001
Tennessee Certification #: TN02974
Texas Certification: FL NELAC Reciprocity
US Virgin Islands Certification: FL NELAC Reciprocity
Utah FL NELAC Reciprocity
Utah
Virginia Environmental Certification #: 460165
Washington Certification #: C955
West Virginia Certification #: 9962C
Wisconsin Certification #: 399079670
Wyoming (EPA Region 8): FL NELAC Reciprocity

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE ANALYTE COUNT

Project: Fortress Wood Products (resamp
Pace Project No.: 92806480

Lab ID	Sample ID	Method	Analysts	Analytes Reported	Laboratory
92806480001	**B-1-TCLP**	EPA 6010	AF	7	PASI-O
		EPA 7470	JNK	1	PASI-O
92806480002	**B-4-C**	EPA 6010	AF	7	PASI-O
		EPA 7470	JNK	1	PASI-O
92806480003	**B-4-D**	EPA 6010	AF	7	PASI-O
		EPA 7470	JNK	1	PASI-O
92806480004	**B-5-C**	EPA 6010	AF	7	PASI-O
		EPA 7470	JNK	1	PASI-O
92806480005	**B-8-B**	EPA 6010	AF	7	PASI-O
		EPA 7470	JNK	1	PASI-O
92806480006	**B-3-TCLP**	EPA 6010	AF	7	PASI-O
		EPA 7470	JNK	1	PASI-O
92806480007	**B-6-TCLP**	EPA 6010	AF	7	PASI-O
		EPA 7470	JNK	1	PASI-O
92806480008	**B-12-TCLP**	EPA 6010	AF	7	PASI-O
		EPA 7470	JNK	1	PASI-O
92806480009	**DUP-TCLP**	EPA 6010	AF	7	PASI-O
		EPA 7470	JNK	1	PASI-O

PASI-O = Pace Analytical Services - Ormond Beach

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products (resamp
Pace Project No.: 92806480

Sample: B-1-TCLP **Lab ID: 92806480001** Collected: 07/09/25 09:40 Received: 07/09/25 14:30 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
6010 MET ICP, TCLP	Analytical Method: EPA 6010 Preparation Method: EPA 3010 Leachate Method/Date: EPA 1311; 07/14/25 13:57 Pace Analytical Services - Ormond Beach							
Arsenic	ND	mg/L	0.10	1	07/15/25 11:29	07/15/25 22:50	7440-38-2	
Barium	**1.5**	mg/L	0.10	1	07/15/25 11:29	07/15/25 22:50	7440-39-3	
Cadmium	**0.084**	mg/L	0.010	1	07/15/25 11:29	07/15/25 22:50	7440-43-9	
Chromium	ND	mg/L	0.050	1	07/15/25 11:29	07/15/25 22:50	7440-47-3	
Lead	**1.2**	mg/L	0.10	1	07/15/25 11:29	07/15/25 22:50	7439-92-1	
Selenium	ND	mg/L	0.15	1	07/15/25 11:29	07/15/25 22:50	7782-49-2	
Silver	ND	mg/L	0.050	1	07/15/25 11:29	07/15/25 22:50	7440-22-4	
7470 Mercury, TCLP	Analytical Method: EPA 7470 Preparation Method: EPA 7470 Leachate Method/Date: EPA 1311; 07/14/25 13:57 Pace Analytical Services - Ormond Beach							
Mercury	**0.0020**	mg/L	0.0020	1	07/15/25 10:11	07/15/25 13:16	7439-97-6	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products (resamp
Pace Project No.: 92806480

Sample: B-4-C **Lab ID: 92806480002** Collected: 07/09/25 10:00 Received: 07/09/25 14:30 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
6010 MET ICP, TCLP	Analytical Method: EPA 6010 Preparation Method: EPA 3010 Leachate Method/Date: EPA 1311; 07/14/25 13:57 Pace Analytical Services - Ormond Beach							
Arsenic	ND	mg/L	0.10	1	07/15/25 11:29	07/15/25 22:55	7440-38-2	
Barium	**0.55**	mg/L	0.10	1	07/15/25 11:29	07/15/25 22:55	7440-39-3	
Cadmium	ND	mg/L	0.010	1	07/15/25 11:29	07/15/25 22:55	7440-43-9	
Chromium	ND	mg/L	0.050	1	07/15/25 11:29	07/15/25 22:55	7440-47-3	
Lead	ND	mg/L	0.10	1	07/15/25 11:29	07/15/25 22:55	7439-92-1	
Selenium	ND	mg/L	0.15	1	07/15/25 11:29	07/15/25 22:55	7782-49-2	
Silver	ND	mg/L	0.050	1	07/15/25 11:29	07/15/25 22:55	7440-22-4	
7470 Mercury, TCLP	Analytical Method: EPA 7470 Preparation Method: EPA 7470 Leachate Method/Date: EPA 1311; 07/14/25 13:57 Pace Analytical Services - Ormond Beach							
Mercury	ND	mg/L	0.0020	1	07/15/25 10:11	07/15/25 13:18	7439-97-6	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products (resamp
Pace Project No.: 92806480

Sample: B-4-D **Lab ID: 92806480003** Collected: 07/09/25 10:10 Received: 07/09/25 14:30 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
6010 MET ICP, TCLP	Analytical Method: EPA 6010 Preparation Method: EPA 3010 Leachate Method/Date: EPA 1311; 07/14/25 13:57 Pace Analytical Services - Ormond Beach							
Arsenic	ND	mg/L	0.10	1	07/15/25 11:29	07/15/25 22:59	7440-38-2	
Barium	**0.55**	mg/L	0.10	1	07/15/25 11:29	07/15/25 22:59	7440-39-3	
Cadmium	ND	mg/L	0.010	1	07/15/25 11:29	07/15/25 22:59	7440-43-9	
Chromium	ND	mg/L	0.050	1	07/15/25 11:29	07/15/25 22:59	7440-47-3	
Lead	**0.22**	mg/L	0.10	1	07/15/25 11:29	07/15/25 22:59	7439-92-1	
Selenium	ND	mg/L	0.15	1	07/15/25 11:29	07/15/25 22:59	7782-49-2	
Silver	ND	mg/L	0.050	1	07/15/25 11:29	07/15/25 22:59	7440-22-4	
7470 Mercury, TCLP	Analytical Method: EPA 7470 Preparation Method: EPA 7470 Leachate Method/Date: EPA 1311; 07/14/25 13:57 Pace Analytical Services - Ormond Beach							
Mercury	ND	mg/L	0.0020	1	07/15/25 10:11	07/15/25 13:21	7439-97-6	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products (resamp
Pace Project No.: 92806480

Sample: B-5-C **Lab ID: 92806480004** Collected: 07/09/25 10:40 Received: 07/09/25 14:30 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
6010 MET ICP, TCLP	Analytical Method: EPA 6010 Preparation Method: EPA 3010 Leachate Method/Date: EPA 1311; 07/14/25 13:57 Pace Analytical Services - Ormond Beach							
Arsenic	**0.12**	mg/L	0.10	1	07/15/25 11:29	07/15/25 23:13	7440-38-2	
Barium	**0.86**	mg/L	0.10	1	07/15/25 11:29	07/15/25 23:13	7440-39-3	
Cadmium	ND	mg/L	0.010	1	07/15/25 11:29	07/15/25 23:13	7440-43-9	
Chromium	ND	mg/L	0.050	1	07/15/25 11:29	07/15/25 23:13	7440-47-3	
Lead	**0.65**	mg/L	0.10	1	07/15/25 11:29	07/15/25 23:13	7439-92-1	
Selenium	ND	mg/L	0.15	1	07/15/25 11:29	07/15/25 23:13	7782-49-2	
Silver	ND	mg/L	0.050	1	07/15/25 11:29	07/15/25 23:13	7440-22-4	
7470 Mercury, TCLP	Analytical Method: EPA 7470 Preparation Method: EPA 7470 Leachate Method/Date: EPA 1311; 07/14/25 13:57 Pace Analytical Services - Ormond Beach							
Mercury	ND	mg/L	0.0020	1	07/15/25 10:11	07/15/25 13:47	7439-97-6	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products (resamp
Pace Project No.: 92806480

Sample: B-8-B **Lab ID: 92806480005** Collected: 07/09/25 10:50 Received: 07/09/25 14:30 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
6010 MET ICP, TCLP	Analytical Method: EPA 6010 Preparation Method: EPA 3010 Leachate Method/Date: EPA 1311; 07/14/25 13:57 Pace Analytical Services - Ormond Beach							
Arsenic	ND	mg/L	0.10	1	07/15/25 11:29	07/15/25 23:18	7440-38-2	
Barium	**0.57**	mg/L	0.10	1	07/15/25 11:29	07/15/25 23:18	7440-39-3	
Cadmium	ND	mg/L	0.010	1	07/15/25 11:29	07/15/25 23:18	7440-43-9	
Chromium	ND	mg/L	0.050	1	07/15/25 11:29	07/15/25 23:18	7440-47-3	
Lead	ND	mg/L	0.10	1	07/15/25 11:29	07/15/25 23:18	7439-92-1	
Selenium	ND	mg/L	0.15	1	07/15/25 11:29	07/15/25 23:18	7782-49-2	
Silver	ND	mg/L	0.050	1	07/15/25 11:29	07/15/25 23:18	7440-22-4	
7470 Mercury, TCLP	Analytical Method: EPA 7470 Preparation Method: EPA 7470 Leachate Method/Date: EPA 1311; 07/14/25 13:57 Pace Analytical Services - Ormond Beach							
Mercury	**0.0027**	mg/L	0.0020	1	07/15/25 10:11	07/15/25 13:49	7439-97-6	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products (resamp
Pace Project No.: 92806480

Sample: B-3-TCLP **Lab ID: 92806480006** Collected: 07/09/25 11:45 Received: 07/09/25 14:30 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
6010 MET ICP, TCLP	Analytical Method: EPA 6010 Preparation Method: EPA 3010 Leachate Method/Date: EPA 1311; 07/14/25 13:57 Pace Analytical Services - Ormond Beach							
Arsenic	ND	mg/L	0.10	1	07/15/25 11:29	07/15/25 23:23	7440-38-2	
Barium	**2.3**	mg/L	0.10	1	07/15/25 11:29	07/15/25 23:23	7440-39-3	
Cadmium	**0.071**	mg/L	0.010	1	07/15/25 11:29	07/15/25 23:23	7440-43-9	
Chromium	ND	mg/L	0.050	1	07/15/25 11:29	07/15/25 23:23	7440-47-3	
Lead	**1.6**	mg/L	0.10	1	07/15/25 11:29	07/15/25 23:23	7439-92-1	
Selenium	ND	mg/L	0.15	1	07/15/25 11:29	07/15/25 23:23	7782-49-2	
Silver	ND	mg/L	0.050	1	07/15/25 11:29	07/15/25 23:23	7440-22-4	
7470 Mercury, TCLP	Analytical Method: EPA 7470 Preparation Method: EPA 7470 Leachate Method/Date: EPA 1311; 07/14/25 13:57 Pace Analytical Services - Ormond Beach							
Mercury	**0.0021**	mg/L	0.0020	1	07/15/25 10:11	07/15/25 13:52	7439-97-6	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products (resamp
Pace Project No.: 92806480

Sample: B-6-TCLP **Lab ID: 92806480007** Collected: 07/09/25 13:00 Received: 07/09/25 14:30 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
6010 MET ICP, TCLP	Analytical Method: EPA 6010 Preparation Method: EPA 3010 Leachate Method/Date: EPA 1311; 07/14/25 13:57 Pace Analytical Services - Ormond Beach							
Arsenic	ND	mg/L	0.10	1	07/15/25 11:29	07/15/25 23:27	7440-38-2	
Barium	**0.62**	mg/L	0.10	1	07/15/25 11:29	07/15/25 23:27	7440-39-3	
Cadmium	ND	mg/L	0.010	1	07/15/25 11:29	07/15/25 23:27	7440-43-9	
Chromium	ND	mg/L	0.050	1	07/15/25 11:29	07/15/25 23:27	7440-47-3	
Lead	ND	mg/L	0.10	1	07/15/25 11:29	07/15/25 23:27	7439-92-1	
Selenium	ND	mg/L	0.15	1	07/15/25 11:29	07/15/25 23:27	7782-49-2	
Silver	ND	mg/L	0.050	1	07/15/25 11:29	07/15/25 23:27	7440-22-4	
7470 Mercury, TCLP	Analytical Method: EPA 7470 Preparation Method: EPA 7470 Leachate Method/Date: EPA 1311; 07/14/25 13:57 Pace Analytical Services - Ormond Beach							
Mercury	**0.0020**	mg/L	0.0020	1	07/15/25 10:11	07/15/25 13:54	7439-97-6	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products (resamp
Pace Project No.: 92806480

Sample: B-12-TCLP **Lab ID: 92806480008** Collected: 07/09/25 13:45 Received: 07/09/25 14:30 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
6010 MET ICP, TCLP	Analytical Method: EPA 6010 Preparation Method: EPA 3010 Leachate Method/Date: EPA 1311; 07/14/25 13:57 Pace Analytical Services - Ormond Beach							
Arsenic	ND	mg/L	0.10	1	07/15/25 11:29	07/15/25 23:32	7440-38-2	
Barium	**0.48**	mg/L	0.10	1	07/15/25 11:29	07/15/25 23:32	7440-39-3	
Cadmium	ND	mg/L	0.010	1	07/15/25 11:29	07/15/25 23:32	7440-43-9	
Chromium	ND	mg/L	0.050	1	07/15/25 11:29	07/15/25 23:32	7440-47-3	
Lead	ND	mg/L	0.10	1	07/15/25 11:29	07/15/25 23:32	7439-92-1	
Selenium	ND	mg/L	0.15	1	07/15/25 11:29	07/15/25 23:32	7782-49-2	
Silver	ND	mg/L	0.050	1	07/15/25 11:29	07/15/25 23:32	7440-22-4	
7470 Mercury, TCLP	Analytical Method: EPA 7470 Preparation Method: EPA 7470 Leachate Method/Date: EPA 1311; 07/14/25 13:57 Pace Analytical Services - Ormond Beach							
Mercury	ND	mg/L	0.0020	1	07/15/25 10:11	07/15/25 13:56	7439-97-6	

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products (resamp
Pace Project No.: 92806480

Sample: DUP-TCLP **Lab ID: 92806480009** Collected: 07/09/25 00:01 Received: 07/09/25 14:30 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
6010 MET ICP, TCLP	Analytical Method: EPA 6010 Preparation Method: EPA 3010 Leachate Method/Date: EPA 1311; 07/14/25 13:57 Pace Analytical Services - Ormond Beach							
Arsenic	ND	mg/L	0.10	1	07/15/25 11:29	07/15/25 23:37	7440-38-2	
Barium	**0.52**	mg/L	0.10	1	07/15/25 11:29	07/15/25 23:37	7440-39-3	
Cadmium	ND	mg/L	0.010	1	07/15/25 11:29	07/15/25 23:37	7440-43-9	
Chromium	ND	mg/L	0.050	1	07/15/25 11:29	07/15/25 23:37	7440-47-3	
Lead	ND	mg/L	0.10	1	07/15/25 11:29	07/15/25 23:37	7439-92-1	
Selenium	ND	mg/L	0.15	1	07/15/25 11:29	07/15/25 23:37	7782-49-2	
Silver	ND	mg/L	0.050	1	07/15/25 11:29	07/15/25 23:37	7440-22-4	
7470 Mercury, TCLP	Analytical Method: EPA 7470 Preparation Method: EPA 7470 Leachate Method/Date: EPA 1311; 07/14/25 13:57 Pace Analytical Services - Ormond Beach							
Mercury	**0.0020**	mg/L	0.0020	1	07/15/25 10:11	07/15/25 13:59	7439-97-6	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products (resamp
Pace Project No.: 92806480

QC Batch: 1113362 | Analysis Method: EPA 7470
QC Batch Method: EPA 7470 | Analysis Description: 7470 Mercury TCLP
Laboratory: Pace Analytical Services - Ormond Beach
Associated Lab Samples: 92806480001, 92806480002, 92806480003, 92806480004, 92806480005, 92806480006, 92806480007, 92806480008, 92806480009

METHOD BLANK: 6104010 Matrix: Water
Associated Lab Samples: 92806480001, 92806480002, 92806480003, 92806480004, 92806480005, 92806480006, 92806480007, 92806480008, 92806480009

Parameter	Units	Blank Result	Reporting Limit	Analyzed	Qualifiers
Mercury	mg/L	ND	0.00020	07/15/25 12:55	

LABORATORY CONTROL SAMPLE: 6105619

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Mercury	mg/L	0.002	0.0023	116	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6105620 6105621

Parameter	Units	35967199001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Qual
Mercury	mg/L	0.0019J	0.02	0.02	0.025	0.028	116	129	75-125	10	M1

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products (resamp
Pace Project No.: 92806480

QC Batch: 1113396
QC Batch Method: EPA 3010
Analysis Method: EPA 6010
Analysis Description: 6010 MET TCLP
Laboratory: Pace Analytical Services - Ormond Beach
Associated Lab Samples: 92806480001, 92806480002, 92806480003, 92806480004, 92806480005, 92806480006, 92806480007, 92806480008, 92806480009

METHOD BLANK: 6104010 Matrix: Water
Associated Lab Samples: 92806480001, 92806480002, 92806480003, 92806480004, 92806480005, 92806480006, 92806480007, 92806480008, 92806480009

Parameter	Units	Blank Result	Reporting Limit	Analyzed	Qualifiers
Arsenic	mg/L	ND	0.010	07/16/25 06:59	
Barium	mg/L	ND	0.010	07/16/25 06:59	
Cadmium	mg/L	ND	0.0010	07/16/25 06:59	
Chromium	mg/L	ND	0.0050	07/16/25 06:59	
Lead	mg/L	ND	0.010	07/16/25 06:59	
Selenium	mg/L	ND	0.015	07/16/25 06:59	
Silver	mg/L	ND	0.0050	07/16/25 06:59	

LABORATORY CONTROL SAMPLE: 6105738

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Arsenic	mg/L	0.25	0.26	105	80-120	
Barium	mg/L	0.25	0.26	104	80-120	
Cadmium	mg/L	0.025	0.024	94	80-120	
Chromium	mg/L	0.25	0.25	99	80-120	
Lead	mg/L	0.25	0.23	91	80-120	
Selenium	mg/L	0.25	0.29	115	80-120	
Silver	mg/L	0.025	0.030	119	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6105739 6105740

Parameter	Units	35967199001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Qual
Arsenic	mg/L	0.034U	2.5	2.5	2.6	2.6	102	106	75-125	3	
Barium	mg/L	0.030J	2.5	2.5	2.6	2.7	101	105	75-125	4	
Cadmium	mg/L	0.0033J	0.25	0.25	0.25	0.26	99	101	75-125	2	
Chromium	mg/L	0.017U	2.5	2.5	2.5	2.6	101	103	75-125	2	
Lead	mg/L	0.021U	2.5	2.5	2.5	2.5	99	101	75-125	2	
Selenium	mg/L	0.039U	2.5	2.5	2.6	2.7	103	106	75-125	3	
Silver	mg/L	0.010U	0.25	0.25	0.27	0.28	106	108	75-125	2	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALIFIERS

Project: Fortress Wood Products (resamp
Pace Project No.: 92806480

DEFINITIONS

DF - Dilution Factor, if reported, represents the factor applied to the reported data due to dilution of the sample aliquot.

ND - Not Detected at or above adjusted reporting limit.

TNTC - Too Numerous To Count

J - Estimated concentration above the adjusted method detection limit and below the adjusted reporting limit.

MDL - Adjusted Method Detection Limit.

PQL - Practical Quantitation Limit.

RL - Reporting Limit - The lowest concentration value that meets project requirements for quantitative data with known precision and bias for a specific analyte in a specific matrix.

S - Surrogate

1,2-Diphenylhydrazine decomposes to and cannot be separated from Azobenzene using Method 8270. The result for each analyte is a combined concentration.

Consistent with EPA guidelines, unrounded data are displayed and have been used to calculate % recovery and RPD values.

LCS(D) - Laboratory Control Sample (Duplicate)

MS(D) - Matrix Spike (Duplicate)

DUP - Sample Duplicate

RPD - Relative Percent Difference

NC - Not Calculable.

SG - Silica Gel - Clean-Up

U - Indicates the compound was analyzed for, but not detected.

Acid preservation may not be appropriate for 2 Chloroethylvinyl ether.

A separate vial preserved to a pH of 4-5 is recommended in SW846 Chapter 4 for the analysis of Acrolein and Acrylonitrile by EPA Method 8260.

N-Nitrosodiphenylamine decomposes and cannot be separated from Diphenylamine using Method 8270. The result reported for each analyte is a combined concentration.

Reported results are not rounded until the final step prior to reporting. Therefore, calculated parameters that are typically reported as "Total" may vary slightly from the sum of the reported component parameters.

Pace Analytical is TNI accredited. Contact your Pace PM for the current list of accredited analytes.

TNI - The NELAC Institute.

ANALYTE QUALIFIERS

M1 Matrix spike recovery exceeded QC limits. Batch accepted based on laboratory control sample (LCS) recovery.

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA CROSS REFERENCE TABLE

Project: Fortress Wood Products (resamp
Pace Project No.: 92806480

Lab ID	Sample ID	QC Batch Method	QC Batch	Analytical Method	Analytical Batch
92806480001	**B-1-TCLP**	EPA 3010	1113396	EPA 6010	1113488
92806480002	**B-4-C**	EPA 3010	1113396	EPA 6010	1113488
92806480003	**B-4-D**	EPA 3010	1113396	EPA 6010	1113488
92806480004	**B-5-C**	EPA 3010	1113396	EPA 6010	1113488
92806480005	**B-8-B**	EPA 3010	1113396	EPA 6010	1113488
92806480006	**B-3-TCLP**	EPA 3010	1113396	EPA 6010	1113488
92806480007	**B-6-TCLP**	EPA 3010	1113396	EPA 6010	1113488
92806480008	**B-12-TCLP**	EPA 3010	1113396	EPA 6010	1113488
92806480009	**DUP-TCLP**	EPA 3010	1113396	EPA 6010	1113488
92806480001	**B-1-TCLP**	EPA 7470	1113362	EPA 7470	1113385
92806480002	**B-4-C**	EPA 7470	1113362	EPA 7470	1113385
92806480003	**B-4-D**	EPA 7470	1113362	EPA 7470	1113385
92806480004	**B-5-C**	EPA 7470	1113362	EPA 7470	1113385
92806480005	**B-8-B**	EPA 7470	1113362	EPA 7470	1113385
92806480006	**B-3-TCLP**	EPA 7470	1113362	EPA 7470	1113385
92806480007	**B-6-TCLP**	EPA 7470	1113362	EPA 7470	1113385
92806480008	**B-12-TCLP**	EPA 7470	1113362	EPA 7470	1113385
92806480009	**DUP-TCLP**	EPA 7470	1113362	EPA 7470	1113385

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace® Location Requested (City/State):
Pace Analytical Charlotte
9800 Kincey Ave. Suite 100, Huntersville, NC 28078

CHAIN-OF-CUSTODY Analytical Request Document

Chain-of-Custody is a LEGAL DOCUMENT - Complete all relevant fields

LAB USE ONLY- Affix Workorder/Login Label Here

WO# : 92806480

92806480

Company Name:	ECS Southeast, LLC-Charlotte	Contact/Report To:	Emery Lovekamp
Street Address:	1812 Center Park Drive Suite D Charlotte, NC 28217	Phone #:	704-525-5152
		E-Mail:	elovekamp@ecslimited.com
		Cc E-Mail:	
Customer Project #:	24413-C	Invoice To:	AP-ECS Charlotte
Project Name:	Fortress Wood Products (resample)	Invoice E-Mail:	ecs-49@ecslimited.com
Site Collection Info/Facility ID (as applicable):		Purchase Order # (if applicable):	
		Quote #:	

Time Zone Collected: [ ] AK [ ] PT [ ] MT [ ] CT [X] ET

County / State origin of sample(s): North Carolina

Data Deliverables: [X] Level II [ ] Level III [ ] Level IV [ ] EQUIS REPORT MDLs [ ] Other

Regulatory Program (DW, RCRA, etc.) as applicable: Reportable [ ] Yes [ ] No BROWNFIELDS

Rush (Pre-approval required): [ ] Same Day [ ] 1 Day [ ] 2 Day [ ] 3 Day [ ] Other ASAP

DW PWSID # or WW Permit # as applicable:

Date Results Requested: * RUSH TAT ASAP

Field Filtered (if applicable): [ ] Yes [X] No

Analysis:

Specify Container Size **: 3

Identify Container Preservative Type***: i

Analysis Requested: TCLP - RCRA-8

** (1) 1L, (2) 500mL, (3) 250mL, (4) 125mL, (5) 100mL, (6) 40mL vial, (7) EnCore, (8) TerraCore, (9) 90mL, (10) Other

*** Preservative Types: (1) None, (2) HNO3, (3) H2SO4, (4) HCl, (5) NaOH, (6) Zn Acetate, (7) NaHSO4, (8) Sod. Thiosulfate, (9) Ascorbic Acid, (10) MeOH, (11) Other

Lab Use Only: Proj. Mgr: Angela Baioni; AcctNum / Client ID:; Table #:; Profile / Template: 18978; Prelog / Bottle Ord. ID: EZ 3276081

Preservation non-conformance identified for sample.

* Matrix Codes (Insert in Matrix box below): Drinking Water (DW), Ground Water (GW), Waste Water (WW), Product (P), Soil/Solid (SS), Oil (OL), Wipe (WP), Tissue (TS), Bioassay (B), Vapor (V), Surface Water (SW), Sediment (SED), Sludge (SL), Caulk (CK), Leachate (LL), Biosolid (BS), Other (OT)

Customer Sample ID	Matrix *	Comp / Grab	Composite Start Date	Composite Start Time	Collected or Composite End Date	Collected or Composite End Time	# Cont.	Res. Chlorine Results	Res. Chlorine Units	TCLP - RCRA-8	Sample Comment
B-1-TCLP	SS	C			7/9/25	0940	1			X	
B-4-C		G				1000	1			X	
B-4-D		G				1010	1			X	
B-5-C		G				1040	1			X	
B-8-B		G				1050	1			X	
B-3-TCLP		C				1145	1			X	
B-6-TCLP		C				1300	1			X	
B-12-TCLP		C				1345	1			X	
DUP-TCLP		C				—	1			X	

Additional Instructions from Pace®:

* TCLP RCRA-8 METALS ON RUSH TAT ASAP *

Collected By: (Printed Name) EMERY LOVEKAMP

Signature:

Customer Remarks / Special Conditions / Possible Hazards:

# Coolers:	Thermometer ID:	Correction Factor (°C):	Obs. Temp. (°C)	Corrected Temp. (°C)	On Ice:

Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Tracking Number:
ECS	7/9/25 1430	Attila Bernd	07/09/25 1450	
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Delivered by: [ ] In-Person [ ] Courier [ ] FedEx [ ] UPS [ ] Other
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Page: 1 of 2

Page 17 of 19

Submitting a sample via this chain of custody constitutes acknowledgment and acceptance of the Pace® Terms and Conditions found at https://www.pacelabs.com/resource-library/resource/pace-terms-and-conditions/

ENV-FRM-CORQ-0019_v02_110123 ©

DC#_Title: ENV-FRM-HUN1-0083 v05_Sample Condition Upon Receipt

Effective Date: 05/24/2024

Laboratory receiving samples:

Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☐ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☑

Sample Condition Upon Receipt

Client Name: ECS

Project #:

Courier: ☐ Commercial ☐ Fed Ex ☐ Pace ☐ UPS ☐ USPS ☐ Other: ☑ Client

Custody Seal Present? ☐ Yes ☑ No Seals Intact? ☐ Yes ☐ No ☑ N/A

Date/Initials Person Examining Contents: A.B.

Packing Material: ☐ Bubble Wrap ☑ Bubble Bags ☐ None ☐ Other

Biological Tissue Frozen? ☐ Yes ☐ No ☑ N/A

Thermometer: ☐ IR Gun ID: KRT002

Type of Ice: ☑ Wet ☐ Blue ☐ None

Cooler Temp: 5.9 Correction Factor: Add/Subtract (°C) 0.0

Temp should be above freezing to 6°C

☐ Samples out of temp criteria. Samples on ice, cooling process has begun

Cooler Temp Corrected (°C): 5.9

USDA Regulated Soil (☑ N/A, water sample)

Did samples originate in a quarantine zone within the United States: CA, NY, or SC (check maps)? ☐ Yes ☑ No

Did samples originate from a foreign source (internationally, including Hawaii and Puerto Rico)? ☐ Yes ☑ No

				Comments/Discrepancy:
Chain of Custody Present?	☑ Yes	☐ No	☐ N/A	1
Samples Arrived within Hold Time?	☑ Yes	☐ No	☐ N/A	2
Short Hold Time Analysis (<72 hr.)?	☐ Yes	☑ No	☐ N/A	3.
Rush Turn Around Time Requested?	☑ Yes	☐ No	☐ N/A	4 ASAP
Sufficient Volume?	☑ Yes	☐ No	☐ N/A	5.
Correct Containers Used?	☑ Yes	☐ No	☐ N/A	6.
-Pace Containers Used?	☑ Yes	☐ No	☐ N/A	
Containers Intact?	☑ Yes	☐ No	☐ N/A	7
Dissolved analysis. Samples Field Filtered?	☐ Yes	☑ No	☐ N/A	8
Sample Labels Match COC?	☑ Yes	☐ No	☐ N/A	9
-Includes Date/Time/ID/Analysis Matrix: SL				
Headspace in VOA Vials (>5-6mm)?	☐ Yes	☐ No	☑ N/A	10.
Trip Blank Present?	☐ Yes	☐ No	☑ N/A	11.
Trip Blank Custody Seals Present?	☐ Yes	☐ No	☑ N/A	

COMMENTS/SAMPLE DISCREPANCY

Field Data Required? ☐ Yes ☑ No

Lot ID of split containers

CLIENT NOTIFICATION/RESOLUTION

Person contacted Date/Time:

Project Manager SCURF Review: Date:

Project Manager SRF Review: Date:

Qualtrax ID 69614

*Check mark top half of box if pH and/or dechlorination is verified and within the acceptance range for preservation samples.
Exceptions: VOA, Coliform, TOC, Oil and Grease, DRO/8015 (water) DOC, LLHg
**Bottom half of box is to list number of bottles
***Check all unpreserved Nitrates for chlorine

Project #

Laboratory Receiving Location: Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☐ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☑

Client ECS Profile # EZ (Circle one) 3276081 Notes

Item#	BP4U-125 mL Plastic Unpreserved (N/A) (Cl-)	BP3U-250 mL Plastic Unpreserved (N/A)	BP2U-500 mL Plastic Unpreserved (N/A)	BP1U-1 liter Plastic Unpreserved (N/A)		BP4S-125 mL Plastic H2SO4 (pH < 2) (Cl-)	BP3N-250 mL plastic HNO3 (pH < 2)	BP4Z-125 mL Plastic ZN Acetate & NaOH (>9)	BP4B-125 mL Plastic NaOH (pH > 12) (Cl-)	WGFU-Wide-mouthed Glass jar Unpreserved	AG1U-1 liter Amber Unpreserved (N/A) (Cl-)	AG1H-1 liter Amber HCl (pH < 2)	AG3U-250 mL Amber Unpreserved (N/A) (Cl-)	AG1S-1 liter Amber H2SO4 (pH < 2)	AG3S-250 mL Amber H2SO4 (pH < 2)	DG94-40 mL Amber NH4Cl (N/A)(Cl-)	DG9H-40 mL VOA HCl (N/A)	VG9T-40 mL VOA Na2S2O3 (N/A)	VG9U-40 mL VOA Unpreserved (N/A)	DG9V-40 mL VOA H3PO4 (N/A)	KP7U-50 mL Plastic Unpreserved (N/A)	V/GK (3 vials per kit)-VPH/Gas kit (N/A)	SP5T-125 mL Sterile Plastic (N/A – lab)	SP2T-250 mL Sterile Plastic (N/A – lab)		BP3R-250 mL Plastic (NH2)2SO4 (9.3-9.7)	AG0U-100 mL Amber Unpreserved (N/A) (Cl-)	VSGU-20 mL Scintillation vials (N/A)	DG9U-40 mL Amber Unpreserved vials (N/A)
CC																													
1													1																
2													1																
3													1																
4													1																
5													1																
6													1																
7													1																
8													1																
9													1																
10																													
11																													
12																													

pH Adjustment Log for Preserved Samples

Sample ID	Type of Preservative	pH upon receipt	Date preservation adjusted	Time preservation adjusted	Amount of Preservative added	Lot #

Note: Whenever there is a discrepancy affecting North Carolina compliance samples, a copy of this form will be sent to the North Carolina DENR Certification Office (i.e. Out of hold, incorrect preservative, out of temp, incorrect containers.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

June 27, 2025

Emery Lovekamp
ECS Southeast, LLC-Charlotte
1812 Center Park Drive
Suite D
Charlotte, NC 28217

RE: Project: Fortress Wood Products
Pace Project No.: 92799826

Dear Emery Lovekamp:

Enclosed are the analytical results for sample(s) received by the laboratory on June 02, 2025. The results relate only to the samples included in this report. Results reported herein conform to the applicable TNI/NELAC Standards and the laboratory's Quality Manual, where applicable, unless otherwise noted in the body of the report.

The test results provided in this final report were generated by each of the following laboratories within the Pace Network:

- Pace Analytical Services - Minneapolis

If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Angela M. Baioni

Angela Baioni
angela.baioni@pacelabs.com
612-473-6801
Project Manager

Enclosures

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

CERTIFICATIONS

Project: Fortress Wood Products
Pace Project No.: 92799826

Pace Analytical Services, LLC - Minneapolis MN
1700 Elm Street SE, Minneapolis, MN 55414
Alabama Certification #: 40770
Alaska Contaminated Sites Certification #: 17-009
Alaska DW Certification #: MN00064
Arizona Certification #: AZ0014
Arkansas DW Certification #: MN00064
Arkansas WW Certification #: 88-0680
California Certification #: 2929
Colorado Certification #: MN00064
Connecticut Certification #: PH-0256
DoD Certification via A2LA #: 2926.01
EPA Region 8 Tribal Water Systems+Wyoming DW Certification #: via MN 027-053-137
Florida Certification #: E87605
Georgia Certification #: 959
Idaho Certification #: MN00064
Illinois Certification #: 200011
Indiana Certification #: C-MN-01
Iowa Certification #: 368
ISO/IEC 17025 Certification via A2LA #: 2926.01
Kansas Certification #: E-10167
Kentucky DW Certification #: 90062
Kentucky WW Certification #: 90062
Louisiana DEQ Certification #: AI-03086
Louisiana DW Certification #: MN00064
Maine Certification #: MN00064
Maryland Certification #: 322
Michigan Certification #: 9909
Minnesota Certification #: 027-053-137
Minnesota Dept of Ag Approval: via MN 027-053-137
Minnesota Petrofund Registration #: 1240
Mississippi Certification #: MN00064
Missouri Certification #: 10100
Montana Certification #: CERT0092
Nebraska Certification #: NE-OS-18-06
Nevada Certification #: MN00064
New Hampshire Certification #: 2081
New Jersey Certification #: MN002
New York Certification #: 11647
North Carolina DW Certification #: 27700
North Carolina WW Certification #: 530
North Dakota Certification via A2LA #: R-036
North Dakota Certification via MN #: R-036
Ohio DW Certification #: 41244
Ohio VAP Certification (1700) #: CL101
Oklahoma Certification #: 9507
Oregon Primary Certification #: MN300001
Oregon Secondary Certification #: MN200001
Pennsylvania Certification #: 68-00563
Puerto Rico Certification #: MN00064
South Carolina Certification #:74003001
Tennessee Certification #: TN02818
Texas Certification #: T104704192
Utah Certification #: MN00064
Vermont Certification #: VT-027053137
Virginia Certification #: 460163
Washington Certification #: C486
West Virginia DEP Certification #: 382
West Virginia DW Certification #: 9952 C
Wisconsin Certification #: 999407970
Wyoming UST Certification via A2LA #: 2926.01
USDA Permit #: P330-19-00208

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE SUMMARY

Project: Fortress Wood Products
Pace Project No.: 92799826

Lab ID	Sample ID	Matrix	Date Collected	Date Received
92799826001	**B-14-P**	Solid	06/02/25 10:00	06/02/25 15:52
92799826002	**B-13-P**	Solid	06/02/25 11:40	06/02/25 15:52
92799826003	**B-12-P**	Solid	06/02/25 12:30	06/02/25 15:52
92799826004	**B-8-P**	Solid	06/02/25 13:50	06/02/25 15:52
92799826005	**B-7-P**	Solid	06/02/25 14:30	06/02/25 15:52
92799826006	**FB-1-P**	Water	06/02/25 14:15	06/02/25 15:52
92799826007	**B-DUP**	Solid	06/02/25 00:01	06/02/25 15:52

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE ANALYTE COUNT

Project: Fortress Wood Products
Pace Project No.: 92799826

Lab ID	Sample ID	Method	Analysts	Analytes Reported	Laboratory
92799826001	**B-14-P**	ASTM D2974	JDL	1	PASI-M
		EPA 1633	AJG	65	PASI-M
92799826002	**B-13-P**	ASTM D2974	JDL	1	PASI-M
		EPA 1633	AJG	65	PASI-M
92799826003	**B-12-P**	ASTM D2974	JDL	1	PASI-M
		EPA 1633	AJG	65	PASI-M
92799826004	**B-8-P**	ASTM D2974	JDL	1	PASI-M
		EPA 1633	AJG	65	PASI-M
92799826005	**B-7-P**	ASTM D2974	JDL	1	PASI-M
		EPA 1633	AJG	65	PASI-M
92799826006	**FB-1-P**	EPA 1633	MJL	65	PASI-M
92799826007	**B-DUP**	ASTM D2974	JDL	1	PASI-M
		EPA 1633	AJG	65	PASI-M

PASI-M = Pace Analytical Services - Minneapolis

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799826

Sample: B-14-P **Lab ID: 92799826001** Collected: 06/02/25 10:00 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Dry Weight / %M by ASTM D2974	Analytical Method: ASTM D2974 Pace Analytical Services - Minneapolis								
Percent Moisture	**19.7**	%	0.10	0.10	1		06/10/25 08:48		N2
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ug/kg	0.79	0.15	1	06/20/25 13:07	06/23/25 12:50	763051-92-9	
3:3 FTCA	ND	ug/kg	0.99	0.26	1	06/20/25 13:07	06/23/25 12:50	356-02-5	
4:2 FTS	ND	ug/kg	0.79	0.14	1	06/20/25 13:07	06/23/25 12:50	757124-72-4	
5:3 FTCA	ND	ug/kg	4.9	1.2	1	06/20/25 13:07	06/23/25 12:50	914637-49-3	
6:2 FTS	ND	ug/kg	0.79	0.20	1	06/20/25 13:07	06/23/25 12:50	27619-97-2	
7:3 FTCA	ND	ug/kg	4.9	1.1	1	06/20/25 13:07	06/23/25 12:50	812-70-4	
8:2 FTS	ND	ug/kg	0.79	0.20	1	06/20/25 13:07	06/23/25 12:50	39108-34-4	
9Cl-PF3ONS	ND	ug/kg	0.79	0.18	1	06/20/25 13:07	06/23/25 12:50	756426-58-1	
ADONA	ND	ug/kg	0.79	0.18	1	06/20/25 13:07	06/23/25 12:50	919005-14-4	
HFPO-DA	ND	ug/kg	0.79	0.19	1	06/20/25 13:07	06/23/25 12:50	13252-13-6	
NEtFOSAA	ND	ug/kg	0.20	0.073	1	06/20/25 13:07	06/23/25 12:50	2991-50-6	
NEtFOSA	ND	ug/kg	0.20	0.052	1	06/20/25 13:07	06/23/25 12:50	4151-50-2	
NEtFOSE	ND	ug/kg	2.0	0.39	1	06/20/25 13:07	06/23/25 12:50	1691-99-2	
NFDHA	ND	ug/kg	0.40	0.13	1	06/20/25 13:07	06/23/25 12:50	151772-58-6	
NMeFOSAA	ND	ug/kg	0.20	0.053	1	06/20/25 13:07	06/23/25 12:50	2355-31-9	
NMeFOSA	ND	ug/kg	0.20	0.060	1	06/20/25 13:07	06/23/25 12:50	31506-32-8	
NMeFOSE	ND	ug/kg	2.0	0.46	1	06/20/25 13:07	06/23/25 12:50	24448-09-7	
PFBS	ND	ug/kg	0.20	0.037	1	06/20/25 13:07	06/23/25 12:50	375-73-5	
PFDA	ND	ug/kg	0.20	0.046	1	06/20/25 13:07	06/23/25 12:50	335-76-2	
PFHxA	ND	ug/kg	0.20	0.044	1	06/20/25 13:07	06/23/25 12:50	307-24-4	
PFBA	ND	ug/kg	0.79	0.21	1	06/20/25 13:07	06/23/25 12:50	375-22-4	
PFDS	ND	ug/kg	0.20	0.057	1	06/20/25 13:07	06/23/25 12:50	335-77-3	
PFDoS	ND	ug/kg	0.20	0.042	1	06/20/25 13:07	06/23/25 12:50	79780-39-5	
PFEESA	ND	ug/kg	0.40	0.082	1	06/20/25 13:07	06/23/25 12:50	113507-82-7	
PFHpS	ND	ug/kg	0.20	0.059	1	06/20/25 13:07	06/23/25 12:50	375-92-8	
PFMBA	ND	ug/kg	0.40	0.095	1	06/20/25 13:07	06/23/25 12:50	863090-89-5	
PFMPA	ND	ug/kg	0.40	0.12	1	06/20/25 13:07	06/23/25 12:50	377-73-1	
PFNS	ND	ug/kg	0.20	0.052	1	06/20/25 13:07	06/23/25 12:50	68259-12-1	
PFOSA	ND	ug/kg	0.20	0.043	1	06/20/25 13:07	06/23/25 12:50	754-91-6	
PFPeA	ND	ug/kg	0.40	0.085	1	06/20/25 13:07	06/23/25 12:50	2706-90-3	
PFPeS	ND	ug/kg	0.20	0.047	1	06/20/25 13:07	06/23/25 12:50	2706-91-4	
PFDoA	ND	ug/kg	0.20	0.044	1	06/20/25 13:07	06/23/25 12:50	307-55-1	
PFHpA	ND	ug/kg	0.20	0.077	1	06/20/25 13:07	06/23/25 12:50	375-85-9	
PFHxS	ND	ug/kg	0.20	0.049	1	06/20/25 13:07	06/23/25 12:50	355-46-4	
PFNA	ND	ug/kg	0.20	0.056	1	06/20/25 13:07	06/23/25 12:50	375-95-1	
PFOS	ND	ug/kg	0.20	0.039	1	06/20/25 13:07	06/23/25 12:50	1763-23-1	
PFOA	**0.34**	ug/kg	0.20	0.050	1	06/20/25 13:07	06/23/25 12:50	335-67-1	
PFTeDA	ND	ug/kg	0.20	0.050	1	06/20/25 13:07	06/23/25 12:50	376-06-7	
PFTrDA	ND	ug/kg	0.20	0.042	1	06/20/25 13:07	06/23/25 12:50	72629-94-8	
PFUnA	ND	ug/kg	0.20	0.047	1	06/20/25 13:07	06/23/25 12:50	2058-94-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799826

Sample: B-14-P **Lab ID: 92799826001** Collected: 06/02/25 10:00 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C2-PFDoA (S)	23	%.	40-130		1	06/20/25 13:07	06/23/25 12:50		S0
13C3HFPO-DA (S)	22	%.	40-130		1	06/20/25 13:07	06/23/25 12:50		S0
13C3-PFBS (S)	22	%.	40-135		1	06/20/25 13:07	06/23/25 12:50		S0
13C3-PFHxS (S)	22	%.	40-130		1	06/20/25 13:07	06/23/25 12:50		S0
13C4-PFBA (S)	17	%.	8-130		1	06/20/25 13:07	06/23/25 12:50		
13C4-PFHpA (S)	22	%.	40-130		1	06/20/25 13:07	06/23/25 12:50		S0
13C5-PFHxA (S)	21	%.	40-130		1	06/20/25 13:07	06/23/25 12:50		S0
13C5-PFPeA (S)	20	%.	35-130		1	06/20/25 13:07	06/23/25 12:50		S0
13C6-PFDA (S)	22	%.	40-130		1	06/20/25 13:07	06/23/25 12:50		S0
13C8-PFOA (S)	22	%.	40-130		1	06/20/25 13:07	06/23/25 12:50		S0
13C8-PFOS (S)	26	%.	40-130		1	06/20/25 13:07	06/23/25 12:50		S0
13C8-PFOSA (S)	22	%.	40-130		1	06/20/25 13:07	06/23/25 12:50		S0
13C9-PFNA (S)	22	%.	40-130		1	06/20/25 13:07	06/23/25 12:50		S0
d3-MeFOSAA (S)	23	%.	40-135		1	06/20/25 13:07	06/23/25 12:50		S0
d3-NMeFOSA (S)	23	%.	10-130		1	06/20/25 13:07	06/23/25 12:50		
d5-EtFOSAA (S)	25	%.	40-150		1	06/20/25 13:07	06/23/25 12:50		S0
d5-NEtFOSA (S)	25	%.	10-130		1	06/20/25 13:07	06/23/25 12:50		
d7-NMeFOSE (S)	29	%.	20-130		1	06/20/25 13:07	06/23/25 12:50		
d9-NEtFOSE (S)	38	%.	15-130		1	06/20/25 13:07	06/23/25 12:50		
13C2-PFTA (S)	25	%.	20-130		1	06/20/25 13:07	06/23/25 12:50		
13C7-PFUdA (S)	27	%.	40-130		1	06/20/25 13:07	06/23/25 12:50		S0
13C24:2FTS (S)	24	%.	40-135		1	06/20/25 13:07	06/23/25 12:50		S0
13C26:2FTS (S)	27	%.	40-215		1	06/20/25 13:07	06/23/25 12:50		S0
13C28:2FTS (S)	30	%.	40-275		1	06/20/25 13:07	06/23/25 12:50		S0
13C3-PFPrA (S)	10	%.	8-130		1	06/20/25 13:07	06/23/25 12:50		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799826

Sample: B-13-P **Lab ID: 92799826002** Collected: 06/02/25 11:40 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Dry Weight / %M by ASTM D2974	Analytical Method: ASTM D2974 Pace Analytical Services - Minneapolis								
Percent Moisture	**28.1**	%	0.10	0.10	1		06/10/25 08:48		N2
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ug/kg	0.79	0.15	1	06/20/25 13:07	06/23/25 13:00	763051-92-9	
3:3 FTCA	ND	ug/kg	0.99	0.27	1	06/20/25 13:07	06/23/25 13:00	356-02-5	
4:2 FTS	ND	ug/kg	0.79	0.14	1	06/20/25 13:07	06/23/25 13:00	757124-72-4	
5:3 FTCA	ND	ug/kg	5.0	1.2	1	06/20/25 13:07	06/23/25 13:00	914637-49-3	
6:2 FTS	ND	ug/kg	0.79	0.20	1	06/20/25 13:07	06/23/25 13:00	27619-97-2	
7:3 FTCA	ND	ug/kg	5.0	1.1	1	06/20/25 13:07	06/23/25 13:00	812-70-4	
8:2 FTS	ND	ug/kg	0.79	0.20	1	06/20/25 13:07	06/23/25 13:00	39108-34-4	
9Cl-PF3ONS	ND	ug/kg	0.79	0.19	1	06/20/25 13:07	06/23/25 13:00	756426-58-1	
ADONA	ND	ug/kg	0.79	0.18	1	06/20/25 13:07	06/23/25 13:00	919005-14-4	
HFPO-DA	ND	ug/kg	0.79	0.19	1	06/20/25 13:07	06/23/25 13:00	13252-13-6	
NEtFOSAA	ND	ug/kg	0.20	0.073	1	06/20/25 13:07	06/23/25 13:00	2991-50-6	
NEtFOSA	ND	ug/kg	0.20	0.052	1	06/20/25 13:07	06/23/25 13:00	4151-50-2	
NEtFOSE	ND	ug/kg	2.0	0.39	1	06/20/25 13:07	06/23/25 13:00	1691-99-2	
NFDHA	ND	ug/kg	0.40	0.13	1	06/20/25 13:07	06/23/25 13:00	151772-58-6	
NMeFOSAA	ND	ug/kg	0.20	0.054	1	06/20/25 13:07	06/23/25 13:00	2355-31-9	
NMeFOSA	ND	ug/kg	0.20	0.060	1	06/20/25 13:07	06/23/25 13:00	31506-32-8	
NMeFOSE	ND	ug/kg	2.0	0.46	1	06/20/25 13:07	06/23/25 13:00	24448-09-7	
PFBS	ND	ug/kg	0.20	0.038	1	06/20/25 13:07	06/23/25 13:00	375-73-5	
PFDA	ND	ug/kg	0.20	0.046	1	06/20/25 13:07	06/23/25 13:00	335-76-2	
PFHxA	ND	ug/kg	0.20	0.044	1	06/20/25 13:07	06/23/25 13:00	307-24-4	
PFBA	ND	ug/kg	0.79	0.21	1	06/20/25 13:07	06/23/25 13:00	375-22-4	
PFDS	ND	ug/kg	0.20	0.058	1	06/20/25 13:07	06/23/25 13:00	335-77-3	
PFDoS	ND	ug/kg	0.20	0.042	1	06/20/25 13:07	06/23/25 13:00	79780-39-5	
PFEESA	ND	ug/kg	0.40	0.082	1	06/20/25 13:07	06/23/25 13:00	113507-82-7	
PFHpS	ND	ug/kg	0.20	0.059	1	06/20/25 13:07	06/23/25 13:00	375-92-8	
PFMBA	ND	ug/kg	0.40	0.096	1	06/20/25 13:07	06/23/25 13:00	863090-89-5	
PFMPA	ND	ug/kg	0.40	0.12	1	06/20/25 13:07	06/23/25 13:00	377-73-1	
PFNS	ND	ug/kg	0.20	0.052	1	06/20/25 13:07	06/23/25 13:00	68259-12-1	
PFOSA	ND	ug/kg	0.20	0.044	1	06/20/25 13:07	06/23/25 13:00	754-91-6	
PFPeA	ND	ug/kg	0.40	0.085	1	06/20/25 13:07	06/23/25 13:00	2706-90-3	
PFPeS	ND	ug/kg	0.20	0.048	1	06/20/25 13:07	06/23/25 13:00	2706-91-4	
PFDoA	ND	ug/kg	0.20	0.044	1	06/20/25 13:07	06/23/25 13:00	307-55-1	
PFHpA	ND	ug/kg	0.20	0.077	1	06/20/25 13:07	06/23/25 13:00	375-85-9	
PFHxS	ND	ug/kg	0.20	0.049	1	06/20/25 13:07	06/23/25 13:00	355-46-4	
PFNA	ND	ug/kg	0.20	0.056	1	06/20/25 13:07	06/23/25 13:00	375-95-1	
PFOS	**0.46**	ug/kg	0.20	0.040	1	06/20/25 13:07	06/23/25 13:00	1763-23-1	
PFOA	**0.21**	ug/kg	0.20	0.050	1	06/20/25 13:07	06/23/25 13:00	335-67-1	
PFTeDA	ND	ug/kg	0.20	0.050	1	06/20/25 13:07	06/23/25 13:00	376-06-7	
PFTrDA	ND	ug/kg	0.20	0.042	1	06/20/25 13:07	06/23/25 13:00	72629-94-8	
PFUnA	ND	ug/kg	0.20	0.047	1	06/20/25 13:07	06/23/25 13:00	2058-94-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799826

Sample: B-13-P **Lab ID: 92799826002** Collected: 06/02/25 11:40 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C2-PFDoA (S)	26	%.	40-130		1	06/20/25 13:07	06/23/25 13:00		S0
13C3HFPO-DA (S)	25	%.	40-130		1	06/20/25 13:07	06/23/25 13:00		S0
13C3-PFBS (S)	28	%.	40-135		1	06/20/25 13:07	06/23/25 13:00		S0
13C3-PFHxS (S)	27	%.	40-130		1	06/20/25 13:07	06/23/25 13:00		S0
13C4-PFBA (S)	22	%.	8-130		1	06/20/25 13:07	06/23/25 13:00		
13C4-PFHpA (S)	25	%.	40-130		1	06/20/25 13:07	06/23/25 13:00		S0
13C5-PFHxA (S)	24	%.	40-130		1	06/20/25 13:07	06/23/25 13:00		S0
13C5-PFPeA (S)	24	%.	35-130		1	06/20/25 13:07	06/23/25 13:00		S0
13C6-PFDA (S)	26	%.	40-130		1	06/20/25 13:07	06/23/25 13:00		S0
13C8-PFOA (S)	26	%.	40-130		1	06/20/25 13:07	06/23/25 13:00		S0
13C8-PFOS (S)	31	%.	40-130		1	06/20/25 13:07	06/23/25 13:00		S0
13C8-PFOSA (S)	26	%.	40-130		1	06/20/25 13:07	06/23/25 13:00		S0
13C9-PFNA (S)	26	%.	40-130		1	06/20/25 13:07	06/23/25 13:00		S0
d3-MeFOSAA (S)	26	%.	40-135		1	06/20/25 13:07	06/23/25 13:00		S0
d3-NMeFOSA (S)	26	%.	10-130		1	06/20/25 13:07	06/23/25 13:00		
d5-EtFOSAA (S)	26	%.	40-150		1	06/20/25 13:07	06/23/25 13:00		S0
d5-NEtFOSA (S)	29	%.	10-130		1	06/20/25 13:07	06/23/25 13:00		
d7-NMeFOSE (S)	31	%.	20-130		1	06/20/25 13:07	06/23/25 13:00		
d9-NEtFOSE (S)	40	%.	15-130		1	06/20/25 13:07	06/23/25 13:00		
13C2-PFTA (S)	26	%.	20-130		1	06/20/25 13:07	06/23/25 13:00		
13C7-PFUdA (S)	29	%.	40-130		1	06/20/25 13:07	06/23/25 13:00		S0
13C24:2FTS (S)	29	%.	40-135		1	06/20/25 13:07	06/23/25 13:00		S0
13C26:2FTS (S)	31	%.	40-215		1	06/20/25 13:07	06/23/25 13:00		S0
13C28:2FTS (S)	32	%.	40-275		1	06/20/25 13:07	06/23/25 13:00		S0
13C3-PFPrA (S)	13	%.	8-130		1	06/20/25 13:07	06/23/25 13:00		

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799826

Sample: B-12-P **Lab ID: 92799826003** Collected: 06/02/25 12:30 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Dry Weight / %M by ASTM D2974	Analytical Method: ASTM D2974 Pace Analytical Services - Minneapolis								
Percent Moisture	**24.4**	%	0.10	0.10	1		06/10/25 08:49		N2
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ug/kg	0.80	0.15	1	06/20/25 13:07	06/23/25 13:10	763051-92-9	
3:3 FTCA	ND	ug/kg	1.0	0.27	1	06/20/25 13:07	06/23/25 13:10	356-02-5	
4:2 FTS	ND	ug/kg	0.80	0.14	1	06/20/25 13:07	06/23/25 13:10	757124-72-4	
5:3 FTCA	ND	ug/kg	5.0	1.2	1	06/20/25 13:07	06/23/25 13:10	914637-49-3	
6:2 FTS	ND	ug/kg	0.80	0.20	1	06/20/25 13:07	06/23/25 13:10	27619-97-2	
7:3 FTCA	ND	ug/kg	5.0	1.1	1	06/20/25 13:07	06/23/25 13:10	812-70-4	
8:2 FTS	ND	ug/kg	0.80	0.20	1	06/20/25 13:07	06/23/25 13:10	39108-34-4	
9Cl-PF3ONS	ND	ug/kg	0.80	0.19	1	06/20/25 13:07	06/23/25 13:10	756426-58-1	
ADONA	ND	ug/kg	0.80	0.18	1	06/20/25 13:07	06/23/25 13:10	919005-14-4	
HFPO-DA	ND	ug/kg	0.80	0.19	1	06/20/25 13:07	06/23/25 13:10	13252-13-6	
NEtFOSAA	ND	ug/kg	0.20	0.074	1	06/20/25 13:07	06/23/25 13:10	2991-50-6	
NEtFOSA	ND	ug/kg	0.20	0.052	1	06/20/25 13:07	06/23/25 13:10	4151-50-2	
NEtFOSE	ND	ug/kg	2.0	0.39	1	06/20/25 13:07	06/23/25 13:10	1691-99-2	
NFDHA	ND	ug/kg	0.40	0.13	1	06/20/25 13:07	06/23/25 13:10	151772-58-6	
NMeFOSAA	ND	ug/kg	0.20	0.054	1	06/20/25 13:07	06/23/25 13:10	2355-31-9	
NMeFOSA	ND	ug/kg	0.20	0.060	1	06/20/25 13:07	06/23/25 13:10	31506-32-8	
NMeFOSE	ND	ug/kg	2.0	0.46	1	06/20/25 13:07	06/23/25 13:10	24448-09-7	
PFBS	ND	ug/kg	0.20	0.038	1	06/20/25 13:07	06/23/25 13:10	375-73-5	
PFDA	ND	ug/kg	0.20	0.047	1	06/20/25 13:07	06/23/25 13:10	335-76-2	
PFHxA	ND	ug/kg	0.20	0.045	1	06/20/25 13:07	06/23/25 13:10	307-24-4	
PFBA	ND	ug/kg	0.80	0.21	1	06/20/25 13:07	06/23/25 13:10	375-22-4	
PFDS	ND	ug/kg	0.20	0.058	1	06/20/25 13:07	06/23/25 13:10	335-77-3	
PFDoS	ND	ug/kg	0.20	0.042	1	06/20/25 13:07	06/23/25 13:10	79780-39-5	
PFEESA	ND	ug/kg	0.40	0.082	1	06/20/25 13:07	06/23/25 13:10	113507-82-7	
PFHpS	ND	ug/kg	0.20	0.059	1	06/20/25 13:07	06/23/25 13:10	375-92-8	
PFMBA	ND	ug/kg	0.40	0.096	1	06/20/25 13:07	06/23/25 13:10	863090-89-5	
PFMPA	ND	ug/kg	0.40	0.12	1	06/20/25 13:07	06/23/25 13:10	377-73-1	
PFNS	ND	ug/kg	0.20	0.053	1	06/20/25 13:07	06/23/25 13:10	68259-12-1	
PFOSA	ND	ug/kg	0.20	0.044	1	06/20/25 13:07	06/23/25 13:10	754-91-6	
PFPeA	ND	ug/kg	0.40	0.086	1	06/20/25 13:07	06/23/25 13:10	2706-90-3	
PFPeS	ND	ug/kg	0.20	0.048	1	06/20/25 13:07	06/23/25 13:10	2706-91-4	
PFDoA	ND	ug/kg	0.20	0.045	1	06/20/25 13:07	06/23/25 13:10	307-55-1	
PFHpA	ND	ug/kg	0.20	0.078	1	06/20/25 13:07	06/23/25 13:10	375-85-9	
PFHxS	ND	ug/kg	0.20	0.049	1	06/20/25 13:07	06/23/25 13:10	355-46-4	
PFNA	ND	ug/kg	0.20	0.056	1	06/20/25 13:07	06/23/25 13:10	375-95-1	
PFOS	ND	ug/kg	0.20	0.040	1	06/20/25 13:07	06/23/25 13:10	1763-23-1	
PFOA	ND	ug/kg	0.20	0.050	1	06/20/25 13:07	06/23/25 13:10	335-67-1	
PFTeDA	ND	ug/kg	0.20	0.050	1	06/20/25 13:07	06/23/25 13:10	376-06-7	
PFTrDA	ND	ug/kg	0.20	0.042	1	06/20/25 13:07	06/23/25 13:10	72629-94-8	
PFUnA	ND	ug/kg	0.20	0.047	1	06/20/25 13:07	06/23/25 13:10	2058-94-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799826

Sample: B-12-P **Lab ID: 92799826003** Collected: 06/02/25 12:30 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C2-PFDoA (S)	98	%.	40-130		1	06/20/25 13:07	06/23/25 13:10		
13C3HFPO-DA (S)	93	%.	40-130		1	06/20/25 13:07	06/23/25 13:10		
13C3-PFBS (S)	90	%.	40-135		1	06/20/25 13:07	06/23/25 13:10		
13C3-PFHxS (S)	92	%.	40-130		1	06/20/25 13:07	06/23/25 13:10		
13C4-PFBA (S)	75	%.	8-130		1	06/20/25 13:07	06/23/25 13:10		
13C4-PFHpA (S)	88	%.	40-130		1	06/20/25 13:07	06/23/25 13:10		
13C5-PFHxA (S)	88	%.	40-130		1	06/20/25 13:07	06/23/25 13:10		
13C5-PFPeA (S)	86	%.	35-130		1	06/20/25 13:07	06/23/25 13:10		
13C6-PFDA (S)	95	%.	40-130		1	06/20/25 13:07	06/23/25 13:10		
13C8-PFOA (S)	92	%.	40-130		1	06/20/25 13:07	06/23/25 13:10		
13C8-PFOS (S)	103	%.	40-130		1	06/20/25 13:07	06/23/25 13:10		
13C8-PFOSA (S)	95	%.	40-130		1	06/20/25 13:07	06/23/25 13:10		
13C9-PFNA (S)	90	%.	40-130		1	06/20/25 13:07	06/23/25 13:10		
d3-MeFOSAA (S)	86	%.	40-135		1	06/20/25 13:07	06/23/25 13:10		
d3-NMeFOSA (S)	94	%.	10-130		1	06/20/25 13:07	06/23/25 13:10		
d5-EtFOSAA (S)	90	%.	40-150		1	06/20/25 13:07	06/23/25 13:10		
d5-NEtFOSA (S)	101	%.	10-130		1	06/20/25 13:07	06/23/25 13:10		
d7-NMeFOSE (S)	107	%.	20-130		1	06/20/25 13:07	06/23/25 13:10		
d9-NEtFOSE (S)	137	%.	15-130		1	06/20/25 13:07	06/23/25 13:10		S3
13C2-PFTA (S)	94	%.	20-130		1	06/20/25 13:07	06/23/25 13:10		
13C7-PFUdA (S)	113	%.	40-130		1	06/20/25 13:07	06/23/25 13:10		
13C24:2FTS (S)	97	%.	40-135		1	06/20/25 13:07	06/23/25 13:10		
13C26:2FTS (S)	111	%.	40-215		1	06/20/25 13:07	06/23/25 13:10		
13C28:2FTS (S)	118	%.	40-275		1	06/20/25 13:07	06/23/25 13:10		
13C3-PFPrA (S)	44	%.	8-130		1	06/20/25 13:07	06/23/25 13:10		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799826

Sample: B-8-P **Lab ID: 92799826004** Collected: 06/02/25 13:50 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Dry Weight / %M by ASTM D2974	Analytical Method: ASTM D2974 Pace Analytical Services - Minneapolis								
Percent Moisture	**19.6**	%	0.10	0.10	1		06/10/25 08:49		N2
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ug/kg	0.80	0.15	1	06/20/25 13:07	06/23/25 13:21	763051-92-9	
3:3 FTCA	ND	ug/kg	1.0	0.27	1	06/20/25 13:07	06/23/25 13:21	356-02-5	
4:2 FTS	ND	ug/kg	0.80	0.14	1	06/20/25 13:07	06/23/25 13:21	757124-72-4	
5:3 FTCA	ND	ug/kg	5.0	1.2	1	06/20/25 13:07	06/23/25 13:21	914637-49-3	
6:2 FTS	ND	ug/kg	0.80	0.20	1	06/20/25 13:07	06/23/25 13:21	27619-97-2	
7:3 FTCA	ND	ug/kg	5.0	1.1	1	06/20/25 13:07	06/23/25 13:21	812-70-4	
8:2 FTS	ND	ug/kg	0.80	0.20	1	06/20/25 13:07	06/23/25 13:21	39108-34-4	
9Cl-PF3ONS	ND	ug/kg	0.80	0.19	1	06/20/25 13:07	06/23/25 13:21	756426-58-1	
ADONA	ND	ug/kg	0.80	0.18	1	06/20/25 13:07	06/23/25 13:21	919005-14-4	
HFPO-DA	ND	ug/kg	0.80	0.19	1	06/20/25 13:07	06/23/25 13:21	13252-13-6	
NEtFOSAA	ND	ug/kg	0.20	0.074	1	06/20/25 13:07	06/23/25 13:21	2991-50-6	
NEtFOSA	ND	ug/kg	0.20	0.052	1	06/20/25 13:07	06/23/25 13:21	4151-50-2	
NEtFOSE	ND	ug/kg	2.0	0.39	1	06/20/25 13:07	06/23/25 13:21	1691-99-2	
NFDHA	ND	ug/kg	0.40	0.13	1	06/20/25 13:07	06/23/25 13:21	151772-58-6	
NMeFOSAA	ND	ug/kg	0.20	0.054	1	06/20/25 13:07	06/23/25 13:21	2355-31-9	
NMeFOSA	ND	ug/kg	0.20	0.061	1	06/20/25 13:07	06/23/25 13:21	31506-32-8	
NMeFOSE	ND	ug/kg	2.0	0.46	1	06/20/25 13:07	06/23/25 13:21	24448-09-7	
PFBS	ND	ug/kg	0.20	0.038	1	06/20/25 13:07	06/23/25 13:21	375-73-5	
PFDA	ND	ug/kg	0.20	0.047	1	06/20/25 13:07	06/23/25 13:21	335-76-2	
PFHxA	ND	ug/kg	0.20	0.045	1	06/20/25 13:07	06/23/25 13:21	307-24-4	
PFBA	ND	ug/kg	0.80	0.21	1	06/20/25 13:07	06/23/25 13:21	375-22-4	
PFDS	ND	ug/kg	0.20	0.058	1	06/20/25 13:07	06/23/25 13:21	335-77-3	
PFDoS	ND	ug/kg	0.20	0.043	1	06/20/25 13:07	06/23/25 13:21	79780-39-5	
PFEESA	ND	ug/kg	0.40	0.083	1	06/20/25 13:07	06/23/25 13:21	113507-82-7	
PFHpS	ND	ug/kg	0.20	0.060	1	06/20/25 13:07	06/23/25 13:21	375-92-8	
PFMBA	ND	ug/kg	0.40	0.097	1	06/20/25 13:07	06/23/25 13:21	863090-89-5	
PFMPA	ND	ug/kg	0.40	0.12	1	06/20/25 13:07	06/23/25 13:21	377-73-1	
PFNS	ND	ug/kg	0.20	0.053	1	06/20/25 13:07	06/23/25 13:21	68259-12-1	
PFOSA	ND	ug/kg	0.20	0.044	1	06/20/25 13:07	06/23/25 13:21	754-91-6	
PFPeA	ND	ug/kg	0.40	0.086	1	06/20/25 13:07	06/23/25 13:21	2706-90-3	
PFPeS	ND	ug/kg	0.20	0.048	1	06/20/25 13:07	06/23/25 13:21	2706-91-4	
PFDoA	ND	ug/kg	0.20	0.045	1	06/20/25 13:07	06/23/25 13:21	307-55-1	
PFHpA	ND	ug/kg	0.20	0.078	1	06/20/25 13:07	06/23/25 13:21	375-85-9	
PFHxS	ND	ug/kg	0.20	0.049	1	06/20/25 13:07	06/23/25 13:21	355-46-4	
PFNA	ND	ug/kg	0.20	0.057	1	06/20/25 13:07	06/23/25 13:21	375-95-1	
PFOS	**0.29**	ug/kg	0.20	0.040	1	06/20/25 13:07	06/23/25 13:21	1763-23-1	
PFOA	ND	ug/kg	0.20	0.051	1	06/20/25 13:07	06/23/25 13:21	335-67-1	
PFTeDA	ND	ug/kg	0.20	0.050	1	06/20/25 13:07	06/23/25 13:21	376-06-7	
PFTrDA	ND	ug/kg	0.20	0.042	1	06/20/25 13:07	06/23/25 13:21	72629-94-8	
PFUnA	ND	ug/kg	0.20	0.048	1	06/20/25 13:07	06/23/25 13:21	2058-94-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799826

Sample: B-8-P **Lab ID: 92799826004** Collected: 06/02/25 13:50 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C2-PFDoA (S)	30	%.	40-130		1	06/20/25 13:07	06/23/25 13:21		S0
13C3HFPO-DA (S)	26	%.	40-130		1	06/20/25 13:07	06/23/25 13:21		S0
13C3-PFBS (S)	28	%.	40-135		1	06/20/25 13:07	06/23/25 13:21		S0
13C3-PFHxS (S)	29	%.	40-130		1	06/20/25 13:07	06/23/25 13:21		S0
13C4-PFBA (S)	23	%.	8-130		1	06/20/25 13:07	06/23/25 13:21		
13C4-PFHpA (S)	26	%.	40-130		1	06/20/25 13:07	06/23/25 13:21		S0
13C5-PFHxA (S)	25	%.	40-130		1	06/20/25 13:07	06/23/25 13:21		S0
13C5-PFPeA (S)	25	%.	35-130		1	06/20/25 13:07	06/23/25 13:21		S0
13C6-PFDA (S)	28	%.	40-130		1	06/20/25 13:07	06/23/25 13:21		S0
13C8-PFOA (S)	28	%.	40-130		1	06/20/25 13:07	06/23/25 13:21		S0
13C8-PFOS (S)	35	%.	40-130		1	06/20/25 13:07	06/23/25 13:21		S0
13C8-PFOSA (S)	29	%.	40-130		1	06/20/25 13:07	06/23/25 13:21		S0
13C9-PFNA (S)	27	%.	40-130		1	06/20/25 13:07	06/23/25 13:21		S0
d3-MeFOSAA (S)	33	%.	40-135		1	06/20/25 13:07	06/23/25 13:21		S0
d3-NMeFOSA (S)	31	%.	10-130		1	06/20/25 13:07	06/23/25 13:21		
d5-EtFOSAA (S)	35	%.	40-150		1	06/20/25 13:07	06/23/25 13:21		S0
d5-NEtFOSA (S)	35	%.	10-130		1	06/20/25 13:07	06/23/25 13:21		
d7-NMeFOSE (S)	36	%.	20-130		1	06/20/25 13:07	06/23/25 13:21		
d9-NEtFOSE (S)	47	%.	15-130		1	06/20/25 13:07	06/23/25 13:21		
13C2-PFTA (S)	32	%.	20-130		1	06/20/25 13:07	06/23/25 13:21		
13C7-PFUdA (S)	35	%.	40-130		1	06/20/25 13:07	06/23/25 13:21		S0
13C24:2FTS (S)	30	%.	40-135		1	06/20/25 13:07	06/23/25 13:21		S0
13C26:2FTS (S)	34	%.	40-215		1	06/20/25 13:07	06/23/25 13:21		S0
13C28:2FTS (S)	40	%.	40-275		1	06/20/25 13:07	06/23/25 13:21		
13C3-PFPrA (S)	12	%.	8-130		1	06/20/25 13:07	06/23/25 13:21		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799826

Sample: B-7-P **Lab ID: 92799826005** Collected: 06/02/25 14:30 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Dry Weight / %M by ASTM D2974	Analytical Method: ASTM D2974 Pace Analytical Services - Minneapolis								
Percent Moisture	**25.3**	%	0.10	0.10	1		06/10/25 08:49		N2
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ug/kg	0.78	0.14	1	06/20/25 13:07	06/23/25 13:31	763051-92-9	
3:3 FTCA	ND	ug/kg	0.97	0.26	1	06/20/25 13:07	06/23/25 13:31	356-02-5	
4:2 FTS	ND	ug/kg	0.78	0.13	1	06/20/25 13:07	06/23/25 13:31	757124-72-4	
5:3 FTCA	ND	ug/kg	4.9	1.1	1	06/20/25 13:07	06/23/25 13:31	914637-49-3	
6:2 FTS	ND	ug/kg	0.78	0.20	1	06/20/25 13:07	06/23/25 13:31	27619-97-2	
7:3 FTCA	ND	ug/kg	4.9	1.1	1	06/20/25 13:07	06/23/25 13:31	812-70-4	
8:2 FTS	ND	ug/kg	0.78	0.19	1	06/20/25 13:07	06/23/25 13:31	39108-34-4	
9Cl-PF3ONS	ND	ug/kg	0.78	0.18	1	06/20/25 13:07	06/23/25 13:31	756426-58-1	
ADONA	ND	ug/kg	0.78	0.18	1	06/20/25 13:07	06/23/25 13:31	919005-14-4	
HFPO-DA	ND	ug/kg	0.78	0.18	1	06/20/25 13:07	06/23/25 13:31	13252-13-6	
NEtFOSAA	ND	ug/kg	0.19	0.072	1	06/20/25 13:07	06/23/25 13:31	2991-50-6	
NEtFOSA	ND	ug/kg	0.19	0.051	1	06/20/25 13:07	06/23/25 13:31	4151-50-2	
NEtFOSE	ND	ug/kg	1.9	0.38	1	06/20/25 13:07	06/23/25 13:31	1691-99-2	
NFDHA	ND	ug/kg	0.39	0.13	1	06/20/25 13:07	06/23/25 13:31	151772-58-6	
NMeFOSAA	ND	ug/kg	0.19	0.053	1	06/20/25 13:07	06/23/25 13:31	2355-31-9	
NMeFOSA	ND	ug/kg	0.19	0.059	1	06/20/25 13:07	06/23/25 13:31	31506-32-8	
NMeFOSE	ND	ug/kg	1.9	0.45	1	06/20/25 13:07	06/23/25 13:31	24448-09-7	
PFBS	ND	ug/kg	0.19	0.037	1	06/20/25 13:07	06/23/25 13:31	375-73-5	
PFDA	ND	ug/kg	0.19	0.046	1	06/20/25 13:07	06/23/25 13:31	335-76-2	
PFHxA	ND	ug/kg	0.19	0.044	1	06/20/25 13:07	06/23/25 13:31	307-24-4	
PFBA	ND	ug/kg	0.78	0.21	1	06/20/25 13:07	06/23/25 13:31	375-22-4	
PFDS	ND	ug/kg	0.19	0.056	1	06/20/25 13:07	06/23/25 13:31	335-77-3	
PFDoS	ND	ug/kg	0.19	0.041	1	06/20/25 13:07	06/23/25 13:31	79780-39-5	
PFEESA	ND	ug/kg	0.39	0.080	1	06/20/25 13:07	06/23/25 13:31	113507-82-7	
PFHpS	ND	ug/kg	0.19	0.058	1	06/20/25 13:07	06/23/25 13:31	375-92-8	
PFMBA	ND	ug/kg	0.39	0.094	1	06/20/25 13:07	06/23/25 13:31	863090-89-5	
PFMPA	ND	ug/kg	0.39	0.11	1	06/20/25 13:07	06/23/25 13:31	377-73-1	
PFNS	ND	ug/kg	0.19	0.051	1	06/20/25 13:07	06/23/25 13:31	68259-12-1	
PFOSA	ND	ug/kg	0.19	0.043	1	06/20/25 13:07	06/23/25 13:31	754-91-6	
PFPeA	ND	ug/kg	0.39	0.084	1	06/20/25 13:07	06/23/25 13:31	2706-90-3	
PFPeS	ND	ug/kg	0.19	0.047	1	06/20/25 13:07	06/23/25 13:31	2706-91-4	
PFDoA	ND	ug/kg	0.19	0.044	1	06/20/25 13:07	06/23/25 13:31	307-55-1	
PFHpA	ND	ug/kg	0.19	0.076	1	06/20/25 13:07	06/23/25 13:31	375-85-9	
PFHxS	ND	ug/kg	0.19	0.048	1	06/20/25 13:07	06/23/25 13:31	355-46-4	
PFNA	ND	ug/kg	0.19	0.055	1	06/20/25 13:07	06/23/25 13:31	375-95-1	
PFOS	ND	ug/kg	0.19	0.039	1	06/20/25 13:07	06/23/25 13:31	1763-23-1	
PFOA	ND	ug/kg	0.19	0.049	1	06/20/25 13:07	06/23/25 13:31	335-67-1	
PFTeDA	ND	ug/kg	0.19	0.049	1	06/20/25 13:07	06/23/25 13:31	376-06-7	
PFTrDA	ND	ug/kg	0.19	0.041	1	06/20/25 13:07	06/23/25 13:31	72629-94-8	
PFUnA	ND	ug/kg	0.19	0.046	1	06/20/25 13:07	06/23/25 13:31	2058-94-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799826

Sample: B-7-P **Lab ID: 92799826005** Collected: 06/02/25 14:30 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C2-PFDoA (S)	36	%.	40-130		1	06/20/25 13:07	06/23/25 13:31		S0
13C3HFPO-DA (S)	33	%.	40-130		1	06/20/25 13:07	06/23/25 13:31		S0
13C3-PFBS (S)	33	%.	40-135		1	06/20/25 13:07	06/23/25 13:31		S0
13C3-PFHxS (S)	35	%.	40-130		1	06/20/25 13:07	06/23/25 13:31		S0
13C4-PFBA (S)	30	%.	8-130		1	06/20/25 13:07	06/23/25 13:31		
13C4-PFHpA (S)	33	%.	40-130		1	06/20/25 13:07	06/23/25 13:31		S0
13C5-PFHxA (S)	32	%.	40-130		1	06/20/25 13:07	06/23/25 13:31		S0
13C5-PFPeA (S)	31	%.	35-130		1	06/20/25 13:07	06/23/25 13:31		S0
13C6-PFDA (S)	35	%.	40-130		1	06/20/25 13:07	06/23/25 13:31		S0
13C8-PFOA (S)	35	%.	40-130		1	06/20/25 13:07	06/23/25 13:31		S0
13C8-PFOS (S)	40	%.	40-130		1	06/20/25 13:07	06/23/25 13:31		
13C8-PFOSA (S)	34	%.	40-130		1	06/20/25 13:07	06/23/25 13:31		S0
13C9-PFNA (S)	33	%.	40-130		1	06/20/25 13:07	06/23/25 13:31		S0
d3-MeFOSAA (S)	37	%.	40-135		1	06/20/25 13:07	06/23/25 13:31		S0
d3-NMeFOSA (S)	36	%.	10-130		1	06/20/25 13:07	06/23/25 13:31		
d5-EtFOSAA (S)	39	%.	40-150		1	06/20/25 13:07	06/23/25 13:31		S0
d5-NEtFOSA (S)	39	%.	10-130		1	06/20/25 13:07	06/23/25 13:31		
d7-NMeFOSE (S)	40	%.	20-130		1	06/20/25 13:07	06/23/25 13:31		
d9-NEtFOSE (S)	51	%.	15-130		1	06/20/25 13:07	06/23/25 13:31		
13C2-PFTA (S)	36	%.	20-130		1	06/20/25 13:07	06/23/25 13:31		
13C7-PFUdA (S)	40	%.	40-130		1	06/20/25 13:07	06/23/25 13:31		
13C24:2FTS (S)	39	%.	40-135		1	06/20/25 13:07	06/23/25 13:31		S0
13C26:2FTS (S)	43	%.	40-215		1	06/20/25 13:07	06/23/25 13:31		
13C28:2FTS (S)	46	%.	40-275		1	06/20/25 13:07	06/23/25 13:31		
13C3-PFPrA (S)	17	%.	8-130		1	06/20/25 13:07	06/23/25 13:31		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799826

Sample: FB-1-P **Lab ID: 92799826006** Collected: 06/02/25 14:15 Received: 06/02/25 15:52 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ng/L	6.4	1.9	1	06/21/25 09:17	06/24/25 21:36	763051-92-9	
3:3 FTCA	ND	ng/L	8.0	2.2	1	06/21/25 09:17	06/24/25 21:36	356-02-5	
4:2 FTS	ND	ng/L	6.4	1.6	1	06/21/25 09:17	06/24/25 21:36	757124-72-4	
5:3 FTCA	ND	ng/L	39.8	9.6	1	06/21/25 09:17	06/24/25 21:36	914637-49-3	
6:2 FTS	ND	ng/L	6.4	1.8	1	06/21/25 09:17	06/24/25 21:36	27619-97-2	
7:3 FTCA	ND	ng/L	39.8	11.3	1	06/21/25 09:17	06/24/25 21:36	812-70-4	
8:2 FTS	ND	ng/L	6.4	1.7	1	06/21/25 09:17	06/24/25 21:36	39108-34-4	
9Cl-PF3ONS	ND	ng/L	6.4	1.7	1	06/21/25 09:17	06/24/25 21:36	756426-58-1	
ADONA	ND	ng/L	6.4	1.9	1	06/21/25 09:17	06/24/25 21:36	919005-14-4	
HFPO-DA	ND	ng/L	6.4	1.8	1	06/21/25 09:17	06/24/25 21:36	13252-13-6	
NEtFOSAA	ND	ng/L	1.6	0.66	1	06/21/25 09:17	06/24/25 21:36	2991-50-6	
NEtFOSA	ND	ng/L	1.6	0.50	1	06/21/25 09:17	06/24/25 21:36	4151-50-2	
NEtFOSE	ND	ng/L	15.9	4.1	1	06/21/25 09:17	06/24/25 21:36	1691-99-2	
NFDHA	ND	ng/L	3.2	1.3	1	06/21/25 09:17	06/24/25 21:36	151772-58-6	
NMeFOSAA	ND	ng/L	1.6	0.50	1	06/21/25 09:17	06/24/25 21:36	2355-31-9	
NMeFOSA	ND	ng/L	1.6	0.49	1	06/21/25 09:17	06/24/25 21:36	31506-32-8	
NMeFOSE	ND	ng/L	15.9	4.1	1	06/21/25 09:17	06/24/25 21:36	24448-09-7	
PFBS	ND	ng/L	1.6	0.42	1	06/21/25 09:17	06/24/25 21:36	375-73-5	
PFDA	ND	ng/L	1.6	0.49	1	06/21/25 09:17	06/24/25 21:36	335-76-2	
PFHxA	ND	ng/L	1.6	0.38	1	06/21/25 09:17	06/24/25 21:36	307-24-4	
PFBA	ND	ng/L	6.4	1.5	1	06/21/25 09:17	06/24/25 21:36	375-22-4	
PFDS	ND	ng/L	1.6	0.68	1	06/21/25 09:17	06/24/25 21:36	335-77-3	
PFDoS	ND	ng/L	1.6	0.34	1	06/21/25 09:17	06/24/25 21:36	79780-39-5	
PFEESA	ND	ng/L	3.2	0.69	1	06/21/25 09:17	06/24/25 21:36	113507-82-7	
PFHpS	ND	ng/L	1.6	0.46	1	06/21/25 09:17	06/24/25 21:36	375-92-8	
PFMBA	ND	ng/L	3.2	0.77	1	06/21/25 09:17	06/24/25 21:36	863090-89-5	
PFMPA	ND	ng/L	3.2	0.62	1	06/21/25 09:17	06/24/25 21:36	377-73-1	
PFNS	ND	ng/L	1.6	0.47	1	06/21/25 09:17	06/24/25 21:36	68259-12-1	
PFOSA	ND	ng/L	1.6	0.49	1	06/21/25 09:17	06/24/25 21:36	754-91-6	
PFPeA	ND	ng/L	3.2	0.95	1	06/21/25 09:17	06/24/25 21:36	2706-90-3	
PFPeS	ND	ng/L	1.6	0.38	1	06/21/25 09:17	06/24/25 21:36	2706-91-4	
PFDoA	ND	ng/L	1.6	0.49	1	06/21/25 09:17	06/24/25 21:36	307-55-1	
PFHpA	ND	ng/L	1.6	0.61	1	06/21/25 09:17	06/24/25 21:36	375-85-9	
PFHxS	ND	ng/L	1.6	0.41	1	06/21/25 09:17	06/24/25 21:36	355-46-4	
PFNA	ND	ng/L	1.6	0.52	1	06/21/25 09:17	06/24/25 21:36	375-95-1	
PFOS	ND	ng/L	1.6	0.39	1	06/21/25 09:17	06/24/25 21:36	1763-23-1	
PFOA	ND	ng/L	1.6	0.48	1	06/21/25 09:17	06/24/25 21:36	335-67-1	
PFTeDA	ND	ng/L	1.6	0.41	1	06/21/25 09:17	06/24/25 21:36	376-06-7	
PFTrDA	ND	ng/L	1.6	0.45	1	06/21/25 09:17	06/24/25 21:36	72629-94-8	
PFUnA	ND	ng/L	1.6	0.35	1	06/21/25 09:17	06/24/25 21:36	2058-94-8	
Surrogates									
13C2-PFDoA (S)	60	%.	10-130		1	06/21/25 09:17	06/24/25 21:36		
13C3HFPO-DA (S)	80	%.	40-130		1	06/21/25 09:17	06/24/25 21:36		
13C3-PFBS (S)	81	%.	40-135		1	06/21/25 09:17	06/24/25 21:36		
13C3-PFHxS (S)	74	%.	40-130		1	06/21/25 09:17	06/24/25 21:36		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799826

Sample: FB-1-P **Lab ID: 92799826006** Collected: 06/02/25 14:15 Received: 06/02/25 15:52 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C4-PFBA (S)	82	%.	5-130		1	06/21/25 09:17	06/24/25 21:36		
13C4-PFHpA (S)	75	%.	40-130		1	06/21/25 09:17	06/24/25 21:36		
13C5-PFHxA (S)	82	%.	40-130		1	06/21/25 09:17	06/24/25 21:36		
13C5-PFPeA (S)	85	%.	40-130		1	06/21/25 09:17	06/24/25 21:36		
13C6-PFDA (S)	70	%.	40-130		1	06/21/25 09:17	06/24/25 21:36		
13C8-PFOA (S)	78	%.	40-130		1	06/21/25 09:17	06/24/25 21:36		
13C8-PFOS (S)	81	%.	40-130		1	06/21/25 09:17	06/24/25 21:36		
13C8-PFOSA (S)	73	%.	40-130		1	06/21/25 09:17	06/24/25 21:36		
13C9-PFNA (S)	72	%.	40-130		1	06/21/25 09:17	06/24/25 21:36		
d3-MeFOSAA (S)	79	%.	40-170		1	06/21/25 09:17	06/24/25 21:36		
d3-NMeFOSA (S)	51	%.	10-130		1	06/21/25 09:17	06/24/25 21:36		
d5-EtFOSAA (S)	74	%.	25-135		1	06/21/25 09:17	06/24/25 21:36		
d5-NEtFOSA (S)	55	%.	10-130		1	06/21/25 09:17	06/24/25 21:36		
d7-NMeFOSE (S)	65	%.	10-130		1	06/21/25 09:17	06/24/25 21:36		
d9-NEtFOSE (S)	74	%.	10-130		1	06/21/25 09:17	06/24/25 21:36		
13C2-PFTA (S)	66	%.	10-130		1	06/21/25 09:17	06/24/25 21:36		
13C7-PFUdA (S)	72	%.	30-130		1	06/21/25 09:17	06/24/25 21:36		
13C24:2FTS (S)	103	%.	40-200		1	06/21/25 09:17	06/24/25 21:36		
13C26:2FTS (S)	99	%.	40-200		1	06/21/25 09:17	06/24/25 21:36		
13C28:2FTS (S)	93	%.	40-300		1	06/21/25 09:17	06/24/25 21:36		
13C3-PFPrA (S)	91	%.	5-130		1	06/21/25 09:17	06/24/25 21:36		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799826

Sample: B-DUP **Lab ID: 92799826007** Collected: 06/02/25 00:01 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Dry Weight / %M by ASTM D2974	Analytical Method: ASTM D2974 Pace Analytical Services - Minneapolis								
Percent Moisture	**16.9**	%	0.10	0.10	1		06/10/25 08:48		N2
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ug/kg	0.79	0.15	1	06/20/25 13:07	06/23/25 14:01	763051-92-9	
3:3 FTCA	ND	ug/kg	0.99	0.27	1	06/20/25 13:07	06/23/25 14:01	356-02-5	
4:2 FTS	ND	ug/kg	0.79	0.14	1	06/20/25 13:07	06/23/25 14:01	757124-72-4	
5:3 FTCA	ND	ug/kg	5.0	1.2	1	06/20/25 13:07	06/23/25 14:01	914637-49-3	
6:2 FTS	ND	ug/kg	0.79	0.20	1	06/20/25 13:07	06/23/25 14:01	27619-97-2	
7:3 FTCA	ND	ug/kg	5.0	1.1	1	06/20/25 13:07	06/23/25 14:01	812-70-4	
8:2 FTS	ND	ug/kg	0.79	0.20	1	06/20/25 13:07	06/23/25 14:01	39108-34-4	
9Cl-PF3ONS	ND	ug/kg	0.79	0.19	1	06/20/25 13:07	06/23/25 14:01	756426-58-1	
ADONA	ND	ug/kg	0.79	0.18	1	06/20/25 13:07	06/23/25 14:01	919005-14-4	
HFPO-DA	ND	ug/kg	0.79	0.19	1	06/20/25 13:07	06/23/25 14:01	13252-13-6	
NEtFOSAA	ND	ug/kg	0.20	0.073	1	06/20/25 13:07	06/23/25 14:01	2991-50-6	
NEtFOSA	ND	ug/kg	0.20	0.052	1	06/20/25 13:07	06/23/25 14:01	4151-50-2	
NEtFOSE	ND	ug/kg	2.0	0.39	1	06/20/25 13:07	06/23/25 14:01	1691-99-2	
NFDHA	ND	ug/kg	0.40	0.13	1	06/20/25 13:07	06/23/25 14:01	151772-58-6	
NMeFOSAA	ND	ug/kg	0.20	0.054	1	06/20/25 13:07	06/23/25 14:01	2355-31-9	
NMeFOSA	ND	ug/kg	0.20	0.060	1	06/20/25 13:07	06/23/25 14:01	31506-32-8	
NMeFOSE	ND	ug/kg	2.0	0.46	1	06/20/25 13:07	06/23/25 14:01	24448-09-7	
PFBS	ND	ug/kg	0.20	0.038	1	06/20/25 13:07	06/23/25 14:01	375-73-5	
PFDA	ND	ug/kg	0.20	0.046	1	06/20/25 13:07	06/23/25 14:01	335-76-2	
PFHxA	ND	ug/kg	0.20	0.044	1	06/20/25 13:07	06/23/25 14:01	307-24-4	
PFBA	ND	ug/kg	0.79	0.21	1	06/20/25 13:07	06/23/25 14:01	375-22-4	
PFDS	ND	ug/kg	0.20	0.057	1	06/20/25 13:07	06/23/25 14:01	335-77-3	
PFDoS	ND	ug/kg	0.20	0.042	1	06/20/25 13:07	06/23/25 14:01	79780-39-5	
PFEESA	ND	ug/kg	0.40	0.082	1	06/20/25 13:07	06/23/25 14:01	113507-82-7	
PFHpS	ND	ug/kg	0.20	0.059	1	06/20/25 13:07	06/23/25 14:01	375-92-8	
PFMBA	ND	ug/kg	0.40	0.095	1	06/20/25 13:07	06/23/25 14:01	863090-89-5	
PFMPA	ND	ug/kg	0.40	0.12	1	06/20/25 13:07	06/23/25 14:01	377-73-1	
PFNS	ND	ug/kg	0.20	0.052	1	06/20/25 13:07	06/23/25 14:01	68259-12-1	
PFOSA	ND	ug/kg	0.20	0.043	1	06/20/25 13:07	06/23/25 14:01	754-91-6	
PFPeA	ND	ug/kg	0.40	0.085	1	06/20/25 13:07	06/23/25 14:01	2706-90-3	
PFPeS	ND	ug/kg	0.20	0.048	1	06/20/25 13:07	06/23/25 14:01	2706-91-4	
PFDoA	ND	ug/kg	0.20	0.044	1	06/20/25 13:07	06/23/25 14:01	307-55-1	
PFHpA	ND	ug/kg	0.20	0.077	1	06/20/25 13:07	06/23/25 14:01	375-85-9	
PFHxS	ND	ug/kg	0.20	0.049	1	06/20/25 13:07	06/23/25 14:01	355-46-4	
PFNA	ND	ug/kg	0.20	0.056	1	06/20/25 13:07	06/23/25 14:01	375-95-1	
PFOS	**1.0**	ug/kg	0.20	0.040	1	06/20/25 13:07	06/23/25 14:01	1763-23-1	
PFOA	**0.27**	ug/kg	0.20	0.050	1	06/20/25 13:07	06/23/25 14:01	335-67-1	
PFTeDA	ND	ug/kg	0.20	0.050	1	06/20/25 13:07	06/23/25 14:01	376-06-7	
PFTrDA	ND	ug/kg	0.20	0.042	1	06/20/25 13:07	06/23/25 14:01	72629-94-8	
PFUnA	ND	ug/kg	0.20	0.047	1	06/20/25 13:07	06/23/25 14:01	2058-94-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92799826

Sample: B-DUP **Lab ID: 92799826007** Collected: 06/02/25 00:01 Received: 06/02/25 15:52 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C2-PFDoA (S)	41	%.	40-130		1	06/20/25 13:07	06/23/25 14:01		
13C3HFPO-DA (S)	36	%.	40-130		1	06/20/25 13:07	06/23/25 14:01		S0
13C3-PFBS (S)	39	%.	40-135		1	06/20/25 13:07	06/23/25 14:01		S0
13C3-PFHxS (S)	41	%.	40-130		1	06/20/25 13:07	06/23/25 14:01		
13C4-PFBA (S)	32	%.	8-130		1	06/20/25 13:07	06/23/25 14:01		
13C4-PFHpA (S)	38	%.	40-130		1	06/20/25 13:07	06/23/25 14:01		S0
13C5-PFHxA (S)	36	%.	40-130		1	06/20/25 13:07	06/23/25 14:01		S0
13C5-PFPeA (S)	36	%.	35-130		1	06/20/25 13:07	06/23/25 14:01		
13C6-PFDA (S)	38	%.	40-130		1	06/20/25 13:07	06/23/25 14:01		S0
13C8-PFOA (S)	40	%.	40-130		1	06/20/25 13:07	06/23/25 14:01		
13C8-PFOS (S)	43	%.	40-130		1	06/20/25 13:07	06/23/25 14:01		
13C8-PFOSA (S)	37	%.	40-130		1	06/20/25 13:07	06/23/25 14:01		S0
13C9-PFNA (S)	39	%.	40-130		1	06/20/25 13:07	06/23/25 14:01		S0
d3-MeFOSAA (S)	42	%.	40-135		1	06/20/25 13:07	06/23/25 14:01		
d3-NMeFOSA (S)	36	%.	10-130		1	06/20/25 13:07	06/23/25 14:01		
d5-EtFOSAA (S)	45	%.	40-150		1	06/20/25 13:07	06/23/25 14:01		
d5-NEtFOSA (S)	38	%.	10-130		1	06/20/25 13:07	06/23/25 14:01		
d7-NMeFOSE (S)	43	%.	20-130		1	06/20/25 13:07	06/23/25 14:01		
d9-NEtFOSE (S)	49	%.	15-130		1	06/20/25 13:07	06/23/25 14:01		
13C2-PFTA (S)	43	%.	20-130		1	06/20/25 13:07	06/23/25 14:01		
13C7-PFUdA (S)	46	%.	40-130		1	06/20/25 13:07	06/23/25 14:01		
13C24:2FTS (S)	46	%.	40-135		1	06/20/25 13:07	06/23/25 14:01		
13C26:2FTS (S)	53	%.	40-215		1	06/20/25 13:07	06/23/25 14:01		
13C28:2FTS (S)	56	%.	40-275		1	06/20/25 13:07	06/23/25 14:01		
13C3-PFPrA (S)	17	%.	8-130		1	06/20/25 13:07	06/23/25 14:01		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799826

QC Batch: 1011660
QC Batch Method: ASTM D2974
Analysis Method: ASTM D2974
Analysis Description: Dry Weight / %M by ASTM D2974
Laboratory: Pace Analytical Services - Minneapolis
Associated Lab Samples: 92799826001, 92799826002, 92799826003, 92799826004, 92799826005, 92799826007

SAMPLE DUPLICATE: 5274274

Parameter	Units	92799826001 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	19.7	20.7	5	30	N2

SAMPLE DUPLICATE: 5275165

Parameter	Units	10736712002 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	8.4	8.4	1	30	N2

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799826

QC Batch: 1013452 | Analysis Method: EPA 1633
QC Batch Method: EPA 1633 | Analysis Description: EPA 1633F Soil
Laboratory: Pace Analytical Services - Minneapolis
Associated Lab Samples: 92799826001, 92799826002, 92799826003, 92799826004, 92799826005, 92799826007

METHOD BLANK: 5283104 Matrix: Solid
Associated Lab Samples: 92799826001, 92799826002, 92799826003, 92799826004, 92799826005, 92799826007

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
11Cl-PF3OUdS	ug/kg	ND	0.80	0.15	06/24/25 13:17	
3:3 FTCA	ug/kg	ND	1.0	0.27	06/24/25 13:17	
4:2 FTS	ug/kg	ND	0.80	0.14	06/24/25 13:17	
5:3 FTCA	ug/kg	ND	5.0	1.2	06/24/25 13:17	
6:2 FTS	ug/kg	ND	0.80	0.20	06/24/25 13:17	
7:3 FTCA	ug/kg	ND	5.0	1.1	06/24/25 13:17	
8:2 FTS	ug/kg	ND	0.80	0.20	06/24/25 13:17	
9Cl-PF3ONS	ug/kg	ND	0.80	0.19	06/24/25 13:17	
ADONA	ug/kg	ND	0.80	0.18	06/24/25 13:17	
HFPO-DA	ug/kg	ND	0.80	0.19	06/24/25 13:17	
NEtFOSA	ug/kg	ND	0.20	0.052	06/24/25 13:17	
NEtFOSAA	ug/kg	ND	0.20	0.074	06/24/25 13:17	
NEtFOSE	ug/kg	ND	2.0	0.39	06/24/25 13:17	
NFDHA	ug/kg	ND	0.40	0.13	06/24/25 13:17	
NMeFOSA	ug/kg	ND	0.20	0.060	06/24/25 13:17	
NMeFOSAA	ug/kg	ND	0.20	0.054	06/24/25 13:17	
NMeFOSE	ug/kg	ND	2.0	0.46	06/24/25 13:17	
PFBA	ug/kg	ND	0.80	0.21	06/24/25 13:17	
PFBS	ug/kg	ND	0.20	0.038	06/24/25 13:17	
PFDA	ug/kg	ND	0.20	0.047	06/24/25 13:17	
PFDoA	ug/kg	ND	0.20	0.045	06/24/25 13:17	
PFDoS	ug/kg	ND	0.20	0.042	06/24/25 13:17	
PFDS	ug/kg	ND	0.20	0.058	06/24/25 13:17	
PFEESA	ug/kg	ND	0.40	0.083	06/24/25 13:17	
PFHpA	ug/kg	ND	0.20	0.078	06/24/25 13:17	
PFHpS	ug/kg	ND	0.20	0.060	06/24/25 13:17	
PFHxA	ug/kg	ND	0.20	0.045	06/24/25 13:17	
PFHxS	ug/kg	ND	0.20	0.049	06/24/25 13:17	
PFMBA	ug/kg	ND	0.40	0.096	06/24/25 13:17	
PFMPA	ug/kg	ND	0.40	0.12	06/24/25 13:17	
PFNA	ug/kg	ND	0.20	0.056	06/24/25 13:17	
PFNS	ug/kg	ND	0.20	0.053	06/24/25 13:17	
PFOA	ug/kg	ND	0.20	0.050	06/24/25 13:17	
PFOS	ug/kg	ND	0.20	0.040	06/24/25 13:17	
PFOSA	ug/kg	ND	0.20	0.044	06/24/25 13:17	
PFPeA	ug/kg	ND	0.40	0.086	06/24/25 13:17	
PFPeS	ug/kg	ND	0.20	0.048	06/24/25 13:17	
PFTeDA	ug/kg	ND	0.20	0.050	06/24/25 13:17	
PFTrDA	ug/kg	ND	0.20	0.042	06/24/25 13:17	
PFUnA	ug/kg	ND	0.20	0.048	06/24/25 13:17	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799826

METHOD BLANK: 5283104 Matrix: Solid
Associated Lab Samples: 92799826001, 92799826002, 92799826003, 92799826004, 92799826005, 92799826007

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
13C2-PFDoA (S)	%.	84	40-130		06/24/25 13:17	
13C2-PFTA (S)	%.	80	20-130		06/24/25 13:17	
13C24:2FTS (S)	%.	116	40-135		06/24/25 13:17	
13C26:2FTS (S)	%.	113	40-215		06/24/25 13:17	
13C28:2FTS (S)	%.	112	40-275		06/24/25 13:17	
13C3-PFBS (S)	%.	96	40-135		06/24/25 13:17	
13C3-PFHxS (S)	%.	95	40-130		06/24/25 13:17	
13C3-PFPrA (S)	%.	43	8-130		06/24/25 13:17	
13C3HFPO-DA (S)	%.	100	40-130		06/24/25 13:17	
13C4-PFBA (S)	%.	82	8-130		06/24/25 13:17	
13C4-PFHpA (S)	%.	101	40-130		06/24/25 13:17	
13C5-PFHxA (S)	%.	96	40-130		06/24/25 13:17	
13C5-PFPeA (S)	%.	98	35-130		06/24/25 13:17	
13C6-PFDA (S)	%.	87	40-130		06/24/25 13:17	
13C7-PFUdA (S)	%.	87	40-130		06/24/25 13:17	
13C8-PFOA (S)	%.	97	40-130		06/24/25 13:17	
13C8-PFOS (S)	%.	100	40-130		06/24/25 13:17	
13C8-PFOSA (S)	%.	107	40-130		06/24/25 13:17	
13C9-PFNA (S)	%.	94	40-130		06/24/25 13:17	
d3-MeFOSAA (S)	%.	98	40-135		06/24/25 13:17	
d3-NMeFOSA (S)	%.	87	10-130		06/24/25 13:17	
d5-EtFOSAA (S)	%.	107	40-150		06/24/25 13:17	
d5-NEtFOSA (S)	%.	87	10-130		06/24/25 13:17	
d7-NMeFOSE (S)	%.	108	20-130		06/24/25 13:17	
d9-NEtFOSE (S)	%.	110	15-130		06/24/25 13:17	

LABORATORY CONTROL SAMPLE: 5283105

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ug/kg	7.5	6.5	86	45-160	
3:3 FTCA	ug/kg	9.9	7.4	75	45-130	
4:2 FTS	ug/kg	7.5	6.8	90	60-150	
5:3 FTCA	ug/kg	49.6	46.4	94	60-130	
6:2 FTS	ug/kg	7.7	6.7	87	55-200	
7:3 FTCA	ug/kg	49.6	44.4	89	60-150	
8:2 FTS	ug/kg	7.7	6.9	90	70-150	
9Cl-PF3ONS	ug/kg	7.5	6.8	90	70-150	
ADONA	ug/kg	7.5	7.3	97	70-160	
HFPO-DA	ug/kg	8	7.1	89	70-145	
NEtFOSA	ug/kg	1.9	1.7	90	70-140	
NEtFOSAA	ug/kg	1.9	1.8	92	65-165	
NEtFOSE	ug/kg	19.2	18.5	96	70-135	
NFDHA	ug/kg	4	3.7	93	60-155	
NMeFOSA	ug/kg	1.9	1.8	94	70-155	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799826

LABORATORY CONTROL SAMPLE: 5283105

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
NMeFOSAA	ug/kg	1.9	1.8	94	65-155	
NMeFOSE	ug/kg	19.2	17.3	90	70-140	
PFBA	ug/kg	8	7.3	91	70-140	
PFBS	ug/kg	1.8	1.6	93	65-145	
PFDA	ug/kg	1.9	1.9	101	70-155	
PFDoA	ug/kg	1.9	1.9	99	70-150	
PFDoS	ug/kg	1.9	1.6	84	25-160	
PFDS	ug/kg	1.9	1.7	86	40-155	
PFEESA	ug/kg	3.5	3.5	100	70-140	
PFHpA	ug/kg	1.9	1.9	97	65-145	
PFHpS	ug/kg	1.9	1.6	84	65-155	
PFHxA	ug/kg	1.9	1.8	95	65-140	
PFHxS	ug/kg	1.8	1.7	95	60-150	
PFMBA	ug/kg	4	3.8	94	60-150	
PFMPA	ug/kg	4	3.6	90	30-140	
PFNA	ug/kg	1.9	1.8	95	70-155	
PFNS	ug/kg	1.9	1.6	85	55-140	
PFOA	ug/kg	1.9	1.7	90	70-150	
PFOS	ug/kg	1.9	1.5	80	65-160	
PFOSA	ug/kg	1.9	1.8	92	70-140	
PFPeA	ug/kg	4	3.6	90	60-150	
PFPeS	ug/kg	1.9	1.7	91	55-160	
PFTeDA	ug/kg	1.9	1.7	88	65-150	
PFTrDA	ug/kg	1.9	1.9	101	65-150	
PFUnA	ug/kg	1.9	1.8	93	70-155	
13C2-PFDoA (S)	%.			128	40-130	
13C2-PFTA (S)	%.			130	20-130	
13C24:2FTS (S)	%.			137	40-135	S0
13C26:2FTS (S)	%.			160	40-215	
13C28:2FTS (S)	%.			174	40-275	
13C3-PFBS (S)	%.			137	40-135	S0
13C3-PFHxS (S)	%.			140	40-130	S0
13C3-PFPrA (S)	%.			59	8-130	
13C3HFPO-DA (S)	%.			136	40-130	S0
13C4-PFBA (S)	%.			104	8-130	
13C4-PFHpA (S)	%.			134	40-130	S0
13C5-PFHxA (S)	%.			127	40-130	
13C5-PFPeA (S)	%.			124	35-130	
13C6-PFDA (S)	%.			134	40-130	S0
13C7-PFUdA (S)	%.			149	40-130	S0
13C8-PFOA (S)	%.			146	40-130	S0
13C8-PFOS (S)	%.			155	40-130	S0
13C8-PFOSA (S)	%.			135	40-130	S0
13C9-PFNA (S)	%.			136	40-130	S0
d3-MeFOSAA (S)	%.			134	40-135	
d3-NMeFOSA (S)	%.			126	10-130	
d5-EtFOSAA (S)	%.			135	40-150	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799826

LABORATORY CONTROL SAMPLE: 5283105

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
d5-NEtFOSA (S)	%.			136	10-130	S0
d7-NMeFOSE (S)	%.			152	20-130	S0
d9-NEtFOSE (S)	%.			145	15-130	S0

LABORATORY CONTROL SAMPLE: 5283106

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ug/kg	1.5	1.2	82	45-160	
3:3 FTCA	ug/kg	2	1.7	85	45-130	
4:2 FTS	ug/kg	1.5	1.3	88	60-150	
5:3 FTCA	ug/kg	9.9	8.2	82	60-130	
6:2 FTS	ug/kg	1.5	1.4	89	55-200	
7:3 FTCA	ug/kg	9.9	7.6	77	60-150	
8:2 FTS	ug/kg	1.5	1.3	85	70-150	
9Cl-PF3ONS	ug/kg	1.5	1.3	87	70-150	
ADONA	ug/kg	1.5	1.3	86	70-160	
HFPO-DA	ug/kg	1.6	1.4	85	70-145	
NEtFOSA	ug/kg	0.38	0.33	86	70-140	
NEtFOSAA	ug/kg	0.38	0.33	87	65-165	
NEtFOSE	ug/kg	3.8	3.2	83	70-135	
NFDHA	ug/kg	0.8	0.68	85	60-155	
NMeFOSA	ug/kg	0.38	0.34	90	70-155	
NMeFOSAA	ug/kg	0.38	0.40	104	65-155	
NMeFOSE	ug/kg	3.8	3.3	86	70-140	
PFBA	ug/kg	1.6	1.4	86	70-140	
PFBS	ug/kg	0.35	0.31	87	65-145	
PFDA	ug/kg	0.38	0.32	83	70-155	
PFDoA	ug/kg	0.38	0.34	88	70-150	
PFDoS	ug/kg	0.38	0.28	72	25-160	
PFDS	ug/kg	0.38	0.27	71	40-155	
PFEESA	ug/kg	0.7	0.63	89	70-140	
PFHpA	ug/kg	0.38	0.33	85	65-145	
PFHpS	ug/kg	0.38	0.31	80	65-155	
PFHxA	ug/kg	0.38	0.34	88	65-140	
PFHxS	ug/kg	0.35	0.28	81	60-150	
PFMBA	ug/kg	0.8	0.67	83	60-150	
PFMPA	ug/kg	0.8	0.77	96	30-140	
PFNA	ug/kg	0.38	0.31	82	70-155	
PFNS	ug/kg	0.38	0.30	78	55-140	
PFOA	ug/kg	0.38	0.32	84	70-150	
PFOS	ug/kg	0.38	0.29	75	65-160	
PFOSA	ug/kg	0.38	0.33	87	70-140	
PFPeA	ug/kg	0.8	0.66	83	60-150	
PFPeS	ug/kg	0.38	0.30	77	55-160	
PFTeDA	ug/kg	0.38	0.34	89	65-150	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799826

LABORATORY CONTROL SAMPLE: 5283106

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
PFTrDA	ug/kg	0.38	0.30	79	65-150	
PFUnA	ug/kg	0.38	0.33	86	70-155	
13C2-PFDoA (S)	%.			74	40-130	
13C2-PFTA (S)	%.			62	20-130	
13C24:2FTS (S)	%.			90	40-135	
13C26:2FTS (S)	%.			86	40-215	
13C28:2FTS (S)	%.			86	40-275	
13C3-PFBS (S)	%.			78	40-135	
13C3-PFHxS (S)	%.			86	40-130	
13C3-PFPrA (S)	%.			28	8-130	
13C3HFPO-DA (S)	%.			85	40-130	
13C4-PFBA (S)	%.			71	8-130	
13C4-PFHpA (S)	%.			85	40-130	
13C5-PFHxA (S)	%.			82	40-130	
13C5-PFPeA (S)	%.			84	35-130	
13C6-PFDA (S)	%.			82	40-130	
13C7-PFUdA (S)	%.			77	40-130	
13C8-PFOA (S)	%.			82	40-130	
13C8-PFOS (S)	%.			84	40-130	
13C8-PFOSA (S)	%.			80	40-130	
13C9-PFNA (S)	%.			88	40-130	
d3-MeFOSAA (S)	%.			76	40-135	
d3-NMeFOSA (S)	%.			69	10-130	
d5-EtFOSAA (S)	%.			74	40-150	
d5-NEtFOSA (S)	%.			69	10-130	
d7-NMeFOSE (S)	%.			77	20-130	
d9-NEtFOSE (S)	%.			74	15-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799826

QC Batch: 1013593
QC Batch Method: EPA 1633
Analysis Method: EPA 1633
Analysis Description: EPA 1633F Water
Laboratory: Pace Analytical Services - Minneapolis

Associated Lab Samples: 92799826006

METHOD BLANK: 5283906 Matrix: Water
Associated Lab Samples: 92799826006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
11Cl-PF3OUdS	ng/L	ND	6.4	1.9	06/24/25 17:53	
3:3 FTCA	ng/L	ND	8.0	2.2	06/24/25 17:53	
4:2 FTS	ng/L	ND	6.4	1.6	06/24/25 17:53	
5:3 FTCA	ng/L	ND	40.0	9.6	06/24/25 17:53	
6:2 FTS	ng/L	ND	6.4	1.8	06/24/25 17:53	
7:3 FTCA	ng/L	ND	40.0	11.4	06/24/25 17:53	
8:2 FTS	ng/L	ND	6.4	1.7	06/24/25 17:53	
9Cl-PF3ONS	ng/L	ND	6.4	1.7	06/24/25 17:53	
ADONA	ng/L	ND	6.4	1.9	06/24/25 17:53	
HFPO-DA	ng/L	ND	6.4	1.8	06/24/25 17:53	
NEtFOSA	ng/L	ND	1.6	0.51	06/24/25 17:53	
NEtFOSAA	ng/L	ND	1.6	0.66	06/24/25 17:53	
NEtFOSE	ng/L	ND	16.0	4.1	06/24/25 17:53	
NFDHA	ng/L	ND	3.2	1.3	06/24/25 17:53	
NMeFOSA	ng/L	ND	1.6	0.49	06/24/25 17:53	
NMeFOSAA	ng/L	ND	1.6	0.50	06/24/25 17:53	
NMeFOSE	ng/L	ND	16.0	4.1	06/24/25 17:53	
PFBA	ng/L	ND	6.4	1.6	06/24/25 17:53	
PFBS	ng/L	ND	1.6	0.42	06/24/25 17:53	
PFDA	ng/L	ND	1.6	0.50	06/24/25 17:53	
PFDoA	ng/L	ND	1.6	0.49	06/24/25 17:53	
PFDoS	ng/L	ND	1.6	0.34	06/24/25 17:53	
PFDS	ng/L	ND	1.6	0.69	06/24/25 17:53	
PFEESA	ng/L	ND	3.2	0.69	06/24/25 17:53	
PFHpA	ng/L	ND	1.6	0.62	06/24/25 17:53	
PFHpS	ng/L	ND	1.6	0.47	06/24/25 17:53	
PFHxA	ng/L	ND	1.6	0.38	06/24/25 17:53	
PFHxS	ng/L	ND	1.6	0.41	06/24/25 17:53	
PFMBA	ng/L	ND	3.2	0.78	06/24/25 17:53	
PFMPA	ng/L	ND	3.2	0.62	06/24/25 17:53	
PFNA	ng/L	ND	1.6	0.52	06/24/25 17:53	
PFNS	ng/L	ND	1.6	0.47	06/24/25 17:53	
PFOA	ng/L	ND	1.6	0.49	06/24/25 17:53	
PFOS	ng/L	ND	1.6	0.39	06/24/25 17:53	
PFOSA	ng/L	ND	1.6	0.49	06/24/25 17:53	
PFPeA	ng/L	ND	3.2	0.95	06/24/25 17:53	
PFPeS	ng/L	ND	1.6	0.38	06/24/25 17:53	
PFTeDA	ng/L	ND	1.6	0.41	06/24/25 17:53	
PFTrDA	ng/L	ND	1.6	0.45	06/24/25 17:53	
PFUnA	ng/L	ND	1.6	0.36	06/24/25 17:53	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799826

METHOD BLANK: 5283906 Matrix: Water
Associated Lab Samples: 92799826006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
13C2-PFDoA (S)	%.	68	10-130		06/24/25 17:53	
13C2-PFTA (S)	%.	87	10-130		06/24/25 17:53	
13C24:2FTS (S)	%.	104	40-200		06/24/25 17:53	
13C26:2FTS (S)	%.	102	40-200		06/24/25 17:53	
13C28:2FTS (S)	%.	94	40-300		06/24/25 17:53	
13C3-PFBS (S)	%.	86	40-135		06/24/25 17:53	
13C3-PFHxS (S)	%.	81	40-130		06/24/25 17:53	
13C3-PFPrA (S)	%.	94	5-130		06/24/25 17:53	
13C3HFPO-DA (S)	%.	78	40-130		06/24/25 17:53	
13C4-PFBA (S)	%.	82	5-130		06/24/25 17:53	
13C4-PFHpA (S)	%.	73	40-130		06/24/25 17:53	
13C5-PFHxA (S)	%.	82	40-130		06/24/25 17:53	
13C5-PFPeA (S)	%.	80	40-130		06/24/25 17:53	
13C6-PFDA (S)	%.	74	40-130		06/24/25 17:53	
13C7-PFUdA (S)	%.	77	30-130		06/24/25 17:53	
13C8-PFOA (S)	%.	87	40-130		06/24/25 17:53	
13C8-PFOS (S)	%.	82	40-130		06/24/25 17:53	
13C8-PFOSA (S)	%.	79	40-130		06/24/25 17:53	
13C9-PFNA (S)	%.	77	40-130		06/24/25 17:53	
d3-MeFOSAA (S)	%.	87	40-170		06/24/25 17:53	
d3-NMeFOSA (S)	%.	59	10-130		06/24/25 17:53	
d5-EtFOSAA (S)	%.	78	25-135		06/24/25 17:53	
d5-NEtFOSA (S)	%.	47	10-130		06/24/25 17:53	
d7-NMeFOSE (S)	%.	121	10-130		06/24/25 17:53	
d9-NEtFOSE (S)	%.	75	10-130		06/24/25 17:53	

LABORATORY CONTROL SAMPLE: 5283907

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ng/L	75.2	76.8	102	55-160	
3:3 FTCA	ng/L	99.2	77.1	78	65-130	
4:2 FTS	ng/L	75.2	70.7	94	70-145	
5:3 FTCA	ng/L	496	450	91	70-135	
6:2 FTS	ng/L	76.8	75.9	99	65-155	
7:3 FTCA	ng/L	496	453	91	50-145	
8:2 FTS	ng/L	76.8	77.7	101	60-150	
9Cl-PF3ONS	ng/L	75.2	79.4	106	70-155	
ADONA	ng/L	75.2	82.1	109	65-145	
HFPO-DA	ng/L	80	75.0	94	70-140	
NEtFOSA	ng/L	19.2	18.6	97	65-145	
NEtFOSAA	ng/L	19.2	18.9	98	70-145	
NEtFOSE	ng/L	192	183	95	70-135	
NFDHA	ng/L	40	39.7	99	50-150	
NMeFOSA	ng/L	19.2	19.3	101	60-150	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799826

LABORATORY CONTROL SAMPLE: 5283907

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
NMeFOSAA	ng/L	19.2	17.9	93	50-140	
NMeFOSE	ng/L	192	194	101	70-145	
PFBA	ng/L	80	76.8	96	70-140	
PFBS	ng/L	17.6	17.1	97	60-145	
PFDA	ng/L	19.2	21.3	111	70-140	
PFDoA	ng/L	19.2	20.3	106	70-140	
PFDoS	ng/L	19.2	19.4	101	50-145	
PFDS	ng/L	19.2	18.9	98	60-145	
PFEESA	ng/L	35.2	36.7	104	70-140	
PFHpA	ng/L	19.2	18.9	99	70-150	
PFHpS	ng/L	19.2	18.1	94	70-150	
PFHxA	ng/L	19.2	18.8	98	70-145	
PFHxS	ng/L	17.6	17.6	100	65-145	
PFMBA	ng/L	40	38.8	97	60-150	
PFMPA	ng/L	40	35.8	89	55-140	
PFNA	ng/L	19.2	20.0	104	70-150	
PFNS	ng/L	19.2	17.3	90	65-145	
PFOA	ng/L	19.2	18.3	95	70-150	
PFOS	ng/L	19.2	16.5	86	55-150	
PFOSA	ng/L	19.2	18.6	97	70-145	
PFPeA	ng/L	40	38.4	96	65-135	
PFPeS	ng/L	19.2	17.9	93	65-140	
PFTeDA	ng/L	19.2	18.2	95	60-140	
PFTrDA	ng/L	19.2	21.9	114	65-140	
PFUnA	ng/L	19.2	19.5	101	70-145	
13C2-PFDoA (S)	%.			49	10-130	
13C2-PFTA (S)	%.			63	10-130	
13C24:2FTS (S)	%.			62	40-200	
13C26:2FTS (S)	%.			58	40-200	
13C28:2FTS (S)	%.			57	40-300	
13C3-PFBS (S)	%.			49	40-135	
13C3-PFHxS (S)	%.			47	40-130	
13C3-PFPrA (S)	%.			63	5-130	
13C3HFPO-DA (S)	%.			51	40-130	
13C4-PFBA (S)	%.			55	5-130	
13C4-PFHpA (S)	%.			50	40-130	
13C5-PFHxA (S)	%.			51	40-130	
13C5-PFPeA (S)	%.			51	40-130	
13C6-PFDA (S)	%.			47	40-130	
13C7-PFUdA (S)	%.			52	30-130	
13C8-PFOA (S)	%.			53	40-130	
13C8-PFOS (S)	%.			53	40-130	
13C8-PFOSA (S)	%.			49	40-130	
13C9-PFNA (S)	%.			46	40-130	
d3-MeFOSAA (S)	%.			55	40-170	
d3-NMeFOSA (S)	%.			38	10-130	
d5-EtFOSAA (S)	%.			51	25-135	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799826

LABORATORY CONTROL SAMPLE: 5283907

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
d5-NEtFOSA (S)	%.			41	10-130	
d7-NMeFOSE (S)	%.			45	10-130	
d9-NEtFOSE (S)	%.			51	10-130	

LABORATORY CONTROL SAMPLE: 5283908

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ng/L	12	11.6	96	55-160	
3:3 FTCA	ng/L	15.9	12.4	78	65-130	
4:2 FTS	ng/L	12	11.7	97	70-145	
5:3 FTCA	ng/L	79.4	66.5	84	70-135	
6:2 FTS	ng/L	12.3	11.8	96	65-155	
7:3 FTCA	ng/L	79.4	67.0	84	50-145	
8:2 FTS	ng/L	12.3	13.5	110	60-150	
9Cl-PF3ONS	ng/L	12	11.7	97	70-155	
ADONA	ng/L	12	12.4	103	65-145	
HFPO-DA	ng/L	12.8	12.0	94	70-140	
NEtFOSA	ng/L	3.1	3.1	100	65-145	
NEtFOSAA	ng/L	3.1	3.1	101	70-145	
NEtFOSE	ng/L	30.7	29.3	95	70-135	
NFDHA	ng/L	6.4	6.0	94	50-150	
NMeFOSA	ng/L	3.1	3.4	110	60-150	
NMeFOSAA	ng/L	3.1	2.9	93	50-140	
NMeFOSE	ng/L	30.7	29.1	95	70-145	
PFBA	ng/L	12.8	12.2	95	70-140	
PFBS	ng/L	2.8	2.7	96	60-145	
PFDA	ng/L	3.1	3.2	104	70-140	
PFDoA	ng/L	3.1	3.1	100	70-140	
PFDoS	ng/L	3.1	3.1	101	50-145	
PFDS	ng/L	3.1	2.6	84	60-145	
PFEESA	ng/L	5.6	5.7	100	70-140	
PFHpA	ng/L	3.1	3.0	97	70-150	
PFHpS	ng/L	3.1	2.4	78	70-150	
PFHxA	ng/L	3.1	3.0	97	70-145	
PFHxS	ng/L	2.8	3.0	107	65-145	
PFMBA	ng/L	6.4	6.1	95	60-150	
PFMPA	ng/L	6.4	5.3	83	55-140	
PFNA	ng/L	3.1	3.2	105	70-150	
PFNS	ng/L	3.1	2.7	87	65-145	
PFOA	ng/L	3.1	3.2	104	70-150	
PFOS	ng/L	3.1	2.5	82	55-150	
PFOSA	ng/L	3.1	2.9	94	70-145	
PFPeA	ng/L	6.4	5.9	93	65-135	
PFPeS	ng/L	3.1	2.7	87	65-140	
PFTeDA	ng/L	3.1	2.8	92	60-140	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92799826

LABORATORY CONTROL SAMPLE: 5283908

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
PFTrDA	ng/L	3.1	3.3	108	65-140	
PFUnA	ng/L	3.1	3.0	99	70-145	
13C2-PFDoA (S)	%.			43	10-130	
13C2-PFTA (S)	%.			55	10-130	
13C24:2FTS (S)	%.			61	40-200	
13C26:2FTS (S)	%.			62	40-200	
13C28:2FTS (S)	%.			55	40-300	
13C3-PFBS (S)	%.			48	40-135	
13C3-PFHxS (S)	%.			45	40-130	
13C3-PFPrA (S)	%.			60	5-130	
13C3HFPO-DA (S)	%.			52	40-130	
13C4-PFBA (S)	%.			54	5-130	
13C4-PFHpA (S)	%.			47	40-130	
13C5-PFHxA (S)	%.			50	40-130	
13C5-PFPeA (S)	%.			50	40-130	
13C6-PFDA (S)	%.			43	40-130	
13C7-PFUdA (S)	%.			46	30-130	
13C8-PFOA (S)	%.			49	40-130	
13C8-PFOS (S)	%.			50	40-130	
13C8-PFOSA (S)	%.			43	40-130	
13C9-PFNA (S)	%.			44	40-130	
d3-MeFOSAA (S)	%.			51	40-170	
d3-NMeFOSA (S)	%.			32	10-130	
d5-EtFOSAA (S)	%.			49	25-135	
d5-NEtFOSA (S)	%.			36	10-130	
d7-NMeFOSE (S)	%.			39	10-130	
d9-NEtFOSE (S)	%.			44	10-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALIFIERS

Project: Fortress Wood Products
Pace Project No.: 92799826

DEFINITIONS

DF - Dilution Factor, if reported, represents the factor applied to the reported data due to dilution of the sample aliquot.

ND - Not Detected at or above adjusted reporting limit.

TNTC - Too Numerous To Count

J - Estimated concentration above the adjusted method detection limit and below the adjusted reporting limit.

MDL - Adjusted Method Detection Limit.

PQL - Practical Quantitation Limit.

RL - Reporting Limit - The lowest concentration value that meets project requirements for quantitative data with known precision and bias for a specific analyte in a specific matrix.

S - Surrogate

1,2-Diphenylhydrazine decomposes to and cannot be separated from Azobenzene using Method 8270. The result for each analyte is a combined concentration.

Consistent with EPA guidelines, unrounded data are displayed and have been used to calculate % recovery and RPD values.

LCS(D) - Laboratory Control Sample (Duplicate)

MS(D) - Matrix Spike (Duplicate)

DUP - Sample Duplicate

RPD - Relative Percent Difference

NC - Not Calculable.

SG - Silica Gel - Clean-Up

U - Indicates the compound was analyzed for, but not detected.

Acid preservation may not be appropriate for 2 Chloroethylvinyl ether.

A separate vial preserved to a pH of 4-5 is recommended in SW846 Chapter 4 for the analysis of Acrolein and Acrylonitrile by EPA Method 8260.

N-Nitrosodiphenylamine decomposes and cannot be separated from Diphenylamine using Method 8270. The result reported for each analyte is a combined concentration.

Reported results are not rounded until the final step prior to reporting. Therefore, calculated parameters that are typically reported as "Total" may vary slightly from the sum of the reported component parameters.

Pace Analytical is TNI accredited. Contact your Pace PM for the current list of accredited analytes.

TNI - The NELAC Institute.

ANALYTE QUALIFIERS

N2	The lab does not hold NELAC/TNI accreditation for this parameter but other accreditations/certifications may apply. A complete list of accreditations/certifications is available upon request.
S0	Surrogate recovery outside laboratory control limits.
S3	Surrogate recovery exceeded laboratory control limits. Analyte presence below reporting limits in associated sample.

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA CROSS REFERENCE TABLE

Project: Fortress Wood Products
Pace Project No.: 92799826

Lab ID	Sample ID	QC Batch Method	QC Batch	Analytical Method	Analytical Batch
92799826001	**B-14-P**	ASTM D2974	1011660		
92799826002	**B-13-P**	ASTM D2974	1011660		
92799826003	**B-12-P**	ASTM D2974	1011660		
92799826004	**B-8-P**	ASTM D2974	1011660		
92799826005	**B-7-P**	ASTM D2974	1011660		
92799826007	**B-DUP**	ASTM D2974	1011660		
92799826001	**B-14-P**	EPA 1633	1013452	EPA 1633	1014786
92799826002	**B-13-P**	EPA 1633	1013452	EPA 1633	1014786
92799826003	**B-12-P**	EPA 1633	1013452	EPA 1633	1014786
92799826004	**B-8-P**	EPA 1633	1013452	EPA 1633	1014786
92799826005	**B-7-P**	EPA 1633	1013452	EPA 1633	1014786
92799826007	**B-DUP**	EPA 1633	1013452	EPA 1633	1014786
92799826006	**FB-1-P**	EPA 1633	1013593	EPA 1633	1014979

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace® Location Requested (City/State):
Pace Analytical Charlotte
9800 Kincey Ave. Suite 100, Huntersville, NC 28078

CHAIN-OF-CUSTODY Analytical Request Document

Chain-of-Custody is a LEGAL DOCUMENT - Complete all relevant fields

LAB USE ONLY- Affix Workorder/Login Label Here

WO# : 92799826

92799826

Company Name:	ECS Southeast, LLC-Charlotte	Contact/Report To:	Emery Lovekamp
Street Address:	1812 Center Park Drive Suite D Charlotte, NC 28217	Phone #:	704-525-5152
		E-Mail:	elovekamp@ecslimited.com
		Cc E-Mail:	
Customer Project #:			
Project Name:	_____	Invoice To:	AP-ECS Charlotte
		Invoice E-Mail:	ecs-49@ecslimited.com
Site Collection Info/Facility ID (as applicable):		Purchase Order # (if applicable):	NEED
		Quote #:	
Time Zone Collected: [ ] AK [ ] PT [ ] MT [ ] CT [ ] ET		County / State origin of sample(s):	North Carolina
Data Deliverables: [ ] Level II [ ] Level III [ ] Level IV [ ] EQUIS [ ] Other		Regulatory Program (DW, RCRA, etc.) as applicable:	Reportable [ ] Yes [ ] No
		Rush (Pre-approval required): [ ] Same Day [ ] 1 Day [ ] 2 Day [ ] 3 Day [ ] Other _____	DW PWSID # or WW Permit # as applicable:
		Date Results Requested:	Field Filtered (if applicable): [ ] Yes [ ] No
			Analysis:

Specify Container Size***

Identify Container Preservative Type***

***Container Size: (1) 1L, (2) 500mL, (3) 250mL, (4) 125mL, (5) 100mL, (6) 40mL vial, (7) EnCore, (8) TerraCore, (9) 90mL, (10) Other

*** Preservative Types: (1) None, (2) HNO3, (3) H2SO4, (4) HCl, (5) NaOH, (6) Zn Acetate, (7) NaHSO4, (8) Sod. Thiosulfate, (9) Ascorbic Acid, (10) MeOH, (11) Other

Lab Use Only: Proj. Mgr: Angela Baioni; AcctNum / Client ID:; Table #:; Profile / Template: 18978; Prelog / Bottle Ord. ID: EZ 3265816

Preservation non-conformance identified for sample

* Matrix Codes (Insert in Matrix box below): Drinking Water (DW), Ground Water (GW), Waste Water (WW), Product (P), Soil/Solid (SS), Oil (OL), Wipe (WP), Tissue (TS), Bioassay (B), Vapor (V), Surface Water (SW), Sediment (SED), Sludge (SL), Caulk (CK), Leachate (LL), Biosolid (BS), Other (OT)

Customer Sample ID	Matrix *	Comp / Grab	Composite Start Date	Composite Start Time	Collected or Composite End Date	Collected or Composite End Time	# Cont.	Res. Chlorine Results	Res. Chlorine Units	1633 PFAS	Sample Comment
B-14_P	SS	C			6/2/25	1000				X	
B-13_P	SS	C			6/2/25	1140				X	
B-12_P	SS	C			6/2/25	1230				X	
B-8_P	SS	C			6/2/25	1350				X	
B-7_P	SS	C			6/2/25	1430				X	
FB-1_P	W	G			6/2/25	1415				X	
[redacted] B_DUP	SS	C			6/2/25	—				X	

Additional Instructions from Pace®:

Collected By: (Printed Name) Seth Greene

Signature: Seth Greene

Customer Remarks / Special Conditions / Possible Hazards:

# Coolers:	Thermometer ID:	Correction Factor (°C):	Obs. Temp. (°C)	Corrected Temp. (°C)	On Ice:

Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Tracking Number:
Seth Greene (ECS	6/2/25 - 15:52	Mika Bond	06/02/25 1552	
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Delivered by: [ ] In- Person [ ] Courier
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	[ ] FedEx [ ] UPS [ ] Other
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Page: 1 of 2

Submitting a sample via this chain of custody constitutes acknowledgment and acceptance of the Pace® Terms and Conditions found at https://www.pacelabs.com/resource-library/resource/pace-terms-and-conditions/

ENV-FRM-CORQ-0019_v02_110123 ©

Pace	DC#_Title: ENV-FRM-HUN1-0083 v05_Sample Condition Upon Receipt
	Effective Date: 05/24/2024

Laboratory receiving samples:

Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☐ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☑

Sample Condition Upon Receipt

Client Name: ECS

Project #:

Courier: ☐ Fed Ex ☐ UPS ☐ USPS ☑ Client ☐ Commercial ☐ Pace ☐ Other:

Custody Seal Present? ☐ Yes ☑ No Seals Intact? ☐ Yes ☐ No ☑ N/A

Date/Initials Person Examining Contents: SBL

Packing Material: ☐ Bubble Wrap ☐ Bubble Bags ☑ None ☐ Other

Biological Tissue Frozen? ☐ Yes ☐ No ☑ N/A

Thermometer: ☐ IR Gun ID: KRT002

Type of Ice: ☑ Wet ☐ Blue ☐ None

Cooler Temp: 1.3 Correction Factor: Add/Subtract (°C) 0.0

Cooler Temp Corrected (°C): 1.3

Temp should be above freezing to 6°C

☐ Samples out of temp criteria. Samples on ice, cooling process has begun

USDA Regulated Soil (☑ N/A, water sample)

Did samples originate in a quarantine zone within the United States: CA, NY, or SC (check maps)? ☐ Yes ☑ No

Did samples originate from a foreign source (internationally, including Hawaii and Puerto Rico)? ☐ Yes ☑ No

				Comments/Discrepancy:
Chain of Custody Present?	☑ Yes	☐ No	☐ N/A	1.
Samples Arrived within Hold Time?	☑ Yes	☐ No	☐ N/A	2.
Short Hold Time Analysis (<72 hr.)?	☐ Yes	☑ No	☐ N/A	3.
Rush Turn Around Time Requested?	☐ Yes	☑ No	☐ N/A	4.
Sufficient Volume?	☑ Yes	☐ No	☐ N/A	5
Correct Containers Used?	☑ Yes	☐ No	☐ N/A	6
-Pace Containers Used?	☑ Yes	☐ No	☐ N/A	
Containers Intact?	☑ Yes	☐ No	☐ N/A	7
Dissolved analysis: Samples Field Filtered?	☐ Yes	☐ No	☑ N/A	8
Sample Labels Match COC?	☑ Yes	☐ No	☐ N/A	9
-Includes Date/Time/ID/Analysis Matrix: SL/WT				
Headspace in VOA Vials (>5-6mm)?	☐ Yes	☐ No	☑ N/A	10
Trip Blank Present?	☐ Yes	☐ No	☑ N/A	11
Trip Blank Custody Seals Present?	☐ Yes	☐ No	☑ N/A	

COMMENTS/SAMPLE DISCREPANCY

Field Data Required? ☐ Yes ☐ No

Lot ID of split containers:

CLIENT NOTIFICATION/RESOLUTION

Person contacted: Date/Time:

Project Manager SCURF Review: Date:

Project Manager SRF Review: Date:

Pace	DC#_Title: ENV-FRM-HUN1-0083 v05_Sample Condition Upon Receipt
	Effective Date: 05/24/2024

*Check mark top half of box if pH and/or dechlorination is verified and within the acceptance range for preservation samples.
Exceptions: VOA, Coliform, TOC, Oil and Grease, DRO/8015 (water) DOC, LLHg
**Bottom half of box is to list number of bottles
***Check all unpreserved Nitrates for chlorine

Project #

Laboratory Receiving Location: Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☐ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☑

Client ECS Profile/EZ (Circle one) 326816 Notes

Item#	BP4U-125 mL Plastic Unpreserved (N/A) (Cl-)	BP3U-250 mL Plastic Unpreserved (N/A)	BP2U-500 mL Plastic Unpreserved (N/A)	BP1U-1 liter Plastic Unpreserved (N/A)	NT2U	BP4S-125 mL Plastic H2SO4 (pH < 2) (Cl-)	BP3N-250 mL plastic HNO3 (pH < 2)	BP4Z-125 mL Plastic ZN Acetate & NaOH (>9)	BP4B-125 mL Plastic NaOH (pH > 12) (Cl-)	WGFU-Wide-mouthed Glass jar Unpreserved	AG1U-1 liter Amber Unpreserved (N/A) (Cl-)	AG1H-1 liter Amber HCl (pH < 2)	AG3U-250 mL Amber Unpreserved (N/A) (Cl-)	AG1S-1 liter Amber H2SO4 (pH < 2)	AG3S-250 mL Amber H2SO4 (pH < 2)	DG9A-40 mL Amber NH4Cl (N/A)(Cl-)	DG9H-40 mL VOA HCl (N/A)	VG9T-40 mL VOA Na2S2O3 (N/A)	VG9U-40 mL VOA Unpreserved (N/A)	DG9V-40 mL VOA H3PO4 (N/A)	KP7U-50 mL Plastic Unpreserved (N/A)	V/GK (3 vials per kit)-VPH/Gas kit (N/A)	SP5T-125 mL Sterile Plastic (N/A - lab)	SP2T-250 mL Sterile Plastic (N/A - lab)		BP3R-250 mL Plastic (NH4)2SO4 (9.3-9.7)	AG0U-100 mL Amber Unpreserved (N/A) (Cl-)	VSGU-20 mL Scintillation vials (N/A)	DG9U-40 mL Amber Unpreserved vials (N/A)
CC	SI				SI																									
1	1																													
2	1																													
3	1																													
4	1																													
5	1																													
6					2																									
7	1																													
8																														
9																														
10																														
11																														
12																														

pH Adjustment Log for Preserved Samples

Sample ID	Type of Preservative	pH upon receipt	Date preservation adjusted	Time preservation adjusted	Amount of Preservative added	Lot #

Note: Whenever there is a discrepancy affecting North Carolina compliance samples, a copy of this form will be sent to the North Carolina DENR Certification Office (i.e Out of hold, incorrect preservative, out of temp, incorrect containers

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

June 30, 2025

Emery Lovekamp
ECS Southeast, LLC-Charlotte
1812 Center Park Drive
Suite D
Charlotte, NC 28217

RE: Project: Fortress Wood Products
Pace Project No.: 92800074

Dear Emery Lovekamp:

Enclosed are the analytical results for sample(s) received by the laboratory on June 03, 2025. The results relate only to the samples included in this report. Results reported herein conform to the applicable TNI/NELAC Standards and the laboratory's Quality Manual, where applicable, unless otherwise noted in the body of the report.

The test results provided in this final report were generated by each of the following laboratories within the Pace Network:

- Pace Analytical Services - Minneapolis

If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Angela M. Baioni

Angela Baioni
angela.baioni@pacelabs.com
612-473-6801
Project Manager

Enclosures

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

CERTIFICATIONS

Project: Fortress Wood Products
Pace Project No.: 92800074

Pace Analytical Services, LLC - Minneapolis MN
1700 Elm Street SE, Minneapolis, MN 55414
Alabama Certification #: 40770
Alaska Contaminated Sites Certification #: 17-009
Alaska DW Certification #: MN00064
Arizona Certification #: AZ0014
Arkansas DW Certification #: MN00064
Arkansas WW Certification #: 88-0680
California Certification #: 2929
Colorado Certification #: MN00064
Connecticut Certification #: PH-0256
DoD Certification via A2LA #: 2926.01
EPA Region 8 Tribal Water Systems+Wyoming DW Certification #: via MN 027-053-137
Florida Certification #: E87605
Georgia Certification #: 959
Idaho Certification #: MN00064
Illinois Certification #: 200011
Indiana Certification #: C-MN-01
Iowa Certification #: 368
ISO/IEC 17025 Certification via A2LA #: 2926.01
Kansas Certification #: E-10167
Kentucky DW Certification #: 90062
Kentucky WW Certification #: 90062
Louisiana DEQ Certification #: AI-03086
Louisiana DW Certification #: MN00064
Maine Certification #: MN00064
Maryland Certification #: 322
Michigan Certification #: 9909
Minnesota Certification #: 027-053-137
Minnesota Dept of Ag Approval: via MN 027-053-137
Minnesota Petrofund Registration #: 1240
Mississippi Certification #: MN00064
Missouri Certification #: 10100
Montana Certification #: CERT0092
Nebraska Certification #: NE-OS-18-06
Nevada Certification #: MN00064
New Hampshire Certification #: 2081
New Jersey Certification #: MN002
New York Certification #: 11647
North Carolina DW Certification #: 27700
North Carolina WW Certification #: 530
North Dakota Certification via A2LA #: R-036
North Dakota Certification via MN #: R-036
Ohio DW Certification #: 41244
Ohio VAP Certification (1700) #: CL101
Oklahoma Certification #: 9507
Oregon Primary Certification #: MN300001
Oregon Secondary Certification #: MN200001
Pennsylvania Certification #: 68-00563
Puerto Rico Certification #: MN00064
South Carolina Certification #:74003001
Tennessee Certification #: TN02818
Texas Certification #: T104704192
Utah Certification #: MN00064
Vermont Certification #: VT-027053137
Virginia Certification #: 460163
Washington Certification #: C486
West Virginia DEP Certification #: 382
West Virginia DW Certification #: 9952 C
Wisconsin Certification #: 999407970
Wyoming UST Certification via A2LA #: 2926.01
USDA Permit #: P330-19-00208

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE SUMMARY

Project: Fortress Wood Products
Pace Project No.: 92800074

Lab ID	Sample ID	Matrix	Date Collected	Date Received
92800074001	**B-5-P**	Solid	06/03/25 09:25	06/03/25 15:45
92800074002	**B-4-P**	Solid	06/03/25 10:00	06/03/25 15:45
92800074003	**B-2-P**	Solid	06/03/25 11:10	06/03/25 15:45
92800074004	**B-3-P**	Solid	06/03/25 11:35	06/03/25 15:45
92800074005	**FB-2-P**	Water	06/03/25 12:00	06/03/25 15:45
92800074006	**B-6-P**	Solid	06/03/25 13:35	06/03/25 15:45
92800074007	**B-9-P**	Solid	06/03/25 14:15	06/03/25 15:45
92800074008	**B-10-P**	Solid	06/03/25 14:45	06/03/25 15:45

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE ANALYTE COUNT

Project: Fortress Wood Products
Pace Project No.: 92800074

Lab ID	Sample ID	Method	Analysts	Analytes Reported	Laboratory
92800074001	**B-5-P**	ASTM D2974	JDL	1	PASI-M
		EPA 1633	AJG	65	PASI-M
92800074002	**B-4-P**	ASTM D2974	JDL	1	PASI-M
		EPA 1633	AJG	65	PASI-M
92800074003	**B-2-P**	ASTM D2974	JDL	1	PASI-M
		EPA 1633	AJG	65	PASI-M
92800074004	**B-3-P**	ASTM D2974	JDL	1	PASI-M
		EPA 1633	AJG	65	PASI-M
92800074005	**FB-2-P**	EPA 1633	NBH	65	PASI-M
92800074006	**B-6-P**	ASTM D2974	JDL	1	PASI-M
		EPA 1633	AJG	65	PASI-M
92800074007	**B-9-P**	ASTM D2974	JDL	1	PASI-M
		EPA 1633	AJG	65	PASI-M
92800074008	**B-10-P**	ASTM D2974	JDL	1	PASI-M
		EPA 1633	AJG	65	PASI-M

PASI-M = Pace Analytical Services - Minneapolis

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800074

Sample: B-5-P **Lab ID: 92800074001** Collected: 06/03/25 09:25 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Dry Weight / %M by ASTM D2974	Analytical Method: ASTM D2974 Pace Analytical Services - Minneapolis								
Percent Moisture	**17.8**	%	0.10	0.10	1		06/11/25 15:20		N2
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ug/kg	0.80	0.15	1	06/20/25 13:07	06/23/25 15:33	763051-92-9	
3:3 FTCA	ND	ug/kg	1.0	0.27	1	06/20/25 13:07	06/23/25 15:33	356-02-5	
4:2 FTS	ND	ug/kg	0.80	0.14	1	06/20/25 13:07	06/23/25 15:33	757124-72-4	
5:3 FTCA	ND	ug/kg	5.0	1.2	1	06/20/25 13:07	06/23/25 15:33	914637-49-3	
6:2 FTS	ND	ug/kg	0.80	0.20	1	06/20/25 13:07	06/23/25 15:33	27619-97-2	
7:3 FTCA	ND	ug/kg	5.0	1.1	1	06/20/25 13:07	06/23/25 15:33	812-70-4	
8:2 FTS	ND	ug/kg	0.80	0.20	1	06/20/25 13:07	06/23/25 15:33	39108-34-4	
9Cl-PF3ONS	ND	ug/kg	0.80	0.19	1	06/20/25 13:07	06/23/25 15:33	756426-58-1	
ADONA	ND	ug/kg	0.80	0.18	1	06/20/25 13:07	06/23/25 15:33	919005-14-4	
HFPO-DA	ND	ug/kg	0.80	0.19	1	06/20/25 13:07	06/23/25 15:33	13252-13-6	
NEtFOSAA	ND	ug/kg	0.20	0.074	1	06/20/25 13:07	06/23/25 15:33	2991-50-6	
NEtFOSA	ND	ug/kg	0.20	0.052	1	06/20/25 13:07	06/23/25 15:33	4151-50-2	
NEtFOSE	ND	ug/kg	2.0	0.39	1	06/20/25 13:07	06/23/25 15:33	1691-99-2	
NFDHA	ND	ug/kg	0.40	0.13	1	06/20/25 13:07	06/23/25 15:33	151772-58-6	
NMeFOSAA	ND	ug/kg	0.20	0.054	1	06/20/25 13:07	06/23/25 15:33	2355-31-9	
NMeFOSA	ND	ug/kg	0.20	0.061	1	06/20/25 13:07	06/23/25 15:33	31506-32-8	
NMeFOSE	ND	ug/kg	2.0	0.46	1	06/20/25 13:07	06/23/25 15:33	24448-09-7	
PFBS	ND	ug/kg	0.20	0.038	1	06/20/25 13:07	06/23/25 15:33	375-73-5	
PFDA	ND	ug/kg	0.20	0.047	1	06/20/25 13:07	06/23/25 15:33	335-76-2	
PFHxA	ND	ug/kg	0.20	0.045	1	06/20/25 13:07	06/23/25 15:33	307-24-4	
PFBA	ND	ug/kg	0.80	0.21	1	06/20/25 13:07	06/23/25 15:33	375-22-4	
PFDS	ND	ug/kg	0.20	0.058	1	06/20/25 13:07	06/23/25 15:33	335-77-3	
PFDoS	ND	ug/kg	0.20	0.043	1	06/20/25 13:07	06/23/25 15:33	79780-39-5	
PFEESA	ND	ug/kg	0.40	0.083	1	06/20/25 13:07	06/23/25 15:33	113507-82-7	
PFHpS	ND	ug/kg	0.20	0.060	1	06/20/25 13:07	06/23/25 15:33	375-92-8	
PFMBA	ND	ug/kg	0.40	0.096	1	06/20/25 13:07	06/23/25 15:33	863090-89-5	
PFMPA	ND	ug/kg	0.40	0.12	1	06/20/25 13:07	06/23/25 15:33	377-73-1	
PFNS	ND	ug/kg	0.20	0.053	1	06/20/25 13:07	06/23/25 15:33	68259-12-1	
PFOSA	ND	ug/kg	0.20	0.044	1	06/20/25 13:07	06/23/25 15:33	754-91-6	
PFPeA	ND	ug/kg	0.40	0.086	1	06/20/25 13:07	06/23/25 15:33	2706-90-3	
PFPeS	ND	ug/kg	0.20	0.048	1	06/20/25 13:07	06/23/25 15:33	2706-91-4	
PFDoA	ND	ug/kg	0.20	0.045	1	06/20/25 13:07	06/23/25 15:33	307-55-1	
PFHpA	ND	ug/kg	0.20	0.078	1	06/20/25 13:07	06/23/25 15:33	375-85-9	
PFHxS	ND	ug/kg	0.20	0.049	1	06/20/25 13:07	06/23/25 15:33	355-46-4	
PFNA	ND	ug/kg	0.20	0.056	1	06/20/25 13:07	06/23/25 15:33	375-95-1	
PFOS	ND	ug/kg	0.20	0.040	1	06/20/25 13:07	06/23/25 15:33	1763-23-1	
PFOA	ND	ug/kg	0.20	0.050	1	06/20/25 13:07	06/23/25 15:33	335-67-1	
PFTeDA	ND	ug/kg	0.20	0.050	1	06/20/25 13:07	06/23/25 15:33	376-06-7	
PFTrDA	ND	ug/kg	0.20	0.042	1	06/20/25 13:07	06/23/25 15:33	72629-94-8	
PFUnA	ND	ug/kg	0.20	0.048	1	06/20/25 13:07	06/23/25 15:33	2058-94-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800074

Sample: B-5-P **Lab ID: 92800074001** Collected: 06/03/25 09:25 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C2-PFDoA (S)	81	%.	40-130		1	06/20/25 13:07	06/23/25 15:33		
13C3HFPO-DA (S)	76	%.	40-130		1	06/20/25 13:07	06/23/25 15:33		
13C3-PFBS (S)	78	%.	40-135		1	06/20/25 13:07	06/23/25 15:33		
13C3-PFHxS (S)	75	%.	40-130		1	06/20/25 13:07	06/23/25 15:33		
13C4-PFBA (S)	66	%.	8-130		1	06/20/25 13:07	06/23/25 15:33		
13C4-PFHpA (S)	74	%.	40-130		1	06/20/25 13:07	06/23/25 15:33		
13C5-PFHxA (S)	73	%.	40-130		1	06/20/25 13:07	06/23/25 15:33		
13C5-PFPeA (S)	75	%.	35-130		1	06/20/25 13:07	06/23/25 15:33		
13C6-PFDA (S)	76	%.	40-130		1	06/20/25 13:07	06/23/25 15:33		
13C8-PFOA (S)	74	%.	40-130		1	06/20/25 13:07	06/23/25 15:33		
13C8-PFOS (S)	86	%.	40-130		1	06/20/25 13:07	06/23/25 15:33		
13C8-PFOSA (S)	81	%.	40-130		1	06/20/25 13:07	06/23/25 15:33		
13C9-PFNA (S)	75	%.	40-130		1	06/20/25 13:07	06/23/25 15:33		
d3-MeFOSAA (S)	85	%.	40-135		1	06/20/25 13:07	06/23/25 15:33		
d3-NMeFOSA (S)	57	%.	10-130		1	06/20/25 13:07	06/23/25 15:33		
d5-EtFOSAA (S)	93	%.	40-150		1	06/20/25 13:07	06/23/25 15:33		
d5-NEtFOSA (S)	47	%.	10-130		1	06/20/25 13:07	06/23/25 15:33		
d7-NMeFOSE (S)	77	%.	20-130		1	06/20/25 13:07	06/23/25 15:33		
d9-NEtFOSE (S)	51	%.	15-130		1	06/20/25 13:07	06/23/25 15:33		
13C2-PFTA (S)	86	%.	20-130		1	06/20/25 13:07	06/23/25 15:33		
13C7-PFUdA (S)	89	%.	40-130		1	06/20/25 13:07	06/23/25 15:33		
13C24:2FTS (S)	93	%.	40-135		1	06/20/25 13:07	06/23/25 15:33		
13C26:2FTS (S)	107	%.	40-215		1	06/20/25 13:07	06/23/25 15:33		
13C28:2FTS (S)	121	%.	40-275		1	06/20/25 13:07	06/23/25 15:33		
13C3-PFPrA (S)	42	%.	8-130		1	06/20/25 13:07	06/23/25 15:33		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800074

Sample: B-4-P **Lab ID: 92800074002** Collected: 06/03/25 10:00 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Dry Weight / %M by ASTM D2974	Analytical Method: ASTM D2974 Pace Analytical Services - Minneapolis								
Percent Moisture	**17.7**	%	0.10	0.10	1		06/11/25 15:20		N2
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ug/kg	0.79	0.15	1	06/24/25 14:10	06/25/25 19:14	763051-92-9	
3:3 FTCA	ND	ug/kg	0.98	0.26	1	06/24/25 14:10	06/25/25 19:14	356-02-5	
4:2 FTS	ND	ug/kg	0.79	0.14	1	06/24/25 14:10	06/25/25 19:14	757124-72-4	
5:3 FTCA	ND	ug/kg	4.9	1.2	1	06/24/25 14:10	06/25/25 19:14	914637-49-3	
6:2 FTS	ND	ug/kg	0.79	0.20	1	06/24/25 14:10	06/25/25 19:14	27619-97-2	
7:3 FTCA	ND	ug/kg	4.9	1.1	1	06/24/25 14:10	06/25/25 19:14	812-70-4	
8:2 FTS	ND	ug/kg	0.79	0.20	1	06/24/25 14:10	06/25/25 19:14	39108-34-4	
9Cl-PF3ONS	ND	ug/kg	0.79	0.18	1	06/24/25 14:10	06/25/25 19:14	756426-58-1	
ADONA	ND	ug/kg	0.79	0.18	1	06/24/25 14:10	06/25/25 19:14	919005-14-4	
HFPO-DA	ND	ug/kg	0.79	0.19	1	06/24/25 14:10	06/25/25 19:14	13252-13-6	
NEtFOSAA	ND	ug/kg	0.20	0.073	1	06/24/25 14:10	06/25/25 19:14	2991-50-6	
NEtFOSA	ND	ug/kg	0.20	0.051	1	06/24/25 14:10	06/25/25 19:14	4151-50-2	
NEtFOSE	ND	ug/kg	2.0	0.38	1	06/24/25 14:10	06/25/25 19:14	1691-99-2	
NFDHA	ND	ug/kg	0.39	0.13	1	06/24/25 14:10	06/25/25 19:14	151772-58-6	
NMeFOSAA	ND	ug/kg	0.20	0.053	1	06/24/25 14:10	06/25/25 19:14	2355-31-9	
NMeFOSA	ND	ug/kg	0.20	0.059	1	06/24/25 14:10	06/25/25 19:14	31506-32-8	
NMeFOSE	ND	ug/kg	2.0	0.45	1	06/24/25 14:10	06/25/25 19:14	24448-09-7	
PFBS	ND	ug/kg	0.20	0.037	1	06/24/25 14:10	06/25/25 19:14	375-73-5	
PFDA	ND	ug/kg	0.20	0.046	1	06/24/25 14:10	06/25/25 19:14	335-76-2	
PFHxA	ND	ug/kg	0.20	0.044	1	06/24/25 14:10	06/25/25 19:14	307-24-4	
PFBA	ND	ug/kg	0.79	0.21	1	06/24/25 14:10	06/25/25 19:14	375-22-4	
PFDS	ND	ug/kg	0.20	0.057	1	06/24/25 14:10	06/25/25 19:14	335-77-3	
PFDoS	ND	ug/kg	0.20	0.042	1	06/24/25 14:10	06/25/25 19:14	79780-39-5	
PFEESA	ND	ug/kg	0.39	0.081	1	06/24/25 14:10	06/25/25 19:14	113507-82-7	
PFHpS	ND	ug/kg	0.20	0.058	1	06/24/25 14:10	06/25/25 19:14	375-92-8	
PFMBA	ND	ug/kg	0.39	0.095	1	06/24/25 14:10	06/25/25 19:14	863090-89-5	
PFMPA	ND	ug/kg	0.39	0.11	1	06/24/25 14:10	06/25/25 19:14	377-73-1	
PFNS	ND	ug/kg	0.20	0.052	1	06/24/25 14:10	06/25/25 19:14	68259-12-1	
PFOSA	ND	ug/kg	0.20	0.043	1	06/24/25 14:10	06/25/25 19:14	754-91-6	
PFPeA	ND	ug/kg	0.39	0.084	1	06/24/25 14:10	06/25/25 19:14	2706-90-3	
PFPeS	ND	ug/kg	0.20	0.047	1	06/24/25 14:10	06/25/25 19:14	2706-91-4	
PFDoA	ND	ug/kg	0.20	0.044	1	06/24/25 14:10	06/25/25 19:14	307-55-1	
PFHpA	ND	ug/kg	0.20	0.077	1	06/24/25 14:10	06/25/25 19:14	375-85-9	
PFHxS	ND	ug/kg	0.20	0.048	1	06/24/25 14:10	06/25/25 19:14	355-46-4	
PFNA	ND	ug/kg	0.20	0.055	1	06/24/25 14:10	06/25/25 19:14	375-95-1	
PFOS	ND	ug/kg	0.20	0.039	1	06/24/25 14:10	06/25/25 19:14	1763-23-1	
PFOA	ND	ug/kg	0.20	0.049	1	06/24/25 14:10	06/25/25 19:14	335-67-1	
PFTeDA	ND	ug/kg	0.20	0.049	1	06/24/25 14:10	06/25/25 19:14	376-06-7	
PFTrDA	ND	ug/kg	0.20	0.041	1	06/24/25 14:10	06/25/25 19:14	72629-94-8	
PFUnA	ND	ug/kg	0.20	0.047	1	06/24/25 14:10	06/25/25 19:14	2058-94-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800074

Sample: B-4-P **Lab ID: 92800074002** Collected: 06/03/25 10:00 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C2-PFDoA (S)	72	%.	40-130		1	06/24/25 14:10	06/25/25 19:14		
13C3HFPO-DA (S)	74	%.	40-130		1	06/24/25 14:10	06/25/25 19:14		
13C3-PFBS (S)	65	%.	40-135		1	06/24/25 14:10	06/25/25 19:14		
13C3-PFHxS (S)	73	%.	40-130		1	06/24/25 14:10	06/25/25 19:14		
13C4-PFBA (S)	65	%.	8-130		1	06/24/25 14:10	06/25/25 19:14		
13C4-PFHpA (S)	72	%.	40-130		1	06/24/25 14:10	06/25/25 19:14		
13C5-PFHxA (S)	68	%.	40-130		1	06/24/25 14:10	06/25/25 19:14		
13C5-PFPeA (S)	68	%.	35-130		1	06/24/25 14:10	06/25/25 19:14		
13C6-PFDA (S)	70	%.	40-130		1	06/24/25 14:10	06/25/25 19:14		
13C8-PFOA (S)	67	%.	40-130		1	06/24/25 14:10	06/25/25 19:14		
13C8-PFOS (S)	69	%.	40-130		1	06/24/25 14:10	06/25/25 19:14		
13C8-PFOSA (S)	64	%.	40-130		1	06/24/25 14:10	06/25/25 19:14		
13C9-PFNA (S)	71	%.	40-130		1	06/24/25 14:10	06/25/25 19:14		
d3-MeFOSAA (S)	96	%.	40-135		1	06/24/25 14:10	06/25/25 19:14		
d3-NMeFOSA (S)	59	%.	10-130		1	06/24/25 14:10	06/25/25 19:14		
d5-EtFOSAA (S)	102	%.	40-150		1	06/24/25 14:10	06/25/25 19:14		
d5-NEtFOSA (S)	58	%.	10-130		1	06/24/25 14:10	06/25/25 19:14		
d7-NMeFOSE (S)	61	%.	20-130		1	06/24/25 14:10	06/25/25 19:14		
d9-NEtFOSE (S)	62	%.	15-130		1	06/24/25 14:10	06/25/25 19:14		
13C2-PFTA (S)	60	%.	20-130		1	06/24/25 14:10	06/25/25 19:14		
13C7-PFUdA (S)	74	%.	40-130		1	06/24/25 14:10	06/25/25 19:14		
13C24:2FTS (S)	132	%.	40-135		1	06/24/25 14:10	06/25/25 19:14		
13C26:2FTS (S)	121	%.	40-215		1	06/24/25 14:10	06/25/25 19:14		
13C28:2FTS (S)	140	%.	40-275		1	06/24/25 14:10	06/25/25 19:14		
13C3-PFPrA (S)	31	%.	8-130		1	06/24/25 14:10	06/25/25 19:14		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800074

Sample: B-2-P **Lab ID: 92800074003** Collected: 06/03/25 11:10 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Dry Weight / %M by ASTM D2974	Analytical Method: ASTM D2974 Pace Analytical Services - Minneapolis								
Percent Moisture	**12.3**	%	0.10	0.10	1		06/11/25 15:20		N2
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ug/kg	0.80	0.15	1	06/24/25 14:10	06/25/25 19:24	763051-92-9	
3:3 FTCA	ND	ug/kg	0.99	0.27	1	06/24/25 14:10	06/25/25 19:24	356-02-5	
4:2 FTS	ND	ug/kg	0.80	0.14	1	06/24/25 14:10	06/25/25 19:24	757124-72-4	
5:3 FTCA	ND	ug/kg	5.0	1.2	1	06/24/25 14:10	06/25/25 19:24	914637-49-3	
6:2 FTS	ND	ug/kg	0.80	0.20	1	06/24/25 14:10	06/25/25 19:24	27619-97-2	
7:3 FTCA	ND	ug/kg	5.0	1.1	1	06/24/25 14:10	06/25/25 19:24	812-70-4	
8:2 FTS	ND	ug/kg	0.80	0.20	1	06/24/25 14:10	06/25/25 19:24	39108-34-4	
9Cl-PF3ONS	ND	ug/kg	0.80	0.19	1	06/24/25 14:10	06/25/25 19:24	756426-58-1	
ADONA	ND	ug/kg	0.80	0.18	1	06/24/25 14:10	06/25/25 19:24	919005-14-4	
HFPO-DA	ND	ug/kg	0.80	0.19	1	06/24/25 14:10	06/25/25 19:24	13252-13-6	
NEtFOSAA	ND	ug/kg	0.20	0.074	1	06/24/25 14:10	06/25/25 19:24	2991-50-6	
NEtFOSA	ND	ug/kg	0.20	0.052	1	06/24/25 14:10	06/25/25 19:24	4151-50-2	
NEtFOSE	ND	ug/kg	2.0	0.39	1	06/24/25 14:10	06/25/25 19:24	1691-99-2	
NFDHA	ND	ug/kg	0.40	0.13	1	06/24/25 14:10	06/25/25 19:24	151772-58-6	
NMeFOSAA	ND	ug/kg	0.20	0.054	1	06/24/25 14:10	06/25/25 19:24	2355-31-9	
NMeFOSA	ND	ug/kg	0.20	0.060	1	06/24/25 14:10	06/25/25 19:24	31506-32-8	
NMeFOSE	ND	ug/kg	2.0	0.46	1	06/24/25 14:10	06/25/25 19:24	24448-09-7	
PFBS	ND	ug/kg	0.20	0.038	1	06/24/25 14:10	06/25/25 19:24	375-73-5	
PFDA	ND	ug/kg	0.20	0.047	1	06/24/25 14:10	06/25/25 19:24	335-76-2	
PFHxA	ND	ug/kg	0.20	0.045	1	06/24/25 14:10	06/25/25 19:24	307-24-4	
PFBA	ND	ug/kg	0.80	0.21	1	06/24/25 14:10	06/25/25 19:24	375-22-4	
PFDS	ND	ug/kg	0.20	0.058	1	06/24/25 14:10	06/25/25 19:24	335-77-3	
PFDoS	ND	ug/kg	0.20	0.042	1	06/24/25 14:10	06/25/25 19:24	79780-39-5	
PFEESA	ND	ug/kg	0.40	0.082	1	06/24/25 14:10	06/25/25 19:24	113507-82-7	
PFHpS	ND	ug/kg	0.20	0.059	1	06/24/25 14:10	06/25/25 19:24	375-92-8	
PFMBA	ND	ug/kg	0.40	0.096	1	06/24/25 14:10	06/25/25 19:24	863090-89-5	
PFMPA	ND	ug/kg	0.40	0.12	1	06/24/25 14:10	06/25/25 19:24	377-73-1	
PFNS	ND	ug/kg	0.20	0.053	1	06/24/25 14:10	06/25/25 19:24	68259-12-1	
PFOSA	ND	ug/kg	0.20	0.044	1	06/24/25 14:10	06/25/25 19:24	754-91-6	
PFPeA	ND	ug/kg	0.40	0.085	1	06/24/25 14:10	06/25/25 19:24	2706-90-3	
PFPeS	ND	ug/kg	0.20	0.048	1	06/24/25 14:10	06/25/25 19:24	2706-91-4	
PFDoA	ND	ug/kg	0.20	0.045	1	06/24/25 14:10	06/25/25 19:24	307-55-1	
PFHpA	ND	ug/kg	0.20	0.078	1	06/24/25 14:10	06/25/25 19:24	375-85-9	
PFHxS	ND	ug/kg	0.20	0.049	1	06/24/25 14:10	06/25/25 19:24	355-46-4	
PFNA	ND	ug/kg	0.20	0.056	1	06/24/25 14:10	06/25/25 19:24	375-95-1	
PFOS	ND	ug/kg	0.20	0.040	1	06/24/25 14:10	06/25/25 19:24	1763-23-1	
PFOA	ND	ug/kg	0.20	0.050	1	06/24/25 14:10	06/25/25 19:24	335-67-1	
PFTeDA	ND	ug/kg	0.20	0.050	1	06/24/25 14:10	06/25/25 19:24	376-06-7	
PFTrDA	ND	ug/kg	0.20	0.042	1	06/24/25 14:10	06/25/25 19:24	72629-94-8	
PFUnA	ND	ug/kg	0.20	0.047	1	06/24/25 14:10	06/25/25 19:24	2058-94-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800074

Sample: B-2-P **Lab ID: 92800074003** Collected: 06/03/25 11:10 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C2-PFDoA (S)	98	%.	40-130		1	06/24/25 14:10	06/25/25 19:24		
13C3HFPO-DA (S)	96	%.	40-130		1	06/24/25 14:10	06/25/25 19:24		
13C3-PFBS (S)	91	%.	40-135		1	06/24/25 14:10	06/25/25 19:24		
13C3-PFHxS (S)	93	%.	40-130		1	06/24/25 14:10	06/25/25 19:24		
13C4-PFBA (S)	78	%.	8-130		1	06/24/25 14:10	06/25/25 19:24		
13C4-PFHpA (S)	94	%.	40-130		1	06/24/25 14:10	06/25/25 19:24		
13C5-PFHxA (S)	91	%.	40-130		1	06/24/25 14:10	06/25/25 19:24		
13C5-PFPeA (S)	92	%.	35-130		1	06/24/25 14:10	06/25/25 19:24		
13C6-PFDA (S)	93	%.	40-130		1	06/24/25 14:10	06/25/25 19:24		
13C8-PFOA (S)	91	%.	40-130		1	06/24/25 14:10	06/25/25 19:24		
13C8-PFOS (S)	95	%.	40-130		1	06/24/25 14:10	06/25/25 19:24		
13C8-PFOSA (S)	89	%.	40-130		1	06/24/25 14:10	06/25/25 19:24		
13C9-PFNA (S)	93	%.	40-130		1	06/24/25 14:10	06/25/25 19:24		
d3-MeFOSAA (S)	135	%.	40-135		1	06/24/25 14:10	06/25/25 19:24		
d3-NMeFOSA (S)	80	%.	10-130		1	06/24/25 14:10	06/25/25 19:24		
d5-EtFOSAA (S)	142	%.	40-150		1	06/24/25 14:10	06/25/25 19:24		
d5-NEtFOSA (S)	81	%.	10-130		1	06/24/25 14:10	06/25/25 19:24		
d7-NMeFOSE (S)	84	%.	20-130		1	06/24/25 14:10	06/25/25 19:24		
d9-NEtFOSE (S)	82	%.	15-130		1	06/24/25 14:10	06/25/25 19:24		
13C2-PFTA (S)	86	%.	20-130		1	06/24/25 14:10	06/25/25 19:24		
13C7-PFUdA (S)	101	%.	40-130		1	06/24/25 14:10	06/25/25 19:24		
13C24:2FTS (S)	173	%.	40-135		1	06/24/25 14:10	06/25/25 19:24		S3
13C26:2FTS (S)	169	%.	40-215		1	06/24/25 14:10	06/25/25 19:24		
13C28:2FTS (S)	186	%.	40-275		1	06/24/25 14:10	06/25/25 19:24		
13C3-PFPrA (S)	33	%.	8-130		1	06/24/25 14:10	06/25/25 19:24		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800074

Sample: B-3-P **Lab ID: 92800074004** Collected: 06/03/25 11:35 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Dry Weight / %M by ASTM D2974	Analytical Method: ASTM D2974 Pace Analytical Services - Minneapolis								
Percent Moisture	**11.4**	%	0.10	0.10	1		06/11/25 15:21		N2
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ug/kg	0.79	0.15	1	06/24/25 14:10	06/25/25 19:34	763051-92-9	
3:3 FTCA	ND	ug/kg	0.99	0.27	1	06/24/25 14:10	06/25/25 19:34	356-02-5	
4:2 FTS	ND	ug/kg	0.79	0.14	1	06/24/25 14:10	06/25/25 19:34	757124-72-4	
5:3 FTCA	ND	ug/kg	5.0	1.2	1	06/24/25 14:10	06/25/25 19:34	914637-49-3	
6:2 FTS	ND	ug/kg	0.79	0.20	1	06/24/25 14:10	06/25/25 19:34	27619-97-2	
7:3 FTCA	ND	ug/kg	5.0	1.1	1	06/24/25 14:10	06/25/25 19:34	812-70-4	
8:2 FTS	ND	ug/kg	0.79	0.20	1	06/24/25 14:10	06/25/25 19:34	39108-34-4	
9Cl-PF3ONS	ND	ug/kg	0.79	0.19	1	06/24/25 14:10	06/25/25 19:34	756426-58-1	
ADONA	ND	ug/kg	0.79	0.18	1	06/24/25 14:10	06/25/25 19:34	919005-14-4	
HFPO-DA	ND	ug/kg	0.79	0.19	1	06/24/25 14:10	06/25/25 19:34	13252-13-6	
NEtFOSAA	ND	ug/kg	0.20	0.073	1	06/24/25 14:10	06/25/25 19:34	2991-50-6	
NEtFOSA	ND	ug/kg	0.20	0.052	1	06/24/25 14:10	06/25/25 19:34	4151-50-2	
NEtFOSE	ND	ug/kg	2.0	0.39	1	06/24/25 14:10	06/25/25 19:34	1691-99-2	
NFDHA	ND	ug/kg	0.40	0.13	1	06/24/25 14:10	06/25/25 19:34	151772-58-6	
NMeFOSAA	ND	ug/kg	0.20	0.054	1	06/24/25 14:10	06/25/25 19:34	2355-31-9	
NMeFOSA	ND	ug/kg	0.20	0.060	1	06/24/25 14:10	06/25/25 19:34	31506-32-8	
NMeFOSE	ND	ug/kg	2.0	0.46	1	06/24/25 14:10	06/25/25 19:34	24448-09-7	
PFBS	ND	ug/kg	0.20	0.038	1	06/24/25 14:10	06/25/25 19:34	375-73-5	
PFDA	ND	ug/kg	0.20	0.046	1	06/24/25 14:10	06/25/25 19:34	335-76-2	
PFHxA	ND	ug/kg	0.20	0.044	1	06/24/25 14:10	06/25/25 19:34	307-24-4	
PFBA	ND	ug/kg	0.79	0.21	1	06/24/25 14:10	06/25/25 19:34	375-22-4	
PFDS	ND	ug/kg	0.20	0.057	1	06/24/25 14:10	06/25/25 19:34	335-77-3	
PFDoS	ND	ug/kg	0.20	0.042	1	06/24/25 14:10	06/25/25 19:34	79780-39-5	
PFEESA	ND	ug/kg	0.40	0.082	1	06/24/25 14:10	06/25/25 19:34	113507-82-7	
PFHpS	ND	ug/kg	0.20	0.059	1	06/24/25 14:10	06/25/25 19:34	375-92-8	
PFMBA	ND	ug/kg	0.40	0.095	1	06/24/25 14:10	06/25/25 19:34	863090-89-5	
PFMPA	ND	ug/kg	0.40	0.12	1	06/24/25 14:10	06/25/25 19:34	377-73-1	
PFNS	ND	ug/kg	0.20	0.052	1	06/24/25 14:10	06/25/25 19:34	68259-12-1	
PFOSA	ND	ug/kg	0.20	0.044	1	06/24/25 14:10	06/25/25 19:34	754-91-6	
PFPeA	ND	ug/kg	0.40	0.085	1	06/24/25 14:10	06/25/25 19:34	2706-90-3	
PFPeS	ND	ug/kg	0.20	0.048	1	06/24/25 14:10	06/25/25 19:34	2706-91-4	
PFDoA	ND	ug/kg	0.20	0.044	1	06/24/25 14:10	06/25/25 19:34	307-55-1	
PFHpA	ND	ug/kg	0.20	0.077	1	06/24/25 14:10	06/25/25 19:34	375-85-9	
PFHxS	ND	ug/kg	0.20	0.049	1	06/24/25 14:10	06/25/25 19:34	355-46-4	
PFNA	ND	ug/kg	0.20	0.056	1	06/24/25 14:10	06/25/25 19:34	375-95-1	
PFOS	**0.40**	ug/kg	0.20	0.040	1	06/24/25 14:10	06/25/25 19:34	1763-23-1	
PFOA	ND	ug/kg	0.20	0.050	1	06/24/25 14:10	06/25/25 19:34	335-67-1	
PFTeDA	ND	ug/kg	0.20	0.050	1	06/24/25 14:10	06/25/25 19:34	376-06-7	
PFTrDA	ND	ug/kg	0.20	0.042	1	06/24/25 14:10	06/25/25 19:34	72629-94-8	
PFUnA	ND	ug/kg	0.20	0.047	1	06/24/25 14:10	06/25/25 19:34	2058-94-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800074

Sample: B-3-P **Lab ID: 92800074004** Collected: 06/03/25 11:35 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C2-PFDoA (S)	108	%.	40-130		1	06/24/25 14:10	06/25/25 19:34		
13C3HFPO-DA (S)	109	%.	40-130		1	06/24/25 14:10	06/25/25 19:34		
13C3-PFBS (S)	98	%.	40-135		1	06/24/25 14:10	06/25/25 19:34		
13C3-PFHxS (S)	100	%.	40-130		1	06/24/25 14:10	06/25/25 19:34		
13C4-PFBA (S)	89	%.	8-130		1	06/24/25 14:10	06/25/25 19:34		
13C4-PFHpA (S)	104	%.	40-130		1	06/24/25 14:10	06/25/25 19:34		
13C5-PFHxA (S)	100	%.	40-130		1	06/24/25 14:10	06/25/25 19:34		
13C5-PFPeA (S)	102	%.	35-130		1	06/24/25 14:10	06/25/25 19:34		
13C6-PFDA (S)	107	%.	40-130		1	06/24/25 14:10	06/25/25 19:34		
13C8-PFOA (S)	99	%.	40-130		1	06/24/25 14:10	06/25/25 19:34		
13C8-PFOS (S)	104	%.	40-130		1	06/24/25 14:10	06/25/25 19:34		
13C8-PFOSA (S)	93	%.	40-130		1	06/24/25 14:10	06/25/25 19:34		
13C9-PFNA (S)	108	%.	40-130		1	06/24/25 14:10	06/25/25 19:34		
d3-MeFOSAA (S)	143	%.	40-135		1	06/24/25 14:10	06/25/25 19:34		S0
d3-NMeFOSA (S)	84	%.	10-130		1	06/24/25 14:10	06/25/25 19:34		
d5-EtFOSAA (S)	149	%.	40-150		1	06/24/25 14:10	06/25/25 19:34		
d5-NEtFOSA (S)	83	%.	10-130		1	06/24/25 14:10	06/25/25 19:34		
d7-NMeFOSE (S)	85	%.	20-130		1	06/24/25 14:10	06/25/25 19:34		
d9-NEtFOSE (S)	83	%.	15-130		1	06/24/25 14:10	06/25/25 19:34		
13C2-PFTA (S)	101	%.	20-130		1	06/24/25 14:10	06/25/25 19:34		
13C7-PFUdA (S)	113	%.	40-130		1	06/24/25 14:10	06/25/25 19:34		
13C24:2FTS (S)	194	%.	40-135		1	06/24/25 14:10	06/25/25 19:34		S0
13C26:2FTS (S)	190	%.	40-215		1	06/24/25 14:10	06/25/25 19:34		
13C28:2FTS (S)	197	%.	40-275		1	06/24/25 14:10	06/25/25 19:34		
13C3-PFPrA (S)	39	%.	8-130		1	06/24/25 14:10	06/25/25 19:34		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800074

Sample: FB-2-P **Lab ID: 92800074005** Collected: 06/03/25 12:00 Received: 06/03/25 15:45 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ng/L	6.4	1.9	1	06/21/25 09:16	06/23/25 21:56	763051-92-9	
3:3 FTCA	ND	ng/L	8.0	2.2	1	06/21/25 09:16	06/23/25 21:56	356-02-5	
4:2 FTS	ND	ng/L	6.4	1.6	1	06/21/25 09:16	06/23/25 21:56	757124-72-4	
5:3 FTCA	ND	ng/L	39.9	9.6	1	06/21/25 09:16	06/23/25 21:56	914637-49-3	
6:2 FTS	ND	ng/L	6.4	1.8	1	06/21/25 09:16	06/23/25 21:56	27619-97-2	
7:3 FTCA	ND	ng/L	39.9	11.4	1	06/21/25 09:16	06/23/25 21:56	812-70-4	
8:2 FTS	ND	ng/L	6.4	1.7	1	06/21/25 09:16	06/23/25 21:56	39108-34-4	
9Cl-PF3ONS	ND	ng/L	6.4	1.7	1	06/21/25 09:16	06/23/25 21:56	756426-58-1	
ADONA	ND	ng/L	6.4	1.9	1	06/21/25 09:16	06/23/25 21:56	919005-14-4	
HFPO-DA	ND	ng/L	6.4	1.8	1	06/21/25 09:16	06/23/25 21:56	13252-13-6	
NEtFOSAA	ND	ng/L	1.6	0.66	1	06/21/25 09:16	06/23/25 21:56	2991-50-6	
NEtFOSA	ND	ng/L	1.6	0.50	1	06/21/25 09:16	06/23/25 21:56	4151-50-2	
NEtFOSE	ND	ng/L	15.9	4.1	1	06/21/25 09:16	06/23/25 21:56	1691-99-2	
NFDHA	ND	ng/L	3.2	1.3	1	06/21/25 09:16	06/23/25 21:56	151772-58-6	
NMeFOSAA	ND	ng/L	1.6	0.50	1	06/21/25 09:16	06/23/25 21:56	2355-31-9	
NMeFOSA	ND	ng/L	1.6	0.49	1	06/21/25 09:16	06/23/25 21:56	31506-32-8	
NMeFOSE	ND	ng/L	15.9	4.1	1	06/21/25 09:16	06/23/25 21:56	24448-09-7	
PFBS	ND	ng/L	1.6	0.42	1	06/21/25 09:16	06/23/25 21:56	375-73-5	
PFDA	ND	ng/L	1.6	0.49	1	06/21/25 09:16	06/23/25 21:56	335-76-2	
PFHxA	ND	ng/L	1.6	0.38	1	06/21/25 09:16	06/23/25 21:56	307-24-4	
PFBA	ND	ng/L	6.4	1.5	1	06/21/25 09:16	06/23/25 21:56	375-22-4	
PFDS	ND	ng/L	1.6	0.69	1	06/21/25 09:16	06/23/25 21:56	335-77-3	
PFDoS	ND	ng/L	1.6	0.34	1	06/21/25 09:16	06/23/25 21:56	79780-39-5	
PFEESA	ND	ng/L	3.2	0.69	1	06/21/25 09:16	06/23/25 21:56	113507-82-7	
PFHpS	ND	ng/L	1.6	0.46	1	06/21/25 09:16	06/23/25 21:56	375-92-8	
PFMBA	ND	ng/L	3.2	0.77	1	06/21/25 09:16	06/23/25 21:56	863090-89-5	
PFMPA	ND	ng/L	3.2	0.62	1	06/21/25 09:16	06/23/25 21:56	377-73-1	
PFNS	ND	ng/L	1.6	0.47	1	06/21/25 09:16	06/23/25 21:56	68259-12-1	
PFOSA	ND	ng/L	1.6	0.49	1	06/21/25 09:16	06/23/25 21:56	754-91-6	
PFPeA	ND	ng/L	3.2	0.95	1	06/21/25 09:16	06/23/25 21:56	2706-90-3	
PFPeS	ND	ng/L	1.6	0.38	1	06/21/25 09:16	06/23/25 21:56	2706-91-4	
PFDoA	ND	ng/L	1.6	0.49	1	06/21/25 09:16	06/23/25 21:56	307-55-1	
PFHpA	ND	ng/L	1.6	0.61	1	06/21/25 09:16	06/23/25 21:56	375-85-9	
PFHxS	ND	ng/L	1.6	0.41	1	06/21/25 09:16	06/23/25 21:56	355-46-4	
PFNA	ND	ng/L	1.6	0.52	1	06/21/25 09:16	06/23/25 21:56	375-95-1	
PFOS	ND	ng/L	1.6	0.39	1	06/21/25 09:16	06/23/25 21:56	1763-23-1	
PFOA	ND	ng/L	1.6	0.49	1	06/21/25 09:16	06/23/25 21:56	335-67-1	
PFTeDA	ND	ng/L	1.6	0.41	1	06/21/25 09:16	06/23/25 21:56	376-06-7	
PFTrDA	ND	ng/L	1.6	0.45	1	06/21/25 09:16	06/23/25 21:56	72629-94-8	
PFUnA	ND	ng/L	1.6	0.35	1	06/21/25 09:16	06/23/25 21:56	2058-94-8	
Surrogates									
13C2-PFDoA (S)	49	%.	10-130		1	06/21/25 09:16	06/23/25 21:56		
13C3HFPO-DA (S)	48	%.	40-130		1	06/21/25 09:16	06/23/25 21:56		
13C3-PFBS (S)	47	%.	40-135		1	06/21/25 09:16	06/23/25 21:56		
13C3-PFHxS (S)	42	%.	40-130		1	06/21/25 09:16	06/23/25 21:56		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800074

Sample: FB-2-P **Lab ID: 92800074005** Collected: 06/03/25 12:00 Received: 06/03/25 15:45 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C4-PFBA (S)	51	%.	5-130		1	06/21/25 09:16	06/23/25 21:56		
13C4-PFHpA (S)	46	%.	40-130		1	06/21/25 09:16	06/23/25 21:56		
13C5-PFHxA (S)	48	%.	40-130		1	06/21/25 09:16	06/23/25 21:56		
13C5-PFPeA (S)	49	%.	40-130		1	06/21/25 09:16	06/23/25 21:56		
13C6-PFDA (S)	41	%.	40-130		1	06/21/25 09:16	06/23/25 21:56		
13C8-PFOA (S)	43	%.	40-130		1	06/21/25 09:16	06/23/25 21:56		
13C8-PFOS (S)	46	%.	40-130		1	06/21/25 09:16	06/23/25 21:56		
13C8-PFOSA (S)	46	%.	40-130		1	06/21/25 09:16	06/23/25 21:56		
13C9-PFNA (S)	39	%.	40-130		1	06/21/25 09:16	06/23/25 21:56		S0
d3-MeFOSAA (S)	39	%.	40-170		1	06/21/25 09:16	06/23/25 21:56		S0
d3-NMeFOSA (S)	32	%.	10-130		1	06/21/25 09:16	06/23/25 21:56		
d5-EtFOSAA (S)	42	%.	25-135		1	06/21/25 09:16	06/23/25 21:56		
d5-NEtFOSA (S)	29	%.	10-130		1	06/21/25 09:16	06/23/25 21:56		
d7-NMeFOSE (S)	48	%.	10-130		1	06/21/25 09:16	06/23/25 21:56		
d9-NEtFOSE (S)	52	%.	10-130		1	06/21/25 09:16	06/23/25 21:56		
13C2-PFTA (S)	67	%.	10-130		1	06/21/25 09:16	06/23/25 21:56		
13C7-PFUdA (S)	44	%.	30-130		1	06/21/25 09:16	06/23/25 21:56		
13C24:2FTS (S)	52	%.	40-200		1	06/21/25 09:16	06/23/25 21:56		
13C26:2FTS (S)	52	%.	40-200		1	06/21/25 09:16	06/23/25 21:56		
13C28:2FTS (S)	48	%.	40-300		1	06/21/25 09:16	06/23/25 21:56		
13C3-PFPrA (S)	56	%.	5-130		1	06/21/25 09:16	06/23/25 21:56		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800074

Sample: B-6-P **Lab ID: 92800074006** Collected: 06/03/25 13:35 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Dry Weight / %M by ASTM D2974	Analytical Method: ASTM D2974 Pace Analytical Services - Minneapolis								
Percent Moisture	**20.2**	%	0.10	0.10	1		06/11/25 15:21		N2
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ug/kg	0.79	0.15	1	06/24/25 14:10	06/25/25 19:45	763051-92-9	
3:3 FTCA	ND	ug/kg	0.99	0.27	1	06/24/25 14:10	06/25/25 19:45	356-02-5	
4:2 FTS	ND	ug/kg	0.79	0.14	1	06/24/25 14:10	06/25/25 19:45	757124-72-4	
5:3 FTCA	ND	ug/kg	5.0	1.2	1	06/24/25 14:10	06/25/25 19:45	914637-49-3	
6:2 FTS	ND	ug/kg	0.79	0.20	1	06/24/25 14:10	06/25/25 19:45	27619-97-2	
7:3 FTCA	ND	ug/kg	5.0	1.1	1	06/24/25 14:10	06/25/25 19:45	812-70-4	
8:2 FTS	ND	ug/kg	0.79	0.20	1	06/24/25 14:10	06/25/25 19:45	39108-34-4	
9Cl-PF3ONS	ND	ug/kg	0.79	0.19	1	06/24/25 14:10	06/25/25 19:45	756426-58-1	
ADONA	ND	ug/kg	0.79	0.18	1	06/24/25 14:10	06/25/25 19:45	919005-14-4	
HFPO-DA	ND	ug/kg	0.79	0.19	1	06/24/25 14:10	06/25/25 19:45	13252-13-6	
NEtFOSAA	ND	ug/kg	0.20	0.073	1	06/24/25 14:10	06/25/25 19:45	2991-50-6	
NEtFOSA	ND	ug/kg	0.20	0.052	1	06/24/25 14:10	06/25/25 19:45	4151-50-2	
NEtFOSE	ND	ug/kg	2.0	0.39	1	06/24/25 14:10	06/25/25 19:45	1691-99-2	
NFDHA	ND	ug/kg	0.40	0.13	1	06/24/25 14:10	06/25/25 19:45	151772-58-6	
NMeFOSAA	ND	ug/kg	0.20	0.054	1	06/24/25 14:10	06/25/25 19:45	2355-31-9	
NMeFOSA	ND	ug/kg	0.20	0.060	1	06/24/25 14:10	06/25/25 19:45	31506-32-8	
NMeFOSE	ND	ug/kg	2.0	0.46	1	06/24/25 14:10	06/25/25 19:45	24448-09-7	
PFBS	ND	ug/kg	0.20	0.038	1	06/24/25 14:10	06/25/25 19:45	375-73-5	
PFDA	ND	ug/kg	0.20	0.046	1	06/24/25 14:10	06/25/25 19:45	335-76-2	
PFHxA	ND	ug/kg	0.20	0.044	1	06/24/25 14:10	06/25/25 19:45	307-24-4	
PFBA	ND	ug/kg	0.79	0.21	1	06/24/25 14:10	06/25/25 19:45	375-22-4	
PFDS	ND	ug/kg	0.20	0.058	1	06/24/25 14:10	06/25/25 19:45	335-77-3	
PFDoS	ND	ug/kg	0.20	0.042	1	06/24/25 14:10	06/25/25 19:45	79780-39-5	
PFEESA	ND	ug/kg	0.40	0.082	1	06/24/25 14:10	06/25/25 19:45	113507-82-7	
PFHpS	ND	ug/kg	0.20	0.059	1	06/24/25 14:10	06/25/25 19:45	375-92-8	
PFMBA	ND	ug/kg	0.40	0.095	1	06/24/25 14:10	06/25/25 19:45	863090-89-5	
PFMPA	ND	ug/kg	0.40	0.12	1	06/24/25 14:10	06/25/25 19:45	377-73-1	
PFNS	ND	ug/kg	0.20	0.052	1	06/24/25 14:10	06/25/25 19:45	68259-12-1	
PFOSA	ND	ug/kg	0.20	0.044	1	06/24/25 14:10	06/25/25 19:45	754-91-6	
PFPeA	ND	ug/kg	0.40	0.085	1	06/24/25 14:10	06/25/25 19:45	2706-90-3	
PFPeS	ND	ug/kg	0.20	0.048	1	06/24/25 14:10	06/25/25 19:45	2706-91-4	
PFDoA	ND	ug/kg	0.20	0.044	1	06/24/25 14:10	06/25/25 19:45	307-55-1	
PFHpA	ND	ug/kg	0.20	0.077	1	06/24/25 14:10	06/25/25 19:45	375-85-9	
PFHxS	ND	ug/kg	0.20	0.049	1	06/24/25 14:10	06/25/25 19:45	355-46-4	
PFNA	ND	ug/kg	0.20	0.056	1	06/24/25 14:10	06/25/25 19:45	375-95-1	
PFOS	**0.79**	ug/kg	0.20	0.040	1	06/24/25 14:10	06/25/25 19:45	1763-23-1	
PFOA	ND	ug/kg	0.20	0.050	1	06/24/25 14:10	06/25/25 19:45	335-67-1	
PFTeDA	ND	ug/kg	0.20	0.050	1	06/24/25 14:10	06/25/25 19:45	376-06-7	
PFTrDA	ND	ug/kg	0.20	0.042	1	06/24/25 14:10	06/25/25 19:45	72629-94-8	
PFUnA	ND	ug/kg	0.20	0.047	1	06/24/25 14:10	06/25/25 19:45	2058-94-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800074

Sample: B-6-P **Lab ID: 92800074006** Collected: 06/03/25 13:35 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C2-PFDoA (S)	93	%.	40-130		1	06/24/25 14:10	06/25/25 19:45		
13C3HFPO-DA (S)	91	%.	40-130		1	06/24/25 14:10	06/25/25 19:45		
13C3-PFBS (S)	78	%.	40-135		1	06/24/25 14:10	06/25/25 19:45		
13C3-PFHxS (S)	81	%.	40-130		1	06/24/25 14:10	06/25/25 19:45		
13C4-PFBA (S)	72	%.	8-130		1	06/24/25 14:10	06/25/25 19:45		
13C4-PFHpA (S)	89	%.	40-130		1	06/24/25 14:10	06/25/25 19:45		
13C5-PFHxA (S)	85	%.	40-130		1	06/24/25 14:10	06/25/25 19:45		
13C5-PFPeA (S)	85	%.	35-130		1	06/24/25 14:10	06/25/25 19:45		
13C6-PFDA (S)	90	%.	40-130		1	06/24/25 14:10	06/25/25 19:45		
13C8-PFOA (S)	86	%.	40-130		1	06/24/25 14:10	06/25/25 19:45		
13C8-PFOS (S)	89	%.	40-130		1	06/24/25 14:10	06/25/25 19:45		
13C8-PFOSA (S)	77	%.	40-130		1	06/24/25 14:10	06/25/25 19:45		
13C9-PFNA (S)	90	%.	40-130		1	06/24/25 14:10	06/25/25 19:45		
d3-MeFOSAA (S)	130	%.	40-135		1	06/24/25 14:10	06/25/25 19:45		
d3-NMeFOSA (S)	68	%.	10-130		1	06/24/25 14:10	06/25/25 19:45		
d5-EtFOSAA (S)	142	%.	40-150		1	06/24/25 14:10	06/25/25 19:45		
d5-NEtFOSA (S)	65	%.	10-130		1	06/24/25 14:10	06/25/25 19:45		
d7-NMeFOSE (S)	72	%.	20-130		1	06/24/25 14:10	06/25/25 19:45		
d9-NEtFOSE (S)	69	%.	15-130		1	06/24/25 14:10	06/25/25 19:45		
13C2-PFTA (S)	95	%.	20-130		1	06/24/25 14:10	06/25/25 19:45		
13C7-PFUdA (S)	99	%.	40-130		1	06/24/25 14:10	06/25/25 19:45		
13C24:2FTS (S)	159	%.	40-135		1	06/24/25 14:10	06/25/25 19:45		S0
13C26:2FTS (S)	182	%.	40-215		1	06/24/25 14:10	06/25/25 19:45		
13C28:2FTS (S)	227	%.	40-275		1	06/24/25 14:10	06/25/25 19:45		
13C3-PFPrA (S)	32	%.	8-130		1	06/24/25 14:10	06/25/25 19:45		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800074

Sample: B-9-P **Lab ID: 92800074007** Collected: 06/03/25 14:15 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Dry Weight / %M by ASTM D2974	Analytical Method: ASTM D2974 Pace Analytical Services - Minneapolis								
Percent Moisture	**15.3**	%	0.10	0.10	1		06/11/25 15:21		N2
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ug/kg	0.79	0.15	1	06/24/25 14:10	06/25/25 19:55	763051-92-9	
3:3 FTCA	ND	ug/kg	0.99	0.27	1	06/24/25 14:10	06/25/25 19:55	356-02-5	
4:2 FTS	ND	ug/kg	0.79	0.14	1	06/24/25 14:10	06/25/25 19:55	757124-72-4	
5:3 FTCA	ND	ug/kg	5.0	1.2	1	06/24/25 14:10	06/25/25 19:55	914637-49-3	
6:2 FTS	ND	ug/kg	0.79	0.20	1	06/24/25 14:10	06/25/25 19:55	27619-97-2	
7:3 FTCA	ND	ug/kg	5.0	1.1	1	06/24/25 14:10	06/25/25 19:55	812-70-4	
8:2 FTS	ND	ug/kg	0.79	0.20	1	06/24/25 14:10	06/25/25 19:55	39108-34-4	
9Cl-PF3ONS	ND	ug/kg	0.79	0.19	1	06/24/25 14:10	06/25/25 19:55	756426-58-1	
ADONA	ND	ug/kg	0.79	0.18	1	06/24/25 14:10	06/25/25 19:55	919005-14-4	
HFPO-DA	ND	ug/kg	0.79	0.19	1	06/24/25 14:10	06/25/25 19:55	13252-13-6	
NEtFOSAA	ND	ug/kg	0.20	0.073	1	06/24/25 14:10	06/25/25 19:55	2991-50-6	
NEtFOSA	ND	ug/kg	0.20	0.052	1	06/24/25 14:10	06/25/25 19:55	4151-50-2	
NEtFOSE	ND	ug/kg	2.0	0.39	1	06/24/25 14:10	06/25/25 19:55	1691-99-2	
NFDHA	ND	ug/kg	0.40	0.13	1	06/24/25 14:10	06/25/25 19:55	151772-58-6	
NMeFOSAA	ND	ug/kg	0.20	0.054	1	06/24/25 14:10	06/25/25 19:55	2355-31-9	
NMeFOSA	ND	ug/kg	0.20	0.060	1	06/24/25 14:10	06/25/25 19:55	31506-32-8	
NMeFOSE	ND	ug/kg	2.0	0.46	1	06/24/25 14:10	06/25/25 19:55	24448-09-7	
PFBS	ND	ug/kg	0.20	0.038	1	06/24/25 14:10	06/25/25 19:55	375-73-5	
PFDA	ND	ug/kg	0.20	0.046	1	06/24/25 14:10	06/25/25 19:55	335-76-2	
PFHxA	ND	ug/kg	0.20	0.044	1	06/24/25 14:10	06/25/25 19:55	307-24-4	
PFBA	ND	ug/kg	0.79	0.21	1	06/24/25 14:10	06/25/25 19:55	375-22-4	
PFDS	ND	ug/kg	0.20	0.058	1	06/24/25 14:10	06/25/25 19:55	335-77-3	
PFDoS	ND	ug/kg	0.20	0.042	1	06/24/25 14:10	06/25/25 19:55	79780-39-5	
PFEESA	ND	ug/kg	0.40	0.082	1	06/24/25 14:10	06/25/25 19:55	113507-82-7	
PFHpS	ND	ug/kg	0.20	0.059	1	06/24/25 14:10	06/25/25 19:55	375-92-8	
PFMBA	ND	ug/kg	0.40	0.096	1	06/24/25 14:10	06/25/25 19:55	863090-89-5	
PFMPA	ND	ug/kg	0.40	0.12	1	06/24/25 14:10	06/25/25 19:55	377-73-1	
PFNS	ND	ug/kg	0.20	0.052	1	06/24/25 14:10	06/25/25 19:55	68259-12-1	
PFOSA	ND	ug/kg	0.20	0.044	1	06/24/25 14:10	06/25/25 19:55	754-91-6	
PFPeA	ND	ug/kg	0.40	0.085	1	06/24/25 14:10	06/25/25 19:55	2706-90-3	
PFPeS	ND	ug/kg	0.20	0.048	1	06/24/25 14:10	06/25/25 19:55	2706-91-4	
PFDoA	ND	ug/kg	0.20	0.044	1	06/24/25 14:10	06/25/25 19:55	307-55-1	
PFHpA	ND	ug/kg	0.20	0.077	1	06/24/25 14:10	06/25/25 19:55	375-85-9	
PFHxS	ND	ug/kg	0.20	0.049	1	06/24/25 14:10	06/25/25 19:55	355-46-4	
PFNA	ND	ug/kg	0.20	0.056	1	06/24/25 14:10	06/25/25 19:55	375-95-1	
PFOS	ND	ug/kg	0.20	0.040	1	06/24/25 14:10	06/25/25 19:55	1763-23-1	
PFOA	ND	ug/kg	0.20	0.050	1	06/24/25 14:10	06/25/25 19:55	335-67-1	
PFTeDA	ND	ug/kg	0.20	0.050	1	06/24/25 14:10	06/25/25 19:55	376-06-7	
PFTrDA	ND	ug/kg	0.20	0.042	1	06/24/25 14:10	06/25/25 19:55	72629-94-8	
PFUnA	ND	ug/kg	0.20	0.047	1	06/24/25 14:10	06/25/25 19:55	2058-94-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800074

Sample: B-9-P **Lab ID: 92800074007** Collected: 06/03/25 14:15 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C2-PFDoA (S)	107	%.	40-130		1	06/24/25 14:10	06/25/25 19:55		
13C3HFPO-DA (S)	110	%.	40-130		1	06/24/25 14:10	06/25/25 19:55		
13C3-PFBS (S)	94	%.	40-135		1	06/24/25 14:10	06/25/25 19:55		
13C3-PFHxS (S)	102	%.	40-130		1	06/24/25 14:10	06/25/25 19:55		
13C4-PFBA (S)	93	%.	8-130		1	06/24/25 14:10	06/25/25 19:55		
13C4-PFHpA (S)	105	%.	40-130		1	06/24/25 14:10	06/25/25 19:55		
13C5-PFHxA (S)	101	%.	40-130		1	06/24/25 14:10	06/25/25 19:55		
13C5-PFPeA (S)	104	%.	35-130		1	06/24/25 14:10	06/25/25 19:55		
13C6-PFDA (S)	106	%.	40-130		1	06/24/25 14:10	06/25/25 19:55		
13C8-PFOA (S)	96	%.	40-130		1	06/24/25 14:10	06/25/25 19:55		
13C8-PFOS (S)	98	%.	40-130		1	06/24/25 14:10	06/25/25 19:55		
13C8-PFOSA (S)	96	%.	40-130		1	06/24/25 14:10	06/25/25 19:55		
13C9-PFNA (S)	102	%.	40-130		1	06/24/25 14:10	06/25/25 19:55		
d3-MeFOSAA (S)	146	%.	40-135		1	06/24/25 14:10	06/25/25 19:55		S3
d3-NMeFOSA (S)	84	%.	10-130		1	06/24/25 14:10	06/25/25 19:55		
d5-EtFOSAA (S)	158	%.	40-150		1	06/24/25 14:10	06/25/25 19:55		S3
d5-NEtFOSA (S)	83	%.	10-130		1	06/24/25 14:10	06/25/25 19:55		
d7-NMeFOSE (S)	86	%.	20-130		1	06/24/25 14:10	06/25/25 19:55		
d9-NEtFOSE (S)	84	%.	15-130		1	06/24/25 14:10	06/25/25 19:55		
13C2-PFTA (S)	101	%.	20-130		1	06/24/25 14:10	06/25/25 19:55		
13C7-PFUdA (S)	110	%.	40-130		1	06/24/25 14:10	06/25/25 19:55		
13C24:2FTS (S)	190	%.	40-135		1	06/24/25 14:10	06/25/25 19:55		S3
13C26:2FTS (S)	186	%.	40-215		1	06/24/25 14:10	06/25/25 19:55		
13C28:2FTS (S)	209	%.	40-275		1	06/24/25 14:10	06/25/25 19:55		
13C3-PFPrA (S)	41	%.	8-130		1	06/24/25 14:10	06/25/25 19:55		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800074

Sample: B-10-P **Lab ID: 92800074008** Collected: 06/03/25 14:45 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Dry Weight / %M by ASTM D2974	Analytical Method: ASTM D2974 Pace Analytical Services - Minneapolis								
Percent Moisture	**14.3**	%	0.10	0.10	1		06/11/25 15:21		N2
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ug/kg	0.80	0.15	1	06/24/25 14:10	06/25/25 20:05	763051-92-9	
3:3 FTCA	ND	ug/kg	1.0	0.27	1	06/24/25 14:10	06/25/25 20:05	356-02-5	
4:2 FTS	ND	ug/kg	0.80	0.14	1	06/24/25 14:10	06/25/25 20:05	757124-72-4	
5:3 FTCA	ND	ug/kg	5.0	1.2	1	06/24/25 14:10	06/25/25 20:05	914637-49-3	
6:2 FTS	ND	ug/kg	0.80	0.20	1	06/24/25 14:10	06/25/25 20:05	27619-97-2	
7:3 FTCA	ND	ug/kg	5.0	1.1	1	06/24/25 14:10	06/25/25 20:05	812-70-4	
8:2 FTS	ND	ug/kg	0.80	0.20	1	06/24/25 14:10	06/25/25 20:05	39108-34-4	
9Cl-PF3ONS	ND	ug/kg	0.80	0.19	1	06/24/25 14:10	06/25/25 20:05	756426-58-1	
ADONA	ND	ug/kg	0.80	0.18	1	06/24/25 14:10	06/25/25 20:05	919005-14-4	
HFPO-DA	ND	ug/kg	0.80	0.19	1	06/24/25 14:10	06/25/25 20:05	13252-13-6	
NEtFOSAA	ND	ug/kg	0.20	0.074	1	06/24/25 14:10	06/25/25 20:05	2991-50-6	
NEtFOSA	ND	ug/kg	0.20	0.052	1	06/24/25 14:10	06/25/25 20:05	4151-50-2	
NEtFOSE	ND	ug/kg	2.0	0.39	1	06/24/25 14:10	06/25/25 20:05	1691-99-2	
NFDHA	ND	ug/kg	0.40	0.13	1	06/24/25 14:10	06/25/25 20:05	151772-58-6	
NMeFOSAA	ND	ug/kg	0.20	0.054	1	06/24/25 14:10	06/25/25 20:05	2355-31-9	
NMeFOSA	ND	ug/kg	0.20	0.060	1	06/24/25 14:10	06/25/25 20:05	31506-32-8	
NMeFOSE	ND	ug/kg	2.0	0.46	1	06/24/25 14:10	06/25/25 20:05	24448-09-7	
PFBS	ND	ug/kg	0.20	0.038	1	06/24/25 14:10	06/25/25 20:05	375-73-5	
PFDA	ND	ug/kg	0.20	0.047	1	06/24/25 14:10	06/25/25 20:05	335-76-2	
PFHxA	ND	ug/kg	0.20	0.045	1	06/24/25 14:10	06/25/25 20:05	307-24-4	
PFBA	ND	ug/kg	0.80	0.21	1	06/24/25 14:10	06/25/25 20:05	375-22-4	
PFDS	ND	ug/kg	0.20	0.058	1	06/24/25 14:10	06/25/25 20:05	335-77-3	
PFDoS	ND	ug/kg	0.20	0.042	1	06/24/25 14:10	06/25/25 20:05	79780-39-5	
PFEESA	ND	ug/kg	0.40	0.083	1	06/24/25 14:10	06/25/25 20:05	113507-82-7	
PFHpS	ND	ug/kg	0.20	0.059	1	06/24/25 14:10	06/25/25 20:05	375-92-8	
PFMBA	ND	ug/kg	0.40	0.096	1	06/24/25 14:10	06/25/25 20:05	863090-89-5	
PFMPA	ND	ug/kg	0.40	0.12	1	06/24/25 14:10	06/25/25 20:05	377-73-1	
PFNS	ND	ug/kg	0.20	0.053	1	06/24/25 14:10	06/25/25 20:05	68259-12-1	
PFOSA	ND	ug/kg	0.20	0.044	1	06/24/25 14:10	06/25/25 20:05	754-91-6	
PFPeA	ND	ug/kg	0.40	0.086	1	06/24/25 14:10	06/25/25 20:05	2706-90-3	
PFPeS	ND	ug/kg	0.20	0.048	1	06/24/25 14:10	06/25/25 20:05	2706-91-4	
PFDoA	ND	ug/kg	0.20	0.045	1	06/24/25 14:10	06/25/25 20:05	307-55-1	
PFHpA	ND	ug/kg	0.20	0.078	1	06/24/25 14:10	06/25/25 20:05	375-85-9	
PFHxS	ND	ug/kg	0.20	0.049	1	06/24/25 14:10	06/25/25 20:05	355-46-4	
PFNA	ND	ug/kg	0.20	0.056	1	06/24/25 14:10	06/25/25 20:05	375-95-1	
PFOS	**0.21**	ug/kg	0.20	0.040	1	06/24/25 14:10	06/25/25 20:05	1763-23-1	
PFOA	ND	ug/kg	0.20	0.050	1	06/24/25 14:10	06/25/25 20:05	335-67-1	
PFTeDA	ND	ug/kg	0.20	0.050	1	06/24/25 14:10	06/25/25 20:05	376-06-7	
PFTrDA	ND	ug/kg	0.20	0.042	1	06/24/25 14:10	06/25/25 20:05	72629-94-8	
PFUnA	ND	ug/kg	0.20	0.047	1	06/24/25 14:10	06/25/25 20:05	2058-94-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800074

Sample: B-10-P **Lab ID: 92800074008** Collected: 06/03/25 14:45 Received: 06/03/25 15:45 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C2-PFDoA (S)	93	%.	40-130		1	06/24/25 14:10	06/25/25 20:05		
13C3HFPO-DA (S)	87	%.	40-130		1	06/24/25 14:10	06/25/25 20:05		
13C3-PFBS (S)	75	%.	40-135		1	06/24/25 14:10	06/25/25 20:05		
13C3-PFHxS (S)	79	%.	40-130		1	06/24/25 14:10	06/25/25 20:05		
13C4-PFBA (S)	74	%.	8-130		1	06/24/25 14:10	06/25/25 20:05		
13C4-PFHpA (S)	84	%.	40-130		1	06/24/25 14:10	06/25/25 20:05		
13C5-PFHxA (S)	80	%.	40-130		1	06/24/25 14:10	06/25/25 20:05		
13C5-PFPeA (S)	82	%.	35-130		1	06/24/25 14:10	06/25/25 20:05		
13C6-PFDA (S)	90	%.	40-130		1	06/24/25 14:10	06/25/25 20:05		
13C8-PFOA (S)	84	%.	40-130		1	06/24/25 14:10	06/25/25 20:05		
13C8-PFOS (S)	89	%.	40-130		1	06/24/25 14:10	06/25/25 20:05		
13C8-PFOSA (S)	84	%.	40-130		1	06/24/25 14:10	06/25/25 20:05		
13C9-PFNA (S)	83	%.	40-130		1	06/24/25 14:10	06/25/25 20:05		
d3-MeFOSAA (S)	137	%.	40-135		1	06/24/25 14:10	06/25/25 20:05		S0
d3-NMeFOSA (S)	73	%.	10-130		1	06/24/25 14:10	06/25/25 20:05		
d5-EtFOSAA (S)	151	%.	40-150		1	06/24/25 14:10	06/25/25 20:05		S0
d5-NEtFOSA (S)	73	%.	10-130		1	06/24/25 14:10	06/25/25 20:05		
d7-NMeFOSE (S)	77	%.	20-130		1	06/24/25 14:10	06/25/25 20:05		
d9-NEtFOSE (S)	68	%.	15-130		1	06/24/25 14:10	06/25/25 20:05		
13C2-PFTA (S)	86	%.	20-130		1	06/24/25 14:10	06/25/25 20:05		
13C7-PFUdA (S)	96	%.	40-130		1	06/24/25 14:10	06/25/25 20:05		
13C24:2FTS (S)	147	%.	40-135		1	06/24/25 14:10	06/25/25 20:05		S0
13C26:2FTS (S)	171	%.	40-215		1	06/24/25 14:10	06/25/25 20:05		
13C28:2FTS (S)	202	%.	40-275		1	06/24/25 14:10	06/25/25 20:05		
13C3-PFPrA (S)	32	%.	8-130		1	06/24/25 14:10	06/25/25 20:05		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800074

QC Batch: 1012298
QC Batch Method: ASTM D2974
Analysis Method: ASTM D2974
Analysis Description: Dry Weight / %M by ASTM D2974
Laboratory: Pace Analytical Services - Minneapolis
Associated Lab Samples: 92800074001, 92800074002, 92800074003, 92800074004, 92800074006, 92800074007, 92800074008

SAMPLE DUPLICATE: 5277394

Parameter	Units	10736646001 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	14.8	14.9	0	30	N2

SAMPLE DUPLICATE: 5277435

Parameter	Units	92800074008 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	14.3	13.7	5	30	N2

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800074

QC Batch: 1013452
QC Batch Method: EPA 1633
Analysis Method: EPA 1633
Analysis Description: EPA 1633F Soil
Laboratory: Pace Analytical Services - Minneapolis

Associated Lab Samples: 92800074001

METHOD BLANK: 5283104 Matrix: Solid
Associated Lab Samples: 92800074001

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
11Cl-PF3OUdS	ug/kg	ND	0.80	0.15	06/24/25 13:17	
3:3 FTCA	ug/kg	ND	1.0	0.27	06/24/25 13:17	
4:2 FTS	ug/kg	ND	0.80	0.14	06/24/25 13:17	
5:3 FTCA	ug/kg	ND	5.0	1.2	06/24/25 13:17	
6:2 FTS	ug/kg	ND	0.80	0.20	06/24/25 13:17	
7:3 FTCA	ug/kg	ND	5.0	1.1	06/24/25 13:17	
8:2 FTS	ug/kg	ND	0.80	0.20	06/24/25 13:17	
9Cl-PF3ONS	ug/kg	ND	0.80	0.19	06/24/25 13:17	
ADONA	ug/kg	ND	0.80	0.18	06/24/25 13:17	
HFPO-DA	ug/kg	ND	0.80	0.19	06/24/25 13:17	
NEtFOSA	ug/kg	ND	0.20	0.052	06/24/25 13:17	
NEtFOSAA	ug/kg	ND	0.20	0.074	06/24/25 13:17	
NEtFOSE	ug/kg	ND	2.0	0.39	06/24/25 13:17	
NFDHA	ug/kg	ND	0.40	0.13	06/24/25 13:17	
NMeFOSA	ug/kg	ND	0.20	0.060	06/24/25 13:17	
NMeFOSAA	ug/kg	ND	0.20	0.054	06/24/25 13:17	
NMeFOSE	ug/kg	ND	2.0	0.46	06/24/25 13:17	
PFBA	ug/kg	ND	0.80	0.21	06/24/25 13:17	
PFBS	ug/kg	ND	0.20	0.038	06/24/25 13:17	
PFDA	ug/kg	ND	0.20	0.047	06/24/25 13:17	
PFDoA	ug/kg	ND	0.20	0.045	06/24/25 13:17	
PFDoS	ug/kg	ND	0.20	0.042	06/24/25 13:17	
PFDS	ug/kg	ND	0.20	0.058	06/24/25 13:17	
PFEESA	ug/kg	ND	0.40	0.083	06/24/25 13:17	
PFHpA	ug/kg	ND	0.20	0.078	06/24/25 13:17	
PFHpS	ug/kg	ND	0.20	0.060	06/24/25 13:17	
PFHxA	ug/kg	ND	0.20	0.045	06/24/25 13:17	
PFHxS	ug/kg	ND	0.20	0.049	06/24/25 13:17	
PFMBA	ug/kg	ND	0.40	0.096	06/24/25 13:17	
PFMPA	ug/kg	ND	0.40	0.12	06/24/25 13:17	
PFNA	ug/kg	ND	0.20	0.056	06/24/25 13:17	
PFNS	ug/kg	ND	0.20	0.053	06/24/25 13:17	
PFOA	ug/kg	ND	0.20	0.050	06/24/25 13:17	
PFOS	ug/kg	ND	0.20	0.040	06/24/25 13:17	
PFOSA	ug/kg	ND	0.20	0.044	06/24/25 13:17	
PFPeA	ug/kg	ND	0.40	0.086	06/24/25 13:17	
PFPeS	ug/kg	ND	0.20	0.048	06/24/25 13:17	
PFTeDA	ug/kg	ND	0.20	0.050	06/24/25 13:17	
PFTrDA	ug/kg	ND	0.20	0.042	06/24/25 13:17	
PFUnA	ug/kg	ND	0.20	0.048	06/24/25 13:17	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800074

METHOD BLANK: 5283104 Matrix: Solid
Associated Lab Samples: 92800074001

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
13C2-PFDoA (S)	%.	84	40-130		06/24/25 13:17	
13C2-PFTA (S)	%.	80	20-130		06/24/25 13:17	
13C24:2FTS (S)	%.	116	40-135		06/24/25 13:17	
13C26:2FTS (S)	%.	113	40-215		06/24/25 13:17	
13C28:2FTS (S)	%.	112	40-275		06/24/25 13:17	
13C3-PFBS (S)	%.	96	40-135		06/24/25 13:17	
13C3-PFHxS (S)	%.	95	40-130		06/24/25 13:17	
13C3-PFPrA (S)	%.	43	8-130		06/24/25 13:17	
13C3HFPO-DA (S)	%.	100	40-130		06/24/25 13:17	
13C4-PFBA (S)	%.	82	8-130		06/24/25 13:17	
13C4-PFHpA (S)	%.	101	40-130		06/24/25 13:17	
13C5-PFHxA (S)	%.	96	40-130		06/24/25 13:17	
13C5-PFPeA (S)	%.	98	35-130		06/24/25 13:17	
13C6-PFDA (S)	%.	87	40-130		06/24/25 13:17	
13C7-PFUdA (S)	%.	87	40-130		06/24/25 13:17	
13C8-PFOA (S)	%.	97	40-130		06/24/25 13:17	
13C8-PFOS (S)	%.	100	40-130		06/24/25 13:17	
13C8-PFOSA (S)	%.	107	40-130		06/24/25 13:17	
13C9-PFNA (S)	%.	94	40-130		06/24/25 13:17	
d3-MeFOSAA (S)	%.	98	40-135		06/24/25 13:17	
d3-NMeFOSA (S)	%.	87	10-130		06/24/25 13:17	
d5-EtFOSAA (S)	%.	107	40-150		06/24/25 13:17	
d5-NEtFOSA (S)	%.	87	10-130		06/24/25 13:17	
d7-NMeFOSE (S)	%.	108	20-130		06/24/25 13:17	
d9-NEtFOSE (S)	%.	110	15-130		06/24/25 13:17	

LABORATORY CONTROL SAMPLE: 5283105

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ug/kg	7.5	6.5	86	45-160	
3:3 FTCA	ug/kg	9.9	7.4	75	45-130	
4:2 FTS	ug/kg	7.5	6.8	90	60-150	
5:3 FTCA	ug/kg	49.6	46.4	94	60-130	
6:2 FTS	ug/kg	7.7	6.7	87	55-200	
7:3 FTCA	ug/kg	49.6	44.4	89	60-150	
8:2 FTS	ug/kg	7.7	6.9	90	70-150	
9Cl-PF3ONS	ug/kg	7.5	6.8	90	70-150	
ADONA	ug/kg	7.5	7.3	97	70-160	
HFPO-DA	ug/kg	8	7.1	89	70-145	
NEtFOSA	ug/kg	1.9	1.7	90	70-140	
NEtFOSAA	ug/kg	1.9	1.8	92	65-165	
NEtFOSE	ug/kg	19.2	18.5	96	70-135	
NFDHA	ug/kg	4	3.7	93	60-155	
NMeFOSA	ug/kg	1.9	1.8	94	70-155	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800074

LABORATORY CONTROL SAMPLE: 5283105

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
NMeFOSAA	ug/kg	1.9	1.8	94	65-155	
NMeFOSE	ug/kg	19.2	17.3	90	70-140	
PFBA	ug/kg	8	7.3	91	70-140	
PFBS	ug/kg	1.8	1.6	93	65-145	
PFDA	ug/kg	1.9	1.9	101	70-155	
PFDoA	ug/kg	1.9	1.9	99	70-150	
PFDoS	ug/kg	1.9	1.6	84	25-160	
PFDS	ug/kg	1.9	1.7	86	40-155	
PFEESA	ug/kg	3.5	3.5	100	70-140	
PFHpA	ug/kg	1.9	1.9	97	65-145	
PFHpS	ug/kg	1.9	1.6	84	65-155	
PFHxA	ug/kg	1.9	1.8	95	65-140	
PFHxS	ug/kg	1.8	1.7	95	60-150	
PFMBA	ug/kg	4	3.8	94	60-150	
PFMPA	ug/kg	4	3.6	90	30-140	
PFNA	ug/kg	1.9	1.8	95	70-155	
PFNS	ug/kg	1.9	1.6	85	55-140	
PFOA	ug/kg	1.9	1.7	90	70-150	
PFOS	ug/kg	1.9	1.5	80	65-160	
PFOSA	ug/kg	1.9	1.8	92	70-140	
PFPeA	ug/kg	4	3.6	90	60-150	
PFPeS	ug/kg	1.9	1.7	91	55-160	
PFTeDA	ug/kg	1.9	1.7	88	65-150	
PFTrDA	ug/kg	1.9	1.9	101	65-150	
PFUnA	ug/kg	1.9	1.8	93	70-155	
13C2-PFDoA (S)	%.			128	40-130	
13C2-PFTA (S)	%.			130	20-130	
13C24:2FTS (S)	%.			137	40-135	S0
13C26:2FTS (S)	%.			160	40-215	
13C28:2FTS (S)	%.			174	40-275	
13C3-PFBS (S)	%.			137	40-135	S0
13C3-PFHxS (S)	%.			140	40-130	S0
13C3-PFPrA (S)	%.			59	8-130	
13C3HFPO-DA (S)	%.			136	40-130	S0
13C4-PFBA (S)	%.			104	8-130	
13C4-PFHpA (S)	%.			134	40-130	S0
13C5-PFHxA (S)	%.			127	40-130	
13C5-PFPeA (S)	%.			124	35-130	
13C6-PFDA (S)	%.			134	40-130	S0
13C7-PFUdA (S)	%.			149	40-130	S0
13C8-PFOA (S)	%.			146	40-130	S0
13C8-PFOS (S)	%.			155	40-130	S0
13C8-PFOSA (S)	%.			135	40-130	S0
13C9-PFNA (S)	%.			136	40-130	S0
d3-MeFOSAA (S)	%.			134	40-135	
d3-NMeFOSA (S)	%.			126	10-130	
d5-EtFOSAA (S)	%.			135	40-150	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800074

LABORATORY CONTROL SAMPLE: 5283105

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
d5-NEtFOSA (S)	%.			136	10-130	S0
d7-NMeFOSE (S)	%.			152	20-130	S0
d9-NEtFOSE (S)	%.			145	15-130	S0

LABORATORY CONTROL SAMPLE: 5283106

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ug/kg	1.5	1.2	82	45-160	
3:3 FTCA	ug/kg	2	1.7	85	45-130	
4:2 FTS	ug/kg	1.5	1.3	88	60-150	
5:3 FTCA	ug/kg	9.9	8.2	82	60-130	
6:2 FTS	ug/kg	1.5	1.4	89	55-200	
7:3 FTCA	ug/kg	9.9	7.6	77	60-150	
8:2 FTS	ug/kg	1.5	1.3	85	70-150	
9Cl-PF3ONS	ug/kg	1.5	1.3	87	70-150	
ADONA	ug/kg	1.5	1.3	86	70-160	
HFPO-DA	ug/kg	1.6	1.4	85	70-145	
NEtFOSA	ug/kg	0.38	0.33	86	70-140	
NEtFOSAA	ug/kg	0.38	0.33	87	65-165	
NEtFOSE	ug/kg	3.8	3.2	83	70-135	
NFDHA	ug/kg	0.8	0.68	85	60-155	
NMeFOSA	ug/kg	0.38	0.34	90	70-155	
NMeFOSAA	ug/kg	0.38	0.40	104	65-155	
NMeFOSE	ug/kg	3.8	3.3	86	70-140	
PFBA	ug/kg	1.6	1.4	86	70-140	
PFBS	ug/kg	0.35	0.31	87	65-145	
PFDA	ug/kg	0.38	0.32	83	70-155	
PFDoA	ug/kg	0.38	0.34	88	70-150	
PFDoS	ug/kg	0.38	0.28	72	25-160	
PFDS	ug/kg	0.38	0.27	71	40-155	
PFEESA	ug/kg	0.7	0.63	89	70-140	
PFHpA	ug/kg	0.38	0.33	85	65-145	
PFHpS	ug/kg	0.38	0.31	80	65-155	
PFHxA	ug/kg	0.38	0.34	88	65-140	
PFHxS	ug/kg	0.35	0.28	81	60-150	
PFMBA	ug/kg	0.8	0.67	83	60-150	
PFMPA	ug/kg	0.8	0.77	96	30-140	
PFNA	ug/kg	0.38	0.31	82	70-155	
PFNS	ug/kg	0.38	0.30	78	55-140	
PFOA	ug/kg	0.38	0.32	84	70-150	
PFOS	ug/kg	0.38	0.29	75	65-160	
PFOSA	ug/kg	0.38	0.33	87	70-140	
PFPeA	ug/kg	0.8	0.66	83	60-150	
PFPeS	ug/kg	0.38	0.30	77	55-160	
PFTeDA	ug/kg	0.38	0.34	89	65-150	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800074

LABORATORY CONTROL SAMPLE: 5283106

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
PFTrDA	ug/kg	0.38	0.30	79	65-150	
PFUnA	ug/kg	0.38	0.33	86	70-155	
13C2-PFDoA (S)	%.			74	40-130	
13C2-PFTA (S)	%.			62	20-130	
13C24:2FTS (S)	%.			90	40-135	
13C26:2FTS (S)	%.			86	40-215	
13C28:2FTS (S)	%.			86	40-275	
13C3-PFBS (S)	%.			78	40-135	
13C3-PFHxS (S)	%.			86	40-130	
13C3-PFPrA (S)	%.			28	8-130	
13C3HFPO-DA (S)	%.			85	40-130	
13C4-PFBA (S)	%.			71	8-130	
13C4-PFHpA (S)	%.			85	40-130	
13C5-PFHxA (S)	%.			82	40-130	
13C5-PFPeA (S)	%.			84	35-130	
13C6-PFDA (S)	%.			82	40-130	
13C7-PFUdA (S)	%.			77	40-130	
13C8-PFOA (S)	%.			82	40-130	
13C8-PFOS (S)	%.			84	40-130	
13C8-PFOSA (S)	%.			80	40-130	
13C9-PFNA (S)	%.			88	40-130	
d3-MeFOSAA (S)	%.			76	40-135	
d3-NMeFOSA (S)	%.			69	10-130	
d5-EtFOSAA (S)	%.			74	40-150	
d5-NEtFOSA (S)	%.			69	10-130	
d7-NMeFOSE (S)	%.			77	20-130	
d9-NEtFOSE (S)	%.			74	15-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800074

QC Batch: 1014455 | Analysis Method: EPA 1633
QC Batch Method: EPA 1633 | Analysis Description: EPA 1633F Soil
Laboratory: Pace Analytical Services - Minneapolis
Associated Lab Samples: 92800074002, 92800074003, 92800074004, 92800074006, 92800074007, 92800074008

METHOD BLANK: 5289017 Matrix: Solid
Associated Lab Samples: 92800074002, 92800074003, 92800074004, 92800074006, 92800074007, 92800074008

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
11Cl-PF3OUdS	ug/kg	ND	0.80	0.15	06/25/25 18:44	
3:3 FTCA	ug/kg	ND	1.0	0.27	06/25/25 18:44	
4:2 FTS	ug/kg	ND	0.80	0.14	06/25/25 18:44	
5:3 FTCA	ug/kg	ND	5.0	1.2	06/25/25 18:44	
6:2 FTS	ug/kg	ND	0.80	0.20	06/25/25 18:44	
7:3 FTCA	ug/kg	ND	5.0	1.1	06/25/25 18:44	
8:2 FTS	ug/kg	ND	0.80	0.20	06/25/25 18:44	
9Cl-PF3ONS	ug/kg	ND	0.80	0.19	06/25/25 18:44	
ADONA	ug/kg	ND	0.80	0.18	06/25/25 18:44	
HFPO-DA	ug/kg	ND	0.80	0.19	06/25/25 18:44	
NEtFOSA	ug/kg	ND	0.20	0.052	06/25/25 18:44	
NEtFOSAA	ug/kg	ND	0.20	0.074	06/25/25 18:44	
NEtFOSE	ug/kg	ND	2.0	0.39	06/25/25 18:44	
NFDHA	ug/kg	ND	0.40	0.13	06/25/25 18:44	
NMeFOSA	ug/kg	ND	0.20	0.060	06/25/25 18:44	
NMeFOSAA	ug/kg	ND	0.20	0.054	06/25/25 18:44	
NMeFOSE	ug/kg	ND	2.0	0.46	06/25/25 18:44	
PFBA	ug/kg	ND	0.80	0.21	06/25/25 18:44	
PFBS	ug/kg	ND	0.20	0.038	06/25/25 18:44	
PFDA	ug/kg	ND	0.20	0.047	06/25/25 18:44	
PFDoA	ug/kg	ND	0.20	0.045	06/25/25 18:44	
PFDoS	ug/kg	ND	0.20	0.042	06/25/25 18:44	
PFDS	ug/kg	ND	0.20	0.058	06/25/25 18:44	
PFEESA	ug/kg	ND	0.40	0.083	06/25/25 18:44	
PFHpA	ug/kg	ND	0.20	0.078	06/25/25 18:44	
PFHpS	ug/kg	ND	0.20	0.060	06/25/25 18:44	
PFHxA	ug/kg	ND	0.20	0.045	06/25/25 18:44	
PFHxS	ug/kg	ND	0.20	0.049	06/25/25 18:44	
PFMBA	ug/kg	ND	0.40	0.096	06/25/25 18:44	
PFMPA	ug/kg	ND	0.40	0.12	06/25/25 18:44	
PFNA	ug/kg	ND	0.20	0.056	06/25/25 18:44	
PFNS	ug/kg	ND	0.20	0.053	06/25/25 18:44	
PFOA	ug/kg	ND	0.20	0.050	06/25/25 18:44	
PFOS	ug/kg	ND	0.20	0.040	06/25/25 18:44	
PFOSA	ug/kg	ND	0.20	0.044	06/25/25 18:44	
PFPeA	ug/kg	ND	0.40	0.086	06/25/25 18:44	
PFPeS	ug/kg	ND	0.20	0.048	06/25/25 18:44	
PFTeDA	ug/kg	ND	0.20	0.050	06/25/25 18:44	
PFTrDA	ug/kg	ND	0.20	0.042	06/25/25 18:44	
PFUnA	ug/kg	ND	0.20	0.048	06/25/25 18:44	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800074

METHOD BLANK: 5289017 Matrix: Solid
Associated Lab Samples: 92800074002, 92800074003, 92800074004, 92800074006, 92800074007, 92800074008

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
13C2-PFDoA (S)	%.	68	40-130		06/25/25 18:44	
13C2-PFTA (S)	%.	66	20-130		06/25/25 18:44	
13C24:2FTS (S)	%.	118	40-135		06/25/25 18:44	
13C26:2FTS (S)	%.	114	40-215		06/25/25 18:44	
13C28:2FTS (S)	%.	123	40-275		06/25/25 18:44	
13C3-PFBS (S)	%.	62	40-135		06/25/25 18:44	
13C3-PFHxS (S)	%.	67	40-130		06/25/25 18:44	
13C3-PFPrA (S)	%.	20	8-130		06/25/25 18:44	
13C3HFPO-DA (S)	%.	68	40-130		06/25/25 18:44	
13C4-PFBA (S)	%.	49	8-130		06/25/25 18:44	
13C4-PFHpA (S)	%.	70	40-130		06/25/25 18:44	
13C5-PFHxA (S)	%.	68	40-130		06/25/25 18:44	
13C5-PFPeA (S)	%.	66	35-130		06/25/25 18:44	
13C6-PFDA (S)	%.	69	40-130		06/25/25 18:44	
13C7-PFUdA (S)	%.	72	40-130		06/25/25 18:44	
13C8-PFOA (S)	%.	67	40-130		06/25/25 18:44	
13C8-PFOS (S)	%.	68	40-130		06/25/25 18:44	
13C8-PFOSA (S)	%.	64	40-130		06/25/25 18:44	
13C9-PFNA (S)	%.	70	40-130		06/25/25 18:44	
d3-MeFOSAA (S)	%.	96	40-135		06/25/25 18:44	
d3-NMeFOSA (S)	%.	56	10-130		06/25/25 18:44	
d5-EtFOSAA (S)	%.	105	40-150		06/25/25 18:44	
d5-NEtFOSA (S)	%.	59	10-130		06/25/25 18:44	
d7-NMeFOSE (S)	%.	64	20-130		06/25/25 18:44	
d9-NEtFOSE (S)	%.	64	15-130		06/25/25 18:44	

LABORATORY CONTROL SAMPLE: 5289018

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ug/kg	7.5	7.1	94	45-160	
3:3 FTCA	ug/kg	9.9	7.9	80	45-130	
4:2 FTS	ug/kg	7.5	6.9	92	60-150	
5:3 FTCA	ug/kg	49.6	43.6	88	60-130	
6:2 FTS	ug/kg	7.7	7.3	95	55-200	
7:3 FTCA	ug/kg	49.6	39.5	80	60-150	
8:2 FTS	ug/kg	7.7	7.8	102	70-150	
9Cl-PF3ONS	ug/kg	7.5	7.0	93	70-150	
ADONA	ug/kg	7.5	7.1	95	70-160	
HFPO-DA	ug/kg	8	7.4	93	70-145	
NEtFOSA	ug/kg	1.9	1.8	94	70-140	
NEtFOSAA	ug/kg	1.9	1.7	86	65-165	
NEtFOSE	ug/kg	19.2	17.9	93	70-135	
NFDHA	ug/kg	4	3.8	95	60-155	
NMeFOSA	ug/kg	1.9	1.8	93	70-155	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800074

LABORATORY CONTROL SAMPLE: 5289018

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
NMeFOSAA	ug/kg	1.9	1.8	92	65-155	
NMeFOSE	ug/kg	19.2	18.3	95	70-140	
PFBA	ug/kg	8	7.3	92	70-140	
PFBS	ug/kg	1.8	1.6	90	65-145	
PFDA	ug/kg	1.9	1.8	96	70-155	
PFDoA	ug/kg	1.9	1.8	96	70-150	
PFDoS	ug/kg	1.9	1.8	93	25-160	
PFDS	ug/kg	1.9	1.8	93	40-155	
PFEESA	ug/kg	3.5	3.4	96	70-140	
PFHpA	ug/kg	1.9	1.7	91	65-145	
PFHpS	ug/kg	1.9	1.7	88	65-155	
PFHxA	ug/kg	1.9	1.9	97	65-140	
PFHxS	ug/kg	1.8	1.7	95	60-150	
PFMBA	ug/kg	4	3.7	92	60-150	
PFMPA	ug/kg	4	4.2	105	30-140	
PFNA	ug/kg	1.9	1.8	93	70-155	
PFNS	ug/kg	1.9	1.8	95	55-140	
PFOA	ug/kg	1.9	1.8	93	70-150	
PFOS	ug/kg	1.9	1.6	86	65-160	
PFOSA	ug/kg	1.9	1.8	93	70-140	
PFPeA	ug/kg	4	3.6	90	60-150	
PFPeS	ug/kg	1.9	1.7	90	55-160	
PFTeDA	ug/kg	1.9	1.8	96	65-150	
PFTrDA	ug/kg	1.9	1.9	97	65-150	
PFUnA	ug/kg	1.9	1.8	94	70-155	
13C2-PFDoA (S)	%.			82	40-130	
13C2-PFTA (S)	%.			78	20-130	
13C24:2FTS (S)	%.			144	40-135	S0
13C26:2FTS (S)	%.			132	40-215	
13C28:2FTS (S)	%.			146	40-275	
13C3-PFBS (S)	%.			76	40-135	
13C3-PFHxS (S)	%.			78	40-130	
13C3-PFPrA (S)	%.			26	8-130	
13C3HFPO-DA (S)	%.			82	40-130	
13C4-PFBA (S)	%.			62	8-130	
13C4-PFHpA (S)	%.			84	40-130	
13C5-PFHxA (S)	%.			79	40-130	
13C5-PFPeA (S)	%.			80	35-130	
13C6-PFDA (S)	%.			80	40-130	
13C7-PFUdA (S)	%.			85	40-130	
13C8-PFOA (S)	%.			77	40-130	
13C8-PFOS (S)	%.			79	40-130	
13C8-PFOSA (S)	%.			73	40-130	
13C9-PFNA (S)	%.			81	40-130	
d3-MeFOSAA (S)	%.			110	40-135	
d3-NMeFOSA (S)	%.			65	10-130	
d5-EtFOSAA (S)	%.			119	40-150	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800074

LABORATORY CONTROL SAMPLE: 5289018

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
d5-NEtFOSA (S)	%.			65	10-130	
d7-NMeFOSE (S)	%.			68	20-130	
d9-NEtFOSE (S)	%.			69	15-130	

LABORATORY CONTROL SAMPLE: 5289019

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ug/kg	1.5	1.4	96	45-160	
3:3 FTCA	ug/kg	2	1.6	81	45-130	
4:2 FTS	ug/kg	1.5	1.5	98	60-150	
5:3 FTCA	ug/kg	9.9	8.9	90	60-130	
6:2 FTS	ug/kg	1.5	1.5	99	55-200	
7:3 FTCA	ug/kg	9.9	7.8	78	60-150	
8:2 FTS	ug/kg	1.5	1.5	98	70-150	
9Cl-PF3ONS	ug/kg	1.5	1.4	93	70-150	
ADONA	ug/kg	1.5	1.5	100	70-160	
HFPO-DA	ug/kg	1.6	1.5	95	70-145	
NEtFOSA	ug/kg	0.38	0.37	96	70-140	
NEtFOSAA	ug/kg	0.38	0.36	94	65-165	
NEtFOSE	ug/kg	3.8	3.6	94	70-135	
NFDHA	ug/kg	0.8	0.82	103	60-155	
NMeFOSA	ug/kg	0.38	0.35	90	70-155	
NMeFOSAA	ug/kg	0.38	0.36	94	65-155	
NMeFOSE	ug/kg	3.8	3.6	95	70-140	
PFBA	ug/kg	1.6	1.5	96	70-140	
PFBS	ug/kg	0.35	0.34	97	65-145	
PFDA	ug/kg	0.38	0.36	93	70-155	
PFDoA	ug/kg	0.38	0.37	96	70-150	
PFDoS	ug/kg	0.38	0.36	94	25-160	
PFDS	ug/kg	0.38	0.37	96	40-155	
PFEESA	ug/kg	0.7	0.68	97	70-140	
PFHpA	ug/kg	0.38	0.37	95	65-145	
PFHpS	ug/kg	0.38	0.33	86	65-155	
PFHxA	ug/kg	0.38	0.38	99	65-140	
PFHxS	ug/kg	0.35	0.34	97	60-150	
PFMBA	ug/kg	0.8	0.75	94	60-150	
PFMPA	ug/kg	0.8	0.87	109	30-140	
PFNA	ug/kg	0.38	0.34	88	70-155	
PFNS	ug/kg	0.38	0.38	100	55-140	
PFOA	ug/kg	0.38	0.36	94	70-150	
PFOS	ug/kg	0.38	0.35	90	65-160	
PFOSA	ug/kg	0.38	0.36	94	70-140	
PFPeA	ug/kg	0.8	0.75	94	60-150	
PFPeS	ug/kg	0.38	0.34	88	55-160	
PFTeDA	ug/kg	0.38	0.37	95	65-150	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800074

LABORATORY CONTROL SAMPLE: 5289019

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
PFTrDA	ug/kg	0.38	0.37	96	65-150	
PFUnA	ug/kg	0.38	0.36	93	70-155	
13C2-PFDoA (S)	%.			91	40-130	
13C2-PFTA (S)	%.			84	20-130	
13C24:2FTS (S)	%.			162	40-135	S0
13C26:2FTS (S)	%.			153	40-215	
13C28:2FTS (S)	%.			174	40-275	
13C3-PFBS (S)	%.			84	40-135	
13C3-PFHxS (S)	%.			91	40-130	
13C3-PFPrA (S)	%.			29	8-130	
13C3HFPO-DA (S)	%.			95	40-130	
13C4-PFBA (S)	%.			70	8-130	
13C4-PFHpA (S)	%.			96	40-130	
13C5-PFHxA (S)	%.			91	40-130	
13C5-PFPeA (S)	%.			92	35-130	
13C6-PFDA (S)	%.			91	40-130	
13C7-PFUdA (S)	%.			96	40-130	
13C8-PFOA (S)	%.			88	40-130	
13C8-PFOS (S)	%.			90	40-130	
13C8-PFOSA (S)	%.			83	40-130	
13C9-PFNA (S)	%.			93	40-130	
d3-MeFOSAA (S)	%.			125	40-135	
d3-NMeFOSA (S)	%.			73	10-130	
d5-EtFOSAA (S)	%.			133	40-150	
d5-NEtFOSA (S)	%.			72	10-130	
d7-NMeFOSE (S)	%.			77	20-130	
d9-NEtFOSE (S)	%.			77	15-130	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 5289020 5289021

Parameter	Units	10737716004 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
11Cl-PF3OUdS	ug/kg	<0.15	7.35	7.45	7.5	7.7	101	102	45-160	2	30	
3:3 FTCA	ug/kg	<0.27	9.8	9.9	6.0	6.1	62	61	45-130	1	30	
4:2 FTS	ug/kg	<0.14	7.35	7.45	7.1	7.2	96	95	60-150	1	30	
5:3 FTCA	ug/kg	<1.2	48.8	49.5	36.1	36.5	74	74	60-130	1	30	
6:2 FTS	ug/kg	<0.20	7.55	7.66	7.6	7.3	100	95	55-200	3	30	
7:3 FTCA	ug/kg	<1.1	48.8	49.5	34.5	35.4	71	72	60-150	3	30	
8:2 FTS	ug/kg	<0.20	7.55	7.66	7.8	7.8	103	102	70-150	1	30	
9Cl-PF3ONS	ug/kg	<0.19	7.35	7.45	7.2	7.5	98	99	70-150	3	30	
ADONA	ug/kg	<0.18	7.35	7.45	7.2	7.4	97	99	70-160	4	30	
HFPO-DA	ug/kg	<0.19	7.86	7.96	7.4	7.4	94	93	70-145	1	30	
NEtFOSA	ug/kg	<0.052	1.94	1.94	1.8	1.8	96	95	70-140	0	30	
NEtFOSAA	ug/kg	<0.073	1.94	1.94	1.8	1.9	92	96	65-165	5	30	
NEtFOSE	ug/kg	<0.39	18.9	19.2	18.2	18.2	96	95	70-135	0	30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800074

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 5289020 5289021

Parameter	Units	10737716004 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
NFDHA	ug/kg	<0.13	3.98	3.98	4.0	3.9	100	98	60-155	1	30	
NMeFOSA	ug/kg	<0.060	1.94	1.94	1.8	1.8	97	94	70-155	1	30	
NMeFOSAA	ug/kg	<0.054	1.94	1.94	1.8	1.8	94	94	65-155	2	30	
NMeFOSE	ug/kg	<0.46	18.9	19.2	18.1	18.1	96	95	70-140	0	30	
PFBA	ug/kg	<0.21	7.86	7.96	7.4	7.5	93	92	70-140	1	30	
PFBS	ug/kg	<0.038	1.74	1.74	1.6	1.6	93	93	65-145	1	30	
PFDA	ug/kg	<0.046	1.94	1.94	1.8	1.9	95	96	70-155	2	30	
PFDoA	ug/kg	<0.044	1.94	1.94	1.8	1.9	95	98	70-150	4	30	
PFDoS	ug/kg	<0.042	1.94	1.94	1.8	1.8	94	94	25-160	2	30	
PFDS	ug/kg	<0.057	1.94	1.94	1.9	1.9	100	101	40-155	3	30	
PFEESA	ug/kg	<0.082	3.47	3.47	3.3	3.3	95	94	70-140	0	30	
PFHpA	ug/kg	<0.077	1.94	1.94	1.8	1.9	93	96	65-145	4	30	
PFHpS	ug/kg	<0.059	1.94	1.94	1.7	1.7	90	90	65-155	1	30	
PFHxA	ug/kg	<0.044	1.94	1.94	1.8	1.8	95	94	65-140	0	30	
PFHxS	ug/kg	<0.049	1.74	1.74	1.7	1.6	95	90	60-150	5	30	
PFMBA	ug/kg	<0.095	3.98	3.98	3.6	3.7	91	92	60-150	3	30	
PFMPA	ug/kg	<0.12	3.98	3.98	4.0	4.0	102	101	30-140	0	30	
PFNA	ug/kg	<0.056	1.94	1.94	1.8	1.8	93	93	70-155	1	30	
PFNS	ug/kg	<0.052	1.94	1.94	1.8	1.9	98	102	55-140	5	30	
PFOA	ug/kg	0.14J	1.94	1.94	1.9	1.9	95	95	70-150	1	30	
PFOS	ug/kg	0.37	1.94	1.94	2.1	2.2	89	96	65-160	7	30	
PFOSA	ug/kg	<0.043	1.94	1.94	1.8	1.8	97	94	70-140	2	30	
PFPeA	ug/kg	<0.085	3.98	3.98	3.6	3.7	91	92	60-150	2	30	
PFPeS	ug/kg	<0.048	1.94	1.94	1.7	1.7	90	89	55-160	0	30	
PFTeDA	ug/kg	<0.050	1.94	1.94	1.8	1.9	96	98	65-150	4	30	
PFTrDA	ug/kg	<0.042	1.94	1.94	1.9	1.9	100	101	65-150	3	30	
PFUnA	ug/kg	<0.047	1.94	1.94	1.8	1.9	95	97	70-155	4	30	
13C2-PFDoA (S)	%.						99	101	40-130			
13C2-PFTA (S)	%.						96	97	20-130			
13C24:2FTS (S)	%.						173	182	40-135			S0
13C26:2FTS (S)	%.						171	190	40-215			
13C28:2FTS (S)	%.						197	209	40-275			
13C3-PFBS (S)	%.						84	89	40-135			
13C3-PFHxS (S)	%.						89	96	40-130			
13C3-PFPrA (S)	%.						35	37	8-130			
13C3HFPO-DA (S)	%.						97	106	40-130			
13C4-PFBA (S)	%.						78	81	8-130			
13C4-PFHpA (S)	%.						96	103	40-130			
13C5-PFHxA (S)	%.						92	100	40-130			
13C5-PFPeA (S)	%.						92	100	35-130			
13C6-PFDA (S)	%.						95	97	40-130			
13C7-PFUdA (S)	%.						99	103	40-130			
13C8-PFOA (S)	%.						90	92	40-130			
13C8-PFOS (S)	%.						90	91	40-130			
13C8-PFOSA (S)	%.						84	86	40-130			
13C9-PFNA (S)	%.						90	98	40-130			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800074

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 5289020 5289021

Parameter	Units	10737716004 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
d3-MeFOSAA (S)	%.						124	129	40-135			
d3-NMeFOSA (S)	%.						75	78	10-130			
d5-EtFOSAA (S)	%.						139	141	40-150			
d5-NEtFOSA (S)	%.						74	77	10-130			
d7-NMeFOSE (S)	%.						75	77	20-130			
d9-NEtFOSE (S)	%.						75	78	15-130			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800074

QC Batch: 1013596
QC Batch Method: EPA 1633
Analysis Method: EPA 1633
Analysis Description: EPA 1633F Water
Laboratory: Pace Analytical Services - Minneapolis

Associated Lab Samples: 92800074005

METHOD BLANK: 5283909 Matrix: Water
Associated Lab Samples: 92800074005

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
11Cl-PF3OUdS	ng/L	ND	6.4	1.9	06/23/25 17:41	
3:3 FTCA	ng/L	ND	8.0	2.2	06/23/25 17:41	
4:2 FTS	ng/L	ND	6.4	1.6	06/23/25 17:41	
5:3 FTCA	ng/L	ND	40.0	9.6	06/23/25 17:41	
6:2 FTS	ng/L	ND	6.4	1.8	06/23/25 17:41	
7:3 FTCA	ng/L	ND	40.0	11.4	06/23/25 17:41	
8:2 FTS	ng/L	ND	6.4	1.7	06/23/25 17:41	
9Cl-PF3ONS	ng/L	ND	6.4	1.7	06/23/25 17:41	
ADONA	ng/L	ND	6.4	1.9	06/23/25 17:41	
HFPO-DA	ng/L	ND	6.4	1.8	06/23/25 17:41	
NEtFOSA	ng/L	ND	1.6	0.51	06/23/25 17:41	
NEtFOSAA	ng/L	ND	1.6	0.66	06/23/25 17:41	
NEtFOSE	ng/L	ND	16.0	4.1	06/23/25 17:41	
NFDHA	ng/L	ND	3.2	1.3	06/23/25 17:41	
NMeFOSA	ng/L	ND	1.6	0.49	06/23/25 17:41	
NMeFOSAA	ng/L	ND	1.6	0.50	06/23/25 17:41	
NMeFOSE	ng/L	ND	16.0	4.1	06/23/25 17:41	
PFBA	ng/L	ND	6.4	1.6	06/23/25 17:41	
PFBS	ng/L	ND	1.6	0.42	06/23/25 17:41	
PFDA	ng/L	ND	1.6	0.50	06/23/25 17:41	
PFDoA	ng/L	ND	1.6	0.49	06/23/25 17:41	
PFDoS	ng/L	ND	1.6	0.34	06/23/25 17:41	
PFDS	ng/L	ND	1.6	0.69	06/23/25 17:41	
PFEESA	ng/L	ND	3.2	0.69	06/23/25 17:41	
PFHpA	ng/L	ND	1.6	0.62	06/23/25 17:41	
PFHpS	ng/L	ND	1.6	0.47	06/23/25 17:41	
PFHxA	ng/L	ND	1.6	0.38	06/23/25 17:41	
PFHxS	ng/L	ND	1.6	0.41	06/23/25 17:41	
PFMBA	ng/L	ND	3.2	0.78	06/23/25 17:41	
PFMPA	ng/L	ND	3.2	0.62	06/23/25 17:41	
PFNA	ng/L	ND	1.6	0.52	06/23/25 17:41	
PFNS	ng/L	ND	1.6	0.47	06/23/25 17:41	
PFOA	ng/L	ND	1.6	0.49	06/23/25 17:41	
PFOS	ng/L	ND	1.6	0.39	06/23/25 17:41	
PFOSA	ng/L	ND	1.6	0.49	06/23/25 17:41	
PFPeA	ng/L	ND	3.2	0.95	06/23/25 17:41	
PFPeS	ng/L	ND	1.6	0.38	06/23/25 17:41	
PFTeDA	ng/L	ND	1.6	0.41	06/23/25 17:41	
PFTrDA	ng/L	ND	1.6	0.45	06/23/25 17:41	
PFUnA	ng/L	ND	1.6	0.36	06/23/25 17:41	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800074

METHOD BLANK: 5283909 Matrix: Water
Associated Lab Samples: 92800074005

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
13C2-PFDoA (S)	%.	47	10-130		06/23/25 17:41	
13C2-PFTA (S)	%.	57	10-130		06/23/25 17:41	
13C24:2FTS (S)	%.	36	40-200		06/23/25 17:41	S0
13C26:2FTS (S)	%.	38	40-200		06/23/25 17:41	S0
13C28:2FTS (S)	%.	37	40-300		06/23/25 17:41	S0
13C3-PFBS (S)	%.	42	40-135		06/23/25 17:41	
13C3-PFHxS (S)	%.	39	40-130		06/23/25 17:41	S0
13C3-PFPrA (S)	%.	48	5-130		06/23/25 17:41	
13C3HFPO-DA (S)	%.	43	40-130		06/23/25 17:41	
13C4-PFBA (S)	%.	44	5-130		06/23/25 17:41	
13C4-PFHpA (S)	%.	43	40-130		06/23/25 17:41	
13C5-PFHxA (S)	%.	41	40-130		06/23/25 17:41	
13C5-PFPeA (S)	%.	44	40-130		06/23/25 17:41	
13C6-PFDA (S)	%.	39	40-130		06/23/25 17:41	S0
13C7-PFUdA (S)	%.	41	30-130		06/23/25 17:41	
13C8-PFOA (S)	%.	39	40-130		06/23/25 17:41	S0
13C8-PFOS (S)	%.	41	40-130		06/23/25 17:41	
13C8-PFOSA (S)	%.	37	40-130		06/23/25 17:41	S0
13C9-PFNA (S)	%.	36	40-130		06/23/25 17:41	S0
d3-MeFOSAA (S)	%.	32	40-170		06/23/25 17:41	S0
d3-NMeFOSA (S)	%.	29	10-130		06/23/25 17:41	
d5-EtFOSAA (S)	%.	35	25-135		06/23/25 17:41	
d5-NEtFOSA (S)	%.	26	10-130		06/23/25 17:41	
d7-NMeFOSE (S)	%.	42	10-130		06/23/25 17:41	
d9-NEtFOSE (S)	%.	43	10-130		06/23/25 17:41	

LABORATORY CONTROL SAMPLE: 5283910

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ng/L	75.2	71.7	95	55-160	
3:3 FTCA	ng/L	99.2	99.0	100	65-130	
4:2 FTS	ng/L	75.2	75.5	100	70-145	
5:3 FTCA	ng/L	496	502	101	70-135	
6:2 FTS	ng/L	76.8	76.8	100	65-155	
7:3 FTCA	ng/L	496	565	114	50-145	
8:2 FTS	ng/L	76.8	73.2	95	60-150	
9Cl-PF3ONS	ng/L	75.2	73.1	97	70-155	
ADONA	ng/L	75.2	77.4	103	65-145	
HFPO-DA	ng/L	80	78.9	99	70-140	
NEtFOSA	ng/L	19.2	18.9	99	65-145	
NEtFOSAA	ng/L	19.2	19.8	103	70-145	
NEtFOSE	ng/L	192	190	99	70-135	
NFDHA	ng/L	40	39.7	99	50-150	
NMeFOSA	ng/L	19.2	20.0	104	60-150	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800074

LABORATORY CONTROL SAMPLE: 5283910

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
NMeFOSAA	ng/L	19.2	18.2	95	50-140	
NMeFOSE	ng/L	192	190	99	70-145	
PFBA	ng/L	80	78.2	98	70-140	
PFBS	ng/L	17.6	17.5	99	60-145	
PFDA	ng/L	19.2	21.8	114	70-140	
PFDoA	ng/L	19.2	20.2	105	70-140	
PFDoS	ng/L	19.2	18.5	96	50-145	
PFDS	ng/L	19.2	17.5	91	60-145	
PFEESA	ng/L	35.2	38.4	109	70-140	
PFHpA	ng/L	19.2	19.7	102	70-150	
PFHpS	ng/L	19.2	18.6	97	70-150	
PFHxA	ng/L	19.2	19.7	103	70-145	
PFHxS	ng/L	17.6	17.6	100	65-145	
PFMBA	ng/L	40	39.7	99	60-150	
PFMPA	ng/L	40	40.5	101	55-140	
PFNA	ng/L	19.2	20.7	108	70-150	
PFNS	ng/L	19.2	17.3	90	65-145	
PFOA	ng/L	19.2	19.8	103	70-150	
PFOS	ng/L	19.2	16.5	86	55-150	
PFOSA	ng/L	19.2	18.4	96	70-145	
PFPeA	ng/L	40	39.4	99	65-135	
PFPeS	ng/L	19.2	19.6	102	65-140	
PFTeDA	ng/L	19.2	18.9	98	60-140	
PFTrDA	ng/L	19.2	19.1	100	65-140	
PFUnA	ng/L	19.2	19.3	100	70-145	
13C2-PFDoA (S)	%.			72	10-130	
13C2-PFTA (S)	%.			75	10-130	
13C24:2FTS (S)	%.			66	40-200	
13C26:2FTS (S)	%.			69	40-200	
13C28:2FTS (S)	%.			68	40-300	
13C3-PFBS (S)	%.			76	40-135	
13C3-PFHxS (S)	%.			73	40-130	
13C3-PFPrA (S)	%.			92	5-130	
13C3HFPO-DA (S)	%.			79	40-130	
13C4-PFBA (S)	%.			84	5-130	
13C4-PFHpA (S)	%.			81	40-130	
13C5-PFHxA (S)	%.			80	40-130	
13C5-PFPeA (S)	%.			83	40-130	
13C6-PFDA (S)	%.			70	40-130	
13C7-PFUdA (S)	%.			72	30-130	
13C8-PFOA (S)	%.			83	40-130	
13C8-PFOS (S)	%.			78	40-130	
13C8-PFOSA (S)	%.			79	40-130	
13C9-PFNA (S)	%.			70	40-130	
d3-MeFOSAA (S)	%.			58	40-170	
d3-NMeFOSA (S)	%.			54	10-130	
d5-EtFOSAA (S)	%.			55	25-135	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800074

LABORATORY CONTROL SAMPLE: 5283910

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
d5-NEtFOSA (S)	%.			51	10-130	
d7-NMeFOSE (S)	%.			71	10-130	
d9-NEtFOSE (S)	%.			69	10-130	

LABORATORY CONTROL SAMPLE: 5283911

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ng/L	12	14.6	122	55-160	
3:3 FTCA	ng/L	15.9	17.3	109	65-130	
4:2 FTS	ng/L	12	11.5	96	70-145	
5:3 FTCA	ng/L	79.4	66.9	84	70-135	
6:2 FTS	ng/L	12.3	11.6	94	65-155	
7:3 FTCA	ng/L	79.4	78.2	99	50-145	
8:2 FTS	ng/L	12.3	12.5	102	60-150	
9Cl-PF3ONS	ng/L	12	12.0	99	70-155	
ADONA	ng/L	12	12.0	100	65-145	
HFPO-DA	ng/L	12.8	12.1	94	70-140	
NEtFOSA	ng/L	3.1	3.6	116	65-145	
NEtFOSAA	ng/L	3.1	3.0	97	70-145	
NEtFOSE	ng/L	30.7	27.7	90	70-135	
NFDHA	ng/L	6.4	5.7	90	50-150	
NMeFOSA	ng/L	3.1	2.8	93	60-150	
NMeFOSAA	ng/L	3.1	2.7	87	50-140	
NMeFOSE	ng/L	30.7	28.1	91	70-145	
PFBA	ng/L	12.8	11.4	89	70-140	
PFBS	ng/L	2.8	2.4	87	60-145	
PFDA	ng/L	3.1	3.4	110	70-140	
PFDoA	ng/L	3.1	3.2	106	70-140	
PFDoS	ng/L	3.1	4.4	144	50-145	
PFDS	ng/L	3.1	3.4	110	60-145	
PFEESA	ng/L	5.6	5.5	98	70-140	
PFHpA	ng/L	3.1	2.9	96	70-150	
PFHpS	ng/L	3.1	2.6	84	70-150	
PFHxA	ng/L	3.1	2.9	96	70-145	
PFHxS	ng/L	2.8	2.8	100	65-145	
PFMBA	ng/L	6.4	6.1	95	60-150	
PFMPA	ng/L	6.4	6.2	96	55-140	
PFNA	ng/L	3.1	3.2	105	70-150	
PFNS	ng/L	3.1	2.9	95	65-145	
PFOA	ng/L	3.1	3.1	102	70-150	
PFOS	ng/L	3.1	2.9	96	55-150	
PFOSA	ng/L	3.1	2.9	96	70-145	
PFPeA	ng/L	6.4	6.0	94	65-135	
PFPeS	ng/L	3.1	3.0	98	65-140	
PFTeDA	ng/L	3.1	2.7	88	60-140	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800074

LABORATORY CONTROL SAMPLE: 5283911

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
PFTrDA	ng/L	3.1	3.5	115	65-140	
PFUnA	ng/L	3.1	3.1	100	70-145	
13C2-PFDoA (S)	%.			45	10-130	
13C2-PFTA (S)	%.			61	10-130	
13C24:2FTS (S)	%.			39	40-200	S0
13C26:2FTS (S)	%.			42	40-200	
13C28:2FTS (S)	%.			38	40-300	S0
13C3-PFBS (S)	%.			43	40-135	
13C3-PFHxS (S)	%.			40	40-130	
13C3-PFPrA (S)	%.			52	5-130	
13C3HFPO-DA (S)	%.			43	40-130	
13C4-PFBA (S)	%.			47	5-130	
13C4-PFHpA (S)	%.			43	40-130	
13C5-PFHxA (S)	%.			44	40-130	
13C5-PFPeA (S)	%.			44	40-130	
13C6-PFDA (S)	%.			36	40-130	S0
13C7-PFUdA (S)	%.			41	30-130	
13C8-PFOA (S)	%.			42	40-130	
13C8-PFOS (S)	%.			42	40-130	
13C8-PFOSA (S)	%.			41	40-130	
13C9-PFNA (S)	%.			39	40-130	S0
d3-MeFOSAA (S)	%.			36	40-170	S0
d3-NMeFOSA (S)	%.			31	10-130	
d5-EtFOSAA (S)	%.			36	25-135	
d5-NEtFOSA (S)	%.			28	10-130	
d7-NMeFOSE (S)	%.			46	10-130	
d9-NEtFOSE (S)	%.			48	10-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALIFIERS

Project: Fortress Wood Products
Pace Project No.: 92800074

DEFINITIONS

DF - Dilution Factor, if reported, represents the factor applied to the reported data due to dilution of the sample aliquot.

ND - Not Detected at or above adjusted reporting limit.

TNTC - Too Numerous To Count

J - Estimated concentration above the adjusted method detection limit and below the adjusted reporting limit.

MDL - Adjusted Method Detection Limit.

PQL - Practical Quantitation Limit.

RL - Reporting Limit - The lowest concentration value that meets project requirements for quantitative data with known precision and bias for a specific analyte in a specific matrix.

S - Surrogate

1,2-Diphenylhydrazine decomposes to and cannot be separated from Azobenzene using Method 8270. The result for each analyte is a combined concentration.

Consistent with EPA guidelines, unrounded data are displayed and have been used to calculate % recovery and RPD values.

LCS(D) - Laboratory Control Sample (Duplicate)

MS(D) - Matrix Spike (Duplicate)

DUP - Sample Duplicate

RPD - Relative Percent Difference

NC - Not Calculable.

SG - Silica Gel - Clean-Up

U - Indicates the compound was analyzed for, but not detected.

Acid preservation may not be appropriate for 2 Chloroethylvinyl ether.

A separate vial preserved to a pH of 4-5 is recommended in SW846 Chapter 4 for the analysis of Acrolein and Acrylonitrile by EPA Method 8260.

N-Nitrosodiphenylamine decomposes and cannot be separated from Diphenylamine using Method 8270. The result reported for each analyte is a combined concentration.

Reported results are not rounded until the final step prior to reporting. Therefore, calculated parameters that are typically reported as "Total" may vary slightly from the sum of the reported component parameters.

Pace Analytical is TNI accredited. Contact your Pace PM for the current list of accredited analytes.

TNI - The NELAC Institute.

ANALYTE QUALIFIERS

N2	The lab does not hold NELAC/TNI accreditation for this parameter but other accreditations/certifications may apply. A complete list of accreditations/certifications is available upon request.
S0	Surrogate recovery outside laboratory control limits.
S3	Surrogate recovery exceeded laboratory control limits. Analyte presence below reporting limits in associated sample.

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA CROSS REFERENCE TABLE

Project: Fortress Wood Products
Pace Project No.: 92800074

Lab ID	Sample ID	QC Batch Method	QC Batch	Analytical Method	Analytical Batch
92800074001	**B-5-P**	ASTM D2974	1012298		
92800074002	**B-4-P**	ASTM D2974	1012298		
92800074003	**B-2-P**	ASTM D2974	1012298		
92800074004	**B-3-P**	ASTM D2974	1012298		
92800074006	**B-6-P**	ASTM D2974	1012298		
92800074007	**B-9-P**	ASTM D2974	1012298		
92800074008	**B-10-P**	ASTM D2974	1012298		
92800074001	**B-5-P**	EPA 1633	1013452	EPA 1633	1014786
92800074002	**B-4-P**	EPA 1633	1014455	EPA 1633	1015370
92800074003	**B-2-P**	EPA 1633	1014455	EPA 1633	1015370
92800074004	**B-3-P**	EPA 1633	1014455	EPA 1633	1015370
92800074006	**B-6-P**	EPA 1633	1014455	EPA 1633	1015370
92800074007	**B-9-P**	EPA 1633	1014455	EPA 1633	1015370
92800074008	**B-10-P**	EPA 1633	1014455	EPA 1633	1015370
92800074005	**FB-2-P**	EPA 1633	1013596	EPA 1633	1014741

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace® Location Requested (City/State):
Pace Analytical Charlotte
9800 Kincey Ave. Suite 100, Huntersville, NC 28078

CHAIN-OF-CUSTODY Analytical Request Document

Chain-of-Custody is a LEGAL DOCUMENT - Complete all relevant fields

LAB USE ONLY- Affix Workorder/Login Label Here

WO# : 92800074

92800074

Company Name:	ECS Southeast, LLC-Charlotte	Contact/Report To:	Emery Lovekamp
Street Address:	1812 Center Park Drive Suite D Charlotte, NC 28217	Phone #:	704-525-5152
		E-Mail:	elovekamp@ecslimited.com
		Cc E-Mail:	
Customer Project #:			
Project Name:	_____	Invoice To:	AP-ECS Charlotte
		Invoice E-Mail:	ecs-49@ecslimited.com
Site Collection Info/Facility ID (as applicable):		Purchase Order # (if applicable):	NEED
		Quote #:	

Specify Container Size **

Identify Container Preservative Type***

**Container Size: (1) 250mL, (2) 500mL, (3) 1L, (4) 125mL, (5) 100mL, (6) 40mL vial, (7) EnCore, (8) TerraCore, (9) 90mL, (10) Other

*** Preservative Types: (1) None, (2) HNO3, (3) H2SO4, (4) HCl, (5) NaOH, (6) Zn Acetate, (7) NaHSO4, (8) Sod Thiosulfate, (9) Ascorbic Acid, (10) MeOH, (11) Other

Time Zone Collected: [ ] AK [ ] PT [ ] MT [ ] CT [ ] ET

County / State origin of sample(s): North Carolina

Data Deliverables:
[ ] Level II [ ] Level III [ ] Level IV
[ ] EQUIS
[ ] Other

Regulatory Program (DW, RCRA, etc.) as applicable: Reportable [ ] Yes [ ] No

Rush (Pre-approval required):
[ ] Same Day [ ] 1 Day [ ] 2 Day [ ] 3 Day [ ] Other _____

DW PWSID # or WW Permit # as applicable:

Date Results Requested:

Field Filtered (if applicable): [ ] Yes [ ] No

Analysis:

Lab Use Only
Proj. Mgr: Angela Baioni
AcctNum / Client ID:
Table #:
Profile / Template: 18978
Prelog / Bottle Ord. ID: EZ 3265816

Preservation non-conformance identified for sample.

* Matrix Codes (Insert in Matrix box below): Drinking Water (DW), Ground Water (GW), Waste Water (WW), Product (P), Soil/Solid (SS), Oil (OL), Wipe (WP), Tissue (TS), Bioassay (B), Vapor (V), Surface Water (SW), Sediment (SED), Sludge (SL), Caulk (CK), Leachate (LL), Biosolid (BS), Other (OT)

Customer Sample ID	Matrix *	Comp / Grab	Composite Start Date	Composite Start Time	Collected or Composite End Date	Collected or Composite End Time	# Cont.	Res. Chlorine Results	Res. Chlorine Units	Analysis Requested: 1633 PFAS	Sample Comment
B-5_P	SS	C			6/3/25	925				X	
B-4_P	SS	C			6/3/25	1000				X	
B-2_P	SS	C			6/3/25	1110				X	
B-3_P	SS	C			6/3/25	1135				X	
FB-2_P					6/3/25	1200				X	
B-6_P	SS	C			6/3/25	1335				X	
B-9_P	SS	C			6/3/25	1415				X	
B-10_P	SS	C			6/3/25	1445				X	

Additional Instructions from Pace®:

Collected By:
(Printed Name) Seth Greene
Signature: Seth Greene

Customer Remarks / Special Conditions / Possible Hazards:

# Coolers:	Thermometer ID:	Correction Factor (°C):	Obs. Temp. (°C)	Corrected Temp. (°C)	On Ice:

Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Tracking Number:
Seth Greene / ECS	6/3/25 1545	Erica Bond	06/03/25 1545	
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Delivered by: [ ] In-Person [ ] Courier
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	[ ] FedEX [ ] UPS [ ] Other
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Page: 2 of 2

Submitting a sample via this chain of custody constitutes acknowledgment and acceptance of the Pace® Terms and Conditions found at https://www.pacelabs.com/resource-library/resource/pace-terms-and-conditions/

ENV-FRM-CORQ-0019_v02_110123 ©

Pace	DC#_Title: ENV-FRM-HUN1-0083 v05_Sample Condition Upon Receipt
	Effective Date: 05/24/2024

Laboratory receiving samples:

Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☐ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☑

Sample Condition Upon Receipt

Client Name: ECS **Project #:**

Courier: ☐ Commercial ☐ Fed Ex ☐ Pace ☐ UPS ☐ USPS ☐ Other: ☑ Client

Custody Seal Present? ☐ Yes ☑ No **Seals Intact?** ☐ Yes ☐ No ☑ N/A

Date/Initials Person Examining Contents: SAK

Packing Material: ☐ Bubble Wrap ☐ Bubble Bags ☑ None ☐ Other

Biological Tissue Frozen? ☐ Yes ☐ No ☑ N/A

Thermometer: ☐ IR Gun ID: KRT002

Type of Ice: ☑ Wet ☐ Blue ☐ None

Cooler Temp: 1.7 **Correction Factor:** Add/Subtract (°C) 0.0

Temp should be above freezing to 6°C

☐ Samples out of temp criteria. Samples on ice, cooling process has begun

Cooler Temp Corrected (°C): 1.7

USDA Regulated Soil (☑ N/A, water sample)

Did samples originate in a quarantine zone within the United States: CA, NY, or SC (check maps)? ☐ Yes ☑ No

Did samples originate from a foreign source (internationally, including Hawaii and Puerto Rico)? ☐ Yes ☑ No

				Comments/Discrepancy:
Chain of Custody Present?	☑ Yes	☐ No	☐ N/A	1.
Samples Arrived within Hold Time?	☑ Yes	☐ No	☐ N/A	2.
Short Hold Time Analysis (<72 hr.)?	☐ Yes	☑ No	☐ N/A	3.
Rush Turn Around Time Requested?	☐ Yes	☑ No	☐ N/A	4.
Sufficient Volume?	☑ Yes	☐ No	☐ N/A	5.
Correct Containers Used?	☑ Yes	☐ No	☐ N/A	6.
-Pace Containers Used?	☑ Yes	☐ No	☐ N/A	
Containers Intact?	☑ Yes	☐ No	☐ N/A	7.
Dissolved analysis: Samples Field Filtered?	☐ Yes	☐ No	☑ N/A	8.
Sample Labels Match COC? -Includes Date/Time/ID/Analysis Matrix: SL/WT	☑ Yes	☐ No	☐ N/A	9.
Headspace in VOA Vials (>5-6mm)?	☐ Yes	☐ No	☑ N/A	10.
Trip Blank Present?	☐ Yes	☐ No	☑ N/A	11.
Trip Blank Custody Seals Present?	☐ Yes	☐ No	☑ N/A	

COMMENTS/SAMPLE DISCREPANCY

Field Data Required? ☐ Yes ☐ No

Lot ID of split containers:

CLIENT NOTIFICATION/RESOLUTION

Person contacted: Date/Time:

Project Manager SCURF Review: **Date:**

Project Manager SRF Review: **Date:**

Pace	DC#_Title: ENV-FRM-HUN1-0083 v05_Sample Condition Upon Receipt
	Effective Date: 05/24/2024

*Check mark top half of box if pH and/or dechlorination is verified and within the acceptance range for preservation samples.
Exceptions: VOA, Coliform, TOC, Oil and Grease, DRO/8015 (water) DOC, LLHg
**Bottom half of box is to list number of bottles
***Check all unpreserved Nitrates for chlorine

Project #

Laboratory Receiving Location: Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☐ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☑

Client ECS Profile/EZ (Circle one) 32635816 Notes

Item#	BP4U-125 mL Plastic Unpreserved (N/A) (Cl-)	BP3U-250 mL Plastic Unpreserved (N/A)	BP2U-500 mL Plastic Unpreserved (N/A)	BP1U-1 liter Plastic Unpreserved (N/A)	NT2U	BP4S-125 mL Plastic H2SO4 (pH < 2) (Cl-)	BP3N-250 mL plastic HNO3 (pH < 2)	BP4Z-125 mL Plastic ZN Acetate & NaOH (>9)	BP4B-125 mL Plastic NaOH (pH > 12) (Cl-)	WGFU-Wide-mouthed Glass jar Unpreserved	AG1U-1 liter Amber Unpreserved (N/A) (Cl-)	AG1H-1 liter Amber HCl (pH < 2)	AG3U-250 mL Amber Unpreserved (N/A) (Cl-)	AG1S-1 liter Amber H2SO4 (pH < 2)	AG3S-250 mL Amber H2SO4 (pH < 2)	DG9A-40 mL Amber NH4Cl (N/A)(Cl-)	DG9H-40 mL VOA HCl (N/A)	VG9T-40 mL VOA Na2S2O3 (N/A)	VG9U-40 mL VOA Unpreserved (N/A)	DG9V-40 mL VOA H3PO4 (N/A)	KP7U-50 mL Plastic Unpreserved (N/A)	V/GK (3 vials per kit)-VPH/Gas kit (N/A)	SP5T-125 mL Sterile Plastic (N/A – lab)	SP2T-250 mL Sterile Plastic (N/A – lab)	NT4U	BP3R 250 mL Plastic (NH2)2SO4 (9 3-9 7)	AG0U-100 mL Amber Unpreserved (N/A) (Cl-)	VSGU-20 mL Scintillation vials (N/A)	DG9U-40 mL Amber Unpreserved vials (N/A)
CC																											5			
1																											1			
2																											1			
3																											1			
4																											1			
5					2																									
6																											1			
7																											1			
8																											1			
9																														
10																														
11																														
12																														

pH Adjustment Log for Preserved Samples

Sample ID	Type of Preservative	pH upon receipt	Date preservation adjusted	Time preservation adjusted	Amount of Preservative added	Lot #

Note: Whenever there is a discrepancy affecting North Carolina compliance samples, a copy of this form will be sent to the North Carolina DENR Certification Office (i.e Out of hold, incorrect preservative, out of temp, incorrect containers

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

July 02, 2025

Emery Lovekamp
ECS Southeast, LLC-Charlotte
1812 Center Park Drive
Suite D
Charlotte, NC 28217

RE: Project: Fortress Wood Products
Pace Project No.: 92800814

Dear Emery Lovekamp:

Enclosed are the analytical results for sample(s) received by the laboratory on June 05, 2025. The results relate only to the samples included in this report. Results reported herein conform to the applicable TNI/NELAC Standards and the laboratory's Quality Manual, where applicable, unless otherwise noted in the body of the report.

The test results provided in this final report were generated by each of the following laboratories within the Pace Network:

- Pace Analytical Services - Minneapolis

If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Angela M. Baioni

Angela Baioni
angela.baioni@pacelabs.com
612-473-6801
Project Manager

Enclosures

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

CERTIFICATIONS

Project: Fortress Wood Products
Pace Project No.: 92800814

Pace Analytical Services, LLC - Minneapolis MN
1700 Elm Street SE, Minneapolis, MN 55414
Alabama Certification #: 40770
Alaska Contaminated Sites Certification #: 17-009
Alaska DW Certification #: MN00064
Arizona Certification #: AZ0014
Arkansas DW Certification #: MN00064
Arkansas WW Certification #: 88-0680
California Certification #: 2929
Colorado Certification #: MN00064
Connecticut Certification #: PH-0256
DoD Certification via A2LA #: 2926.01
EPA Region 8 Tribal Water Systems+Wyoming DW Certification #: via MN 027-053-137
Florida Certification #: E87605
Georgia Certification #: 959
Idaho Certification #: MN00064
Illinois Certification #: 200011
Indiana Certification #: C-MN-01
Iowa Certification #: 368
ISO/IEC 17025 Certification via A2LA #: 2926.01
Kansas Certification #: E-10167
Kentucky DW Certification #: 90062
Kentucky WW Certification #: 90062
Louisiana DEQ Certification #: AI-03086
Louisiana DW Certification #: MN00064
Maine Certification #: MN00064
Maryland Certification #: 322
Michigan Certification #: 9909
Minnesota Certification #: 027-053-137
Minnesota Dept of Ag Approval: via MN 027-053-137
Minnesota Petrofund Registration #: 1240
Mississippi Certification #: MN00064
Missouri Certification #: 10100
Montana Certification #: CERT0092
Nebraska Certification #: NE-OS-18-06
Nevada Certification #: MN00064
New Hampshire Certification #: 2081
New Jersey Certification #: MN002
New York Certification #: 11647
North Carolina DW Certification #: 27700
North Carolina WW Certification #: 530
North Dakota Certification via A2LA #: R-036
North Dakota Certification via MN #: R-036
Ohio DW Certification #: 41244
Ohio VAP Certification (1700) #: CL101
Oklahoma Certification #: 9507
Oregon Primary Certification #: MN300001
Oregon Secondary Certification #: MN200001
Pennsylvania Certification #: 68-00563
Puerto Rico Certification #: MN00064
South Carolina Certification #:74003001
Tennessee Certification #: TN02818
Texas Certification #: T104704192
Utah Certification #: MN00064
Vermont Certification #: VT-027053137
Virginia Certification #: 460163
Washington Certification #: C486
West Virginia DEP Certification #: 382
West Virginia DW Certification #: 9952 C
Wisconsin Certification #: 999407970
Wyoming UST Certification via A2LA #: 2926.01
USDA Permit #: P330-19-00208

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE SUMMARY

Project: Fortress Wood Products
Pace Project No.: 92800814

Lab ID	Sample ID	Matrix	Date Collected	Date Received
92800814001	**B-11_P**	Solid	06/04/25 12:40	06/05/25 11:40
92800814002	**B-1_P**	Solid	06/04/25 16:00	06/05/25 11:40
92800814003	**FB-3_P**	Water	06/04/25 09:00	06/05/25 11:40

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE ANALYTE COUNT

Project: Fortress Wood Products
Pace Project No.: 92800814

Lab ID	Sample ID	Method	Analysts	Analytes Reported	Laboratory
92800814001	**B-11_P**	ASTM D2974	JDL	1	PASI-M
		EPA 1633	NBH	65	PASI-M
92800814002	**B-1_P**	ASTM D2974	JDL	1	PASI-M
		EPA 1633	NBH	65	PASI-M
92800814003	**FB-3_P**	EPA 1633	AJG	65	PASI-M

PASI-M = Pace Analytical Services - Minneapolis

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800814

Sample: B-11_P **Lab ID: 92800814001** Collected: 06/04/25 12:40 Received: 06/05/25 11:40 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Dry Weight / %M by ASTM D2974	Analytical Method: ASTM D2974 Pace Analytical Services - Minneapolis								
Percent Moisture	**17.3**	%	0.10	0.10	1		06/12/25 10:24		N2
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ug/kg	0.80	0.15	1	06/26/25 14:05	06/27/25 18:28	763051-92-9	
3:3 FTCA	ND	ug/kg	1.0	0.27	1	06/26/25 14:05	06/27/25 18:28	356-02-5	
4:2 FTS	ND	ug/kg	0.80	0.14	1	06/26/25 14:05	06/27/25 18:28	757124-72-4	
5:3 FTCA	ND	ug/kg	5.0	1.2	1	06/26/25 14:05	06/27/25 18:28	914637-49-3	
6:2 FTS	ND	ug/kg	0.80	0.20	1	06/26/25 14:05	06/27/25 18:28	27619-97-2	
7:3 FTCA	ND	ug/kg	5.0	1.1	1	06/26/25 14:05	06/27/25 18:28	812-70-4	
8:2 FTS	ND	ug/kg	0.80	0.20	1	06/26/25 14:05	06/27/25 18:28	39108-34-4	
9Cl-PF3ONS	ND	ug/kg	0.80	0.19	1	06/26/25 14:05	06/27/25 18:28	756426-58-1	
ADONA	ND	ug/kg	0.80	0.18	1	06/26/25 14:05	06/27/25 18:28	919005-14-4	
HFPO-DA	ND	ug/kg	0.80	0.19	1	06/26/25 14:05	06/27/25 18:28	13252-13-6	
NEtFOSAA	ND	ug/kg	0.20	0.074	1	06/26/25 14:05	06/27/25 18:28	2991-50-6	
NEtFOSA	ND	ug/kg	0.20	0.052	1	06/26/25 14:05	06/27/25 18:28	4151-50-2	
NEtFOSE	ND	ug/kg	2.0	0.39	1	06/26/25 14:05	06/27/25 18:28	1691-99-2	
NFDHA	ND	ug/kg	0.40	0.13	1	06/26/25 14:05	06/27/25 18:28	151772-58-6	
NMeFOSAA	ND	ug/kg	0.20	0.054	1	06/26/25 14:05	06/27/25 18:28	2355-31-9	
NMeFOSA	ND	ug/kg	0.20	0.061	1	06/26/25 14:05	06/27/25 18:28	31506-32-8	
NMeFOSE	ND	ug/kg	2.0	0.46	1	06/26/25 14:05	06/27/25 18:28	24448-09-7	
PFBS	ND	ug/kg	0.20	0.038	1	06/26/25 14:05	06/27/25 18:28	375-73-5	
PFDA	ND	ug/kg	0.20	0.047	1	06/26/25 14:05	06/27/25 18:28	335-76-2	
PFHxA	ND	ug/kg	0.20	0.045	1	06/26/25 14:05	06/27/25 18:28	307-24-4	
PFBA	ND	ug/kg	0.80	0.21	1	06/26/25 14:05	06/27/25 18:28	375-22-4	
PFDS	ND	ug/kg	0.20	0.058	1	06/26/25 14:05	06/27/25 18:28	335-77-3	
PFDoS	ND	ug/kg	0.20	0.043	1	06/26/25 14:05	06/27/25 18:28	79780-39-5	
PFEESA	ND	ug/kg	0.40	0.083	1	06/26/25 14:05	06/27/25 18:28	113507-82-7	
PFHpS	ND	ug/kg	0.20	0.060	1	06/26/25 14:05	06/27/25 18:28	375-92-8	
PFMBA	ND	ug/kg	0.40	0.096	1	06/26/25 14:05	06/27/25 18:28	863090-89-5	
PFMPA	ND	ug/kg	0.40	0.12	1	06/26/25 14:05	06/27/25 18:28	377-73-1	
PFNS	ND	ug/kg	0.20	0.053	1	06/26/25 14:05	06/27/25 18:28	68259-12-1	
PFOSA	ND	ug/kg	0.20	0.044	1	06/26/25 14:05	06/27/25 18:28	754-91-6	
PFPeA	ND	ug/kg	0.40	0.086	1	06/26/25 14:05	06/27/25 18:28	2706-90-3	
PFPeS	ND	ug/kg	0.20	0.048	1	06/26/25 14:05	06/27/25 18:28	2706-91-4	
PFDoA	ND	ug/kg	0.20	0.045	1	06/26/25 14:05	06/27/25 18:28	307-55-1	
PFHpA	ND	ug/kg	0.20	0.078	1	06/26/25 14:05	06/27/25 18:28	375-85-9	
PFHxS	ND	ug/kg	0.20	0.049	1	06/26/25 14:05	06/27/25 18:28	355-46-4	
PFNA	ND	ug/kg	0.20	0.056	1	06/26/25 14:05	06/27/25 18:28	375-95-1	
PFOS	**0.25**	ug/kg	0.20	0.040	1	06/26/25 14:05	06/27/25 18:28	1763-23-1	
PFOA	**0.11J**	ug/kg	0.20	0.050	1	06/26/25 14:05	06/27/25 18:28	335-67-1	
PFTeDA	ND	ug/kg	0.20	0.050	1	06/26/25 14:05	06/27/25 18:28	376-06-7	
PFTrDA	ND	ug/kg	0.20	0.042	1	06/26/25 14:05	06/27/25 18:28	72629-94-8	
PFUnA	ND	ug/kg	0.20	0.048	1	06/26/25 14:05	06/27/25 18:28	2058-94-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800814

Sample: B-11_P **Lab ID: 92800814001** Collected: 06/04/25 12:40 Received: 06/05/25 11:40 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C2-PFDoA (S)	111	%.	40-130		1	06/26/25 14:05	06/27/25 18:28		
13C3HFPO-DA (S)	88	%.	40-130		1	06/26/25 14:05	06/27/25 18:28		
13C3-PFBS (S)	79	%.	40-135		1	06/26/25 14:05	06/27/25 18:28		
13C3-PFHxS (S)	80	%.	40-130		1	06/26/25 14:05	06/27/25 18:28		
13C4-PFBA (S)	57	%.	8-130		1	06/26/25 14:05	06/27/25 18:28		
13C4-PFHpA (S)	66	%.	40-130		1	06/26/25 14:05	06/27/25 18:28		
13C5-PFHxA (S)	72	%.	40-130		1	06/26/25 14:05	06/27/25 18:28		
13C5-PFPeA (S)	68	%.	35-130		1	06/26/25 14:05	06/27/25 18:28		
13C6-PFDA (S)	78	%.	40-130		1	06/26/25 14:05	06/27/25 18:28		
13C8-PFOA (S)	87	%.	40-130		1	06/26/25 14:05	06/27/25 18:28		
13C8-PFOS (S)	79	%.	40-130		1	06/26/25 14:05	06/27/25 18:28		
13C8-PFOSA (S)	79	%.	40-130		1	06/26/25 14:05	06/27/25 18:28		
13C9-PFNA (S)	75	%.	40-130		1	06/26/25 14:05	06/27/25 18:28		
d3-MeFOSAA (S)	88	%.	40-135		1	06/26/25 14:05	06/27/25 18:28		
d3-NMeFOSA (S)	48	%.	10-130		1	06/26/25 14:05	06/27/25 18:28		
d5-EtFOSAA (S)	87	%.	40-150		1	06/26/25 14:05	06/27/25 18:28		
d5-NEtFOSA (S)	54	%.	10-130		1	06/26/25 14:05	06/27/25 18:28		
d7-NMeFOSE (S)	65	%.	20-130		1	06/26/25 14:05	06/27/25 18:28		
d9-NEtFOSE (S)	50	%.	15-130		1	06/26/25 14:05	06/27/25 18:28		
13C2-PFTA (S)	124	%.	20-130		1	06/26/25 14:05	06/27/25 18:28		
13C7-PFUdA (S)	95	%.	40-130		1	06/26/25 14:05	06/27/25 18:28		
13C24:2FTS (S)	139	%.	40-135		1	06/26/25 14:05	06/27/25 18:28		S0
13C26:2FTS (S)	114	%.	40-215		1	06/26/25 14:05	06/27/25 18:28		
13C28:2FTS (S)	108	%.	40-275		1	06/26/25 14:05	06/27/25 18:28		
13C3-PFPrA (S)	53	%.	8-130		1	06/26/25 14:05	06/27/25 18:28		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800814

Sample: B-1_P **Lab ID: 92800814002** Collected: 06/04/25 16:00 Received: 06/05/25 11:40 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Dry Weight / %M by ASTM D2974	Analytical Method: ASTM D2974 Pace Analytical Services - Minneapolis								
Percent Moisture	**21.5**	%	0.10	0.10	1		06/12/25 10:24		N2
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ug/kg	0.79	0.15	1	06/26/25 14:05	06/30/25 14:55	763051-92-9	
3:3 FTCA	ND	ug/kg	0.99	0.27	1	06/26/25 14:05	06/30/25 14:55	356-02-5	
4:2 FTS	ND	ug/kg	0.79	0.14	1	06/26/25 14:05	06/30/25 14:55	757124-72-4	
5:3 FTCA	ND	ug/kg	5.0	1.2	1	06/26/25 14:05	06/30/25 14:55	914637-49-3	
6:2 FTS	ND	ug/kg	0.79	0.20	1	06/26/25 14:05	06/30/25 14:55	27619-97-2	
7:3 FTCA	ND	ug/kg	5.0	1.1	1	06/26/25 14:05	06/30/25 14:55	812-70-4	
8:2 FTS	ND	ug/kg	0.79	0.20	1	06/26/25 14:05	06/30/25 14:55	39108-34-4	
9Cl-PF3ONS	ND	ug/kg	0.79	0.19	1	06/26/25 14:05	06/30/25 14:55	756426-58-1	
ADONA	ND	ug/kg	0.79	0.18	1	06/26/25 14:05	06/30/25 14:55	919005-14-4	
HFPO-DA	ND	ug/kg	0.79	0.19	1	06/26/25 14:05	06/30/25 14:55	13252-13-6	
NEtFOSAA	ND	ug/kg	0.20	0.073	1	06/26/25 14:05	06/30/25 14:55	2991-50-6	
NEtFOSA	ND	ug/kg	0.20	0.052	1	06/26/25 14:05	06/30/25 14:55	4151-50-2	
NEtFOSE	ND	ug/kg	2.0	0.39	1	06/26/25 14:05	06/30/25 14:55	1691-99-2	
NFDHA	ND	ug/kg	0.40	0.13	1	06/26/25 14:05	06/30/25 14:55	151772-58-6	
NMeFOSAA	ND	ug/kg	0.20	0.054	1	06/26/25 14:05	06/30/25 14:55	2355-31-9	
NMeFOSA	ND	ug/kg	0.20	0.060	1	06/26/25 14:05	06/30/25 14:55	31506-32-8	
NMeFOSE	ND	ug/kg	2.0	0.46	1	06/26/25 14:05	06/30/25 14:55	24448-09-7	
PFBS	ND	ug/kg	0.20	0.038	1	06/26/25 14:05	06/30/25 14:55	375-73-5	
PFDA	**0.079J**	ug/kg	0.20	0.046	1	06/26/25 14:05	06/30/25 14:55	335-76-2	
PFHxA	ND	ug/kg	0.20	0.044	1	06/26/25 14:05	06/30/25 14:55	307-24-4	
PFBA	ND	ug/kg	0.79	0.21	1	06/26/25 14:05	06/30/25 14:55	375-22-4	
PFDS	ND	ug/kg	0.20	0.058	1	06/26/25 14:05	06/30/25 14:55	335-77-3	
PFDoS	ND	ug/kg	0.20	0.042	1	06/26/25 14:05	06/30/25 14:55	79780-39-5	
PFEESA	ND	ug/kg	0.40	0.082	1	06/26/25 14:05	06/30/25 14:55	113507-82-7	
PFHpS	ND	ug/kg	0.20	0.059	1	06/26/25 14:05	06/30/25 14:55	375-92-8	
PFMBA	ND	ug/kg	0.40	0.095	1	06/26/25 14:05	06/30/25 14:55	863090-89-5	
PFMPA	ND	ug/kg	0.40	0.12	1	06/26/25 14:05	06/30/25 14:55	377-73-1	
PFNS	ND	ug/kg	0.20	0.052	1	06/26/25 14:05	06/30/25 14:55	68259-12-1	
PFOSA	ND	ug/kg	0.20	0.044	1	06/26/25 14:05	06/30/25 14:55	754-91-6	
PFPeA	ND	ug/kg	0.40	0.085	1	06/26/25 14:05	06/30/25 14:55	2706-90-3	
PFPeS	ND	ug/kg	0.20	0.048	1	06/26/25 14:05	06/30/25 14:55	2706-91-4	
PFDoA	**0.079J**	ug/kg	0.20	0.044	1	06/26/25 14:05	06/30/25 14:55	307-55-1	
PFHpA	ND	ug/kg	0.20	0.077	1	06/26/25 14:05	06/30/25 14:55	375-85-9	
PFHxS	ND	ug/kg	0.20	0.049	1	06/26/25 14:05	06/30/25 14:55	355-46-4	
PFNA	**0.073J**	ug/kg	0.20	0.056	1	06/26/25 14:05	06/30/25 14:55	375-95-1	
PFOS	**1.3**	ug/kg	0.20	0.040	1	06/26/25 14:05	06/30/25 14:55	1763-23-1	
PFOA	**0.18J**	ug/kg	0.20	0.050	1	06/26/25 14:05	06/30/25 14:55	335-67-1	
PFTeDA	ND	ug/kg	0.20	0.050	1	06/26/25 14:05	06/30/25 14:55	376-06-7	
PFTrDA	**0.044J**	ug/kg	0.20	0.042	1	06/26/25 14:05	06/30/25 14:55	72629-94-8	
PFUnA	**0.076J**	ug/kg	0.20	0.047	1	06/26/25 14:05	06/30/25 14:55	2058-94-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800814

Sample: B-1_P **Lab ID: 92800814002** Collected: 06/04/25 16:00 Received: 06/05/25 11:40 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Soil	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C2-PFDoA (S)	85	%.	40-130		1	06/26/25 14:05	06/30/25 14:55		
13C3HFPO-DA (S)	81	%.	40-130		1	06/26/25 14:05	06/30/25 14:55		
13C3-PFBS (S)	78	%.	40-135		1	06/26/25 14:05	06/30/25 14:55		
13C3-PFHxS (S)	79	%.	40-130		1	06/26/25 14:05	06/30/25 14:55		
13C4-PFBA (S)	64	%.	8-130		1	06/26/25 14:05	06/30/25 14:55		
13C4-PFHpA (S)	82	%.	40-130		1	06/26/25 14:05	06/30/25 14:55		
13C5-PFHxA (S)	79	%.	40-130		1	06/26/25 14:05	06/30/25 14:55		
13C5-PFPeA (S)	69	%.	35-130		1	06/26/25 14:05	06/30/25 14:55		
13C6-PFDA (S)	87	%.	40-130		1	06/26/25 14:05	06/30/25 14:55		
13C8-PFOA (S)	84	%.	40-130		1	06/26/25 14:05	06/30/25 14:55		
13C8-PFOS (S)	85	%.	40-130		1	06/26/25 14:05	06/30/25 14:55		
13C8-PFOSA (S)	79	%.	40-130		1	06/26/25 14:05	06/30/25 14:55		
13C9-PFNA (S)	84	%.	40-130		1	06/26/25 14:05	06/30/25 14:55		
d3-MeFOSAA (S)	83	%.	40-135		1	06/26/25 14:05	06/30/25 14:55		
d3-NMeFOSA (S)	69	%.	10-130		1	06/26/25 14:05	06/30/25 14:55		
d5-EtFOSAA (S)	83	%.	40-150		1	06/26/25 14:05	06/30/25 14:55		
d5-NEtFOSA (S)	65	%.	10-130		1	06/26/25 14:05	06/30/25 14:55		
d7-NMeFOSE (S)	76	%.	20-130		1	06/26/25 14:05	06/30/25 14:55		
d9-NEtFOSE (S)	72	%.	15-130		1	06/26/25 14:05	06/30/25 14:55		
13C2-PFTA (S)	79	%.	20-130		1	06/26/25 14:05	06/30/25 14:55		
13C7-PFUdA (S)	97	%.	40-130		1	06/26/25 14:05	06/30/25 14:55		
13C24:2FTS (S)	88	%.	40-135		1	06/26/25 14:05	06/30/25 14:55		
13C26:2FTS (S)	111	%.	40-215		1	06/26/25 14:05	06/30/25 14:55		
13C28:2FTS (S)	122	%.	40-275		1	06/26/25 14:05	06/30/25 14:55		
13C3-PFPrA (S)	69	%.	8-130		1	06/26/25 14:05	06/30/25 14:55		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800814

Sample: FB-3_P **Lab ID: 92800814003** Collected: 06/04/25 09:00 Received: 06/05/25 11:40 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ng/L	6.2	1.9	1	06/27/25 08:48	06/28/25 00:54	763051-92-9	
3:3 FTCA	ND	ng/L	7.7	2.1	1	06/27/25 08:48	06/28/25 00:54	356-02-5	
4:2 FTS	ND	ng/L	6.2	1.5	1	06/27/25 08:48	06/28/25 00:54	757124-72-4	
5:3 FTCA	ND	ng/L	38.7	9.3	1	06/27/25 08:48	06/28/25 00:54	914637-49-3	
6:2 FTS	ND	ng/L	6.2	1.8	1	06/27/25 08:48	06/28/25 00:54	27619-97-2	
7:3 FTCA	ND	ng/L	38.7	11.0	1	06/27/25 08:48	06/28/25 00:54	812-70-4	
8:2 FTS	ND	ng/L	6.2	1.6	1	06/27/25 08:48	06/28/25 00:54	39108-34-4	
9Cl-PF3ONS	ND	ng/L	6.2	1.6	1	06/27/25 08:48	06/28/25 00:54	756426-58-1	
ADONA	ND	ng/L	6.2	1.8	1	06/27/25 08:48	06/28/25 00:54	919005-14-4	
HFPO-DA	ND	ng/L	6.2	1.7	1	06/27/25 08:48	06/28/25 00:54	13252-13-6	
NEtFOSAA	ND	ng/L	1.5	0.64	1	06/27/25 08:48	06/28/25 00:54	2991-50-6	
NEtFOSA	ND	ng/L	1.5	0.49	1	06/27/25 08:48	06/28/25 00:54	4151-50-2	
NEtFOSE	ND	ng/L	15.5	4.0	1	06/27/25 08:48	06/28/25 00:54	1691-99-2	
NFDHA	ND	ng/L	3.1	1.3	1	06/27/25 08:48	06/28/25 00:54	151772-58-6	
NMeFOSAA	ND	ng/L	1.5	0.48	1	06/27/25 08:48	06/28/25 00:54	2355-31-9	
NMeFOSA	ND	ng/L	1.5	0.48	1	06/27/25 08:48	06/28/25 00:54	31506-32-8	
NMeFOSE	ND	ng/L	15.5	4.0	1	06/27/25 08:48	06/28/25 00:54	24448-09-7	
PFBS	ND	ng/L	1.5	0.41	1	06/27/25 08:48	06/28/25 00:54	375-73-5	
PFDA	ND	ng/L	1.5	0.48	1	06/27/25 08:48	06/28/25 00:54	335-76-2	
PFHxA	ND	ng/L	1.5	0.37	1	06/27/25 08:48	06/28/25 00:54	307-24-4	
PFBA	ND	ng/L	6.2	1.5	1	06/27/25 08:48	06/28/25 00:54	375-22-4	
PFDS	ND	ng/L	1.5	0.67	1	06/27/25 08:48	06/28/25 00:54	335-77-3	
PFDoS	ND	ng/L	1.5	0.33	1	06/27/25 08:48	06/28/25 00:54	79780-39-5	
PFEESA	ND	ng/L	3.1	0.67	1	06/27/25 08:48	06/28/25 00:54	113507-82-7	
PFHpS	ND	ng/L	1.5	0.45	1	06/27/25 08:48	06/28/25 00:54	375-92-8	
PFMBA	ND	ng/L	3.1	0.75	1	06/27/25 08:48	06/28/25 00:54	863090-89-5	
PFMPA	ND	ng/L	3.1	0.60	1	06/27/25 08:48	06/28/25 00:54	377-73-1	
PFNS	ND	ng/L	1.5	0.46	1	06/27/25 08:48	06/28/25 00:54	68259-12-1	
PFOSA	ND	ng/L	1.5	0.47	1	06/27/25 08:48	06/28/25 00:54	754-91-6	
PFPeA	ND	ng/L	3.1	0.92	1	06/27/25 08:48	06/28/25 00:54	2706-90-3	
PFPeS	ND	ng/L	1.5	0.37	1	06/27/25 08:48	06/28/25 00:54	2706-91-4	
PFDoA	ND	ng/L	1.5	0.47	1	06/27/25 08:48	06/28/25 00:54	307-55-1	
PFHpA	ND	ng/L	1.5	0.60	1	06/27/25 08:48	06/28/25 00:54	375-85-9	
PFHxS	ND	ng/L	1.5	0.40	1	06/27/25 08:48	06/28/25 00:54	355-46-4	
PFNA	ND	ng/L	1.5	0.51	1	06/27/25 08:48	06/28/25 00:54	375-95-1	
PFOS	ND	ng/L	1.5	0.38	1	06/27/25 08:48	06/28/25 00:54	1763-23-1	
PFOA	ND	ng/L	1.5	0.47	1	06/27/25 08:48	06/28/25 00:54	335-67-1	
PFTeDA	ND	ng/L	1.5	0.40	1	06/27/25 08:48	06/28/25 00:54	376-06-7	
PFTrDA	ND	ng/L	1.5	0.44	1	06/27/25 08:48	06/28/25 00:54	72629-94-8	
PFUnA	ND	ng/L	1.5	0.34	1	06/27/25 08:48	06/28/25 00:54	2058-94-8	
Surrogates									
13C2-PFDoA (S)	105	%.	10-130		1	06/27/25 08:48	06/28/25 00:54		
13C3HFPO-DA (S)	109	%.	40-130		1	06/27/25 08:48	06/28/25 00:54		
13C3-PFBS (S)	84	%.	40-135		1	06/27/25 08:48	06/28/25 00:54		
13C3-PFHxS (S)	88	%.	40-130		1	06/27/25 08:48	06/28/25 00:54		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92800814

Sample: FB-3_P **Lab ID: 92800814003** Collected: 06/04/25 09:00 Received: 06/05/25 11:40 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C4-PFBA (S)	87	%.	5-130		1	06/27/25 08:48	06/28/25 00:54		
13C4-PFHpA (S)	79	%.	40-130		1	06/27/25 08:48	06/28/25 00:54		
13C5-PFHxA (S)	86	%.	40-130		1	06/27/25 08:48	06/28/25 00:54		
13C5-PFPeA (S)	92	%.	40-130		1	06/27/25 08:48	06/28/25 00:54		
13C6-PFDA (S)	80	%.	40-130		1	06/27/25 08:48	06/28/25 00:54		
13C8-PFOA (S)	94	%.	40-130		1	06/27/25 08:48	06/28/25 00:54		
13C8-PFOS (S)	80	%.	40-130		1	06/27/25 08:48	06/28/25 00:54		
13C8-PFOSA (S)	70	%.	40-130		1	06/27/25 08:48	06/28/25 00:54		
13C9-PFNA (S)	80	%.	40-130		1	06/27/25 08:48	06/28/25 00:54		
d3-MeFOSAA (S)	62	%.	40-170		1	06/27/25 08:48	06/28/25 00:54		
d3-NMeFOSA (S)	36	%.	10-130		1	06/27/25 08:48	06/28/25 00:54		
d5-EtFOSAA (S)	59	%.	25-135		1	06/27/25 08:48	06/28/25 00:54		
d5-NEtFOSA (S)	38	%.	10-130		1	06/27/25 08:48	06/28/25 00:54		
d7-NMeFOSE (S)	53	%.	10-130		1	06/27/25 08:48	06/28/25 00:54		
d9-NEtFOSE (S)	39	%.	10-130		1	06/27/25 08:48	06/28/25 00:54		
13C2-PFTA (S)	114	%.	10-130		1	06/27/25 08:48	06/28/25 00:54		
13C7-PFUdA (S)	89	%.	30-130		1	06/27/25 08:48	06/28/25 00:54		
13C24:2FTS (S)	98	%.	40-200		1	06/27/25 08:48	06/28/25 00:54		
13C26:2FTS (S)	89	%.	40-200		1	06/27/25 08:48	06/28/25 00:54		
13C28:2FTS (S)	92	%.	40-300		1	06/27/25 08:48	06/28/25 00:54		
13C3-PFPrA (S)	82	%.	5-130		1	06/27/25 08:48	06/28/25 00:54		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800814

QC Batch: 1012514
QC Batch Method: ASTM D2974
Analysis Method: ASTM D2974
Analysis Description: Dry Weight / %M by ASTM D2974
Laboratory: Pace Analytical Services - Minneapolis

Associated Lab Samples: 92800814001, 92800814002

SAMPLE DUPLICATE: 5278046

Parameter	Units	10737716004 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	2.1	2.0	4	30	N2

SAMPLE DUPLICATE: 5278047

Parameter	Units	10737752001 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	14.3	13.9	3	30	N2

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800814

QC Batch: 1014701
QC Batch Method: EPA 1633
Analysis Method: EPA 1633
Analysis Description: EPA 1633F Soil
Laboratory: Pace Analytical Services - Minneapolis

Associated Lab Samples: 92800814001, 92800814002

METHOD BLANK: 5289926 Matrix: Solid

Associated Lab Samples: 92800814001, 92800814002

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
11Cl-PF3OUdS	ug/kg	ND	0.80	0.15	06/30/25 11:24	
3:3 FTCA	ug/kg	ND	1.0	0.27	06/30/25 11:24	
4:2 FTS	ug/kg	ND	0.80	0.14	06/30/25 11:24	
5:3 FTCA	ug/kg	ND	5.0	1.2	06/30/25 11:24	
6:2 FTS	ug/kg	ND	0.80	0.20	06/30/25 11:24	
7:3 FTCA	ug/kg	ND	5.0	1.1	06/30/25 11:24	
8:2 FTS	ug/kg	ND	0.80	0.20	06/30/25 11:24	
9Cl-PF3ONS	ug/kg	ND	0.80	0.19	06/30/25 11:24	
ADONA	ug/kg	ND	0.80	0.18	06/30/25 11:24	
HFPO-DA	ug/kg	ND	0.80	0.19	06/30/25 11:24	
NEtFOSA	ug/kg	ND	0.20	0.052	06/30/25 11:24	
NEtFOSAA	ug/kg	ND	0.20	0.074	06/30/25 11:24	
NEtFOSE	ug/kg	ND	2.0	0.39	06/30/25 11:24	
NFDHA	ug/kg	ND	0.40	0.13	06/30/25 11:24	
NMeFOSA	ug/kg	ND	0.20	0.060	06/30/25 11:24	
NMeFOSAA	ug/kg	ND	0.20	0.054	06/30/25 11:24	
NMeFOSE	ug/kg	ND	2.0	0.46	06/30/25 11:24	
PFBA	ug/kg	ND	0.80	0.21	06/30/25 11:24	
PFBS	ug/kg	ND	0.20	0.038	06/30/25 11:24	
PFDA	ug/kg	ND	0.20	0.047	06/30/25 11:24	
PFDoA	ug/kg	ND	0.20	0.045	06/30/25 11:24	
PFDoS	ug/kg	ND	0.20	0.042	06/30/25 11:24	
PFDS	ug/kg	ND	0.20	0.058	06/30/25 11:24	
PFEESA	ug/kg	ND	0.40	0.083	06/30/25 11:24	
PFHpA	ug/kg	ND	0.20	0.078	06/30/25 11:24	
PFHpS	ug/kg	ND	0.20	0.060	06/30/25 11:24	
PFHxA	ug/kg	ND	0.20	0.045	06/30/25 11:24	
PFHxS	ug/kg	ND	0.20	0.049	06/30/25 11:24	
PFMBA	ug/kg	ND	0.40	0.096	06/30/25 11:24	
PFMPA	ug/kg	ND	0.40	0.12	06/30/25 11:24	
PFNA	ug/kg	ND	0.20	0.056	06/30/25 11:24	
PFNS	ug/kg	ND	0.20	0.053	06/30/25 11:24	
PFOA	ug/kg	ND	0.20	0.050	06/30/25 11:24	
PFOS	ug/kg	ND	0.20	0.040	06/30/25 11:24	
PFOSA	ug/kg	ND	0.20	0.044	06/30/25 11:24	
PFPeA	ug/kg	ND	0.40	0.086	06/30/25 11:24	
PFPeS	ug/kg	ND	0.20	0.048	06/30/25 11:24	
PFTeDA	ug/kg	ND	0.20	0.050	06/30/25 11:24	
PFTrDA	ug/kg	ND	0.20	0.042	06/30/25 11:24	
PFUnA	ug/kg	ND	0.20	0.048	06/30/25 11:24	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800814

METHOD BLANK: 5289926 Matrix: Solid
Associated Lab Samples: 92800814001, 92800814002

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
13C2-PFDoA (S)	%.	42	40-130		06/30/25 11:24	
13C2-PFTA (S)	%.	45	20-130		06/30/25 11:24	
13C24:2FTS (S)	%.	37	40-135		06/30/25 11:24	S0
13C26:2FTS (S)	%.	44	40-215		06/30/25 11:24	
13C28:2FTS (S)	%.	42	40-275		06/30/25 11:24	
13C3-PFBS (S)	%.	39	40-135		06/30/25 11:24	S0
13C3-PFHxS (S)	%.	46	40-130		06/30/25 11:24	
13C3-PFPrA (S)	%.	52	8-130		06/30/25 11:24	
13C3HFPO-DA (S)	%.	40	40-130		06/30/25 11:24	
13C4-PFBA (S)	%.	38	8-130		06/30/25 11:24	
13C4-PFHpA (S)	%.	46	40-130		06/30/25 11:24	
13C5-PFHxA (S)	%.	38	40-130		06/30/25 11:24	S0
13C5-PFPeA (S)	%.	37	35-130		06/30/25 11:24	
13C6-PFDA (S)	%.	44	40-130		06/30/25 11:24	
13C7-PFUdA (S)	%.	45	40-130		06/30/25 11:24	
13C8-PFOA (S)	%.	44	40-130		06/30/25 11:24	
13C8-PFOS (S)	%.	45	40-130		06/30/25 11:24	
13C8-PFOSA (S)	%.	43	40-130		06/30/25 11:24	
13C9-PFNA (S)	%.	46	40-130		06/30/25 11:24	
d3-MeFOSAA (S)	%.	37	40-135		06/30/25 11:24	S0
d3-NMeFOSA (S)	%.	38	10-130		06/30/25 11:24	
d5-EtFOSAA (S)	%.	35	40-150		06/30/25 11:24	S0
d5-NEtFOSA (S)	%.	36	10-130		06/30/25 11:24	
d7-NMeFOSE (S)	%.	44	20-130		06/30/25 11:24	
d9-NEtFOSE (S)	%.	42	15-130		06/30/25 11:24	

LABORATORY CONTROL SAMPLE: 5289927

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ug/kg	7.5	6.8	90	45-160	
3:3 FTCA	ug/kg	9.9	8.0	80	45-130	
4:2 FTS	ug/kg	7.5	6.8	91	60-150	
5:3 FTCA	ug/kg	49.6	51.5	104	60-130	
6:2 FTS	ug/kg	7.7	7.3	96	55-200	
7:3 FTCA	ug/kg	49.6	42.2	85	60-150	
8:2 FTS	ug/kg	7.7	7.1	92	70-150	
9Cl-PF3ONS	ug/kg	7.5	7.0	93	70-150	
ADONA	ug/kg	7.5	6.8	91	70-160	
HFPO-DA	ug/kg	8	6.9	86	70-145	
NEtFOSA	ug/kg	1.9	1.8	92	70-140	
NEtFOSAA	ug/kg	1.9	1.8	91	65-165	
NEtFOSE	ug/kg	19.2	17.9	93	70-135	
NFDHA	ug/kg	4	3.4	84	60-155	
NMeFOSA	ug/kg	1.9	1.8	95	70-155	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800814

LABORATORY CONTROL SAMPLE: 5289927

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
NMeFOSAA	ug/kg	1.9	1.7	89	65-155	
NMeFOSE	ug/kg	19.2	17.7	92	70-140	
PFBA	ug/kg	8	7.3	91	70-140	
PFBS	ug/kg	1.8	1.5	87	65-145	
PFDA	ug/kg	1.9	1.7	91	70-155	
PFDoA	ug/kg	1.9	1.8	95	70-150	
PFDoS	ug/kg	1.9	1.7	86	25-160	
PFDS	ug/kg	1.9	1.7	89	40-155	
PFEESA	ug/kg	3.5	3.4	97	70-140	
PFHpA	ug/kg	1.9	1.7	87	65-145	
PFHpS	ug/kg	1.9	1.7	90	65-155	
PFHxA	ug/kg	1.9	1.8	94	65-140	
PFHxS	ug/kg	1.8	1.5	85	60-150	
PFMBA	ug/kg	4	3.7	92	60-150	
PFMPA	ug/kg	4	3.7	93	30-140	
PFNA	ug/kg	1.9	1.8	92	70-155	
PFNS	ug/kg	1.9	1.7	90	55-140	
PFOA	ug/kg	1.9	1.7	89	70-150	
PFOS	ug/kg	1.9	1.6	83	65-160	
PFOSA	ug/kg	1.9	1.8	91	70-140	
PFPeA	ug/kg	4	3.5	88	60-150	
PFPeS	ug/kg	1.9	1.7	88	55-160	
PFTeDA	ug/kg	1.9	1.8	93	65-150	
PFTrDA	ug/kg	1.9	1.9	100	65-150	
PFUnA	ug/kg	1.9	1.7	89	70-155	
13C2-PFDoA (S)	%.			75	40-130	
13C2-PFTA (S)	%.			75	20-130	
13C24:2FTS (S)	%.			58	40-135	
13C26:2FTS (S)	%.			70	40-215	
13C28:2FTS (S)	%.			72	40-275	
13C3-PFBS (S)	%.			73	40-135	
13C3-PFHxS (S)	%.			80	40-130	
13C3-PFPrA (S)	%.			63	8-130	
13C3HFPO-DA (S)	%.			74	40-130	
13C4-PFBA (S)	%.			57	8-130	
13C4-PFHpA (S)	%.			81	40-130	
13C5-PFHxA (S)	%.			71	40-130	
13C5-PFPeA (S)	%.			63	35-130	
13C6-PFDA (S)	%.			79	40-130	
13C7-PFUdA (S)	%.			84	40-130	
13C8-PFOA (S)	%.			84	40-130	
13C8-PFOS (S)	%.			77	40-130	
13C8-PFOSA (S)	%.			74	40-130	
13C9-PFNA (S)	%.			79	40-130	
d3-MeFOSAA (S)	%.			68	40-135	
d3-NMeFOSA (S)	%.			66	10-130	
d5-EtFOSAA (S)	%.			65	40-150	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800814

LABORATORY CONTROL SAMPLE: 5289927

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
d5-NEtFOSA (S)	%.			66	10-130	
d7-NMeFOSE (S)	%.			77	20-130	
d9-NEtFOSE (S)	%.			73	15-130	

LABORATORY CONTROL SAMPLE: 5289928

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ug/kg	1.5	1.3	88	45-160	
3:3 FTCA	ug/kg	2	1.7	87	45-130	
4:2 FTS	ug/kg	1.5	1.3	86	60-150	
5:3 FTCA	ug/kg	9.9	8.7	88	60-130	
6:2 FTS	ug/kg	1.5	1.3	87	55-200	
7:3 FTCA	ug/kg	9.9	8.5	86	60-150	
8:2 FTS	ug/kg	1.5	1.4	92	70-150	
9Cl-PF3ONS	ug/kg	1.5	1.4	90	70-150	
ADONA	ug/kg	1.5	1.3	87	70-160	
HFPO-DA	ug/kg	1.6	1.3	82	70-145	
NEtFOSA	ug/kg	0.38	0.32	83	70-140	
NEtFOSAA	ug/kg	0.38	0.34	89	65-165	
NEtFOSE	ug/kg	3.8	3.4	89	70-135	
NFDHA	ug/kg	0.8	0.68	84	60-155	
NMeFOSA	ug/kg	0.38	0.36	95	70-155	
NMeFOSAA	ug/kg	0.38	0.36	94	65-155	
NMeFOSE	ug/kg	3.8	3.5	91	70-140	
PFBA	ug/kg	1.6	1.5	95	70-140	
PFBS	ug/kg	0.35	0.29	83	65-145	
PFDA	ug/kg	0.38	0.35	92	70-155	
PFDoA	ug/kg	0.38	0.38	98	70-150	
PFDoS	ug/kg	0.38	0.37	97	25-160	
PFDS	ug/kg	0.38	0.32	83	40-155	
PFEESA	ug/kg	0.7	0.66	94	70-140	
PFHpA	ug/kg	0.38	0.35	91	65-145	
PFHpS	ug/kg	0.38	0.30	78	65-155	
PFHxA	ug/kg	0.38	0.38	98	65-140	
PFHxS	ug/kg	0.35	0.32	90	60-150	
PFMBA	ug/kg	0.8	0.67	84	60-150	
PFMPA	ug/kg	0.8	0.77	97	30-140	
PFNA	ug/kg	0.38	0.38	99	70-155	
PFNS	ug/kg	0.38	0.34	88	55-140	
PFOA	ug/kg	0.38	0.33	87	70-150	
PFOS	ug/kg	0.38	0.37	96	65-160	
PFOSA	ug/kg	0.38	0.34	88	70-140	
PFPeA	ug/kg	0.8	0.70	88	60-150	
PFPeS	ug/kg	0.38	0.33	85	55-160	
PFTeDA	ug/kg	0.38	0.37	95	65-150	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800814

LABORATORY CONTROL SAMPLE: 5289928

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
PFTrDA	ug/kg	0.38	0.40	103	65-150	
PFUnA	ug/kg	0.38	0.34	90	70-155	
13C2-PFDoA (S)	%.			41	40-130	
13C2-PFTA (S)	%.			44	20-130	
13C24:2FTS (S)	%.			46	40-135	
13C26:2FTS (S)	%.			46	40-215	
13C28:2FTS (S)	%.			44	40-275	
13C3-PFBS (S)	%.			50	40-135	
13C3-PFHxS (S)	%.			46	40-130	
13C3-PFPrA (S)	%.			52	8-130	
13C3HFPO-DA (S)	%.			49	40-130	
13C4-PFBA (S)	%.			38	8-130	
13C4-PFHpA (S)	%.			46	40-130	
13C5-PFHxA (S)	%.			46	40-130	
13C5-PFPeA (S)	%.			44	35-130	
13C6-PFDA (S)	%.			43	40-130	
13C7-PFUdA (S)	%.			45	40-130	
13C8-PFOA (S)	%.			42	40-130	
13C8-PFOS (S)	%.			45	40-130	
13C8-PFOSA (S)	%.			42	40-130	
13C9-PFNA (S)	%.			42	40-130	
d3-MeFOSAA (S)	%.			39	40-135	S0
d3-NMeFOSA (S)	%.			36	10-130	
d5-EtFOSAA (S)	%.			39	40-150	S0
d5-NEtFOSA (S)	%.			38	10-130	
d7-NMeFOSE (S)	%.			43	20-130	
d9-NEtFOSE (S)	%.			41	15-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800814

QC Batch: 1014950
QC Batch Method: EPA 1633
Analysis Method: EPA 1633
Analysis Description: EPA 1633F Water
Laboratory: Pace Analytical Services - Minneapolis

Associated Lab Samples: 92800814003

METHOD BLANK: 5291217 Matrix: Water
Associated Lab Samples: 92800814003

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
11Cl-PF3OUdS	ng/L	ND	6.4	1.9	06/27/25 21:21	
3:3 FTCA	ng/L	ND	8.0	2.2	06/27/25 21:21	
4:2 FTS	ng/L	ND	6.4	1.6	06/27/25 21:21	
5:3 FTCA	ng/L	ND	40.0	9.6	06/27/25 21:21	
6:2 FTS	ng/L	ND	6.4	1.8	06/27/25 21:21	
7:3 FTCA	ng/L	ND	40.0	11.4	06/27/25 21:21	
8:2 FTS	ng/L	ND	6.4	1.7	06/27/25 21:21	
9Cl-PF3ONS	ng/L	ND	6.4	1.7	06/27/25 21:21	
ADONA	ng/L	ND	6.4	1.9	06/27/25 21:21	
HFPO-DA	ng/L	ND	6.4	1.8	06/27/25 21:21	
NEtFOSA	ng/L	ND	1.6	0.51	06/27/25 21:21	
NEtFOSAA	ng/L	ND	1.6	0.66	06/27/25 21:21	
NEtFOSE	ng/L	ND	16.0	4.1	06/27/25 21:21	
NFDHA	ng/L	ND	3.2	1.3	06/27/25 21:21	
NMeFOSA	ng/L	ND	1.6	0.49	06/27/25 21:21	
NMeFOSAA	ng/L	ND	1.6	0.50	06/27/25 21:21	
NMeFOSE	ng/L	ND	16.0	4.1	06/27/25 21:21	
PFBA	ng/L	ND	6.4	1.6	06/27/25 21:21	
PFBS	ng/L	ND	1.6	0.42	06/27/25 21:21	
PFDA	ng/L	ND	1.6	0.50	06/27/25 21:21	
PFDoA	ng/L	ND	1.6	0.49	06/27/25 21:21	
PFDoS	ng/L	ND	1.6	0.34	06/27/25 21:21	
PFDS	ng/L	ND	1.6	0.69	06/27/25 21:21	
PFEESA	ng/L	ND	3.2	0.69	06/27/25 21:21	
PFHpA	ng/L	ND	1.6	0.62	06/27/25 21:21	
PFHpS	ng/L	ND	1.6	0.47	06/27/25 21:21	
PFHxA	ng/L	0.65J	1.6	0.38	06/27/25 21:21	
PFHxS	ng/L	ND	1.6	0.41	06/27/25 21:21	
PFMBA	ng/L	ND	3.2	0.78	06/27/25 21:21	
PFMPA	ng/L	ND	3.2	0.62	06/27/25 21:21	
PFNA	ng/L	ND	1.6	0.52	06/27/25 21:21	
PFNS	ng/L	ND	1.6	0.47	06/27/25 21:21	
PFOA	ng/L	ND	1.6	0.49	06/27/25 21:21	
PFOS	ng/L	ND	1.6	0.39	06/27/25 21:21	
PFOSA	ng/L	ND	1.6	0.49	06/27/25 21:21	
PFPeA	ng/L	ND	3.2	0.95	06/27/25 21:21	
PFPeS	ng/L	ND	1.6	0.38	06/27/25 21:21	
PFTeDA	ng/L	ND	1.6	0.41	06/27/25 21:21	
PFTrDA	ng/L	ND	1.6	0.45	06/27/25 21:21	
PFUnA	ng/L	ND	1.6	0.36	06/27/25 21:21	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800814

METHOD BLANK: 5291217 Matrix: Water
Associated Lab Samples: 92800814003

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
13C2-PFDoA (S)	%.	112	10-130		06/27/25 21:21	
13C2-PFTA (S)	%.	124	10-130		06/27/25 21:21	
13C24:2FTS (S)	%.	152	40-200		06/27/25 21:21	
13C26:2FTS (S)	%.	118	40-200		06/27/25 21:21	
13C28:2FTS (S)	%.	97	40-300		06/27/25 21:21	
13C3-PFBS (S)	%.	84	40-135		06/27/25 21:21	
13C3-PFHxS (S)	%.	82	40-130		06/27/25 21:21	
13C3-PFPrA (S)	%.	83	5-130		06/27/25 21:21	
13C3HFPO-DA (S)	%.	108	40-130		06/27/25 21:21	
13C4-PFBA (S)	%.	88	5-130		06/27/25 21:21	
13C4-PFHpA (S)	%.	79	40-130		06/27/25 21:21	
13C5-PFHxA (S)	%.	87	40-130		06/27/25 21:21	
13C5-PFPeA (S)	%.	89	40-130		06/27/25 21:21	
13C6-PFDA (S)	%.	86	40-130		06/27/25 21:21	
13C7-PFUdA (S)	%.	95	30-130		06/27/25 21:21	
13C8-PFOA (S)	%.	96	40-130		06/27/25 21:21	
13C8-PFOS (S)	%.	82	40-130		06/27/25 21:21	
13C8-PFOSA (S)	%.	77	40-130		06/27/25 21:21	
13C9-PFNA (S)	%.	79	40-130		06/27/25 21:21	
d3-MeFOSAA (S)	%.	89	40-170		06/27/25 21:21	
d3-NMeFOSA (S)	%.	36	10-130		06/27/25 21:21	
d5-EtFOSAA (S)	%.	88	25-135		06/27/25 21:21	
d5-NEtFOSA (S)	%.	37	10-130		06/27/25 21:21	
d7-NMeFOSE (S)	%.	54	10-130		06/27/25 21:21	
d9-NEtFOSE (S)	%.	40	10-130		06/27/25 21:21	

LABORATORY CONTROL SAMPLE: 5291218

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ng/L	75.2	78.0	104	55-160	
3:3 FTCA	ng/L	99.2	101	102	65-130	
4:2 FTS	ng/L	75.2	80.9	108	70-145	
5:3 FTCA	ng/L	496	455	92	70-135	
6:2 FTS	ng/L	76.8	79.8	104	65-155	
7:3 FTCA	ng/L	496	529	107	50-145	
8:2 FTS	ng/L	76.8	73.2	95	60-150	
9Cl-PF3ONS	ng/L	75.2	86.7	115	70-155	
ADONA	ng/L	75.2	95.1	126	65-145	
HFPO-DA	ng/L	80	80.1	100	70-140	
NEtFOSA	ng/L	19.2	20.8	108	65-145	
NEtFOSAA	ng/L	19.2	18.9	98	70-145	
NEtFOSE	ng/L	192	180	93	70-135	
NFDHA	ng/L	40	42.8	107	50-150	
NMeFOSA	ng/L	19.2	22.9	119	60-150	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800814

LABORATORY CONTROL SAMPLE: 5291218

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
NMeFOSAA	ng/L	19.2	18.0	94	50-140	
NMeFOSE	ng/L	192	193	100	70-145	
PFBA	ng/L	80	83.6	104	70-140	
PFBS	ng/L	17.6	17.9	102	60-145	
PFDA	ng/L	19.2	20.3	106	70-140	
PFDoA	ng/L	19.2	20.1	105	70-140	
PFDoS	ng/L	19.2	23.4	122	50-145	
PFDS	ng/L	19.2	19.1	99	60-145	
PFEESA	ng/L	35.2	48.1	137	70-140	
PFHpA	ng/L	19.2	20.3	106	70-150	
PFHpS	ng/L	19.2	19.6	102	70-150	
PFHxA	ng/L	19.2	18.2	95	70-145	
PFHxS	ng/L	17.6	17.3	98	65-145	
PFMBA	ng/L	40	36.9	92	60-150	
PFMPA	ng/L	40	36.8	92	55-140	
PFNA	ng/L	19.2	19.8	103	70-150	
PFNS	ng/L	19.2	19.4	101	65-145	
PFOA	ng/L	19.2	18.9	98	70-150	
PFOS	ng/L	19.2	17.9	93	55-150	
PFOSA	ng/L	19.2	19.6	102	70-145	
PFPeA	ng/L	40	41.6	104	65-135	
PFPeS	ng/L	19.2	18.4	96	65-140	
PFTeDA	ng/L	19.2	21.4	112	60-140	
PFTrDA	ng/L	19.2	21.2	110	65-140	
PFUnA	ng/L	19.2	20.1	105	70-145	
13C2-PFDoA (S)	%.			112	10-130	
13C2-PFTA (S)	%.			123	10-130	
13C24:2FTS (S)	%.			141	40-200	
13C26:2FTS (S)	%.			110	40-200	
13C28:2FTS (S)	%.			100	40-300	
13C3-PFBS (S)	%.			86	40-135	
13C3-PFHxS (S)	%.			84	40-130	
13C3-PFPrA (S)	%.			67	5-130	
13C3HFPO-DA (S)	%.			109	40-130	
13C4-PFBA (S)	%.			86	5-130	
13C4-PFHpA (S)	%.			80	40-130	
13C5-PFHxA (S)	%.			88	40-130	
13C5-PFPeA (S)	%.			91	40-130	
13C6-PFDA (S)	%.			84	40-130	
13C7-PFUdA (S)	%.			96	30-130	
13C8-PFOA (S)	%.			96	40-130	
13C8-PFOS (S)	%.			81	40-130	
13C8-PFOSA (S)	%.			74	40-130	
13C9-PFNA (S)	%.			83	40-130	
d3-MeFOSAA (S)	%.			89	40-170	
d3-NMeFOSA (S)	%.			38	10-130	
d5-EtFOSAA (S)	%.			83	25-135	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800814

LABORATORY CONTROL SAMPLE: 5291218

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
d5-NEtFOSA (S)	%.			39	10-130	
d7-NMeFOSE (S)	%.			55	10-130	
d9-NEtFOSE (S)	%.			41	10-130	

LABORATORY CONTROL SAMPLE: 5291219

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ng/L	12	13.5	113	55-160	
3:3 FTCA	ng/L	15.9	14.7	93	65-130	
4:2 FTS	ng/L	12	12.6	105	70-145	
5:3 FTCA	ng/L	79.4	83.7	105	70-135	
6:2 FTS	ng/L	12.3	11.9	97	65-155	
7:3 FTCA	ng/L	79.4	86.2	109	50-145	
8:2 FTS	ng/L	12.3	13.1	106	60-150	
9Cl-PF3ONS	ng/L	12	13.0	108	70-155	
ADONA	ng/L	12	13.9	115	65-145	
HFPO-DA	ng/L	12.8	12.8	100	70-140	
NEtFOSA	ng/L	3.1	3.2	105	65-145	
NEtFOSAA	ng/L	3.1	3.1	101	70-145	
NEtFOSE	ng/L	30.7	31.8	104	70-135	
NFDHA	ng/L	6.4	6.9	107	50-150	
NMeFOSA	ng/L	3.1	3.1	102	60-150	
NMeFOSAA	ng/L	3.1	3.8	124	50-140	
NMeFOSE	ng/L	30.7	33.6	109	70-145	
PFBA	ng/L	12.8	13.3	104	70-140	
PFBS	ng/L	2.8	2.9	105	60-145	
PFDA	ng/L	3.1	3.0	98	70-140	
PFDoA	ng/L	3.1	3.4	110	70-140	
PFDoS	ng/L	3.1	3.4	110	50-145	
PFDS	ng/L	3.1	3.1	100	60-145	
PFEESA	ng/L	5.6	6.3	112	70-140	
PFHpA	ng/L	3.1	3.3	106	70-150	
PFHpS	ng/L	3.1	2.9	94	70-150	
PFHxA	ng/L	3.1	3.3	107	70-145	
PFHxS	ng/L	2.8	3.4	121	65-145	
PFMBA	ng/L	6.4	6.7	104	60-150	
PFMPA	ng/L	6.4	6.3	99	55-140	
PFNA	ng/L	3.1	3.3	107	70-150	
PFNS	ng/L	3.1	3.2	104	65-145	
PFOA	ng/L	3.1	3.4	109	70-150	
PFOS	ng/L	3.1	2.9	94	55-150	
PFOSA	ng/L	3.1	3.4	109	70-145	
PFPeA	ng/L	6.4	6.7	104	65-135	
PFPeS	ng/L	3.1	3.2	105	65-140	
PFTeDA	ng/L	3.1	3.6	116	60-140	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800814

LABORATORY CONTROL SAMPLE: 5291219

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
PFTrDA	ng/L	3.1	3.6	119	65-140	
PFUnA	ng/L	3.1	3.2	103	70-145	
13C2-PFDoA (S)	%.			58	10-130	
13C2-PFTA (S)	%.			58	10-130	
13C24:2FTS (S)	%.			44	40-200	
13C26:2FTS (S)	%.			42	40-200	
13C28:2FTS (S)	%.			38	40-300	S0
13C3-PFBS (S)	%.			61	40-135	
13C3-PFHxS (S)	%.			59	40-130	
13C3-PFPrA (S)	%.			77	5-130	
13C3HFPO-DA (S)	%.			62	40-130	
13C4-PFBA (S)	%.			68	5-130	
13C4-PFHpA (S)	%.			58	40-130	
13C5-PFHxA (S)	%.			60	40-130	
13C5-PFPeA (S)	%.			62	40-130	
13C6-PFDA (S)	%.			62	40-130	
13C7-PFUdA (S)	%.			63	30-130	
13C8-PFOA (S)	%.			61	40-130	
13C8-PFOS (S)	%.			61	40-130	
13C8-PFOSA (S)	%.			57	40-130	
13C9-PFNA (S)	%.			59	40-130	
d3-MeFOSAA (S)	%.			44	40-170	
d3-NMeFOSA (S)	%.			46	10-130	
d5-EtFOSAA (S)	%.			45	25-135	
d5-NEtFOSA (S)	%.			45	10-130	
d7-NMeFOSE (S)	%.			58	10-130	
d9-NEtFOSE (S)	%.			62	10-130	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 5291220 5291221

Parameter	Units	10737060001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
11Cl-PF3OUdS	ng/L	ND	80.7	79.7	81.2	80.3	100	101	55-160	1	30	
3:3 FTCA	ng/L	ND	107	105	143	128	134	122	65-130	11	30	
4:2 FTS	ng/L	ND	80.7	79.7	84.8	86.6	105	109	70-145	2	30	
5:3 FTCA	ng/L	ND	533	525	620	601	116	114	70-135	3	30	
6:2 FTS	ng/L	ND	82.5	81.4	87.5	86.9	104	104	65-155	1	30	
7:3 FTCA	ng/L	ND	533	525	672	698	126	133	50-145	4	30	
8:2 FTS	ng/L	ND	82.5	81.4	81.0	79.1	97	96	60-150	2	30	
9Cl-PF3ONS	ng/L	ND	80.7	79.7	98.2	98.3	121	123	70-155	0	30	
ADONA	ng/L	ND	80.7	79.7	100	94.4	124	118	65-145	6	30	
HFPO-DA	ng/L	ND	85.9	84.7	91.9	91.2	107	108	70-140	1	30	
NEtFOSA	ng/L	ND	20.6	20.3	23.8	21.4	116	105	65-145	11	30	
NEtFOSAA	ng/L	ND	20.6	20.3	21.6	20.5	105	101	70-145	6	30	
NEtFOSE	ng/L	ND	206	203	213	206	103	101	70-135	4	30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800814

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 5291220 5291221

Parameter	Units	10737060001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
NFDHA	ng/L	ND	42.9	42.4	28.9	27.3	67	65	50-150	5	30	
NMeFOSA	ng/L	ND	20.6	20.3	27.4	25.0	133	123	60-150	9	30	
NMeFOSAA	ng/L	ND	20.6	20.3	20.4	19.8	99	97	50-140	3	30	
NMeFOSE	ng/L	ND	206	203	220	220	107	108	70-145	0	30	
PFBA	ng/L	422	85.9	84.7	604	483	212	72	70-140	22	30	
PFBS	ng/L	2.7	18.9	18.6	21.4	23.3	99	110	60-145	9	30	
PFDA	ng/L	ND	20.6	20.3	24.9	24.3	117	116	70-140	3	30	
PFDoA	ng/L	ND	20.6	20.3	22.4	22.0	108	108	70-140	2	30	
PFDoS	ng/L	ND	20.6	20.3	20.1	19.7	98	97	50-145	2	30	
PFDS	ng/L	ND	20.6	20.3	20.9	19.8	101	97	60-145	5	30	
PFEESA	ng/L	ND	37.8	37.3	54.4	52.0	144	140	70-140	4	30	
PFHpA	ng/L	10.1	20.6	20.3	34.5	33.2	118	113	70-150	4	30	
PFHpS	ng/L	ND	20.6	20.3	22.7	21.1	107	100	70-150	7	30	
PFHxA	ng/L	21.4	20.6	20.3	42.3	41.4	102	98	70-145	2	30	
PFHxS	ng/L	14.4	18.9	18.6	34.5	34.4	106	107	65-145	0	30	
PFMBA	ng/L	ND	42.9	42.4	44.1	43.1	103	102	60-150	2	30	
PFMPA	ng/L	7.8	42.9	42.4	102	55.2	220	112	55-140	60	30	
PFNA	ng/L	4.5	20.6	20.3	27.1	27.4	110	113	70-150	1	30	
PFNS	ng/L	ND	20.6	20.3	21.1	21.1	102	104	65-145	0	30	
PFOA	ng/L	6.5	20.6	20.3	29.2	28.3	110	107	70-150	3	30	
PFOS	ng/L	36.2	20.6	20.3	56.4	56.5	98	100	55-150	0	30	
PFOSA	ng/L	ND	20.6	20.3	22.7	21.4	110	105	70-145	6	30	
PFPeA	ng/L	12.5	42.9	42.4	70.2	57.7	134	107	65-135	19	30	
PFPeS	ng/L	6.3	20.6	20.3	28.6	28.6	108	109	65-140	0	30	
PFTeDA	ng/L	ND	20.6	20.3	23.9	22.9	116	113	60-140	4	30	
PFTrDA	ng/L	ND	20.6	20.3	22.0	20.7	107	102	65-140	6	30	
PFUnA	ng/L	ND	20.6	20.3	23.5	22.6	112	109	70-145	4	30	
13C2-PFDoA (S)	%.						101	109	10-130			
13C2-PFTA (S)	%.						86	93	10-130			
13C24:2FTS (S)	%.						144	136	40-200			
13C26:2FTS (S)	%.						136	140	40-200			
13C28:2FTS (S)	%.						120	121	40-300			
13C3-PFBS (S)	%.						82	87	40-135			
13C3-PFHxS (S)	%.						83	84	40-130			
13C3-PFPrA (S)	%.						11	15	5-130			
13C3HFPO-DA (S)	%.						94	96	40-130			
13C4-PFBA (S)	%.						42	73	5-130			
13C4-PFHpA (S)	%.						69	74	40-130			
13C5-PFHxA (S)	%.						77	81	40-130			
13C5-PFPeA (S)	%.						77	77	40-130			
13C6-PFDA (S)	%.						77	83	40-130			
13C7-PFUdA (S)	%.						90	99	30-130			
13C8-PFOA (S)	%.						86	92	40-130			
13C8-PFOS (S)	%.						81	83	40-130			
13C8-PFOSA (S)	%.						78	82	40-130			
13C9-PFNA (S)	%.						77	80	40-130			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92800814

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 5291220 5291221

Parameter	Units	10737060001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
d3-MeFOSAA (S)	%.						91	93	40-170			
d3-NMeFOSA (S)	%.						34	39	10-130			
d5-EtFOSAA (S)	%.						92	94	25-135			
d5-NEtFOSA (S)	%.						35	41	10-130			
d7-NMeFOSE (S)	%.						47	48	10-130			
d9-NEtFOSE (S)	%.						33	33	10-130			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALIFIERS

Project: Fortress Wood Products
Pace Project No.: 92800814

DEFINITIONS

DF - Dilution Factor, if reported, represents the factor applied to the reported data due to dilution of the sample aliquot.

ND - Not Detected at or above adjusted reporting limit.

TNTC - Too Numerous To Count

J - Estimated concentration above the adjusted method detection limit and below the adjusted reporting limit.

MDL - Adjusted Method Detection Limit.

PQL - Practical Quantitation Limit.

RL - Reporting Limit - The lowest concentration value that meets project requirements for quantitative data with known precision and bias for a specific analyte in a specific matrix.

S - Surrogate

1,2-Diphenylhydrazine decomposes to and cannot be separated from Azobenzene using Method 8270. The result for each analyte is a combined concentration.

Consistent with EPA guidelines, unrounded data are displayed and have been used to calculate % recovery and RPD values.

LCS(D) - Laboratory Control Sample (Duplicate)

MS(D) - Matrix Spike (Duplicate)

DUP - Sample Duplicate

RPD - Relative Percent Difference

NC - Not Calculable.

SG - Silica Gel - Clean-Up

U - Indicates the compound was analyzed for, but not detected.

Acid preservation may not be appropriate for 2 Chloroethylvinyl ether.

A separate vial preserved to a pH of 4-5 is recommended in SW846 Chapter 4 for the analysis of Acrolein and Acrylonitrile by EPA Method 8260.

N-Nitrosodiphenylamine decomposes and cannot be separated from Diphenylamine using Method 8270. The result reported for each analyte is a combined concentration.

Reported results are not rounded until the final step prior to reporting. Therefore, calculated parameters that are typically reported as "Total" may vary slightly from the sum of the reported component parameters.

Pace Analytical is TNI accredited. Contact your Pace PM for the current list of accredited analytes.

TNI - The NELAC Institute.

ANALYTE QUALIFIERS

N2	The lab does not hold NELAC/TNI accreditation for this parameter but other accreditations/certifications may apply. A complete list of accreditations/certifications is available upon request.
S0	Surrogate recovery outside laboratory control limits.

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA CROSS REFERENCE TABLE

Project: Fortress Wood Products
Pace Project No.: 92800814

Lab ID	Sample ID	QC Batch Method	QC Batch	Analytical Method	Analytical Batch
92800814001	**B-11_P**	ASTM D2974	1012514		
92800814002	**B-1_P**	ASTM D2974	1012514		
92800814001	**B-11_P**	EPA 1633	1014701	EPA 1633	1015814
92800814002	**B-1_P**	EPA 1633	1014701	EPA 1633	1015814
92800814003	**FB-3_P**	EPA 1633	1014950	EPA 1633	1015882

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Laboratory receiving samples:
Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☑ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☐

Sample Condition Upon Receipt

Client Name: ECS Southeast - LLC charlotte

Project #: **WO#: 92800814**

92800814

Courier: ☐ Commercial ☐ Fed Ex ☑ Pace ☐ UPS ☐ USPS ☐ Other:____ ☐ Client

Custody Seal Present? ☐ Yes ☑ No Seals Intact? ☐ Yes ☐ No ☑ N/A

Date/Initials Person Examining Contents: MA 5/5/25

Packing Material: ☐ Bubble Wrap ☐ Bubble Bags ☑ None ☐ Other

Biological Tissue Frozen? ☐ Yes ☐ No ☑ N/A

Thermometer: ☑ IR Gun ID: 92408J

Type of Ice: ☑ Wet ☐ Blue ☐ None

Cooler Temp: 2.9 Correction Factor: Add/Subtract (°C) 0

Temp should be above freezing to 6°C
☐ Samples out of temp criteria. Samples on ice, cooling process has begun

Cooler Temp Corrected (°C): 2.9

USDA Regulated Soil (☐ N/A, water sample)
Did samples originate in a quarantine zone within the United States: CA, NY, or SC (check maps)? ☐ Yes ☑ No

Did samples originate from a foreign source (internationally, including Hawaii and Puerto Rico)? ☐ Yes ☑ No

				Comments/Discrepancy:
Chain of Custody Present?	☑ Yes	☐ No	☐ N/A	1.
Samples Arrived within Hold Time?	☑ Yes	☐ No	☐ N/A	2.
Short Hold Time Analysis (<72 hr.)?	☐ Yes	☑ No	☐ N/A	3.
Rush Turn Around Time Requested?	☐ Yes	☑ No	☐ N/A	4.
Sufficient Volume?	☑ Yes	☐ No	☐ N/A	5.
Correct Containers Used?	☑ Yes	☐ No	☐ N/A	6.
-Pace Containers Used?	☑ Yes	☐ No	☐ N/A	
Containers Intact?	☑ Yes	☐ No	☐ N/A	7.
Dissolved analysis: Samples Field Filtered?	☐ Yes	☑ No	☐ N/A	8.
Sample Labels Match COC?	☑ Yes	☐ No	☐ N/A	9.
-Includes Date/Time/ID/Analysis Matrix: SL, WT				
Headspace in VOA Vials (>5-6mm)?	☐ Yes	☐ No	☑ N/A	10.
Trip Blank Present?	☐ Yes	☐ No	☑ N/A	11.
Trip Blank Custody Seals Present?	☐ Yes	☐ No	☑ N/A	

COMMENTS/SAMPLE DISCREPANCY

Field Data Required? ☐ Yes ☐ No

Lot ID of split containers:

CLIENT NOTIFICATION/RESOLUTION

Person contacted: Date/Time:

Project Manager SCURF Review: Date:

Project Manager SRF Review: Date:

Pace

Effective Date: 05/24/2024

*Check mark top half of box if pH and/or dechlorination is verified and within the acceptance range for preservation samples.
Exceptions: VOA, Coliform, TOC, Oil and Grease, DRO/8015 (water) DOC, LLHg
**Bottom half of box is to list number of bottles
***Check all unpreserved Nitrates for chlorine

Project # WO#: 92800814
PM: AMB Due Date: 06/19/25
CLIENT: 92-ECS

Laboratory Receiving location: Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☑ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☐

Client ECS Southeast Profile/EZ (circle one) 32658/5 Notes

Item#	BP4U-125 mL Plastic Unpreserved (N/A) (Cl-)	BP3U-250 mL Plastic Unpreserved (N/A)	BP2U-500 mL Plastic Unpreserved (N/A)	BP1U-1 liter Plastic Unpreserved (N/A)	GN	BP4S-125 mL Plastic H2SO4 (pH < 2) (Cl-)	BP3N-250 mL plastic HNO3 (pH < 2)	BP4Z-125 mL Plastic Zn Acetate & NaOH (>9)	BP4B-125 mL Plastic NaOH (pH > 12) (Cl-)	WGFU-Wide-mouthed Glass jar Unpreserved	AG1U-1 liter Amber Unpreserved (N/A) (Cl-)	AG1H-1 liter Amber HCl (pH < 2)	AG3U-250 mL Amber Unpreserved (N/A) (Cl-)	AG1S-1 liter Amber H2SO4 (pH < 2)	AG3S-250 mL Amber H2SO4 (pH < 2)	DG9A-40 mL Amber NH4Cl (N/A)(Cl-)	DG9H-40 mL VOA HCl (N/A)	VG9T-40 mL VOA Na2S2O3 (N/A)	VG9U-40 mL VOA Unpreserved (N/A)	DG9V-40 mL VOA H3PO4 (N/A)	KP7U-50 mL Plastic Unpreserved (N/A)	V/GK (3 vials per kit)-VPH/Gas kit (N/A)	SP5T-125 mL Sterile Plastic (N/A - lab)	SP2T-250 mL Sterile Plastic (N/A - lab)		BP3R-250 mL Plastic (NH4)2SO4 (9.3-9.7)	AG0U-100 mL Amber Unpreserved (N/A) (Cl-)	VSGU-20 mL Scintillation vials (N/A)	DG9U-40 mL Amber Unpreserved vials (N/A)
CC																														
1					1																									
2					1																									
3					2																									
4																														
5																														
6																														
7																														
8																														
9																														
10																														
11																														
12																														

pH Adjustment Log for Preserved Samples

Sample ID	Type of Preservative	pH upon receipt	Date preservation adjusted	Time preservation adjusted	Amount of Preservative added	Lot #

Note: Whenever there is a discrepancy affecting North Carolina compliance samples, a copy of this form will be sent to the North Carolina DENR Certification Office (i.e. Out of hold, incorrect preservative, out of temp, incorrect containers.

2

Pace® Location Requested (City/State):
Pace Analytical Charlotte
9800 Kincey Ave. Suite 100, Huntersville, NC 28078

CHAIN-OF-CUSTODY Analytical Request Document

Chain-of-Custody is a LEGAL DOCUMENT - Complete all relevant fields

LAB USE ONLY- Affix Workorder/Login Label Here

Scan QR Code for instructions

Company Name:	ECS Southeast, LLC-Charlotte	Contact/Report To:	Emery Lovekamp
Street Address:	1812 Center Park Drive Suite D Charlotte, NC 28217	Phone #:	704-525-5152
		E-Mail:	elovekamp@ecslimited.com
		Cc E-Mail:	
Customer Project #:	24413-C	Invoice To:	AP-ECS Charlotte
Project Name:	FORTRESS WOOD PRODUCTS	Invoice E-Mail:	ecs-49@ecslimited.com
Site Collection Info/Facility ID (as applicable):		Purchase Order # (if applicable):	NEED
		Quote #:	

Time Zone Collected: [ ] AK [ ] PT [ ] MT [ ] CT [X] ET

County / State origin of sample(s): North Carolina GUILFORD CO

Data Deliverables:
[ ] Level II [ ] Level III [ ] Level IV
[ ] EQUIS
[ ] Other

Regulatory Program (DW, RCRA, etc.) as applicable: Reportable [ ] Yes [ ] No
BROWNFIELDS

Rush (Pre-approval required):
[ ] Same Day [ ] 1 Day [ ] 2 Day [ ] 3 Day [ ] Other _____

DW PWSID # or WW Permit # as applicable:

Date Results Requested: STANDARD

Field Filtered (if applicable): [ ] Yes [X] No
Analysis:

* Matrix Codes (Insert in Matrix box below): Drinking Water (DW), Ground Water (GW), Waste Water (WW), Product (P), Soil/Solid (SS), Oil (OL), Wipe (WP), Tissue (TS), Bioassay (B), Vapor (V), Surface Water (SW), Sediment (SED), Sludge (SL), Caulk (CK), Leachate (LL), Biosolid (BS), Other (OT)

Customer Sample ID	Matrix *	Comp / Grab	Composite Start Date	Composite Start Time	Collected or Composite End Date	Collected or Composite End Time	# Cont.	Res. Chlorine Results	Res. Chlorine Units	8082 PCB	8260 VOC; dry weight	8270 SVOC; 7196 hex chrome	PCB congeners (HOLD)	PRL Metals 6020/7471	TCLP RCRA 8 Metals	PFAS 1633	Sample Comment
B-11_P	SS	C			6/4/25	1240	1									X	
B-1_P	↓	C			↓	1600	1									X	
FB-3_P	WW	G			↓	0400	2									X	

Specify Container Size **

Identify Container Preservative Type***

Analysis Requested

**Container Size: (1) 1L, (2) 500mL, (3) 250mL, (4) 125mL, (5) 100mL, (6) 40mL vial, (7) EnCore, (8) TerraCore, (9) 90mL, (10) Other

*** Preservative Types: (1) None, (2) HNO3, (3) H2SO4, (4) HCl, (5) NaOH, (6) Zn Acetate, (7) NaHSO4, (8) Sod. Thiosulfate, (9) Ascorbic Acid, (10) MeOH, (11) Other

Lab Use Only
Proj. Mgr: Angela Baioni
AcctNum / Client ID:
Table #:
Profile / Template: 18978
Prelog / Bottle Ord. ID: EZ 3265815

Preservation non-conformance identified for sample.

Additional Instructions from Pace®:

Collected By: (Printed Name) EMERY LOVEKAMP
Signature:

Customer Remarks / Special Conditions / Possible Hazards:

# Coolers:	Thermometer ID:	Correction Factor (°C):	Obs. Temp. (°C)	Corrected Temp. (°C)	On Ice:

Relinquished by/Company: (Signature) ECS	Date/Time: 6/4/25 1615	Received by/Company: (Signature)		Date/Time: 6/5/25 0700	Tracking Number:
Relinquished by/Company: (Signature)	Date/Time: 6/5/25 1140	Received by/Company: (Signature) Pace HUV		Date/Time: 6/5/25 1140	Delivered by: [ ] In- Person [✓] Courier
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)		Date/Time:	[ ] FedEX [ ] UPS [ ] Other
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)		Date/Time:	Page: 3 of 5

Submitting a sample via this chain of custody constitutes acknowledgment and acceptance of the Pace® Terms and Conditions found at https://www.pacelabs.com/resource-library/resource/pace-terms-and-conditions/

ENV-FRM-CORO-0019_v02_110123 ©

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

June 24, 2025

Emery Lovekamp
ECS Southeast, LLC-Charlotte
1812 Center Park Drive
Suite D
Charlotte, NC 28217

RE: Project: Fortress Wood Products
Pace Project No.: 92801798

Dear Emery Lovekamp:

Enclosed are the analytical results for sample(s) received by the laboratory on June 11, 2025. The results relate only to the samples included in this report. Results reported herein conform to the applicable TNI/NELAC Standards and the laboratory's Quality Manual, where applicable, unless otherwise noted in the body of the report.

The test results provided in this final report were generated by each of the following laboratories within the Pace Network:

- Pace Analytical Services - Charlotte
- Pace Analytical Services - Ormond Beach

Revised 6/24/25 to report MDLs and applicable J values, per client request.

If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Angela M. Baioni

Angela Baioni
angela.baioni@pacelabs.com
612-473-6801
Project Manager

Enclosures

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

CERTIFICATIONS

Project: Fortress Wood Products
Pace Project No.: 92801798

Pace Analytical Services Ormond Beach
8 East Tower Circle, Ormond Beach, FL 32174
Alaska DEC- CS/UST/LUST
Alabama Certification #: 41320
California Certification# 3096
Colorado Certification: FL NELAC Reciprocity
Connecticut Certification #: PH-0216
Delaware Certification: FL NELAC Reciprocity
DoD-ANAB #:ADE-3199
Florida Certification #: E83079
Georgia Certification #: 955
Guam Certification: FL NELAC Reciprocity
Hawaii Certification: FL NELAC Reciprocity
Illinois Certification #: 200068
Indiana Certification: FL NELAC Reciprocity
Kansas Certification #: E-10383
Kentucky Certification #: 90050
Louisiana Certification #: FL NELAC Reciprocity
Louisiana Environmental Certificate #: 05007
Maine Certification #: FL01264
Maryland Certification: #346
Massachusetts Certification #: M-FL1264
Michigan Certification #: 9911
Mississippi Certification: FL NELAC Reciprocity
Missouri Certification #: 236
Montana Certification #: Cert 0074
Nebraska Certification: NE-OS-28-14
Nevada Certification: FL NELAC Reciprocity
New Hampshire Certification #: 2958
New Jersey Certification #: FL022
New York Certification #: 11608
North Carolina Environmental Certificate #: 667
North Carolina Certification #: 12710
North Dakota Certification #: R-216
Ohio DEP 87780
Oklahoma Certification #: D9947
Pennsylvania Certification #: 68-00547
Puerto Rico Certification #: FL01264
South Carolina Certification: #96042001
Tennessee Certification #: TN02974
Texas Certification: FL NELAC Reciprocity
US Virgin Islands Certification: FL NELAC Reciprocity
Utah
Utah FL NELAC Reciprocity
Virginia Environmental Certification #: 460165
West Virginia Certification #: 9962C
Wisconsin Certification #: 399079670
Wyoming (EPA Region 8): FL NELAC Reciprocity

Pace Analytical Services Charlotte
South Carolina Laboratory ID: 99006
9800 Kincey Ave. Ste 100, Huntersville, NC 28078
North Carolina Drinking Water Certification #: 37706
North Carolina Field Services Certification #: 5342
North Carolina Wastewater Certification #: 12
South Carolina Laboratory ID: 99006
South Carolina Certification #: 99006001
South Carolina Drinking Water Cert. #: 99006003
Florida/NELAP Certification #: E87627
Kentucky UST Certification #: 84
Louisiana DoH Drinking Water #: LA029
Virginia/VELAP Certification #: 460221

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE SUMMARY

Project: Fortress Wood Products
Pace Project No.: 92801798

Lab ID	Sample ID	Matrix	Date Collected	Date Received
92801798001	**GW-7**	Water	06/10/25 11:00	06/11/25 13:32
92801798002	**EB-1**	Water	06/10/25 11:20	06/11/25 13:32
92801798003	**GW-1**	Water	06/10/25 13:25	06/11/25 13:32
92801798004	**GW-2**	Water	06/10/25 14:20	06/11/25 13:32
92801798005	**DUP-1**	Water	06/10/25 00:00	06/11/25 13:32
92801798006	**TB-1**	Water	06/05/25 00:00	06/11/25 13:32
92801798007	**TX-1**	Solid	06/10/25 15:00	06/11/25 13:32
92801798008	**TX-DUP**	Solid	06/10/25 00:00	06/11/25 13:32

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE ANALYTE COUNT

Project: Fortress Wood Products
Pace Project No.: 92801798

Lab ID	Sample ID	Method	Analysts	Analytes Reported	Laboratory
92801798001	**GW-7**	EPA 6020	BSL	12	PASI-O
		EPA 7470	JNK	1	PASI-O
		EPA 8270E	ICO	74	PASI-C
		EPA 8260D	LMB	63	PASI-C
92801798002	**EB-1**	EPA 6020	BSL	12	PASI-O
		EPA 7470	JNK	1	PASI-O
		EPA 8270E	ICO	74	PASI-C
		EPA 8260D	LMB	63	PASI-C
92801798003	**GW-1**	EPA 6020	BSL	12	PASI-O
		EPA 7470	JNK	1	PASI-O
		EPA 8270E	ICO	74	PASI-C
		EPA 8260D	LMB	63	PASI-C
92801798004	**GW-2**	EPA 6020	BSL	12	PASI-O
		EPA 7470	JNK	1	PASI-O
		EPA 8270E	ICO	74	PASI-C
		EPA 8260D	LMB	63	PASI-C
92801798005	**DUP-1**	EPA 6020	BSL	12	PASI-O
		EPA 7470	JNK	1	PASI-O
		EPA 8270E	ICO	74	PASI-C
		EPA 8260D	LMB	63	PASI-C
92801798006	**TB-1**	EPA 8260D	LMB	63	PASI-C
92801798007	**TX-1**	EPA 8082A	BAJ	8	PASI-C
		SW-846	KDF	1	PASI-C
92801798008	**TX-DUP**	EPA 8082A	BAJ	8	PASI-C
		SW-846	KDF	1	PASI-C

PASI-C = Pace Analytical Services - Charlotte
PASI-O = Pace Analytical Services - Ormond Beach

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: GW-7 **Lab ID: 92801798001** Collected: 06/10/25 11:00 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3010 Pace Analytical Services - Ormond Beach								
Antimony	ND	ug/L	1.0	0.50	1	06/20/25 04:04	06/20/25 11:04	7440-36-0	
Arsenic	ND	ug/L	1.0	0.50	1	06/20/25 04:04	06/20/25 11:04	7440-38-2	
Beryllium	**0.58**	ug/L	0.10	0.033	1	06/20/25 04:04	06/20/25 11:04	7440-41-7	
Cadmium	ND	ug/L	0.10	0.067	1	06/20/25 04:04	06/20/25 11:04	7440-43-9	
Chromium	**19.5**	ug/L	1.0	0.50	1	06/20/25 04:04	06/20/25 11:04	7440-47-3	
Copper	**16.1**	ug/L	1.0	0.42	1	06/20/25 04:04	06/20/25 11:04	7440-50-8	
Lead	ND	ug/L	1.0	0.22	1	06/20/25 04:04	06/20/25 11:04	7439-92-1	
Nickel	**30.9**	ug/L	1.0	0.26	1	06/20/25 04:04	06/20/25 11:04	7440-02-0	
Selenium	ND	ug/L	2.0	0.20	1	06/20/25 04:04	06/20/25 11:04	7782-49-2	
Silver	ND	ug/L	0.50	0.028	1	06/20/25 04:04	06/20/25 11:04	7440-22-4	
Thallium	ND	ug/L	1.0	0.11	1	06/20/25 04:04	06/20/25 11:04	7440-28-0	
Zinc	**38.2**	ug/L	10.0	6.7	1	06/20/25 04:04	06/20/25 11:04	7440-66-6	
7470 Mercury	Analytical Method: EPA 7470 Preparation Method: EPA 7470 Pace Analytical Services - Ormond Beach								
Mercury	ND	ug/L	0.20	0.14	1	06/23/25 09:12	06/23/25 14:35	7439-97-6	
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Acenaphthene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 16:17	83-32-9	
Acenaphthylene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 16:17	208-96-8	
Aniline	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 16:17	62-53-3	
Anthracene	ND	ug/L	10.0	2.3	1	06/12/25 12:40	06/13/25 16:17	120-12-7	
Benzo(a)anthracene	ND	ug/L	10.0	2.7	1	06/12/25 12:40	06/13/25 16:17	56-55-3	
Benzo(a)pyrene	ND	ug/L	10.0	2.8	1	06/12/25 12:40	06/13/25 16:17	50-32-8	
Benzo(b)fluoranthene	ND	ug/L	10.0	2.6	1	06/12/25 12:40	06/13/25 16:17	205-99-2	
Benzo(g,h,i)perylene	ND	ug/L	10.0	2.8	1	06/12/25 12:40	06/13/25 16:17	191-24-2	
Benzo(k)fluoranthene	ND	ug/L	10.0	2.7	1	06/12/25 12:40	06/13/25 16:17	207-08-9	
Benzoic Acid	ND	ug/L	50.0	22.0	1	06/12/25 12:40	06/13/25 16:17	65-85-0	M1
Benzyl alcohol	ND	ug/L	20.0	2.9	1	06/12/25 12:40	06/13/25 16:17	100-51-6	
4-Bromophenylphenyl ether	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 16:17	101-55-3	
Butylbenzylphthalate	ND	ug/L	10.0	3.1	1	06/12/25 12:40	06/13/25 16:17	85-68-7	
4-Chloro-3-methylphenol	ND	ug/L	10.0	3.3	1	06/12/25 12:40	06/13/25 16:17	59-50-7	
4-Chloroaniline	ND	ug/L	20.0	3.6	1	06/12/25 12:40	06/13/25 16:17	106-47-8	
bis(2-Chloroethoxy)methane	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 16:17	111-91-1	
bis(2-Chloroethyl) ether	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 16:17	111-44-4	
2-Chloronaphthalene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 16:17	91-58-7	
2-Chlorophenol	ND	ug/L	10.0	1.2	1	06/12/25 12:40	06/13/25 16:17	95-57-8	
4-Chlorophenylphenyl ether	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 16:17	7005-72-3	
Chrysene	ND	ug/L	10.0	2.8	1	06/12/25 12:40	06/13/25 16:17	218-01-9	
Dibenz(a,h)anthracene	ND	ug/L	10.0	3.0	1	06/12/25 12:40	06/13/25 16:17	53-70-3	
Dibenzofuran	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 16:17	132-64-9	
1,2-Dichlorobenzene	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 16:17	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 16:17	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 16:17	106-46-7	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: GW-7 **Lab ID: 92801798001** Collected: 06/10/25 11:00 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
3,3'-Dichlorobenzidine	ND	ug/L	20.0	8.1	1	06/12/25 12:40	06/13/25 16:17	91-94-1	
2,4-Dichlorophenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 16:17	120-83-2	
Diethylphthalate	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 16:17	84-66-2	
2,4-Dimethylphenol	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 16:17	105-67-9	
Dimethylphthalate	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 16:17	131-11-3	
Di-n-butylphthalate	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 16:17	84-74-2	
4,6-Dinitro-2-methylphenol	ND	ug/L	20.0	7.8	1	06/12/25 12:40	06/13/25 16:17	534-52-1	R1
2,4-Dinitrophenol	ND	ug/L	50.0	26.0	1	06/12/25 12:40	06/13/25 16:17	51-28-5	M1
2,4-Dinitrotoluene	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 16:17	121-14-2	
2,6-Dinitrotoluene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 16:17	606-20-2	
Di-n-octylphthalate	ND	ug/L	10.0	3.9	1	06/12/25 12:40	06/13/25 16:17	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	ug/L	6.0	3.7	1	06/12/25 12:40	06/13/25 16:17	117-81-7	
Fluoranthene	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 16:17	206-44-0	
Fluorene	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 16:17	86-73-7	
Hexachloro-1,3-butadiene	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 16:17	87-68-3	
Hexachlorobenzene	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 16:17	118-74-1	
Hexachlorocyclopentadiene	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 16:17	77-47-4	R1
Hexachloroethane	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 16:17	67-72-1	M1
Indeno(1,2,3-cd)pyrene	ND	ug/L	10.0	2.9	1	06/12/25 12:40	06/13/25 16:17	193-39-5	
Isophorone	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 16:17	78-59-1	
1-Methylnaphthalene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 16:17	90-12-0	
2-Methylnaphthalene	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 16:17	91-57-6	
2-Methylphenol(o-Cresol)	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 16:17	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	ug/L	10.0	1.2	1	06/12/25 12:40	06/13/25 16:17	15831-10-4	
Naphthalene	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 16:17	91-20-3	R1
2-Nitroaniline	ND	ug/L	20.0	3.0	1	06/12/25 12:40	06/13/25 16:17	88-74-4	
3-Nitroaniline	ND	ug/L	20.0	3.8	1	06/12/25 12:40	06/13/25 16:17	99-09-2	
4-Nitroaniline	ND	ug/L	20.0	5.1	1	06/12/25 12:40	06/13/25 16:17	100-01-6	
Nitrobenzene	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 16:17	98-95-3	
2-Nitrophenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 16:17	88-75-5	
4-Nitrophenol	ND	ug/L	50.0	6.6	1	06/12/25 12:40	06/13/25 16:17	100-02-7	R1
N-Nitrosodimethylamine	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 16:17	62-75-9	
N-Nitroso-di-n-propylamine	ND	ug/L	10.0	1.3	1	06/12/25 12:40	06/13/25 16:17	621-64-7	
N-Nitrosodiphenylamine	ND	ug/L	10.0	3.0	1	06/12/25 12:40	06/13/25 16:17	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	ug/L	10.0	1.2	1	06/12/25 12:40	06/13/25 16:17	108-60-1	
Pentachlorophenol	ND	ug/L	20.0	3.8	1	06/12/25 12:40	06/13/25 16:17	87-86-5	
Phenanthrene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 16:17	85-01-8	
Phenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 16:17	108-95-2	
Pyrene	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 16:17	129-00-0	
1,2,4-Trichlorobenzene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 16:17	120-82-1	R1
2,4,5-Trichlorophenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 16:17	95-95-4	
2,4,6-Trichlorophenol	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 16:17	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	18	%	10-133		1	06/12/25 12:40	06/13/25 16:17	4165-60-0	
2-Fluorobiphenyl (S)	16	%	10-130		1	06/12/25 12:40	06/13/25 16:17	321-60-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: GW-7 **Lab ID: 92801798001** Collected: 06/10/25 11:00 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Surrogates									
Terphenyl-d14 (S)	77	%	10-193		1	06/12/25 12:40	06/13/25 16:17	1718-51-0	
Phenol-d6 (S)	16	%	10-130		1	06/12/25 12:40	06/13/25 16:17	13127-88-3	
2-Fluorophenol (S)	14	%	10-130		1	06/12/25 12:40	06/13/25 16:17	367-12-4	
2,4,6-Tribromophenol (S)	63	%	10-166		1	06/12/25 12:40	06/13/25 16:17	118-79-6	
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		06/14/25 02:07	67-64-1	v2
Benzene	ND	ug/L	1.0	0.34	1		06/14/25 02:07	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		06/14/25 02:07	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		06/14/25 02:07	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		06/14/25 02:07	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		06/14/25 02:07	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		06/14/25 02:07	74-83-9	
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		06/14/25 02:07	78-93-3	v2
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		06/14/25 02:07	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		06/14/25 02:07	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		06/14/25 02:07	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		06/14/25 02:07	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		06/14/25 02:07	74-87-3	v2
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/14/25 02:07	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/14/25 02:07	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		06/14/25 02:07	96-12-8	
Dibromochloromethane	ND	ug/L	1.0	0.36	1		06/14/25 02:07	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		06/14/25 02:07	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		06/14/25 02:07	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/14/25 02:07	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/14/25 02:07	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		06/14/25 02:07	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		06/14/25 02:07	75-71-8	
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		06/14/25 02:07	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		06/14/25 02:07	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		06/14/25 02:07	75-35-4	
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		06/14/25 02:07	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		06/14/25 02:07	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		06/14/25 02:07	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		06/14/25 02:07	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		06/14/25 02:07	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		06/14/25 02:07	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/14/25 02:07	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/14/25 02:07	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		06/14/25 02:07	108-20-3	
Ethylbenzene	ND	ug/L	1.0	0.30	1		06/14/25 02:07	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		06/14/25 02:07	87-68-3	IK

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: GW-7 **Lab ID: 92801798001** Collected: 06/10/25 11:00 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
2-Hexanone	ND	ug/L	5.0	0.48	1		06/14/25 02:07	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		06/14/25 02:07	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		06/14/25 02:07	75-09-2	v2
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		06/14/25 02:07	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		06/14/25 02:07	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		06/14/25 02:07	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		06/14/25 02:07	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		06/14/25 02:07	630-20-6	
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		06/14/25 02:07	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		06/14/25 02:07	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		06/14/25 02:07	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		06/14/25 02:07	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		06/14/25 02:07	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		06/14/25 02:07	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		06/14/25 02:07	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		06/14/25 02:07	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		06/14/25 02:07	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		06/14/25 02:07	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		06/14/25 02:07	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		06/14/25 02:07	75-01-4	v2
Xylene (Total)	ND	ug/L	1.0	0.34	1		06/14/25 02:07	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		06/14/25 02:07	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		06/14/25 02:07	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	96	%	70-130		1		06/14/25 02:07	460-00-4	
1,2-Dichloroethane-d4 (S)	98	%	70-130		1		06/14/25 02:07	17060-07-0	
Toluene-d8 (S)	98	%	70-130		1		06/14/25 02:07	2037-26-5	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: EB-1 **Lab ID: 92801798002** Collected: 06/10/25 11:20 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3010 Pace Analytical Services - Ormond Beach								
Antimony	ND	ug/L	1.0	0.50	1	06/20/25 04:04	06/20/25 11:19	7440-36-0	
Arsenic	ND	ug/L	1.0	0.50	1	06/20/25 04:04	06/20/25 11:19	7440-38-2	
Beryllium	ND	ug/L	0.10	0.033	1	06/20/25 04:04	06/20/25 11:19	7440-41-7	
Cadmium	ND	ug/L	0.10	0.067	1	06/20/25 04:04	06/20/25 11:19	7440-43-9	
Chromium	ND	ug/L	1.0	0.50	1	06/20/25 04:04	06/20/25 11:19	7440-47-3	
Copper	ND	ug/L	1.0	0.42	1	06/20/25 04:04	06/20/25 11:19	7440-50-8	
Lead	ND	ug/L	1.0	0.22	1	06/20/25 04:04	06/20/25 11:19	7439-92-1	
Nickel	ND	ug/L	1.0	0.26	1	06/20/25 04:04	06/20/25 11:19	7440-02-0	
Selenium	ND	ug/L	2.0	0.20	1	06/20/25 04:04	06/20/25 11:19	7782-49-2	
Silver	ND	ug/L	0.50	0.028	1	06/20/25 04:04	06/20/25 11:19	7440-22-4	
Thallium	ND	ug/L	1.0	0.11	1	06/20/25 04:04	06/20/25 11:19	7440-28-0	
Zinc	ND	ug/L	10.0	6.7	1	06/20/25 04:04	06/20/25 11:19	7440-66-6	
7470 Mercury	Analytical Method: EPA 7470 Preparation Method: EPA 7470 Pace Analytical Services - Ormond Beach								
Mercury	ND	ug/L	0.20	0.14	1	06/23/25 09:12	06/23/25 14:41	7439-97-6	
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Acenaphthene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 16:43	83-32-9	
Acenaphthylene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 16:43	208-96-8	
Aniline	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 16:43	62-53-3	
Anthracene	ND	ug/L	10.0	2.3	1	06/12/25 12:40	06/13/25 16:43	120-12-7	
Benzo(a)anthracene	ND	ug/L	10.0	2.7	1	06/12/25 12:40	06/13/25 16:43	56-55-3	
Benzo(a)pyrene	ND	ug/L	10.0	2.8	1	06/12/25 12:40	06/13/25 16:43	50-32-8	
Benzo(b)fluoranthene	ND	ug/L	10.0	2.6	1	06/12/25 12:40	06/13/25 16:43	205-99-2	
Benzo(g,h,i)perylene	ND	ug/L	10.0	2.8	1	06/12/25 12:40	06/13/25 16:43	191-24-2	
Benzo(k)fluoranthene	ND	ug/L	10.0	2.7	1	06/12/25 12:40	06/13/25 16:43	207-08-9	
Benzoic Acid	ND	ug/L	50.0	22.0	1	06/12/25 12:40	06/13/25 16:43	65-85-0	
Benzyl alcohol	ND	ug/L	20.0	2.9	1	06/12/25 12:40	06/13/25 16:43	100-51-6	
4-Bromophenylphenyl ether	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 16:43	101-55-3	
Butylbenzylphthalate	ND	ug/L	10.0	3.1	1	06/12/25 12:40	06/13/25 16:43	85-68-7	
4-Chloro-3-methylphenol	ND	ug/L	10.0	3.3	1	06/12/25 12:40	06/13/25 16:43	59-50-7	
4-Chloroaniline	ND	ug/L	20.0	3.6	1	06/12/25 12:40	06/13/25 16:43	106-47-8	
bis(2-Chloroethoxy)methane	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 16:43	111-91-1	
bis(2-Chloroethyl) ether	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 16:43	111-44-4	
2-Chloronaphthalene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 16:43	91-58-7	
2-Chlorophenol	ND	ug/L	10.0	1.2	1	06/12/25 12:40	06/13/25 16:43	95-57-8	
4-Chlorophenylphenyl ether	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 16:43	7005-72-3	
Chrysene	ND	ug/L	10.0	2.8	1	06/12/25 12:40	06/13/25 16:43	218-01-9	
Dibenz(a,h)anthracene	ND	ug/L	10.0	3.0	1	06/12/25 12:40	06/13/25 16:43	53-70-3	
Dibenzofuran	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 16:43	132-64-9	
1,2-Dichlorobenzene	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 16:43	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 16:43	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 16:43	106-46-7	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: EB-1 **Lab ID: 92801798002** Collected: 06/10/25 11:20 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
3,3'-Dichlorobenzidine	ND	ug/L	20.0	8.1	1	06/12/25 12:40	06/13/25 16:43	91-94-1	
2,4-Dichlorophenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 16:43	120-83-2	
Diethylphthalate	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 16:43	84-66-2	
2,4-Dimethylphenol	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 16:43	105-67-9	
Dimethylphthalate	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 16:43	131-11-3	
Di-n-butylphthalate	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 16:43	84-74-2	
4,6-Dinitro-2-methylphenol	ND	ug/L	20.0	7.8	1	06/12/25 12:40	06/13/25 16:43	534-52-1	
2,4-Dinitrophenol	ND	ug/L	50.0	26.0	1	06/12/25 12:40	06/13/25 16:43	51-28-5	
2,4-Dinitrotoluene	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 16:43	121-14-2	
2,6-Dinitrotoluene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 16:43	606-20-2	
Di-n-octylphthalate	ND	ug/L	10.0	3.9	1	06/12/25 12:40	06/13/25 16:43	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	ug/L	6.0	3.7	1	06/12/25 12:40	06/13/25 16:43	117-81-7	
Fluoranthene	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 16:43	206-44-0	
Fluorene	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 16:43	86-73-7	
Hexachloro-1,3-butadiene	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 16:43	87-68-3	
Hexachlorobenzene	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 16:43	118-74-1	
Hexachlorocyclopentadiene	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 16:43	77-47-4	
Hexachloroethane	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 16:43	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	ug/L	10.0	2.9	1	06/12/25 12:40	06/13/25 16:43	193-39-5	
Isophorone	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 16:43	78-59-1	
1-Methylnaphthalene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 16:43	90-12-0	
2-Methylnaphthalene	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 16:43	91-57-6	
2-Methylphenol(o-Cresol)	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 16:43	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	ug/L	10.0	1.2	1	06/12/25 12:40	06/13/25 16:43	15831-10-4	
Naphthalene	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 16:43	91-20-3	
2-Nitroaniline	ND	ug/L	20.0	3.0	1	06/12/25 12:40	06/13/25 16:43	88-74-4	
3-Nitroaniline	ND	ug/L	20.0	3.8	1	06/12/25 12:40	06/13/25 16:43	99-09-2	
4-Nitroaniline	ND	ug/L	20.0	5.1	1	06/12/25 12:40	06/13/25 16:43	100-01-6	
Nitrobenzene	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 16:43	98-95-3	
2-Nitrophenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 16:43	88-75-5	
4-Nitrophenol	ND	ug/L	50.0	6.6	1	06/12/25 12:40	06/13/25 16:43	100-02-7	
N-Nitrosodimethylamine	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 16:43	62-75-9	
N-Nitroso-di-n-propylamine	ND	ug/L	10.0	1.3	1	06/12/25 12:40	06/13/25 16:43	621-64-7	
N-Nitrosodiphenylamine	ND	ug/L	10.0	3.0	1	06/12/25 12:40	06/13/25 16:43	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	ug/L	10.0	1.2	1	06/12/25 12:40	06/13/25 16:43	108-60-1	
Pentachlorophenol	ND	ug/L	20.0	3.8	1	06/12/25 12:40	06/13/25 16:43	87-86-5	
Phenanthrene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 16:43	85-01-8	
Phenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 16:43	108-95-2	
Pyrene	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 16:43	129-00-0	
1,2,4-Trichlorobenzene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 16:43	120-82-1	
2,4,5-Trichlorophenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 16:43	95-95-4	
2,4,6-Trichlorophenol	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 16:43	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	22	%	10-133		1	06/12/25 12:40	06/13/25 16:43	4165-60-0	
2-Fluorobiphenyl (S)	16	%	10-130		1	06/12/25 12:40	06/13/25 16:43	321-60-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: EB-1 **Lab ID: 92801798002** Collected: 06/10/25 11:20 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Surrogates									
Terphenyl-d14 (S)	87	%	10-193		1	06/12/25 12:40	06/13/25 16:43	1718-51-0	
Phenol-d6 (S)	19	%	10-130		1	06/12/25 12:40	06/13/25 16:43	13127-88-3	
2-Fluorophenol (S)	16	%	10-130		1	06/12/25 12:40	06/13/25 16:43	367-12-4	
2,4,6-Tribromophenol (S)	68	%	10-166		1	06/12/25 12:40	06/13/25 16:43	118-79-6	
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		06/12/25 11:53	67-64-1	
Benzene	ND	ug/L	1.0	0.34	1		06/12/25 11:53	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		06/12/25 11:53	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		06/12/25 11:53	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		06/12/25 11:53	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		06/12/25 11:53	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		06/12/25 11:53	74-83-9	
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		06/12/25 11:53	78-93-3	
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		06/12/25 11:53	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		06/12/25 11:53	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		06/12/25 11:53	75-00-3	
Chloroform	**2.0**	ug/L	1.0	0.43	1		06/12/25 11:53	67-66-3	C0
Chloromethane	ND	ug/L	1.0	0.54	1		06/12/25 11:53	74-87-3	
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/12/25 11:53	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/12/25 11:53	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		06/12/25 11:53	96-12-8	
Dibromochloromethane	ND	ug/L	1.0	0.36	1		06/12/25 11:53	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		06/12/25 11:53	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		06/12/25 11:53	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/12/25 11:53	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/12/25 11:53	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		06/12/25 11:53	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		06/12/25 11:53	75-71-8	
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		06/12/25 11:53	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		06/12/25 11:53	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		06/12/25 11:53	75-35-4	
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		06/12/25 11:53	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		06/12/25 11:53	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		06/12/25 11:53	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		06/12/25 11:53	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		06/12/25 11:53	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		06/12/25 11:53	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/12/25 11:53	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/12/25 11:53	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		06/12/25 11:53	108-20-3	
Ethylbenzene	ND	ug/L	1.0	0.30	1		06/12/25 11:53	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		06/12/25 11:53	87-68-3	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: EB-1 **Lab ID: 92801798002** Collected: 06/10/25 11:20 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
2-Hexanone	ND	ug/L	5.0	0.48	1		06/12/25 11:53	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		06/12/25 11:53	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		06/12/25 11:53	75-09-2	
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		06/12/25 11:53	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		06/12/25 11:53	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		06/12/25 11:53	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		06/12/25 11:53	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		06/12/25 11:53	630-20-6	
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		06/12/25 11:53	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		06/12/25 11:53	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		06/12/25 11:53	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		06/12/25 11:53	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		06/12/25 11:53	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		06/12/25 11:53	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		06/12/25 11:53	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		06/12/25 11:53	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		06/12/25 11:53	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		06/12/25 11:53	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		06/12/25 11:53	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		06/12/25 11:53	75-01-4	
Xylene (Total)	ND	ug/L	1.0	0.34	1		06/12/25 11:53	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		06/12/25 11:53	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		06/12/25 11:53	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	96	%	70-130		1		06/12/25 11:53	460-00-4	
1,2-Dichloroethane-d4 (S)	101	%	70-130		1		06/12/25 11:53	17060-07-0	
Toluene-d8 (S)	103	%	70-130		1		06/12/25 11:53	2037-26-5	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: GW-1 **Lab ID: 92801798003** Collected: 06/10/25 13:25 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3010 Pace Analytical Services - Ormond Beach								
Antimony	ND	ug/L	1.0	0.50	1	06/20/25 04:04	06/20/25 11:22	7440-36-0	
Arsenic	ND	ug/L	1.0	0.50	1	06/20/25 04:04	06/20/25 11:22	7440-38-2	
Beryllium	**0.12**	ug/L	0.10	0.033	1	06/20/25 04:04	06/20/25 11:22	7440-41-7	
Cadmium	ND	ug/L	0.10	0.067	1	06/20/25 04:04	06/20/25 11:22	7440-43-9	
Chromium	**7.5**	ug/L	1.0	0.50	1	06/20/25 04:04	06/20/25 11:22	7440-47-3	
Copper	**6.7**	ug/L	1.0	0.42	1	06/20/25 04:04	06/20/25 11:22	7440-50-8	
Lead	ND	ug/L	1.0	0.22	1	06/20/25 04:04	06/20/25 11:22	7439-92-1	
Nickel	**8.0**	ug/L	1.0	0.26	1	06/20/25 04:04	06/20/25 11:22	7440-02-0	
Selenium	ND	ug/L	2.0	0.20	1	06/20/25 04:04	06/20/25 11:22	7782-49-2	
Silver	ND	ug/L	0.50	0.028	1	06/20/25 04:04	06/20/25 11:22	7440-22-4	
Thallium	ND	ug/L	1.0	0.11	1	06/20/25 04:04	06/20/25 11:22	7440-28-0	
Zinc	ND	ug/L	10.0	6.7	1	06/20/25 04:04	06/20/25 11:22	7440-66-6	
7470 Mercury	Analytical Method: EPA 7470 Preparation Method: EPA 7470 Pace Analytical Services - Ormond Beach								
Mercury	ND	ug/L	0.20	0.14	1	06/23/25 09:12	06/23/25 14:44	7439-97-6	
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Acenaphthene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 17:08	83-32-9	
Acenaphthylene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 17:08	208-96-8	
Aniline	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 17:08	62-53-3	
Anthracene	ND	ug/L	10.0	2.3	1	06/12/25 12:40	06/13/25 17:08	120-12-7	
Benzo(a)anthracene	ND	ug/L	10.0	2.7	1	06/12/25 12:40	06/13/25 17:08	56-55-3	
Benzo(a)pyrene	ND	ug/L	10.0	2.8	1	06/12/25 12:40	06/13/25 17:08	50-32-8	
Benzo(b)fluoranthene	ND	ug/L	10.0	2.6	1	06/12/25 12:40	06/13/25 17:08	205-99-2	
Benzo(g,h,i)perylene	ND	ug/L	10.0	2.8	1	06/12/25 12:40	06/13/25 17:08	191-24-2	
Benzo(k)fluoranthene	ND	ug/L	10.0	2.7	1	06/12/25 12:40	06/13/25 17:08	207-08-9	
Benzoic Acid	ND	ug/L	50.0	22.0	1	06/12/25 12:40	06/13/25 17:08	65-85-0	
Benzyl alcohol	ND	ug/L	20.0	2.9	1	06/12/25 12:40	06/13/25 17:08	100-51-6	
4-Bromophenylphenyl ether	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 17:08	101-55-3	
Butylbenzylphthalate	ND	ug/L	10.0	3.1	1	06/12/25 12:40	06/13/25 17:08	85-68-7	
4-Chloro-3-methylphenol	ND	ug/L	10.0	3.3	1	06/12/25 12:40	06/13/25 17:08	59-50-7	
4-Chloroaniline	ND	ug/L	20.0	3.6	1	06/12/25 12:40	06/13/25 17:08	106-47-8	
bis(2-Chloroethoxy)methane	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 17:08	111-91-1	
bis(2-Chloroethyl) ether	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 17:08	111-44-4	
2-Chloronaphthalene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 17:08	91-58-7	
2-Chlorophenol	ND	ug/L	10.0	1.2	1	06/12/25 12:40	06/13/25 17:08	95-57-8	
4-Chlorophenylphenyl ether	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 17:08	7005-72-3	
Chrysene	ND	ug/L	10.0	2.8	1	06/12/25 12:40	06/13/25 17:08	218-01-9	
Dibenz(a,h)anthracene	ND	ug/L	10.0	3.0	1	06/12/25 12:40	06/13/25 17:08	53-70-3	
Dibenzofuran	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 17:08	132-64-9	
1,2-Dichlorobenzene	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 17:08	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 17:08	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 17:08	106-46-7	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: GW-1 **Lab ID: 92801798003** Collected: 06/10/25 13:25 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
3,3'-Dichlorobenzidine	ND	ug/L	20.0	8.1	1	06/12/25 12:40	06/13/25 17:08	91-94-1	
2,4-Dichlorophenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 17:08	120-83-2	
Diethylphthalate	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 17:08	84-66-2	
2,4-Dimethylphenol	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 17:08	105-67-9	
Dimethylphthalate	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 17:08	131-11-3	
Di-n-butylphthalate	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 17:08	84-74-2	
4,6-Dinitro-2-methylphenol	ND	ug/L	20.0	7.8	1	06/12/25 12:40	06/13/25 17:08	534-52-1	
2,4-Dinitrophenol	ND	ug/L	50.0	26.0	1	06/12/25 12:40	06/13/25 17:08	51-28-5	
2,4-Dinitrotoluene	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 17:08	121-14-2	
2,6-Dinitrotoluene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 17:08	606-20-2	
Di-n-octylphthalate	ND	ug/L	10.0	3.9	1	06/12/25 12:40	06/13/25 17:08	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	ug/L	6.0	3.7	1	06/12/25 12:40	06/13/25 17:08	117-81-7	
Fluoranthene	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 17:08	206-44-0	
Fluorene	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 17:08	86-73-7	
Hexachloro-1,3-butadiene	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 17:08	87-68-3	
Hexachlorobenzene	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 17:08	118-74-1	
Hexachlorocyclopentadiene	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 17:08	77-47-4	
Hexachloroethane	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 17:08	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	ug/L	10.0	2.9	1	06/12/25 12:40	06/13/25 17:08	193-39-5	
Isophorone	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 17:08	78-59-1	
1-Methylnaphthalene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 17:08	90-12-0	
2-Methylnaphthalene	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 17:08	91-57-6	
2-Methylphenol(o-Cresol)	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 17:08	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	ug/L	10.0	1.2	1	06/12/25 12:40	06/13/25 17:08	15831-10-4	
Naphthalene	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 17:08	91-20-3	
2-Nitroaniline	ND	ug/L	20.0	3.0	1	06/12/25 12:40	06/13/25 17:08	88-74-4	
3-Nitroaniline	ND	ug/L	20.0	3.8	1	06/12/25 12:40	06/13/25 17:08	99-09-2	
4-Nitroaniline	ND	ug/L	20.0	5.1	1	06/12/25 12:40	06/13/25 17:08	100-01-6	
Nitrobenzene	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 17:08	98-95-3	
2-Nitrophenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 17:08	88-75-5	
4-Nitrophenol	ND	ug/L	50.0	6.6	1	06/12/25 12:40	06/13/25 17:08	100-02-7	
N-Nitrosodimethylamine	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 17:08	62-75-9	
N-Nitroso-di-n-propylamine	ND	ug/L	10.0	1.3	1	06/12/25 12:40	06/13/25 17:08	621-64-7	
N-Nitrosodiphenylamine	ND	ug/L	10.0	3.0	1	06/12/25 12:40	06/13/25 17:08	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	ug/L	10.0	1.2	1	06/12/25 12:40	06/13/25 17:08	108-60-1	
Pentachlorophenol	ND	ug/L	20.0	3.8	1	06/12/25 12:40	06/13/25 17:08	87-86-5	
Phenanthrene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 17:08	85-01-8	
Phenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 17:08	108-95-2	
Pyrene	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 17:08	129-00-0	
1,2,4-Trichlorobenzene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 17:08	120-82-1	
2,4,5-Trichlorophenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 17:08	95-95-4	
2,4,6-Trichlorophenol	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 17:08	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	26	%	10-133		1	06/12/25 12:40	06/13/25 17:08	4165-60-0	
2-Fluorobiphenyl (S)	21	%	10-130		1	06/12/25 12:40	06/13/25 17:08	321-60-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: GW-1 **Lab ID: 92801798003** Collected: 06/10/25 13:25 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Surrogates									
Terphenyl-d14 (S)	82	%	10-193		1	06/12/25 12:40	06/13/25 17:08	1718-51-0	
Phenol-d6 (S)	26	%	10-130		1	06/12/25 12:40	06/13/25 17:08	13127-88-3	
2-Fluorophenol (S)	25	%	10-130		1	06/12/25 12:40	06/13/25 17:08	367-12-4	
2,4,6-Tribromophenol (S)	68	%	10-166		1	06/12/25 12:40	06/13/25 17:08	118-79-6	
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		06/14/25 02:26	67-64-1	v2
Benzene	ND	ug/L	1.0	0.34	1		06/14/25 02:26	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		06/14/25 02:26	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		06/14/25 02:26	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		06/14/25 02:26	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		06/14/25 02:26	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		06/14/25 02:26	74-83-9	
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		06/14/25 02:26	78-93-3	v2
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		06/14/25 02:26	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		06/14/25 02:26	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		06/14/25 02:26	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		06/14/25 02:26	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		06/14/25 02:26	74-87-3	v2
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/14/25 02:26	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/14/25 02:26	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		06/14/25 02:26	96-12-8	
Dibromochloromethane	ND	ug/L	1.0	0.36	1		06/14/25 02:26	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		06/14/25 02:26	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		06/14/25 02:26	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/14/25 02:26	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/14/25 02:26	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		06/14/25 02:26	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		06/14/25 02:26	75-71-8	
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		06/14/25 02:26	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		06/14/25 02:26	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		06/14/25 02:26	75-35-4	
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		06/14/25 02:26	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		06/14/25 02:26	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		06/14/25 02:26	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		06/14/25 02:26	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		06/14/25 02:26	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		06/14/25 02:26	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/14/25 02:26	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/14/25 02:26	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		06/14/25 02:26	108-20-3	
Ethylbenzene	ND	ug/L	1.0	0.30	1		06/14/25 02:26	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		06/14/25 02:26	87-68-3	IK

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: GW-1 **Lab ID: 92801798003** Collected: 06/10/25 13:25 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
2-Hexanone	ND	ug/L	5.0	0.48	1		06/14/25 02:26	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		06/14/25 02:26	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		06/14/25 02:26	75-09-2	v2
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		06/14/25 02:26	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		06/14/25 02:26	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		06/14/25 02:26	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		06/14/25 02:26	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		06/14/25 02:26	630-20-6	
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		06/14/25 02:26	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		06/14/25 02:26	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		06/14/25 02:26	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		06/14/25 02:26	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		06/14/25 02:26	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		06/14/25 02:26	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		06/14/25 02:26	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		06/14/25 02:26	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		06/14/25 02:26	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		06/14/25 02:26	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		06/14/25 02:26	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		06/14/25 02:26	75-01-4	v2
Xylene (Total)	ND	ug/L	1.0	0.34	1		06/14/25 02:26	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		06/14/25 02:26	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		06/14/25 02:26	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	97	%	70-130		1		06/14/25 02:26	460-00-4	
1,2-Dichloroethane-d4 (S)	102	%	70-130		1		06/14/25 02:26	17060-07-0	
Toluene-d8 (S)	97	%	70-130		1		06/14/25 02:26	2037-26-5	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: GW-2 **Lab ID: 92801798004** Collected: 06/10/25 14:20 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3010 Pace Analytical Services - Ormond Beach								
Antimony	ND	ug/L	1.0	0.50	1	06/20/25 04:04	06/20/25 11:24	7440-36-0	
Arsenic	**1.1**	ug/L	1.0	0.50	1	06/20/25 04:04	06/20/25 11:24	7440-38-2	
Beryllium	ND	ug/L	0.10	0.033	1	06/20/25 04:04	06/20/25 11:24	7440-41-7	
Cadmium	**2.4**	ug/L	0.10	0.067	1	06/20/25 04:04	06/20/25 11:24	7440-43-9	
Chromium	**1.4**	ug/L	1.0	0.50	1	06/20/25 04:04	06/20/25 11:24	7440-47-3	
Copper	**7.2**	ug/L	1.0	0.42	1	06/20/25 04:04	06/20/25 11:24	7440-50-8	
Lead	**2.6**	ug/L	1.0	0.22	1	06/20/25 04:04	06/20/25 11:24	7439-92-1	
Nickel	**13.4**	ug/L	1.0	0.26	1	06/20/25 04:04	06/20/25 11:24	7440-02-0	
Selenium	ND	ug/L	2.0	0.20	1	06/20/25 04:04	06/20/25 11:24	7782-49-2	
Silver	ND	ug/L	0.50	0.028	1	06/20/25 04:04	06/20/25 11:24	7440-22-4	
Thallium	ND	ug/L	1.0	0.11	1	06/20/25 04:04	06/20/25 11:24	7440-28-0	
Zinc	**565**	ug/L	10.0	6.7	1	06/20/25 04:04	06/20/25 11:24	7440-66-6	
7470 Mercury	Analytical Method: EPA 7470 Preparation Method: EPA 7470 Pace Analytical Services - Ormond Beach								
Mercury	ND	ug/L	0.20	0.14	1	06/23/25 09:12	06/23/25 14:46	7439-97-6	
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Acenaphthene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 17:34	83-32-9	
Acenaphthylene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 17:34	208-96-8	
Aniline	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 17:34	62-53-3	
Anthracene	ND	ug/L	10.0	2.3	1	06/12/25 12:40	06/13/25 17:34	120-12-7	
Benzo(a)anthracene	ND	ug/L	10.0	2.7	1	06/12/25 12:40	06/13/25 17:34	56-55-3	
Benzo(a)pyrene	ND	ug/L	10.0	2.8	1	06/12/25 12:40	06/13/25 17:34	50-32-8	
Benzo(b)fluoranthene	ND	ug/L	10.0	2.6	1	06/12/25 12:40	06/13/25 17:34	205-99-2	
Benzo(g,h,i)perylene	ND	ug/L	10.0	2.8	1	06/12/25 12:40	06/13/25 17:34	191-24-2	
Benzo(k)fluoranthene	ND	ug/L	10.0	2.7	1	06/12/25 12:40	06/13/25 17:34	207-08-9	
Benzoic Acid	ND	ug/L	50.0	22.0	1	06/12/25 12:40	06/13/25 17:34	65-85-0	
Benzyl alcohol	ND	ug/L	20.0	2.9	1	06/12/25 12:40	06/13/25 17:34	100-51-6	
4-Bromophenylphenyl ether	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 17:34	101-55-3	
Butylbenzylphthalate	ND	ug/L	10.0	3.1	1	06/12/25 12:40	06/13/25 17:34	85-68-7	
4-Chloro-3-methylphenol	ND	ug/L	10.0	3.3	1	06/12/25 12:40	06/13/25 17:34	59-50-7	
4-Chloroaniline	ND	ug/L	20.0	3.6	1	06/12/25 12:40	06/13/25 17:34	106-47-8	
bis(2-Chloroethoxy)methane	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 17:34	111-91-1	
bis(2-Chloroethyl) ether	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 17:34	111-44-4	
2-Chloronaphthalene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 17:34	91-58-7	
2-Chlorophenol	ND	ug/L	10.0	1.2	1	06/12/25 12:40	06/13/25 17:34	95-57-8	
4-Chlorophenylphenyl ether	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 17:34	7005-72-3	
Chrysene	ND	ug/L	10.0	2.8	1	06/12/25 12:40	06/13/25 17:34	218-01-9	
Dibenz(a,h)anthracene	ND	ug/L	10.0	3.0	1	06/12/25 12:40	06/13/25 17:34	53-70-3	
Dibenzofuran	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 17:34	132-64-9	
1,2-Dichlorobenzene	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 17:34	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 17:34	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 17:34	106-46-7	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: GW-2 **Lab ID: 92801798004** Collected: 06/10/25 14:20 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
3,3'-Dichlorobenzidine	ND	ug/L	20.0	8.1	1	06/12/25 12:40	06/13/25 17:34	91-94-1	
2,4-Dichlorophenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 17:34	120-83-2	
Diethylphthalate	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 17:34	84-66-2	
2,4-Dimethylphenol	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 17:34	105-67-9	
Dimethylphthalate	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 17:34	131-11-3	
Di-n-butylphthalate	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 17:34	84-74-2	
4,6-Dinitro-2-methylphenol	ND	ug/L	20.0	7.8	1	06/12/25 12:40	06/13/25 17:34	534-52-1	
2,4-Dinitrophenol	ND	ug/L	50.0	26.0	1	06/12/25 12:40	06/13/25 17:34	51-28-5	
2,4-Dinitrotoluene	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 17:34	121-14-2	
2,6-Dinitrotoluene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 17:34	606-20-2	
Di-n-octylphthalate	ND	ug/L	10.0	3.9	1	06/12/25 12:40	06/13/25 17:34	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	ug/L	6.0	3.7	1	06/12/25 12:40	06/13/25 17:34	117-81-7	
Fluoranthene	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 17:34	206-44-0	
Fluorene	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 17:34	86-73-7	
Hexachloro-1,3-butadiene	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 17:34	87-68-3	
Hexachlorobenzene	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 17:34	118-74-1	
Hexachlorocyclopentadiene	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 17:34	77-47-4	
Hexachloroethane	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 17:34	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	ug/L	10.0	2.9	1	06/12/25 12:40	06/13/25 17:34	193-39-5	
Isophorone	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 17:34	78-59-1	
1-Methylnaphthalene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 17:34	90-12-0	
2-Methylnaphthalene	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 17:34	91-57-6	
2-Methylphenol(o-Cresol)	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 17:34	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	ug/L	10.0	1.2	1	06/12/25 12:40	06/13/25 17:34	15831-10-4	
Naphthalene	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 17:34	91-20-3	
2-Nitroaniline	ND	ug/L	20.0	3.0	1	06/12/25 12:40	06/13/25 17:34	88-74-4	
3-Nitroaniline	ND	ug/L	20.0	3.8	1	06/12/25 12:40	06/13/25 17:34	99-09-2	
4-Nitroaniline	ND	ug/L	20.0	5.1	1	06/12/25 12:40	06/13/25 17:34	100-01-6	
Nitrobenzene	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 17:34	98-95-3	
2-Nitrophenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 17:34	88-75-5	
4-Nitrophenol	ND	ug/L	50.0	6.6	1	06/12/25 12:40	06/13/25 17:34	100-02-7	
N-Nitrosodimethylamine	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 17:34	62-75-9	
N-Nitroso-di-n-propylamine	ND	ug/L	10.0	1.3	1	06/12/25 12:40	06/13/25 17:34	621-64-7	
N-Nitrosodiphenylamine	ND	ug/L	10.0	3.0	1	06/12/25 12:40	06/13/25 17:34	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	ug/L	10.0	1.2	1	06/12/25 12:40	06/13/25 17:34	108-60-1	
Pentachlorophenol	ND	ug/L	20.0	3.8	1	06/12/25 12:40	06/13/25 17:34	87-86-5	
Phenanthrene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 17:34	85-01-8	
Phenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 17:34	108-95-2	
Pyrene	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 17:34	129-00-0	
1,2,4-Trichlorobenzene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 17:34	120-82-1	
2,4,5-Trichlorophenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 17:34	95-95-4	
2,4,6-Trichlorophenol	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 17:34	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	27	%	10-133		1	06/12/25 12:40	06/13/25 17:34	4165-60-0	
2-Fluorobiphenyl (S)	15	%	10-130		1	06/12/25 12:40	06/13/25 17:34	321-60-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: GW-2 **Lab ID: 92801798004** Collected: 06/10/25 14:20 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Surrogates									
Terphenyl-d14 (S)	94	%	10-193		1	06/12/25 12:40	06/13/25 17:34	1718-51-0	
Phenol-d6 (S)	9	%	10-130		1	06/12/25 12:40	06/13/25 17:34	13127-88-3	S0
2-Fluorophenol (S)	14	%	10-130		1	06/12/25 12:40	06/13/25 17:34	367-12-4	
2,4,6-Tribromophenol (S)	70	%	10-166		1	06/12/25 12:40	06/13/25 17:34	118-79-6	
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		06/14/25 02:44	67-64-1	v2
Benzene	ND	ug/L	1.0	0.34	1		06/14/25 02:44	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		06/14/25 02:44	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		06/14/25 02:44	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		06/14/25 02:44	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		06/14/25 02:44	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		06/14/25 02:44	74-83-9	
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		06/14/25 02:44	78-93-3	v2
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		06/14/25 02:44	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		06/14/25 02:44	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		06/14/25 02:44	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		06/14/25 02:44	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		06/14/25 02:44	74-87-3	v2
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/14/25 02:44	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/14/25 02:44	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		06/14/25 02:44	96-12-8	
Dibromochloromethane	ND	ug/L	1.0	0.36	1		06/14/25 02:44	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		06/14/25 02:44	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		06/14/25 02:44	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/14/25 02:44	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/14/25 02:44	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		06/14/25 02:44	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		06/14/25 02:44	75-71-8	
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		06/14/25 02:44	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		06/14/25 02:44	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		06/14/25 02:44	75-35-4	
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		06/14/25 02:44	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		06/14/25 02:44	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		06/14/25 02:44	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		06/14/25 02:44	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		06/14/25 02:44	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		06/14/25 02:44	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/14/25 02:44	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/14/25 02:44	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		06/14/25 02:44	108-20-3	
Ethylbenzene	ND	ug/L	1.0	0.30	1		06/14/25 02:44	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		06/14/25 02:44	87-68-3	IK

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: GW-2 **Lab ID: 92801798004** Collected: 06/10/25 14:20 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
2-Hexanone	ND	ug/L	5.0	0.48	1		06/14/25 02:44	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		06/14/25 02:44	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		06/14/25 02:44	75-09-2	v2
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		06/14/25 02:44	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		06/14/25 02:44	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		06/14/25 02:44	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		06/14/25 02:44	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		06/14/25 02:44	630-20-6	
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		06/14/25 02:44	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		06/14/25 02:44	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		06/14/25 02:44	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		06/14/25 02:44	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		06/14/25 02:44	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		06/14/25 02:44	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		06/14/25 02:44	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		06/14/25 02:44	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		06/14/25 02:44	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		06/14/25 02:44	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		06/14/25 02:44	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		06/14/25 02:44	75-01-4	v2
Xylene (Total)	ND	ug/L	1.0	0.34	1		06/14/25 02:44	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		06/14/25 02:44	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		06/14/25 02:44	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	95	%	70-130		1		06/14/25 02:44	460-00-4	
1,2-Dichloroethane-d4 (S)	100	%	70-130		1		06/14/25 02:44	17060-07-0	
Toluene-d8 (S)	100	%	70-130		1		06/14/25 02:44	2037-26-5	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: DUP-1 **Lab ID: 92801798005** Collected: 06/10/25 00:00 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3010 Pace Analytical Services - Ormond Beach								
Antimony	ND	ug/L	1.0	0.50	1	06/20/25 04:04	06/20/25 11:27	7440-36-0	
Arsenic	ND	ug/L	1.0	0.50	1	06/20/25 04:04	06/20/25 11:27	7440-38-2	
Beryllium	**0.57**	ug/L	0.10	0.033	1	06/20/25 04:04	06/20/25 11:27	7440-41-7	
Cadmium	ND	ug/L	0.10	0.067	1	06/20/25 04:04	06/20/25 11:27	7440-43-9	
Chromium	**18.3**	ug/L	1.0	0.50	1	06/20/25 04:04	06/20/25 11:27	7440-47-3	
Copper	**16.2**	ug/L	1.0	0.42	1	06/20/25 04:04	06/20/25 11:27	7440-50-8	
Lead	ND	ug/L	1.0	0.22	1	06/20/25 04:04	06/20/25 11:27	7439-92-1	
Nickel	**32.2**	ug/L	1.0	0.26	1	06/20/25 04:04	06/20/25 11:27	7440-02-0	
Selenium	ND	ug/L	2.0	0.20	1	06/20/25 04:04	06/20/25 11:27	7782-49-2	
Silver	ND	ug/L	0.50	0.028	1	06/20/25 04:04	06/20/25 11:27	7440-22-4	
Thallium	ND	ug/L	1.0	0.11	1	06/20/25 04:04	06/20/25 11:27	7440-28-0	
Zinc	**39.2**	ug/L	10.0	6.7	1	06/20/25 04:04	06/20/25 11:27	7440-66-6	
7470 Mercury	Analytical Method: EPA 7470 Preparation Method: EPA 7470 Pace Analytical Services - Ormond Beach								
Mercury	ND	ug/L	0.20	0.14	1	06/23/25 09:12	06/23/25 14:48	7439-97-6	
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Acenaphthene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 18:00	83-32-9	
Acenaphthylene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 18:00	208-96-8	
Aniline	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 18:00	62-53-3	
Anthracene	ND	ug/L	10.0	2.3	1	06/12/25 12:40	06/13/25 18:00	120-12-7	
Benzo(a)anthracene	ND	ug/L	10.0	2.7	1	06/12/25 12:40	06/13/25 18:00	56-55-3	
Benzo(a)pyrene	ND	ug/L	10.0	2.8	1	06/12/25 12:40	06/13/25 18:00	50-32-8	
Benzo(b)fluoranthene	ND	ug/L	10.0	2.6	1	06/12/25 12:40	06/13/25 18:00	205-99-2	
Benzo(g,h,i)perylene	ND	ug/L	10.0	2.8	1	06/12/25 12:40	06/13/25 18:00	191-24-2	
Benzo(k)fluoranthene	ND	ug/L	10.0	2.7	1	06/12/25 12:40	06/13/25 18:00	207-08-9	
Benzoic Acid	ND	ug/L	50.0	22.0	1	06/12/25 12:40	06/13/25 18:00	65-85-0	
Benzyl alcohol	ND	ug/L	20.0	2.9	1	06/12/25 12:40	06/13/25 18:00	100-51-6	
4-Bromophenylphenyl ether	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 18:00	101-55-3	
Butylbenzylphthalate	ND	ug/L	10.0	3.1	1	06/12/25 12:40	06/13/25 18:00	85-68-7	
4-Chloro-3-methylphenol	ND	ug/L	10.0	3.3	1	06/12/25 12:40	06/13/25 18:00	59-50-7	
4-Chloroaniline	ND	ug/L	20.0	3.6	1	06/12/25 12:40	06/13/25 18:00	106-47-8	
bis(2-Chloroethoxy)methane	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 18:00	111-91-1	
bis(2-Chloroethyl) ether	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 18:00	111-44-4	
2-Chloronaphthalene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 18:00	91-58-7	
2-Chlorophenol	ND	ug/L	10.0	1.2	1	06/12/25 12:40	06/13/25 18:00	95-57-8	
4-Chlorophenylphenyl ether	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 18:00	7005-72-3	
Chrysene	ND	ug/L	10.0	2.8	1	06/12/25 12:40	06/13/25 18:00	218-01-9	
Dibenz(a,h)anthracene	ND	ug/L	10.0	3.0	1	06/12/25 12:40	06/13/25 18:00	53-70-3	
Dibenzofuran	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 18:00	132-64-9	
1,2-Dichlorobenzene	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 18:00	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 18:00	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 18:00	106-46-7	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: DUP-1 **Lab ID: 92801798005** Collected: 06/10/25 00:00 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
3,3'-Dichlorobenzidine	ND	ug/L	20.0	8.1	1	06/12/25 12:40	06/13/25 18:00	91-94-1	
2,4-Dichlorophenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 18:00	120-83-2	
Diethylphthalate	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 18:00	84-66-2	
2,4-Dimethylphenol	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 18:00	105-67-9	
Dimethylphthalate	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 18:00	131-11-3	
Di-n-butylphthalate	**2.4J**	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 18:00	84-74-2	
4,6-Dinitro-2-methylphenol	ND	ug/L	20.0	7.8	1	06/12/25 12:40	06/13/25 18:00	534-52-1	
2,4-Dinitrophenol	ND	ug/L	50.0	26.0	1	06/12/25 12:40	06/13/25 18:00	51-28-5	
2,4-Dinitrotoluene	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 18:00	121-14-2	
2,6-Dinitrotoluene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 18:00	606-20-2	
Di-n-octylphthalate	ND	ug/L	10.0	3.9	1	06/12/25 12:40	06/13/25 18:00	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	ug/L	6.0	3.7	1	06/12/25 12:40	06/13/25 18:00	117-81-7	
Fluoranthene	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 18:00	206-44-0	
Fluorene	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 18:00	86-73-7	
Hexachloro-1,3-butadiene	ND	ug/L	10.0	1.8	1	06/12/25 12:40	06/13/25 18:00	87-68-3	
Hexachlorobenzene	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 18:00	118-74-1	
Hexachlorocyclopentadiene	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 18:00	77-47-4	
Hexachloroethane	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 18:00	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	ug/L	10.0	2.9	1	06/12/25 12:40	06/13/25 18:00	193-39-5	
Isophorone	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 18:00	78-59-1	
1-Methylnaphthalene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 18:00	90-12-0	
2-Methylnaphthalene	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 18:00	91-57-6	
2-Methylphenol(o-Cresol)	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 18:00	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	ug/L	10.0	1.2	1	06/12/25 12:40	06/13/25 18:00	15831-10-4	
Naphthalene	ND	ug/L	10.0	2.1	1	06/12/25 12:40	06/13/25 18:00	91-20-3	
2-Nitroaniline	ND	ug/L	20.0	3.0	1	06/12/25 12:40	06/13/25 18:00	88-74-4	
3-Nitroaniline	ND	ug/L	20.0	3.8	1	06/12/25 12:40	06/13/25 18:00	99-09-2	
4-Nitroaniline	ND	ug/L	20.0	5.1	1	06/12/25 12:40	06/13/25 18:00	100-01-6	
Nitrobenzene	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 18:00	98-95-3	
2-Nitrophenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 18:00	88-75-5	
4-Nitrophenol	ND	ug/L	50.0	6.6	1	06/12/25 12:40	06/13/25 18:00	100-02-7	
N-Nitrosodimethylamine	ND	ug/L	10.0	1.9	1	06/12/25 12:40	06/13/25 18:00	62-75-9	
N-Nitroso-di-n-propylamine	ND	ug/L	10.0	1.3	1	06/12/25 12:40	06/13/25 18:00	621-64-7	
N-Nitrosodiphenylamine	ND	ug/L	10.0	3.0	1	06/12/25 12:40	06/13/25 18:00	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	ug/L	10.0	1.2	1	06/12/25 12:40	06/13/25 18:00	108-60-1	
Pentachlorophenol	ND	ug/L	20.0	3.8	1	06/12/25 12:40	06/13/25 18:00	87-86-5	
Phenanthrene	ND	ug/L	10.0	2.0	1	06/12/25 12:40	06/13/25 18:00	85-01-8	
Phenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 18:00	108-95-2	
Pyrene	ND	ug/L	10.0	2.2	1	06/12/25 12:40	06/13/25 18:00	129-00-0	
1,2,4-Trichlorobenzene	ND	ug/L	10.0	1.7	1	06/12/25 12:40	06/13/25 18:00	120-82-1	
2,4,5-Trichlorophenol	ND	ug/L	10.0	1.4	1	06/12/25 12:40	06/13/25 18:00	95-95-4	
2,4,6-Trichlorophenol	ND	ug/L	10.0	1.6	1	06/12/25 12:40	06/13/25 18:00	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	46	%	10-133		1	06/12/25 12:40	06/13/25 18:00	4165-60-0	
2-Fluorobiphenyl (S)	45	%	10-130		1	06/12/25 12:40	06/13/25 18:00	321-60-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: DUP-1 **Lab ID: 92801798005** Collected: 06/10/25 00:00 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Surrogates									
Terphenyl-d14 (S)	71	%	10-193		1	06/12/25 12:40	06/13/25 18:00	1718-51-0	
Phenol-d6 (S)	25	%	10-130		1	06/12/25 12:40	06/13/25 18:00	13127-88-3	
2-Fluorophenol (S)	29	%	10-130		1	06/12/25 12:40	06/13/25 18:00	367-12-4	
2,4,6-Tribromophenol (S)	67	%	10-166		1	06/12/25 12:40	06/13/25 18:00	118-79-6	
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		06/14/25 03:03	67-64-1	v2
Benzene	ND	ug/L	1.0	0.34	1		06/14/25 03:03	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		06/14/25 03:03	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		06/14/25 03:03	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		06/14/25 03:03	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		06/14/25 03:03	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		06/14/25 03:03	74-83-9	
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		06/14/25 03:03	78-93-3	v2
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		06/14/25 03:03	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		06/14/25 03:03	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		06/14/25 03:03	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		06/14/25 03:03	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		06/14/25 03:03	74-87-3	v2
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/14/25 03:03	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/14/25 03:03	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		06/14/25 03:03	96-12-8	
Dibromochloromethane	ND	ug/L	1.0	0.36	1		06/14/25 03:03	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		06/14/25 03:03	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		06/14/25 03:03	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/14/25 03:03	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/14/25 03:03	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		06/14/25 03:03	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		06/14/25 03:03	75-71-8	
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		06/14/25 03:03	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		06/14/25 03:03	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		06/14/25 03:03	75-35-4	
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		06/14/25 03:03	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		06/14/25 03:03	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		06/14/25 03:03	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		06/14/25 03:03	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		06/14/25 03:03	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		06/14/25 03:03	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/14/25 03:03	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/14/25 03:03	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		06/14/25 03:03	108-20-3	
Ethylbenzene	ND	ug/L	1.0	0.30	1		06/14/25 03:03	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		06/14/25 03:03	87-68-3	IK

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: DUP-1 **Lab ID: 92801798005** Collected: 06/10/25 00:00 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
2-Hexanone	ND	ug/L	5.0	0.48	1		06/14/25 03:03	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		06/14/25 03:03	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		06/14/25 03:03	75-09-2	v2
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		06/14/25 03:03	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		06/14/25 03:03	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		06/14/25 03:03	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		06/14/25 03:03	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		06/14/25 03:03	630-20-6	
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		06/14/25 03:03	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		06/14/25 03:03	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		06/14/25 03:03	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		06/14/25 03:03	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		06/14/25 03:03	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		06/14/25 03:03	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		06/14/25 03:03	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		06/14/25 03:03	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		06/14/25 03:03	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		06/14/25 03:03	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		06/14/25 03:03	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		06/14/25 03:03	75-01-4	v2
Xylene (Total)	ND	ug/L	1.0	0.34	1		06/14/25 03:03	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		06/14/25 03:03	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		06/14/25 03:03	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	100	%	70-130		1		06/14/25 03:03	460-00-4	
1,2-Dichloroethane-d4 (S)	101	%	70-130		1		06/14/25 03:03	17060-07-0	
Toluene-d8 (S)	98	%	70-130		1		06/14/25 03:03	2037-26-5	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: TB-1 **Lab ID: 92801798006** Collected: 06/05/25 00:00 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		06/12/25 11:33	67-64-1	
Benzene	ND	ug/L	1.0	0.34	1		06/12/25 11:33	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		06/12/25 11:33	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		06/12/25 11:33	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		06/12/25 11:33	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		06/12/25 11:33	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		06/12/25 11:33	74-83-9	
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		06/12/25 11:33	78-93-3	
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		06/12/25 11:33	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		06/12/25 11:33	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		06/12/25 11:33	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		06/12/25 11:33	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		06/12/25 11:33	74-87-3	
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/12/25 11:33	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/12/25 11:33	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		06/12/25 11:33	96-12-8	
Dibromochloromethane	ND	ug/L	1.0	0.36	1		06/12/25 11:33	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		06/12/25 11:33	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		06/12/25 11:33	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/12/25 11:33	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/12/25 11:33	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		06/12/25 11:33	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		06/12/25 11:33	75-71-8	
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		06/12/25 11:33	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		06/12/25 11:33	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		06/12/25 11:33	75-35-4	
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		06/12/25 11:33	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		06/12/25 11:33	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		06/12/25 11:33	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		06/12/25 11:33	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		06/12/25 11:33	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		06/12/25 11:33	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/12/25 11:33	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/12/25 11:33	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		06/12/25 11:33	108-20-3	
Ethylbenzene	ND	ug/L	1.0	0.30	1		06/12/25 11:33	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		06/12/25 11:33	87-68-3	
2-Hexanone	ND	ug/L	5.0	0.48	1		06/12/25 11:33	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		06/12/25 11:33	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		06/12/25 11:33	75-09-2	
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		06/12/25 11:33	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		06/12/25 11:33	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		06/12/25 11:33	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		06/12/25 11:33	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		06/12/25 11:33	630-20-6	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: TB-1 **Lab ID: 92801798006** Collected: 06/05/25 00:00 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		06/12/25 11:33	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		06/12/25 11:33	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		06/12/25 11:33	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		06/12/25 11:33	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		06/12/25 11:33	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		06/12/25 11:33	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		06/12/25 11:33	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		06/12/25 11:33	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		06/12/25 11:33	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		06/12/25 11:33	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		06/12/25 11:33	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		06/12/25 11:33	75-01-4	
Xylene (Total)	ND	ug/L	1.0	0.34	1		06/12/25 11:33	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		06/12/25 11:33	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		06/12/25 11:33	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	97	%	70-130		1		06/12/25 11:33	460-00-4	
1,2-Dichloroethane-d4 (S)	100	%	70-130		1		06/12/25 11:33	17060-07-0	
Toluene-d8 (S)	101	%	70-130		1		06/12/25 11:33	2037-26-5	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: TX-1 **Lab ID: 92801798007** Collected: 06/10/25 15:00 Received: 06/11/25 13:32 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8082 GCS PCB	Analytical Method: EPA 8082A Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
PCB-1016 (Aroclor 1016)	ND	ug/kg	44.7	17.7	1	06/14/25 15:05	06/18/25 16:38	12674-11-2	
PCB-1221 (Aroclor 1221)	ND	ug/kg	44.7	30.1	1	06/14/25 15:05	06/18/25 16:38	11104-28-2	
PCB-1232 (Aroclor 1232)	ND	ug/kg	44.7	19.9	1	06/14/25 15:05	06/18/25 16:38	11141-16-5	
PCB-1242 (Aroclor 1242)	ND	ug/kg	44.7	10.8	1	06/14/25 15:05	06/18/25 16:38	53469-21-9	
PCB-1248 (Aroclor 1248)	ND	ug/kg	44.7	12.1	1	06/14/25 15:05	06/18/25 16:38	12672-29-6	
PCB-1254 (Aroclor 1254)	ND	ug/kg	44.7	19.6	1	06/14/25 15:05	06/18/25 16:38	11097-69-1	
PCB-1260 (Aroclor 1260)	ND	ug/kg	44.7	19.8	1	06/14/25 15:05	06/18/25 16:38	11096-82-5	
Surrogates									
Decachlorobiphenyl (S)	45	%	10-166		1	06/14/25 15:05	06/18/25 16:38	2051-24-3	
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**25.6**	%	0.10	0.10	1		06/12/25 13:29		N2

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801798

Sample: TX-DUP **Lab ID: 92801798008** Collected: 06/10/25 00:00 Received: 06/11/25 13:32 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8082 GCS PCB	Analytical Method: EPA 8082A Preparation Method: EPA 3546								
	Pace Analytical Services - Charlotte								
PCB-1016 (Aroclor 1016)	ND	ug/kg	43.9	17.4	1	06/14/25 15:05	06/18/25 16:51	12674-11-2	
PCB-1221 (Aroclor 1221)	ND	ug/kg	43.9	29.5	1	06/14/25 15:05	06/18/25 16:51	11104-28-2	
PCB-1232 (Aroclor 1232)	ND	ug/kg	43.9	19.5	1	06/14/25 15:05	06/18/25 16:51	11141-16-5	
PCB-1242 (Aroclor 1242)	ND	ug/kg	43.9	10.6	1	06/14/25 15:05	06/18/25 16:51	53469-21-9	
PCB-1248 (Aroclor 1248)	ND	ug/kg	43.9	11.8	1	06/14/25 15:05	06/18/25 16:51	12672-29-6	
PCB-1254 (Aroclor 1254)	ND	ug/kg	43.9	19.3	1	06/14/25 15:05	06/18/25 16:51	11097-69-1	
PCB-1260 (Aroclor 1260)	ND	ug/kg	43.9	19.4	1	06/14/25 15:05	06/18/25 16:51	11096-82-5	
Surrogates									
Decachlorobiphenyl (S)	54	%	10-166		1	06/14/25 15:05	06/18/25 16:51	2051-24-3	
Percent Moisture	Analytical Method: SW-846								
	Pace Analytical Services - Charlotte								
Percent Moisture	**24.0**	%	0.10	0.10	1		06/12/25 13:29		N2

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

QC Batch: 1107960
QC Batch Method: EPA 7470
Analysis Method: EPA 7470
Analysis Description: 7470 Mercury
Laboratory: Pace Analytical Services - Ormond Beach
Associated Lab Samples: 92801798001, 92801798002, 92801798003, 92801798004, 92801798005

METHOD BLANK: 6077889 Matrix: Water
Associated Lab Samples: 92801798001, 92801798002, 92801798003, 92801798004, 92801798005

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Mercury	ug/L	ND	0.20	0.14	06/23/25 13:19	

LABORATORY CONTROL SAMPLE: 6077890

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Mercury	ug/L	2	2.2	110	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6077891 6077892

Parameter	Units	35961367003 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Mercury	ug/L	<0.14	2	2	2.1	2.2	105	107	75-125	2	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

QC Batch: 1107415
QC Batch Method: EPA 3010
Analysis Method: EPA 6020
Analysis Description: 6020 MET
Laboratory: Pace Analytical Services - Ormond Beach
Associated Lab Samples: 92801798001, 92801798002, 92801798003, 92801798004, 92801798005

METHOD BLANK: 6075229 Matrix: Water
Associated Lab Samples: 92801798001, 92801798002, 92801798003, 92801798004, 92801798005

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Antimony	ug/L	ND	1.0	0.50	06/20/25 10:59	
Arsenic	ug/L	ND	1.0	0.50	06/20/25 10:59	
Beryllium	ug/L	ND	0.10	0.033	06/20/25 10:59	
Cadmium	ug/L	ND	0.10	0.067	06/20/25 10:59	
Chromium	ug/L	ND	1.0	0.50	06/20/25 10:59	
Copper	ug/L	ND	1.0	0.42	06/20/25 10:59	
Lead	ug/L	ND	1.0	0.22	06/20/25 10:59	
Nickel	ug/L	ND	1.0	0.26	06/20/25 10:59	
Selenium	ug/L	ND	2.0	0.20	06/20/25 10:59	
Silver	ug/L	ND	0.50	0.028	06/20/25 10:59	
Thallium	ug/L	ND	1.0	0.11	06/20/25 10:59	
Zinc	ug/L	ND	10.0	6.7	06/20/25 10:59	

LABORATORY CONTROL SAMPLE: 6075230

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Antimony	ug/L	50	53.1	106	80-120	
Arsenic	ug/L	50	51.6	103	80-120	
Beryllium	ug/L	5	5.1	102	80-120	
Cadmium	ug/L	5	5.5	109	80-120	
Chromium	ug/L	50	51.5	103	80-120	
Copper	ug/L	50	54.2	108	80-120	
Lead	ug/L	50	55.1	110	80-120	
Nickel	ug/L	50	53.7	107	80-120	
Selenium	ug/L	50	51.9	104	80-120	
Silver	ug/L	5	5.3	107	80-120	
Thallium	ug/L	50	52.7	105	80-120	
Zinc	ug/L	250	272	109	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6075231 6075232

Parameter	Units	92801798001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Antimony	ug/L	ND	50	50	52.3	53.2	105	106	75-125	2	20	
Arsenic	ug/L	ND	50	50	48.8	47.9	97	96	75-125	2	20	
Beryllium	ug/L	0.58	5	5	5.7	5.6	103	100	75-125	2	20	
Cadmium	ug/L	ND	5	5	5.2	5.1	104	101	75-125	3	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6075231 6075232

Parameter	Units	92801798001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Chromium	ug/L	19.5	50	50	70.8	68.6	103	98	75-125	3	20	
Copper	ug/L	16.1	50	50	70.0	68.5	108	105	75-125	2	20	
Lead	ug/L	ND	50	50	53.7	53.6	107	107	75-125	0	20	
Nickel	ug/L	30.9	50	50	83.5	81.0	105	100	75-125	3	20	
Selenium	ug/L	ND	50	50	51.1	51.7	102	103	75-125	1	20	
Silver	ug/L	ND	5	5	5.1	5.0	103	100	75-125	3	20	
Thallium	ug/L	ND	50	50	51.5	51.5	103	103	75-125	0	20	
Zinc	ug/L	38.2	250	250	311	308	109	108	75-125	1	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

QC Batch: 941470
QC Batch Method: EPA 8260D
Analysis Method: EPA 8260D
Analysis Description: 8260D MSV Low Level
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92801798002, 92801798006

METHOD BLANK: 4838415
Matrix: Water
Associated Lab Samples: 92801798002, 92801798006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	1.0	0.31	06/12/25 10:33	
1,1,1-Trichloroethane	ug/L	ND	1.0	0.33	06/12/25 10:33	
1,1,2,2-Tetrachloroethane	ug/L	ND	1.0	0.22	06/12/25 10:33	
1,1,2-Trichloroethane	ug/L	ND	1.0	0.32	06/12/25 10:33	
1,1-Dichloroethane	ug/L	ND	1.0	0.37	06/12/25 10:33	
1,1-Dichloroethene	ug/L	ND	1.0	0.35	06/12/25 10:33	
1,1-Dichloropropene	ug/L	ND	1.0	0.43	06/12/25 10:33	
1,2,3-Trichlorobenzene	ug/L	ND	1.0	0.81	06/12/25 10:33	
1,2,3-Trichloropropane	ug/L	ND	1.0	0.26	06/12/25 10:33	
1,2,4-Trichlorobenzene	ug/L	ND	1.0	0.64	06/12/25 10:33	
1,2-Dibromo-3-chloropropane	ug/L	ND	2.0	0.34	06/12/25 10:33	
1,2-Dibromoethane (EDB)	ug/L	ND	1.0	0.27	06/12/25 10:33	
1,2-Dichlorobenzene	ug/L	ND	1.0	0.34	06/12/25 10:33	
1,2-Dichloroethane	ug/L	ND	1.0	0.32	06/12/25 10:33	
1,2-Dichloropropane	ug/L	ND	1.0	0.36	06/12/25 10:33	
1,3-Dichlorobenzene	ug/L	ND	1.0	0.34	06/12/25 10:33	
1,3-Dichloropropane	ug/L	ND	1.0	0.28	06/12/25 10:33	
1,4-Dichlorobenzene	ug/L	ND	1.0	0.33	06/12/25 10:33	
2,2-Dichloropropane	ug/L	ND	1.0	0.39	06/12/25 10:33	
2-Butanone (MEK)	ug/L	ND	5.0	4.0	06/12/25 10:33	
2-Chlorotoluene	ug/L	ND	1.0	0.32	06/12/25 10:33	
2-Hexanone	ug/L	ND	5.0	0.48	06/12/25 10:33	
4-Chlorotoluene	ug/L	ND	1.0	0.32	06/12/25 10:33	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	5.0	2.7	06/12/25 10:33	
Acetone	ug/L	ND	25.0	5.1	06/12/25 10:33	
Benzene	ug/L	ND	1.0	0.34	06/12/25 10:33	
Bromobenzene	ug/L	ND	1.0	0.29	06/12/25 10:33	
Bromochloromethane	ug/L	ND	1.0	0.47	06/12/25 10:33	
Bromodichloromethane	ug/L	ND	1.0	0.31	06/12/25 10:33	
Bromoform	ug/L	ND	1.0	0.34	06/12/25 10:33	
Bromomethane	ug/L	ND	2.0	1.7	06/12/25 10:33	
Carbon tetrachloride	ug/L	ND	1.0	0.33	06/12/25 10:33	
Chlorobenzene	ug/L	ND	1.0	0.28	06/12/25 10:33	
Chloroethane	ug/L	ND	1.0	0.65	06/12/25 10:33	
Chloroform	ug/L	ND	1.0	0.43	06/12/25 10:33	
Chloromethane	ug/L	ND	1.0	0.54	06/12/25 10:33	
cis-1,2-Dichloroethene	ug/L	ND	1.0	0.38	06/12/25 10:33	
cis-1,3-Dichloropropene	ug/L	ND	1.0	0.36	06/12/25 10:33	
Dibromochloromethane	ug/L	ND	1.0	0.36	06/12/25 10:33	
Dibromomethane	ug/L	ND	1.0	0.39	06/12/25 10:33	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

METHOD BLANK: 4838415 Matrix: Water
Associated Lab Samples: 92801798002, 92801798006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Dichlorodifluoromethane	ug/L	ND	1.0	0.35	06/12/25 10:33	
Diisopropyl ether	ug/L	ND	1.0	0.31	06/12/25 10:33	
Ethylbenzene	ug/L	ND	1.0	0.30	06/12/25 10:33	
Hexachloro-1,3-butadiene	ug/L	ND	2.0	1.5	06/12/25 10:33	
m&p-Xylene	ug/L	ND	2.0	0.71	06/12/25 10:33	
Methyl-tert-butyl ether	ug/L	ND	1.0	0.42	06/12/25 10:33	
Methylene Chloride	ug/L	ND	5.0	2.0	06/12/25 10:33	
Naphthalene	ug/L	ND	1.0	0.64	06/12/25 10:33	
o-Xylene	ug/L	ND	1.0	0.34	06/12/25 10:33	
p-Isopropyltoluene	ug/L	ND	1.0	0.41	06/12/25 10:33	
Styrene	ug/L	ND	1.0	0.29	06/12/25 10:33	
Tetrachloroethene	ug/L	ND	1.0	0.29	06/12/25 10:33	
Toluene	ug/L	ND	1.0	0.24	06/12/25 10:33	
trans-1,2-Dichloroethene	ug/L	ND	1.0	0.40	06/12/25 10:33	
trans-1,3-Dichloropropene	ug/L	ND	1.0	0.36	06/12/25 10:33	
Trichloroethene	ug/L	ND	1.0	0.38	06/12/25 10:33	
Trichlorofluoromethane	ug/L	ND	1.0	0.30	06/12/25 10:33	
Vinyl acetate	ug/L	ND	2.0	1.3	06/12/25 10:33	
Vinyl chloride	ug/L	ND	1.0	0.39	06/12/25 10:33	
Xylene (Total)	ug/L	ND	1.0	0.34	06/12/25 10:33	
1,2-Dichloroethane-d4 (S)	%	100	70-130		06/12/25 10:33	
4-Bromofluorobenzene (S)	%	95	70-130		06/12/25 10:33	
Toluene-d8 (S)	%	101	70-130		06/12/25 10:33	

LABORATORY CONTROL SAMPLE: 4838418

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	20	18.5	92	70-130	
1,1,1-Trichloroethane	ug/L	20	19.0	95	70-130	
1,1,2,2-Tetrachloroethane	ug/L	20	18.0	90	70-130	
1,1,2-Trichloroethane	ug/L	20	17.8	89	70-130	
1,1-Dichloroethane	ug/L	20	19.0	95	70-130	
1,1-Dichloroethene	ug/L	20	22.7	113	69-131	
1,1-Dichloropropene	ug/L	20	19.0	95	70-132	
1,2,3-Trichlorobenzene	ug/L	20	18.2	91	70-132	
1,2,3-Trichloropropane	ug/L	20	18.6	93	70-130	
1,2,4-Trichlorobenzene	ug/L	20	18.7	94	70-130	
1,2-Dibromo-3-chloropropane	ug/L	20	17.8	89	70-130	
1,2-Dibromoethane (EDB)	ug/L	20	18.5	93	70-130	
1,2-Dichlorobenzene	ug/L	20	18.1	90	70-130	
1,2-Dichloroethane	ug/L	20	18.7	93	70-130	
1,2-Dichloropropane	ug/L	20	18.6	93	70-130	
1,3-Dichlorobenzene	ug/L	20	18.0	90	70-130	
1,3-Dichloropropane	ug/L	20	18.4	92	70-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

LABORATORY CONTROL SAMPLE: 4838418

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,4-Dichlorobenzene	ug/L	20	18.0	90	70-130	
2,2-Dichloropropane	ug/L	20	18.9	95	69-130	
2-Butanone (MEK)	ug/L	40	34.6	86	67-133	
2-Chlorotoluene	ug/L	20	18.3	91	70-130	
2-Hexanone	ug/L	40	35.1	88	70-133	
4-Chlorotoluene	ug/L	20	18.5	93	70-130	
4-Methyl-2-pentanone (MIBK)	ug/L	40	35.6	89	70-130	
Acetone	ug/L	40	34.5	86	67-130	
Benzene	ug/L	20	18.6	93	70-130	
Bromobenzene	ug/L	20	18.0	90	70-130	
Bromochloromethane	ug/L	20	18.9	94	70-130	
Bromodichloromethane	ug/L	20	18.9	94	70-130	
Bromoform	ug/L	20	18.5	92	70-133	
Bromomethane	ug/L	20	19.7	99	41-148	
Carbon tetrachloride	ug/L	20	19.0	95	70-130	
Chlorobenzene	ug/L	20	18.2	91	70-130	
Chloroethane	ug/L	20	17.5	88	41-157	
Chloroform	ug/L	20	18.8	94	70-130	
Chloromethane	ug/L	20	19.3	97	59-141	
cis-1,2-Dichloroethene	ug/L	20	18.8	94	70-130	
cis-1,3-Dichloropropene	ug/L	20	19.1	95	70-130	
Dibromochloromethane	ug/L	20	18.6	93	70-130	
Dibromomethane	ug/L	20	18.0	90	70-130	
Dichlorodifluoromethane	ug/L	20	17.9	90	54-147	
Diisopropyl ether	ug/L	20	18.3	91	70-130	
Ethylbenzene	ug/L	20	18.6	93	70-130	
Hexachloro-1,3-butadiene	ug/L	20	19.0	95	70-134	
m&p-Xylene	ug/L	40	37.2	93	70-130	
Methyl-tert-butyl ether	ug/L	20	17.4	87	70-130	
Methylene Chloride	ug/L	20	19.1	96	62-130	
Naphthalene	ug/L	20	18.2	91	70-135	
o-Xylene	ug/L	20	19.1	96	70-130	
p-Isopropyltoluene	ug/L	20	19.1	95	70-130	
Styrene	ug/L	20	18.6	93	70-130	
Tetrachloroethene	ug/L	20	17.8	89	70-130	
Toluene	ug/L	20	17.9	90	70-130	
trans-1,2-Dichloroethene	ug/L	20	20.3	101	70-130	
trans-1,3-Dichloropropene	ug/L	20	19.0	95	70-130	
Trichloroethene	ug/L	20	17.9	90	70-130	
Trichlorofluoromethane	ug/L	20	17.3	87	57-130	
Vinyl acetate	ug/L	40	38.6	97	70-141	
Vinyl chloride	ug/L	20	17.7	88	66-140	
Xylene (Total)	ug/L	60	56.3	94	70-130	
1,2-Dichloroethane-d4 (S)	%			104	70-130	
4-Bromofluorobenzene (S)	%			102	70-130	
Toluene-d8 (S)	%			100	70-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

MATRIX SPIKE SAMPLE: 4838416

Parameter	Units	92801176006 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	20	22.4	112	70-146	
1,1,1-Trichloroethane	ug/L	ND	20	24.2	121	70-150	
1,1,2,2-Tetrachloroethane	ug/L	ND	20	20.9	104	66-144	
1,1,2-Trichloroethane	ug/L	ND	20	21.6	108	70-142	
1,1-Dichloroethane	ug/L	ND	20	23.1	115	68-150	
1,1-Dichloroethene	ug/L	ND	20	28.3	141	64-162	v1
1,1-Dichloropropene	ug/L	ND	20	24.9	124	70-160	
1,2,3-Trichlorobenzene	ug/L	ND	20	21.5	108	66-151	
1,2,3-Trichloropropane	ug/L	ND	20	20.8	104	66-144	
1,2,4-Trichlorobenzene	ug/L	ND	20	22.5	112	69-147	
1,2-Dibromo-3-chloropropane	ug/L	ND	20	20.2	101	62-146	
1,2-Dibromoethane (EDB)	ug/L	ND	20	21.9	109	70-143	
1,2-Dichlorobenzene	ug/L	ND	20	21.6	108	70-142	
1,2-Dichloroethane	ug/L	ND	20	21.5	108	68-145	
1,2-Dichloropropane	ug/L	ND	20	22.9	114	70-144	
1,3-Dichlorobenzene	ug/L	ND	20	22.5	113	70-142	
1,3-Dichloropropane	ug/L	ND	20	21.3	107	70-141	
1,4-Dichlorobenzene	ug/L	ND	20	22.0	110	70-140	
2,2-Dichloropropane	ug/L	ND	20	24.0	120	58-160	
2-Butanone (MEK)	ug/L	ND	40	34.0	85	57-156	
2-Chlorotoluene	ug/L	ND	20	21.5	108	70-148	
2-Hexanone	ug/L	ND	40	36.7	92	62-153	
4-Chlorotoluene	ug/L	ND	20	21.8	109	70-144	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	40	37.3	93	65-144	
Acetone	ug/L	ND	40	34.2	85	49-162	IH
Benzene	ug/L	ND	20	23.8	119	68-144	
Bromobenzene	ug/L	ND	20	22.4	112	70-144	
Bromochloromethane	ug/L	ND	20	23.8	119	70-148	
Bromodichloromethane	ug/L	ND	20	22.8	114	70-141	
Bromoform	ug/L	ND	20	21.1	106	59-144	
Bromomethane	ug/L	ND	20	27.6	138	23-190	v1
Carbon tetrachloride	ug/L	ND	20	24.8	124	70-147	
Chlorobenzene	ug/L	ND	20	22.9	114	70-143	
Chloroethane	ug/L	ND	20	25.9	130	55-190	
Chloroform	ug/L	ND	20	20.9	105	67-148	
Chloromethane	ug/L	ND	20	21.7	108	38-180	
cis-1,2-Dichloroethene	ug/L	ND	20	22.8	114	67-151	
cis-1,3-Dichloropropene	ug/L	ND	20	22.8	114	70-142	
Dibromochloromethane	ug/L	ND	20	22.2	111	68-140	
Dibromomethane	ug/L	ND	20	23.4	117	70-142	
Dichlorodifluoromethane	ug/L	ND	20	23.7	118	15-200	
Diisopropyl ether	ug/L	ND	20	19.7	98	62-149	
Ethylbenzene	ug/L	ND	20	22.9	114	70-145	
Hexachloro-1,3-butadiene	ug/L	ND	20	24.4	122	64-164	
m&p-Xylene	ug/L	ND	40	46.6	117	70-148	
Methyl-tert-butyl ether	ug/L	ND	20	20.1	100	64-146	
Methylene Chloride	ug/L	ND	20	19.9	100	54-149	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

MATRIX SPIKE SAMPLE: 4838416

Parameter	Units	92801176006 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Naphthalene	ug/L	ND	20	20.4	102	62-154	
o-Xylene	ug/L	ND	20	23.7	119	70-145	
p-Isopropyltoluene	ug/L	ND	20	23.5	117	70-153	
Styrene	ug/L	ND	20	22.7	114	70-147	
Tetrachloroethene	ug/L	ND	20	23.9	119	70-145	
Toluene	ug/L	ND	20	22.6	113	65-146	
trans-1,2-Dichloroethene	ug/L	ND	20	24.9	124	69-155	
trans-1,3-Dichloropropene	ug/L	ND	20	22.1	110	70-142	
Trichloroethene	ug/L	ND	20	24.5	123	70-152	
Trichlorofluoromethane	ug/L	ND	20	26.9	134	60-158	
Vinyl acetate	ug/L	ND	40	42.7	107	56-157	
Vinyl chloride	ug/L	ND	20	22.6	113	51-178	
Xylene (Total)	ug/L	ND	60	70.3	117	70-146	
1,2-Dichloroethane-d4 (S)	%				94	70-130	
4-Bromofluorobenzene (S)	%				97	70-130	
Toluene-d8 (S)	%				100	70-130	

SAMPLE DUPLICATE: 4839845

Parameter	Units	92801375001 Result	Dup Result	RPD	Max RPD	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	ND		30	
1,1,1-Trichloroethane	ug/L	ND	ND		30	
1,1,2,2-Tetrachloroethane	ug/L	ND	ND		30	
1,1,2-Trichloroethane	ug/L	ND	ND		30	
1,1-Dichloroethane	ug/L	ND	ND		30	
1,1-Dichloroethene	ug/L	ND	ND		30	v1
1,1-Dichloropropene	ug/L	ND	ND		30	
1,2,3-Trichlorobenzene	ug/L	ND	ND		30	
1,2,3-Trichloropropane	ug/L	ND	ND		30	
1,2,4-Trichlorobenzene	ug/L	ND	ND		30	
1,2-Dibromo-3-chloropropane	ug/L	ND	ND		30	
1,2-Dibromoethane (EDB)	ug/L	ND	ND		30	
1,2-Dichlorobenzene	ug/L	ND	ND		30	
1,2-Dichloroethane	ug/L	ND	ND		30	
1,2-Dichloropropane	ug/L	ND	ND		30	
1,3-Dichlorobenzene	ug/L	ND	ND		30	
1,3-Dichloropropane	ug/L	ND	ND		30	
1,4-Dichlorobenzene	ug/L	ND	ND		30	
2,2-Dichloropropane	ug/L	ND	ND		30	
2-Butanone (MEK)	ug/L	ND	ND		30	
2-Chlorotoluene	ug/L	ND	ND		30	
2-Hexanone	ug/L	ND	ND		30	
4-Chlorotoluene	ug/L	ND	ND		30	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	ND		30	
Acetone	ug/L	ND	ND		30	IH

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

SAMPLE DUPLICATE: 4839845

Parameter	Units	92801375001 Result	Dup Result	RPD	Max RPD	Qualifiers
Benzene	ug/L	ND	ND		30	
Bromobenzene	ug/L	ND	ND		30	
Bromochloromethane	ug/L	ND	ND		30	
Bromodichloromethane	ug/L	ND	ND		30	
Bromoform	ug/L	ND	ND		30	
Bromomethane	ug/L	ND	ND		30	v1
Carbon tetrachloride	ug/L	ND	ND		30	
Chlorobenzene	ug/L	ND	ND		30	
Chloroethane	ug/L	ND	ND		30	
Chloroform	ug/L	ND	ND		30	
Chloromethane	ug/L	ND	ND		30	
cis-1,2-Dichloroethene	ug/L	ND	ND		30	
cis-1,3-Dichloropropene	ug/L	ND	ND		30	
Dibromochloromethane	ug/L	ND	ND		30	
Dibromomethane	ug/L	ND	ND		30	
Dichlorodifluoromethane	ug/L	ND	ND		30	
Diisopropyl ether	ug/L	ND	ND		30	
Ethylbenzene	ug/L	ND	ND		30	
Hexachloro-1,3-butadiene	ug/L	ND	ND		30	
m&p-Xylene	ug/L	ND	ND		30	
Methyl-tert-butyl ether	ug/L	ND	ND		30	
Methylene Chloride	ug/L	ND	ND		30	
Naphthalene	ug/L	ND	ND		30	
o-Xylene	ug/L	ND	ND		30	
p-Isopropyltoluene	ug/L	ND	ND		30	
Styrene	ug/L	ND	ND		30	
Tetrachloroethene	ug/L	ND	ND		30	
Toluene	ug/L	ND	ND		30	
trans-1,2-Dichloroethene	ug/L	ND	ND		30	
trans-1,3-Dichloropropene	ug/L	ND	ND		30	
Trichloroethene	ug/L	ND	ND		30	
Trichlorofluoromethane	ug/L	ND	ND		30	
Vinyl acetate	ug/L	ND	ND		30	
Vinyl chloride	ug/L	ND	ND		30	
Xylene (Total)	ug/L	ND	ND		30	
1,2-Dichloroethane-d4 (S)	%	100	77			
4-Bromofluorobenzene (S)	%	96	94			
Toluene-d8 (S)	%	102	105			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

QC Batch: 941743
QC Batch Method: EPA 8260D
Analysis Method: EPA 8260D
Analysis Description: 8260D MSV Low Level
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92801798001, 92801798003, 92801798004, 92801798005

METHOD BLANK: 4839822 Matrix: Water
Associated Lab Samples: 92801798001, 92801798003, 92801798004, 92801798005

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	1.0	0.31	06/13/25 20:56	
1,1,1-Trichloroethane	ug/L	ND	1.0	0.33	06/13/25 20:56	
1,1,2,2-Tetrachloroethane	ug/L	ND	1.0	0.22	06/13/25 20:56	
1,1,2-Trichloroethane	ug/L	ND	1.0	0.32	06/13/25 20:56	
1,1-Dichloroethane	ug/L	ND	1.0	0.37	06/13/25 20:56	
1,1-Dichloroethene	ug/L	ND	1.0	0.35	06/13/25 20:56	
1,1-Dichloropropene	ug/L	ND	1.0	0.43	06/13/25 20:56	
1,2,3-Trichlorobenzene	ug/L	ND	1.0	0.81	06/13/25 20:56	
1,2,3-Trichloropropane	ug/L	ND	1.0	0.26	06/13/25 20:56	
1,2,4-Trichlorobenzene	ug/L	ND	1.0	0.64	06/13/25 20:56	
1,2-Dibromo-3-chloropropane	ug/L	ND	2.0	0.34	06/13/25 20:56	
1,2-Dibromoethane (EDB)	ug/L	ND	1.0	0.27	06/13/25 20:56	
1,2-Dichlorobenzene	ug/L	ND	1.0	0.34	06/13/25 20:56	
1,2-Dichloroethane	ug/L	ND	1.0	0.32	06/13/25 20:56	
1,2-Dichloropropane	ug/L	ND	1.0	0.36	06/13/25 20:56	
1,3-Dichlorobenzene	ug/L	ND	1.0	0.34	06/13/25 20:56	
1,3-Dichloropropane	ug/L	ND	1.0	0.28	06/13/25 20:56	
1,4-Dichlorobenzene	ug/L	ND	1.0	0.33	06/13/25 20:56	
2,2-Dichloropropane	ug/L	ND	1.0	0.39	06/13/25 20:56	
2-Butanone (MEK)	ug/L	ND	5.0	4.0	06/13/25 20:56	v2
2-Chlorotoluene	ug/L	ND	1.0	0.32	06/13/25 20:56	
2-Hexanone	ug/L	ND	5.0	0.48	06/13/25 20:56	
4-Chlorotoluene	ug/L	ND	1.0	0.32	06/13/25 20:56	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	5.0	2.7	06/13/25 20:56	
Acetone	ug/L	ND	25.0	5.1	06/13/25 20:56	v2
Benzene	ug/L	ND	1.0	0.34	06/13/25 20:56	
Bromobenzene	ug/L	ND	1.0	0.29	06/13/25 20:56	
Bromochloromethane	ug/L	ND	1.0	0.47	06/13/25 20:56	
Bromodichloromethane	ug/L	ND	1.0	0.31	06/13/25 20:56	
Bromoform	ug/L	ND	1.0	0.34	06/13/25 20:56	
Bromomethane	ug/L	ND	2.0	1.7	06/13/25 20:56	
Carbon tetrachloride	ug/L	ND	1.0	0.33	06/13/25 20:56	
Chlorobenzene	ug/L	ND	1.0	0.28	06/13/25 20:56	
Chloroethane	ug/L	ND	1.0	0.65	06/13/25 20:56	
Chloroform	ug/L	ND	1.0	0.43	06/13/25 20:56	
Chloromethane	ug/L	ND	1.0	0.54	06/13/25 20:56	v2
cis-1,2-Dichloroethene	ug/L	ND	1.0	0.38	06/13/25 20:56	
cis-1,3-Dichloropropene	ug/L	ND	1.0	0.36	06/13/25 20:56	
Dibromochloromethane	ug/L	ND	1.0	0.36	06/13/25 20:56	
Dibromomethane	ug/L	ND	1.0	0.39	06/13/25 20:56	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

METHOD BLANK: 4839822 Matrix: Water
Associated Lab Samples: 92801798001, 92801798003, 92801798004, 92801798005

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Dichlorodifluoromethane	ug/L	ND	1.0	0.35	06/13/25 20:56	
Diisopropyl ether	ug/L	ND	1.0	0.31	06/13/25 20:56	
Ethylbenzene	ug/L	ND	1.0	0.30	06/13/25 20:56	
Hexachloro-1,3-butadiene	ug/L	ND	2.0	1.5	06/13/25 20:56	IK
m&p-Xylene	ug/L	ND	2.0	0.71	06/13/25 20:56	
Methyl-tert-butyl ether	ug/L	ND	1.0	0.42	06/13/25 20:56	
Methylene Chloride	ug/L	ND	5.0	2.0	06/13/25 20:56	v2
Naphthalene	ug/L	ND	1.0	0.64	06/13/25 20:56	
o-Xylene	ug/L	ND	1.0	0.34	06/13/25 20:56	
p-Isopropyltoluene	ug/L	ND	1.0	0.41	06/13/25 20:56	
Styrene	ug/L	ND	1.0	0.29	06/13/25 20:56	
Tetrachloroethene	ug/L	ND	1.0	0.29	06/13/25 20:56	
Toluene	ug/L	ND	1.0	0.24	06/13/25 20:56	
trans-1,2-Dichloroethene	ug/L	ND	1.0	0.40	06/13/25 20:56	
trans-1,3-Dichloropropene	ug/L	ND	1.0	0.36	06/13/25 20:56	
Trichloroethene	ug/L	ND	1.0	0.38	06/13/25 20:56	
Trichlorofluoromethane	ug/L	ND	1.0	0.30	06/13/25 20:56	
Vinyl acetate	ug/L	ND	2.0	1.3	06/13/25 20:56	
Vinyl chloride	ug/L	ND	1.0	0.39	06/13/25 20:56	v2
Xylene (Total)	ug/L	ND	1.0	0.34	06/13/25 20:56	
1,2-Dichloroethane-d4 (S)	%	95	70-130		06/13/25 20:56	
4-Bromofluorobenzene (S)	%	96	70-130		06/13/25 20:56	
Toluene-d8 (S)	%	97	70-130		06/13/25 20:56	

LABORATORY CONTROL SAMPLE: 4839823

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	20	18.8	94	70-130	
1,1,1-Trichloroethane	ug/L	20	18.4	92	70-130	
1,1,2,2-Tetrachloroethane	ug/L	20	18.2	91	70-130	
1,1,2-Trichloroethane	ug/L	20	18.6	93	70-130	
1,1-Dichloroethane	ug/L	20	17.1	85	70-130	
1,1-Dichloroethene	ug/L	20	19.8	99	69-131	
1,1-Dichloropropene	ug/L	20	17.5	87	70-132	
1,2,3-Trichlorobenzene	ug/L	20	18.0	90	70-132	
1,2,3-Trichloropropane	ug/L	20	18.6	93	70-130	
1,2,4-Trichlorobenzene	ug/L	20	18.9	94	70-130	
1,2-Dibromo-3-chloropropane	ug/L	20	16.3	81	70-130	
1,2-Dibromoethane (EDB)	ug/L	20	19.3	96	70-130	
1,2-Dichlorobenzene	ug/L	20	19.6	98	70-130	
1,2-Dichloroethane	ug/L	20	17.3	87	70-130	
1,2-Dichloropropane	ug/L	20	17.4	87	70-130	
1,3-Dichlorobenzene	ug/L	20	19.9	99	70-130	
1,3-Dichloropropane	ug/L	20	19.0	95	70-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

LABORATORY CONTROL SAMPLE: 4839823

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,4-Dichlorobenzene	ug/L	20	19.6	98	70-130	
2,2-Dichloropropane	ug/L	20	16.5	83	69-130	
2-Butanone (MEK)	ug/L	40	30.2	75	67-133	v3
2-Chlorotoluene	ug/L	20	19.2	96	70-130	
2-Hexanone	ug/L	40	33.1	83	70-133	
4-Chlorotoluene	ug/L	20	19.0	95	70-130	
4-Methyl-2-pentanone (MIBK)	ug/L	40	33.9	85	70-130	
Acetone	ug/L	40	29.9	75	67-130	v3
Benzene	ug/L	20	18.4	92	70-130	
Bromobenzene	ug/L	20	20.3	102	70-130	
Bromochloromethane	ug/L	20	18.1	91	70-130	
Bromodichloromethane	ug/L	20	18.3	91	70-130	
Bromoform	ug/L	20	17.7	89	70-133	
Bromomethane	ug/L	20	23.3	117	41-148	
Carbon tetrachloride	ug/L	20	19.2	96	70-130	
Chlorobenzene	ug/L	20	19.6	98	70-130	
Chloroethane	ug/L	20	16.6	83	41-157	
Chloroform	ug/L	20	16.3	82	70-130	
Chloromethane	ug/L	20	15.0	75	59-141	v3
cis-1,2-Dichloroethene	ug/L	20	17.3	87	70-130	
cis-1,3-Dichloropropene	ug/L	20	17.6	88	70-130	
Dibromochloromethane	ug/L	20	18.2	91	70-130	
Dibromomethane	ug/L	20	18.0	90	70-130	
Dichlorodifluoromethane	ug/L	20	17.0	85	54-147	
Diisopropyl ether	ug/L	20	17.2	86	70-130	
Ethylbenzene	ug/L	20	19.1	96	70-130	
Hexachloro-1,3-butadiene	ug/L	20	18.5	92	70-134	IK
m&p-Xylene	ug/L	40	38.0	95	70-130	
Methyl-tert-butyl ether	ug/L	20	17.2	86	70-130	
Methylene Chloride	ug/L	20	15.8	79	62-130	v3
Naphthalene	ug/L	20	17.9	90	70-135	
o-Xylene	ug/L	20	19.6	98	70-130	
p-Isopropyltoluene	ug/L	20	20.3	102	70-130	
Styrene	ug/L	20	18.8	94	70-130	
Tetrachloroethene	ug/L	20	18.8	94	70-130	
Toluene	ug/L	20	18.0	90	70-130	
trans-1,2-Dichloroethene	ug/L	20	18.5	92	70-130	
trans-1,3-Dichloropropene	ug/L	20	17.5	87	70-130	
Trichloroethene	ug/L	20	18.6	93	70-130	
Trichlorofluoromethane	ug/L	20	17.0	85	57-130	
Vinyl acetate	ug/L	40	40.7	102	70-141	
Vinyl chloride	ug/L	20	15.2	76	66-140	v3
Xylene (Total)	ug/L	60	57.6	96	70-130	
1,2-Dichloroethane-d4 (S)	%			93	70-130	
4-Bromofluorobenzene (S)	%			98	70-130	
Toluene-d8 (S)	%			96	70-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

MATRIX SPIKE SAMPLE: 4839825

Parameter	Units	92802132004 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	20	20.0	100	70-146	
1,1,1-Trichloroethane	ug/L	ND	20	20.9	104	70-150	
1,1,2,2-Tetrachloroethane	ug/L	ND	20	18.6	93	66-144	
1,1,2-Trichloroethane	ug/L	ND	20	20.0	100	70-142	
1,1-Dichloroethane	ug/L	ND	20	19.4	97	68-150	
1,1-Dichloroethene	ug/L	ND	20	23.0	115	64-162	
1,1-Dichloropropene	ug/L	ND	20	20.4	102	70-160	
1,2,3-Trichlorobenzene	ug/L	ND	20	20.3	102	66-151	
1,2,3-Trichloropropane	ug/L	ND	20	19.2	96	66-144	
1,2,4-Trichlorobenzene	ug/L	ND	20	21.6	108	69-147	
1,2-Dibromo-3-chloropropane	ug/L	ND	20	17.6	88	62-146	
1,2-Dibromoethane (EDB)	ug/L	ND	20	20.6	103	70-143	
1,2-Dichlorobenzene	ug/L	ND	20	21.6	108	70-142	
1,2-Dichloroethane	ug/L	ND	20	19.7	99	68-145	
1,2-Dichloropropane	ug/L	ND	20	19.6	98	70-144	
1,3-Dichlorobenzene	ug/L	ND	20	21.7	108	70-142	
1,3-Dichloropropane	ug/L	ND	20	19.4	97	70-141	
1,4-Dichlorobenzene	ug/L	ND	20	21.3	106	70-140	
2,2-Dichloropropane	ug/L	ND	20	20.0	100	58-160	
2-Butanone (MEK)	ug/L	ND	40	32.8	82	57-156	v3
2-Chlorotoluene	ug/L	ND	20	21.2	106	70-148	
2-Hexanone	ug/L	ND	40	36.0	90	62-153	
4-Chlorotoluene	ug/L	ND	20	21.0	105	70-144	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	40	37.1	93	65-144	
Acetone	ug/L	ND	40	32.8	82	49-162	
Benzene	ug/L	ND	20	21.1	105	68-144	
Bromobenzene	ug/L	ND	20	22.3	111	70-144	
Bromochloromethane	ug/L	ND	20	18.9	95	70-148	
Bromodichloromethane	ug/L	ND	20	20.2	101	70-141	
Bromoform	ug/L	ND	20	18.8	94	59-144	
Bromomethane	ug/L	ND	20	26.9	128	23-190	v1
Carbon tetrachloride	ug/L	ND	20	22.4	112	70-147	
Chlorobenzene	ug/L	ND	20	21.2	106	70-143	
Chloroethane	ug/L	ND	20	18.3	92	55-190	
Chloroform	ug/L	ND	20	18.7	93	67-148	
Chloromethane	ug/L	ND	20	15.3	76	38-180	
cis-1,2-Dichloroethene	ug/L	ND	20	20.2	101	67-151	
cis-1,3-Dichloropropene	ug/L	ND	20	19.7	98	70-142	
Dibromochloromethane	ug/L	ND	20	20.1	100	68-140	
Dibromomethane	ug/L	ND	20	21.9	109	70-142	
Dichlorodifluoromethane	ug/L	ND	20	13.3	67	15-200	
Diisopropyl ether	ug/L	ND	20	18.6	93	62-149	
Ethylbenzene	ug/L	ND	20	21.0	105	70-145	
Hexachloro-1,3-butadiene	ug/L	ND	20	22.5	113	64-164	IK
m&p-Xylene	ug/L	ND	40	42.5	106	70-148	
Methyl-tert-butyl ether	ug/L	ND	20	18.9	95	64-146	
Methylene Chloride	ug/L	ND	20	17.7	89	54-149	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

MATRIX SPIKE SAMPLE: 4839825

Parameter	Units	92802132004 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Naphthalene	ug/L	ND	20	19.4	97	62-154	
o-Xylene	ug/L	ND	20	21.6	108	70-145	
p-Isopropyltoluene	ug/L	ND	20	23.6	118	70-153	
Styrene	ug/L	ND	20	20.7	104	70-147	
Tetrachloroethene	ug/L	ND	20	21.4	107	70-145	
Toluene	ug/L	ND	20	20.3	102	65-146	
trans-1,2-Dichloroethene	ug/L	ND	20	21.5	108	69-155	
trans-1,3-Dichloropropene	ug/L	ND	20	20.0	100	70-142	
Trichloroethene	ug/L	ND	20	22.0	110	70-152	
Trichlorofluoromethane	ug/L	ND	20	19.5	98	60-158	
Vinyl acetate	ug/L	ND	40	46.2	115	56-157	
Vinyl chloride	ug/L	ND	20	15.3	76	51-178	v3
Xylene (Total)	ug/L	ND	60	64.1	107	70-146	
1,2-Dichloroethane-d4 (S)	%				93	70-130	
4-Bromofluorobenzene (S)	%				98	70-130	
Toluene-d8 (S)	%				99	70-130	

SAMPLE DUPLICATE: 4839824

Parameter	Units	92802132001 Result	Dup Result	RPD	Max RPD	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	ND		30	
1,1,1-Trichloroethane	ug/L	ND	ND		30	
1,1,2,2-Tetrachloroethane	ug/L	ND	ND		30	
1,1,2-Trichloroethane	ug/L	ND	ND		30	
1,1-Dichloroethane	ug/L	ND	ND		30	
1,1-Dichloroethene	ug/L	ND	ND		30	
1,1-Dichloropropene	ug/L	ND	ND		30	
1,2,3-Trichlorobenzene	ug/L	ND	ND		30	
1,2,3-Trichloropropane	ug/L	ND	ND		30	
1,2,4-Trichlorobenzene	ug/L	ND	ND		30	
1,2-Dibromo-3-chloropropane	ug/L	ND	ND		30	
1,2-Dibromoethane (EDB)	ug/L	ND	ND		30	
1,2-Dichlorobenzene	ug/L	ND	ND		30	
1,2-Dichloroethane	ug/L	ND	ND		30	
1,2-Dichloropropane	ug/L	ND	ND		30	
1,3-Dichlorobenzene	ug/L	ND	ND		30	
1,3-Dichloropropane	ug/L	ND	ND		30	
1,4-Dichlorobenzene	ug/L	ND	ND		30	
2,2-Dichloropropane	ug/L	ND	ND		30	
2-Butanone (MEK)	ug/L	ND	ND		30	v2
2-Chlorotoluene	ug/L	ND	ND		30	
2-Hexanone	ug/L	ND	ND		30	
4-Chlorotoluene	ug/L	ND	ND		30	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	ND		30	
Acetone	ug/L	ND	ND		30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

SAMPLE DUPLICATE: 4839824

Parameter	Units	92802132001 Result	Dup Result	RPD	Max RPD	Qualifiers
Benzene	ug/L	ND	ND		30	
Bromobenzene	ug/L	ND	ND		30	
Bromochloromethane	ug/L	ND	ND		30	
Bromodichloromethane	ug/L	ND	ND		30	
Bromoform	ug/L	ND	ND		30	
Bromomethane	ug/L	ND	ND		30	v1
Carbon tetrachloride	ug/L	ND	ND		30	
Chlorobenzene	ug/L	ND	ND		30	
Chloroethane	ug/L	ND	ND		30	
Chloroform	ug/L	ND	ND		30	
Chloromethane	ug/L	ND	ND		30	
cis-1,2-Dichloroethene	ug/L	1.4	1.5	5	30	
cis-1,3-Dichloropropene	ug/L	ND	ND		30	
Dibromochloromethane	ug/L	ND	ND		30	
Dibromomethane	ug/L	ND	ND		30	
Dichlorodifluoromethane	ug/L	ND	ND		30	
Diisopropyl ether	ug/L	ND	ND		30	
Ethylbenzene	ug/L	ND	ND		30	
Hexachloro-1,3-butadiene	ug/L	ND	ND		30	IK
m&p-Xylene	ug/L	ND	ND		30	
Methyl-tert-butyl ether	ug/L	ND	ND		30	
Methylene Chloride	ug/L	ND	ND		30	
Naphthalene	ug/L	ND	ND		30	
o-Xylene	ug/L	ND	ND		30	
p-Isopropyltoluene	ug/L	ND	ND		30	
Styrene	ug/L	ND	ND		30	
Tetrachloroethene	ug/L	ND	ND		30	
Toluene	ug/L	ND	0.41J		30	
trans-1,2-Dichloroethene	ug/L	ND	ND		30	
trans-1,3-Dichloropropene	ug/L	ND	ND		30	
Trichloroethene	ug/L	ND	ND		30	
Trichlorofluoromethane	ug/L	ND	ND		30	
Vinyl acetate	ug/L	ND	ND		30	
Vinyl chloride	ug/L	ND	0.53J		30	v2
Xylene (Total)	ug/L	ND	ND		30	
1,2-Dichloroethane-d4 (S)	%	95	97			
4-Bromofluorobenzene (S)	%	97	100			
Toluene-d8 (S)	%	99	100			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

QC Batch: 941964
QC Batch Method: EPA 3546
Analysis Method: EPA 8082A
Analysis Description: 8082 GCS PCB
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92801798007, 92801798008

METHOD BLANK: 4841481 Matrix: Solid
Associated Lab Samples: 92801798007, 92801798008

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
PCB-1016 (Aroclor 1016)	ug/kg	ND	33.0	13.1	06/18/25 13:38	
PCB-1221 (Aroclor 1221)	ug/kg	ND	33.0	22.2	06/18/25 13:38	
PCB-1232 (Aroclor 1232)	ug/kg	ND	33.0	14.7	06/18/25 13:38	
PCB-1242 (Aroclor 1242)	ug/kg	ND	33.0	8.0	06/18/25 13:38	
PCB-1248 (Aroclor 1248)	ug/kg	ND	33.0	8.9	06/18/25 13:38	
PCB-1254 (Aroclor 1254)	ug/kg	ND	33.0	14.5	06/18/25 13:38	
PCB-1260 (Aroclor 1260)	ug/kg	ND	33.0	14.6	06/18/25 13:38	
Decachlorobiphenyl (S)	%	77	10-166		06/18/25 13:38	

LABORATORY CONTROL SAMPLE: 4841482

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
PCB-1016 (Aroclor 1016)	ug/kg	168	132	78	39-130	
PCB-1260 (Aroclor 1260)	ug/kg	168	136	81	44-130	
Decachlorobiphenyl (S)	%			78	10-166	

MATRIX SPIKE SAMPLE: 4841483

Parameter	Units	92801457001 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
PCB-1016 (Aroclor 1016)	ug/kg	ND	196	131	66	10-130	
PCB-1260 (Aroclor 1260)	ug/kg	ND	196	125	64	10-135	
Decachlorobiphenyl (S)	%				59	10-166	

SAMPLE DUPLICATE: 4841484

Parameter	Units	92801457002 Result	Dup Result	RPD	Max RPD	Qualifiers
PCB-1016 (Aroclor 1016)	ug/kg	ND	ND		30	
PCB-1221 (Aroclor 1221)	ug/kg	ND	ND		30	
PCB-1232 (Aroclor 1232)	ug/kg	ND	ND		30	
PCB-1242 (Aroclor 1242)	ug/kg	ND	ND		30	
PCB-1248 (Aroclor 1248)	ug/kg	ND	ND		30	
PCB-1254 (Aroclor 1254)	ug/kg	ND	ND		30	
PCB-1260 (Aroclor 1260)	ug/kg	ND	ND		30	
Decachlorobiphenyl (S)	%	42	51			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

QC Batch: 941486 | Analysis Method: EPA 8270E
QC Batch Method: EPA 3510C | Analysis Description: 8270E Water MSSV RVE
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92801798001, 92801798002, 92801798003, 92801798004, 92801798005

METHOD BLANK: 4838487 Matrix: Water
Associated Lab Samples: 92801798001, 92801798002, 92801798003, 92801798004, 92801798005

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,2,4-Trichlorobenzene	ug/L	ND	10.0	1.7	06/13/25 12:02	
1,2-Dichlorobenzene	ug/L	ND	10.0	1.8	06/13/25 12:02	
1,3-Dichlorobenzene	ug/L	ND	10.0	1.6	06/13/25 12:02	
1,4-Dichlorobenzene	ug/L	ND	10.0	1.7	06/13/25 12:02	
1-Methylnaphthalene	ug/L	ND	10.0	2.0	06/13/25 12:02	
2,2'-Oxybis(1-chloropropane)	ug/L	ND	10.0	1.2	06/13/25 12:02	
2,4,5-Trichlorophenol	ug/L	ND	10.0	1.4	06/13/25 12:02	
2,4,6-Trichlorophenol	ug/L	ND	10.0	1.6	06/13/25 12:02	
2,4-Dichlorophenol	ug/L	ND	10.0	1.4	06/13/25 12:02	
2,4-Dimethylphenol	ug/L	ND	10.0	1.7	06/13/25 12:02	
2,4-Dinitrophenol	ug/L	ND	50.0	26.0	06/13/25 12:02	
2,4-Dinitrotoluene	ug/L	ND	10.0	1.6	06/13/25 12:02	
2,6-Dinitrotoluene	ug/L	ND	10.0	1.7	06/13/25 12:02	
2-Chloronaphthalene	ug/L	ND	10.0	1.7	06/13/25 12:02	
2-Chlorophenol	ug/L	ND	10.0	1.2	06/13/25 12:02	
2-Methylnaphthalene	ug/L	ND	10.0	1.9	06/13/25 12:02	
2-Methylphenol(o-Cresol)	ug/L	ND	10.0	1.9	06/13/25 12:02	
2-Nitroaniline	ug/L	ND	20.0	3.0	06/13/25 12:02	
2-Nitrophenol	ug/L	ND	10.0	1.4	06/13/25 12:02	
3&4-Methylphenol(m&p Cresol)	ug/L	ND	10.0	1.2	06/13/25 12:02	
3,3'-Dichlorobenzidine	ug/L	ND	20.0	8.1	06/13/25 12:02	
3-Nitroaniline	ug/L	ND	20.0	3.8	06/13/25 12:02	
4,6-Dinitro-2-methylphenol	ug/L	ND	20.0	7.8	06/13/25 12:02	
4-Bromophenylphenyl ether	ug/L	ND	10.0	1.8	06/13/25 12:02	
4-Chloro-3-methylphenol	ug/L	ND	10.0	3.3	06/13/25 12:02	
4-Chloroaniline	ug/L	ND	20.0	3.6	06/13/25 12:02	
4-Chlorophenylphenyl ether	ug/L	ND	10.0	2.0	06/13/25 12:02	
4-Nitroaniline	ug/L	ND	20.0	5.1	06/13/25 12:02	
4-Nitrophenol	ug/L	ND	50.0	6.6	06/13/25 12:02	
Acenaphthene	ug/L	ND	10.0	2.0	06/13/25 12:02	
Acenaphthylene	ug/L	ND	10.0	2.0	06/13/25 12:02	
Aniline	ug/L	ND	10.0	1.6	06/13/25 12:02	
Anthracene	ug/L	ND	10.0	2.3	06/13/25 12:02	
Benzo(a)anthracene	ug/L	ND	10.0	2.7	06/13/25 12:02	
Benzo(a)pyrene	ug/L	ND	10.0	2.8	06/13/25 12:02	
Benzo(b)fluoranthene	ug/L	ND	10.0	2.6	06/13/25 12:02	
Benzo(g,h,i)perylene	ug/L	ND	10.0	2.8	06/13/25 12:02	
Benzo(k)fluoranthene	ug/L	ND	10.0	2.7	06/13/25 12:02	
Benzoic Acid	ug/L	ND	50.0	22.0	06/13/25 12:02	
Benzyl alcohol	ug/L	ND	20.0	2.9	06/13/25 12:02	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

METHOD BLANK: 4838487 Matrix: Water
Associated Lab Samples: 92801798001, 92801798002, 92801798003, 92801798004, 92801798005

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
bis(2-Chloroethoxy)methane	ug/L	ND	10.0	1.8	06/13/25 12:02	
bis(2-Chloroethyl) ether	ug/L	ND	10.0	1.9	06/13/25 12:02	
bis(2-Ethylhexyl)phthalate	ug/L	ND	6.0	3.7	06/13/25 12:02	
Butylbenzylphthalate	ug/L	ND	10.0	3.1	06/13/25 12:02	
Chrysene	ug/L	ND	10.0	2.8	06/13/25 12:02	
Di-n-butylphthalate	ug/L	ND	10.0	2.2	06/13/25 12:02	
Di-n-octylphthalate	ug/L	ND	10.0	3.9	06/13/25 12:02	
Dibenz(a,h)anthracene	ug/L	ND	10.0	3.0	06/13/25 12:02	
Dibenzofuran	ug/L	ND	10.0	2.1	06/13/25 12:02	
Diethylphthalate	ug/L	ND	10.0	2.0	06/13/25 12:02	
Dimethylphthalate	ug/L	ND	10.0	2.1	06/13/25 12:02	
Fluoranthene	ug/L	ND	10.0	2.2	06/13/25 12:02	
Fluorene	ug/L	ND	10.0	2.1	06/13/25 12:02	
Hexachloro-1,3-butadiene	ug/L	ND	10.0	1.8	06/13/25 12:02	
Hexachlorobenzene	ug/L	ND	10.0	2.2	06/13/25 12:02	
Hexachlorocyclopentadiene	ug/L	ND	10.0	1.6	06/13/25 12:02	
Hexachloroethane	ug/L	ND	10.0	1.4	06/13/25 12:02	
Indeno(1,2,3-cd)pyrene	ug/L	ND	10.0	2.9	06/13/25 12:02	
Isophorone	ug/L	ND	10.0	1.7	06/13/25 12:02	
N-Nitroso-di-n-propylamine	ug/L	ND	10.0	1.3	06/13/25 12:02	
N-Nitrosodimethylamine	ug/L	ND	10.0	1.9	06/13/25 12:02	
N-Nitrosodiphenylamine	ug/L	ND	10.0	3.0	06/13/25 12:02	
Naphthalene	ug/L	ND	10.0	2.1	06/13/25 12:02	
Nitrobenzene	ug/L	ND	10.0	1.9	06/13/25 12:02	
Pentachlorophenol	ug/L	ND	20.0	3.8	06/13/25 12:02	
Phenanthrene	ug/L	ND	10.0	2.0	06/13/25 12:02	
Phenol	ug/L	ND	10.0	1.4	06/13/25 12:02	
Pyrene	ug/L	ND	10.0	2.2	06/13/25 12:02	
2,4,6-Tribromophenol (S)	%	71	10-166		06/13/25 12:02	
2-Fluorobiphenyl (S)	%	27	10-130		06/13/25 12:02	
2-Fluorophenol (S)	%	40	10-130		06/13/25 12:02	
Nitrobenzene-d5 (S)	%	44	10-133		06/13/25 12:02	
Phenol-d6 (S)	%	37	10-130		06/13/25 12:02	
Terphenyl-d14 (S)	%	84	10-193		06/13/25 12:02	

LABORATORY CONTROL SAMPLE: 4838488

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,2,4-Trichlorobenzene	ug/L	50	23.0	46	14-130	
1,2-Dichlorobenzene	ug/L	50	14.1	28	10-130	
1,3-Dichlorobenzene	ug/L	50	12.0	24	10-130	
1,4-Dichlorobenzene	ug/L	50	12.4	25	10-130	
1-Methylnaphthalene	ug/L	50	38.8	78	26-131	
2,2'-Oxybis(1-chloropropane)	ug/L	50	27.3	55	23-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

LABORATORY CONTROL SAMPLE: 4838488

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
2,4,5-Trichlorophenol	ug/L	50	47.2	94	36-150	
2,4,6-Trichlorophenol	ug/L	50	47.2	94	30-151	
2,4-Dichlorophenol	ug/L	50	42.3	85	36-140	
2,4-Dimethylphenol	ug/L	50	42.8	86	36-155	
2,4-Dinitrophenol	ug/L	250	274	110	10-169	
2,4-Dinitrotoluene	ug/L	50	51.9	104	46-160	
2,6-Dinitrotoluene	ug/L	50	51.8	104	47-161	
2-Chloronaphthalene	ug/L	50	43.3	87	29-134	
2-Chlorophenol	ug/L	50	33.4	67	29-130	
2-Methylnaphthalene	ug/L	50	37.9	76	26-130	
2-Methylphenol(o-Cresol)	ug/L	50	39.3	79	32-130	
2-Nitroaniline	ug/L	100	100	100	41-150	
2-Nitrophenol	ug/L	50	38.6	77	31-145	
3&4-Methylphenol(m&p Cresol)	ug/L	50	38.5	77	29-130	
3,3'-Dichlorobenzidine	ug/L	100	78.8	79	46-153	
3-Nitroaniline	ug/L	100	94.8	95	47-156	
4,6-Dinitro-2-methylphenol	ug/L	100	94.4	94	23-161	
4-Bromophenylphenyl ether	ug/L	50	44.1	88	45-143	
4-Chloro-3-methylphenol	ug/L	100	92.8	93	42-143	
4-Chloroaniline	ug/L	100	76.9	77	37-135	
4-Chlorophenylphenyl ether	ug/L	50	46.5	93	43-140	
4-Nitroaniline	ug/L	100	97.5	98	47-157	
4-Nitrophenol	ug/L	250	157	63	10-130	
Acenaphthene	ug/L	50	46.8	94	38-138	
Acenaphthylene	ug/L	50	49.3	99	39-139	
Aniline	ug/L	50	25.7	51	16-130	
Anthracene	ug/L	50	46.0	92	45-136	
Benzo(a)anthracene	ug/L	50	43.4	87	52-151	
Benzo(a)pyrene	ug/L	50	48.6	97	46-165	
Benzo(b)fluoranthene	ug/L	50	48.1	96	44-170	
Benzo(g,h,i)perylene	ug/L	50	48.9	98	39-171	
Benzo(k)fluoranthene	ug/L	50	50.3	101	43-168	
Benzoic Acid	ug/L	250	149	60	10-130	
Benzyl alcohol	ug/L	100	81.4	81	33-134	
bis(2-Chloroethoxy)methane	ug/L	50	43.8	88	37-140	
bis(2-Chloroethyl) ether	ug/L	50	35.0	70	33-136	
bis(2-Ethylhexyl)phthalate	ug/L	50	50.5	101	50-169	
Butylbenzylphthalate	ug/L	50	49.8	100	50-174	
Chrysene	ug/L	50	43.9	88	52-148	
Di-n-butylphthalate	ug/L	50	49.3	99	51-154	
Di-n-octylphthalate	ug/L	50	51.2	102	44-170	
Dibenz(a,h)anthracene	ug/L	50	48.2	96	41-171	
Dibenzofuran	ug/L	50	47.6	95	42-157	
Diethylphthalate	ug/L	50	51.1	102	50-149	
Dimethylphthalate	ug/L	50	48.7	97	47-146	
Fluoranthene	ug/L	50	46.6	93	51-152	
Fluorene	ug/L	50	48.4	97	46-143	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

LABORATORY CONTROL SAMPLE: 4838488

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Hexachloro-1,3-butadiene	ug/L	50	16.9	34	10-130	
Hexachlorobenzene	ug/L	50	44.6	89	40-139	
Hexachlorocyclopentadiene	ug/L	50	26.1	52	10-130	
Hexachloroethane	ug/L	50	11.4	23	10-130	
Indeno(1,2,3-cd)pyrene	ug/L	50	44.8	90	40-172	
Isophorone	ug/L	50	48.5	97	37-143	
N-Nitroso-di-n-propylamine	ug/L	50	47.2	94	38-145	
N-Nitrosodimethylamine	ug/L	50	33.7	67	30-130	
N-Nitrosodiphenylamine	ug/L	50	47.3	95	46-144	
Naphthalene	ug/L	50	28.4	57	21-130	
Nitrobenzene	ug/L	50	36.9	74	33-136	
Pentachlorophenol	ug/L	100	90.9	91	19-156	
Phenanthrene	ug/L	50	46.6	93	49-143	
Phenol	ug/L	50	26.4	53	18-130	
Pyrene	ug/L	50	45.6	91	48-156	
2,4,6-Tribromophenol (S)	%			90	10-166	
2-Fluorobiphenyl (S)	%			61	10-130	
2-Fluorophenol (S)	%			44	10-130	
Nitrobenzene-d5 (S)	%			58	10-133	
Phenol-d6 (S)	%			44	10-130	
Terphenyl-d14 (S)	%			88	10-193	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 4838605 4838606

Parameter	Units	92801798001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
1,2,4-Trichlorobenzene	ug/L	ND	100	100	26.6	47.0	27	47	10-130	55	30	R1
1,2-Dichlorobenzene	ug/L	ND	100	100	13.3J	26.9	13	27	10-130		30	
1,3-Dichlorobenzene	ug/L	ND	100	100	10J	21.9	10	22	10-130		30	
1,4-Dichlorobenzene	ug/L	ND	100	100	11.0J	23.6	11	24	10-130		30	
1-Methylnaphthalene	ug/L	ND	100	100	58.9	73.3	59	73	10-130	22	30	
2,2'-Oxybis(1-chloropropane)	ug/L	ND	100	100	38.9	49.9	39	50	10-132	25	30	
2,4,5-Trichlorophenol	ug/L	ND	100	100	79.4	81.6	79	82	10-174	3	30	
2,4,6-Trichlorophenol	ug/L	ND	100	100	78.7	78.6	79	79	10-173	0	30	
2,4-Dichlorophenol	ug/L	ND	100	100	69.0	74.4	69	74	10-153	8	30	
2,4-Dimethylphenol	ug/L	ND	100	100	73.7	75.5	74	75	12-157	2	30	
2,4-Dinitrophenol	ug/L	ND	500	500	348	ND	70	7	10-165		30	M1
2,4-Dinitrotoluene	ug/L	ND	100	100	86.9	86.3	87	86	29-168	1	30	
2,6-Dinitrotoluene	ug/L	ND	100	100	88.2	88.7	88	89	28-168	1	30	
2-Chloronaphthalene	ug/L	ND	100	100	68.9	81.1	69	81	11-136	16	30	
2-Chlorophenol	ug/L	ND	100	100	46.8	60.2	47	60	10-134	25	30	
2-Methylnaphthalene	ug/L	ND	100	100	56.4	71.6	56	72	10-131	24	30	
2-Methylphenol(o-Cresol)	ug/L	ND	100	100	61.9	72.1	62	72	10-130	15	30	
2-Nitroaniline	ug/L	ND	200	200	168	171	84	85	19-156	1	30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 4838605 4838606

Parameter	Units	92801798001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
2-Nitrophenol	ug/L	ND	100	100	56.9	67.8	57	68	10-160	18	30	
3&4-Methylphenol(m&p Cresol)	ug/L	ND	100	100	61.7	69.7	62	70	10-132	12	30	
3,3'-Dichlorobenzidine	ug/L	ND	200	200	138	146	69	73	10-173	6	30	
3-Nitroaniline	ug/L	ND	200	200	158	165	79	83	19-169	5	30	
4,6-Dinitro-2-methylphenol	ug/L	ND	200	200	136	83.8	68	42	10-178	47	30	R1
4-Bromophenylphenyl ether	ug/L	ND	100	100	78.0	79.4	78	79	28-149	2	30	
4-Chloro-3-methylphenol	ug/L	ND	200	200	159	161	79	80	18-148	1	30	
4-Chloroaniline	ug/L	ND	200	200	118	137	59	68	10-141	14	30	
4-Chlorophenylphenyl ether	ug/L	ND	100	100	78.4	81.0	78	81	24-144	3	30	
4-Nitroaniline	ug/L	ND	200	200	163	161	81	80	18-170	1	30	
4-Nitrophenol	ug/L	ND	500	500	252	151	50	30	10-130	51	30	R1
Acenaphthene	ug/L	ND	100	100	77.6	83.4	78	83	18-142	7	30	
Acenaphthylene	ug/L	ND	100	100	81.2	86.9	81	87	18-143	7	30	
Aniline	ug/L	ND	100	100	19.0J	47.8	19	48	10-130		30	
Anthracene	ug/L	ND	100	100	80.7	81.3	81	81	32-138	1	30	
Benzo(a)anthracene	ug/L	ND	100	100	76.5	74.4	77	74	41-155	3	30	
Benzo(a)pyrene	ug/L	ND	100	100	82.5	82.0	83	82	10-167	1	30	
Benzo(b)fluoranthene	ug/L	ND	100	100	81.2	81.3	81	81	31-172	0	30	
Benzo(g,h,i)perylene	ug/L	ND	100	100	78.9	78.2	79	78	26-177	1	30	
Benzo(k)fluoranthene	ug/L	ND	100	100	88.2	83.7	88	84	31-168	5	30	
Benzoic Acid	ug/L	ND	500	500	253	ND	51	0	10-130		30	M1
Benzyl alcohol	ug/L	ND	200	200	134	145	67	72	10-136	8	30	
bis(2-Chloroethoxy)methane	ug/L	ND	100	100	69.3	75.1	69	75	12-143	8	30	
bis(2-Chloroethyl) ether	ug/L	ND	100	100	51.0	60.4	51	60	10-139	17	30	
bis(2-Ethylhexyl)phthalate	ug/L	ND	100	100	93.2	87.5	93	87	41-173	6	30	
Butylbenzylphthalate	ug/L	ND	100	100	92.6	87.8	93	88	38-182	5	30	
Chrysene	ug/L	ND	100	100	76.4	74.8	76	75	41-152	2	30	
Di-n-butylphthalate	ug/L	ND	100	100	86.5	85.8	87	86	37-162	1	30	
Di-n-octylphthalate	ug/L	ND	100	100	90.1	84.4	90	84	36-176	7	30	
Dibenz(a,h)anthracene	ug/L	ND	100	100	77.8	77.5	78	77	29-175	0	30	
Dibenzofuran	ug/L	ND	100	100	79.3	83.0	79	83	23-144	4	30	
Diethylphthalate	ug/L	ND	100	100	86.5	85.9	87	86	33-154	1	30	
Dimethylphthalate	ug/L	ND	100	100	84.2	83.0	84	83	29-150	1	30	
Fluoranthene	ug/L	ND	100	100	79.2	79.4	79	79	40-156	0	30	
Fluorene	ug/L	ND	100	100	81.3	83.6	81	84	26-148	3	30	
Hexachloro-1,3-butadiene	ug/L	ND	100	100	16.7J	35.2	17	35	10-130		30	
Hexachlorobenzene	ug/L	ND	100	100	77.5	76.6	78	77	27-145	1	30	
Hexachlorocyclopentadiene	ug/L	ND	100	100	25.0	39.7	25	40	10-130	45	30	R1
Hexachloroethane	ug/L	ND	100	100	7.7J	20.8	8	21	10-130		30	M1
Indeno(1,2,3-cd)pyrene	ug/L	ND	100	100	72.8	71.8	73	72	28-176	1	30	
Isophorone	ug/L	ND	100	100	81.8	84.1	82	84	14-145	3	30	
N-Nitroso-di-n-propylamine	ug/L	ND	100	100	76.2	84.1	76	84	12-149	10	30	
N-Nitrosodimethylamine	ug/L	ND	100	100	52.6	59.5	53	60	10-130	12	30	
N-Nitrosodiphenylamine	ug/L	ND	100	100	83.2	83.6	83	84	29-149	1	30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 4838605 4838606

Parameter	Units	92801798001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Naphthalene	ug/L	ND	100	100	37.4	57.3	37	57	10-130	42	30	R1
Nitrobenzene	ug/L	ND	100	100	54.4	67.1	54	67	10-145	21	30	
Pentachlorophenol	ug/L	ND	200	200	151	131	76	65	10-178	15	30	
Phenanthrene	ug/L	ND	100	100	80.6	80.9	81	81	36-146	0	30	
Phenol	ug/L	ND	100	100	38.8	49.0	39	49	10-130	23	30	
Pyrene	ug/L	ND	100	100	82.9	79.8	83	80	42-156	4	30	
2,4,6-Tribromophenol (S)	%						73	73	10-166			
2-Fluorobiphenyl (S)	%						21	59	10-130			
2-Fluorophenol (S)	%						24	36	10-130			
Nitrobenzene-d5 (S)	%						27	46	10-133			
Phenol-d6 (S)	%						30	40	10-130			
Terphenyl-d14 (S)	%						77	75	10-193			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801798

QC Batch: 941565
QC Batch Method: SW-846
Analysis Method: SW-846
Analysis Description: Dry Weight/Percent Moisture
Laboratory: Pace Analytical Services - Charlotte

Associated Lab Samples: 92801798007, 92801798008

SAMPLE DUPLICATE: 4838959

Parameter	Units	92801577001 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	96.9	96.9	0	25	N2

SAMPLE DUPLICATE: 4838960

Parameter	Units	92801945002 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	52.5	52.3	0	25	N2

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALIFIERS

Project: Fortress Wood Products
Pace Project No.: 92801798

DEFINITIONS

DF - Dilution Factor, if reported, represents the factor applied to the reported data due to dilution of the sample aliquot.

ND - Not Detected at or above adjusted reporting limit.

TNTC - Too Numerous To Count

J - Estimated concentration above the adjusted method detection limit and below the adjusted reporting limit.

MDL - Adjusted Method Detection Limit.

PQL - Practical Quantitation Limit.

RL - Reporting Limit - The lowest concentration value that meets project requirements for quantitative data with known precision and bias for a specific analyte in a specific matrix.

S - Surrogate

1,2-Diphenylhydrazine decomposes to and cannot be separated from Azobenzene using Method 8270. The result for each analyte is a combined concentration.

Consistent with EPA guidelines, unrounded data are displayed and have been used to calculate % recovery and RPD values.

LCS(D) - Laboratory Control Sample (Duplicate)

MS(D) - Matrix Spike (Duplicate)

DUP - Sample Duplicate

RPD - Relative Percent Difference

NC - Not Calculable.

SG - Silica Gel - Clean-Up

U - Indicates the compound was analyzed for, but not detected.

Acid preservation may not be appropriate for 2 Chloroethylvinyl ether.

A separate vial preserved to a pH of 4-5 is recommended in SW846 Chapter 4 for the analysis of Acrolein and Acrylonitrile by EPA Method 8260.

N-Nitrosodiphenylamine decomposes and cannot be separated from Diphenylamine using Method 8270. The result reported for each analyte is a combined concentration.

Reported results are not rounded until the final step prior to reporting. Therefore, calculated parameters that are typically reported as "Total" may vary slightly from the sum of the reported component parameters.

Pace Analytical is TNI accredited. Contact your Pace PM for the current list of accredited analytes.

TNI - The NELAC Institute.

ANALYTE QUALIFIERS

C0	Result confirmed by second analysis.
IH	This analyte exceeded secondary source verification criteria high for the initial calibration. The reported results should be considered an estimated value.
IK	The recalculated concentration of the calibration standard(s) did not meet method acceptance criteria; this result should be considered an estimated value.
M1	Matrix spike recovery exceeded QC limits. Batch accepted based on laboratory control sample (LCS) recovery.
N2	The lab does not hold NELAC/TNI accreditation for this parameter but other accreditations/certifications may apply. A complete list of accreditations/certifications is available upon request.
R1	RPD value was outside control limits.
S0	Surrogate recovery outside laboratory control limits.
v1	The continuing calibration verification was above the method acceptance limit. Any detection for the analyte in the associated samples may have a high bias.
v2	The continuing calibration verification was below the method acceptance limit. The analyte was not detected in the associated samples and the sensitivity of the instrument was verified with a reporting limit check standard.
v3	The continuing calibration verification was below the method acceptance limit. Any detection for the analyte in the associated samples may have low bias.

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA CROSS REFERENCE TABLE

Project: Fortress Wood Products
Pace Project No.: 92801798

Lab ID	Sample ID	QC Batch Method	QC Batch	Analytical Method	Analytical Batch
92801798007	**TX-1**	EPA 3546	941964	EPA 8082A	942735
92801798008	**TX-DUP**	EPA 3546	941964	EPA 8082A	942735
92801798001	**GW-7**	EPA 3010	1107415	EPA 6020	1107437
92801798002	**EB-1**	EPA 3010	1107415	EPA 6020	1107437
92801798003	**GW-1**	EPA 3010	1107415	EPA 6020	1107437
92801798004	**GW-2**	EPA 3010	1107415	EPA 6020	1107437
92801798005	**DUP-1**	EPA 3010	1107415	EPA 6020	1107437
92801798001	**GW-7**	EPA 7470	1107960	EPA 7470	1107984
92801798002	**EB-1**	EPA 7470	1107960	EPA 7470	1107984
92801798003	**GW-1**	EPA 7470	1107960	EPA 7470	1107984
92801798004	**GW-2**	EPA 7470	1107960	EPA 7470	1107984
92801798005	**DUP-1**	EPA 7470	1107960	EPA 7470	1107984
92801798001	**GW-7**	EPA 3510C	941486	EPA 8270E	941752
92801798002	**EB-1**	EPA 3510C	941486	EPA 8270E	941752
92801798003	**GW-1**	EPA 3510C	941486	EPA 8270E	941752
92801798004	**GW-2**	EPA 3510C	941486	EPA 8270E	941752
92801798005	**DUP-1**	EPA 3510C	941486	EPA 8270E	941752
92801798001	**GW-7**	EPA 8260D	941743		
92801798002	**EB-1**	EPA 8260D	941470		
92801798003	**GW-1**	EPA 8260D	941743		
92801798004	**GW-2**	EPA 8260D	941743		
92801798005	**DUP-1**	EPA 8260D	941743		
92801798006	**TB-1**	EPA 8260D	941470		
92801798007	**TX-1**	SW-846	941565		
92801798008	**TX-DUP**	SW-846	941565		

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Laboratory receiving samples:
Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☑ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☐

Sample Condition Upon Receipt

Client Name: Ed Southeast

Project #: WO# : 92801798

92801798

Courier: ☐ Fed Ex ☐ UPS ☐ USPS ☐ Client ☐ Commercial ☑ Pace ☐ Other:____

Custody Seal Present? ☐ Yes ☑ No Seals Intact? ☐ Yes ☑ No ☐ N/A

Date/Initials Person Examining Contents: LJ 6/11/25

Packing Material: ☑ Bubble Wrap ☑ Bubble Bags ☐ None ☑ Other

Biological Tissue Frozen? ☐ Yes ☐ No ☑ N/A

Thermometer: ☐ IR Gun ID: 92T082

Type of Ice: ☑ Wet ☐ Blue ☐ None

Cooler Temp: 2.2 Correction Factor: Add/Subtract (°C) 0

Temp should be above freezing to 6°C
☐ Samples out of temp criteria. Samples on ice, cooling process has begun

Cooler Temp Corrected (°C): 2.2

USDA Regulated Soil (☐ N/A, water sample)
Did samples originate in a quarantine zone within the United States: CA, NY, or SC (check maps)? ☐ Yes ☐ No

Did samples originate from a foreign source (internationally, including Hawaii and Puerto Rico)? ☐ Yes ☑ No

				Comments/Discrepancy:
Chain of Custody Present?	☑ Yes	☐ No	☐ N/A	1.
Samples Arrived within Hold Time?	☑ Yes	☐ No	☐ N/A	2.
Short Hold Time Analysis (<72 hr.)?	☐ Yes	☑ No	☐ N/A	3.
Rush Turn Around Time Requested?	☐ Yes	☑ No	☐ N/A	4.
Sufficient Volume?	☑ Yes	☐ No	☐ N/A	5.
Correct Containers Used?	☑ Yes	☐ No	☐ N/A	6.
-Pace Containers Used?	☑ Yes	☐ No	☐ N/A	
Containers Intact?	☑ Yes	☐ No	☐ N/A	7.
Dissolved analysis: Samples Field Filtered?	☐ Yes	☑ No	☐ N/A	8.
Sample Labels Match COC? -Includes Date/Time/ID/Analysis Matrix: WT-SL	☑ Yes	☐ No	☐ N/A	9.
Headspace in VOA Vials (>5-6mm)?	☐ Yes	☑ No	☐ N/A	10.
Trip Blank Present?	☑ Yes	☐ No	☐ N/A	11.
Trip Blank Custody Seals Present?	☐ Yes	☐ No	☐ N/A	

COMMENTS/SAMPLE DISCREPANCY

Field Data Required? ☐ Yes ☐ No

Lot ID of split containers:

CLIENT NOTIFICATION/RESOLUTION

Person contacted: Date/Time:

Project Manager SCURF Review: Date:

Project Manager SRF Review: Date:

WO#: 92801798

*Check mark top half of box if pH and/or dechlorination is verified and within the acceptance range for preservation samples.
Exceptions: VOA, Coliform, TOC, Oil and Grease, DRO/8015 (water) DOC, LLHg
**Bottom half of box is to list number of bottles
***Check all unpreserved Nitrates for chlorine

Project #
PM: AMB Due Date: 06/18/25
CLIENT: 92-ECS

Laboratory Receiving location: Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☑ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☐

Client ECS Associates Profile# EZ (Circle one) 3268171 Notes

Item#	BP4U-125 mL Plastic Unpreserved (N/A) (Cl-)	BP3U-250 mL Plastic Unpreserved (N/A)	BP2U-500 mL Plastic Unpreserved (N/A)	BP1U-1 liter Plastic Unpreserved (N/A)		BP4S-125 mL Plastic H2SO4 (pH < 2) (Cl-)	BP3N-250 mL plastic HNO3 (pH < 2)	BP2Z-125 mL Plastic Zn Acetate & NaOH (>9)	BP4B-125 mL Plastic NaOH (pH > 12) (Cl-)	WGFU-Wide-mouthed Glass jar Unpreserved	AG1U-1 liter Amber Unpreserved (N/A) (Cl-)	AG1H-1 liter Amber HCl (pH < 2)	AG3U-250 mL Amber Unpreserved (N/A) (Cl-)	AG1S-1 liter Amber H2SO4 (pH < 2)	AG3S-250 mL Amber H2SO4 (pH < 2)	DG9A-40 mL Amber NH4Cl (N/A)(Cl-)	DG9H-40 mL VOA HCl (N/A)	VG9T-40 mL VOA Na2S2O3 (N/A)	VG9U-40 mL VOA Unpreserved (N/A)	DG9V-40 mL VOA H3PO4 (N/A)	KP2U-50 mL Plastic Unpreserved (N/A)	V/GK (3 vials per kit)-VPH/Gask kit (N/A)	SP5T-125 mL Sterile Plastic (N/A - lab)	SP2T-250 mL Sterile Plastic (N/A - lab)		BP3R-250 mL Plastic (NH4)2SO4 (9.3-9.7)	AG0U-100 mL Amber Unpreserved (N/A) (Cl-)	VSGU-20 mL Scintillation vials (N/A)	DG9U-40 mL Amber Unpreserved vials (N/A)
CC							SI			CH							CH											CH		
1							1										3											2		
2							1										3											2		
3							1										3											2		
4							1										3											2		
5							1										3											2		
6																														
7										2																				
8										2																				
9																														
10																														
11																														
12																														

pH Adjustment Log for Preserved Samples

Sample ID	Type of Preservative	pH upon receipt	Date preservation adjusted	Time preservation adjusted	Amount of Preservative added	Lot #

Note: Whenever there is a discrepancy affecting North Carolina compliance samples, a copy of this form will be sent to the North Carolina DENR Certification Office (i.e. Out of hold, incorrect preservative, out of temp, incorrect containers.

Pace® Location Requested (City/State):
Pace Analytical Charlotte
9800 Kincey Ave. Suite 100, Huntersville, NC 28078

CHAIN-OF-CUSTODY Analytical Request Document

Chain-of-Custody is a LEGAL DOCUMENT - Complete all relevant fields

LAB USE ONLY- Affix Workorder/Login Label Here

Scan QR Code for instructions

Company Name:	ECS Southeast, LLC-Charlotte	Contact/Report To:	Emery Lovekamp
Street Address:	1812 Center Park Drive Suite D Charlotte, NC 28217	Phone #: E-Mail: Cc E-Mail:	704-525-5152 elovekamp@ecslimited.com
Customer Project #:	24413-C	Invoice To:	AP-ECS Charlotte
Project Name:	Fortress Wood Products	Invoice E-Mail: Purchase Order # (if applicable): Quote #:	ecs-49@ecslimited.com 24413-C
Site Collection Info/Facility ID (as applicable):	GUILFORD COUNTY		
Time Zone Collected: [ ] AK [ ] PT [ ] MT [ ] CT [X] ET		County / State origin of sample(s):	North Carolina
Data Deliverables: [ ] Level II [ ] Level III [ ] Level IV [ ] EQUIS [ ] Other		Regulatory Program (DW, RCRA, etc.) as applicable:	Reportable [ ] Yes [ ] No BROWNFIELDS
		Rush (Pre-approval required): [ ] Same Day [ ] 1 Day [ ] 2 Day [ ] 3 Day [ ] Other _____	DW PWSID # or WW Permit # as applicable:
		Date Results Requested: STANDARD	Field Filtered (if applicable): [ ] Yes [X] No Analysis:

Specify Container Size **

Identify Container Preservative Type***

Analysis Requested

**Container Size: (1) 1L, (2) 500mL, (3) 250mL, (4) 125mL, (5) 100mL, (6) 40mL vial, (7) EnCore, (8) TerraCore, (9) 90mL, (10) Other

*** Preservative Types: (1) None, (2) HNO3, (3) H2SO4, (4) HCl, (5) NaOH, (6) Zn Acetate, (7) NaHSO4, (8) Sod. Thiosulfate, (9) Ascorbic Acid, (10) MeOH, (11) Other

Lab Use Only: Proj. Mgr: Angela Baioni; AcctNum / Client ID:; Table #:; Profile / Template: 18978; Prelog / Bottle Ord. ID: EZ 3268171

Preservation non-conformance identified for sample.

* Matrix Codes (Insert in Matrix box below): Drinking Water (DW), Ground Water (GW), Waste Water (WW), Product (P), Soil/Solid (SS), Oil (OL), Wipe (WP), Tissue (TS), Bioassay (B), Vapor (V), Surface Water (SW),Sediment (SED), Sludge (SL), Caulk (CK), Leachate (LL), Biosolid (BS), Other (OT)

Customer Sample ID	Matrix *	Comp / Grab	Composite Start Date	Composite Start Time	Collected or Composite End Date	Collected or Composite End Time	# Cont.	Res. Chlorine Results	Res. Chlorine Units	1633 PFAS	7199 Hexchrome	8260 VOC	8260 VOC-trip blank	8270 SVOC	PPL Metals 6020/7470	BCB2 PCB	PCB CONGENERS (HOLD)	Sample Comment
GW-7	GW	G			6/10/25	1100	6					X		X	X			
EB-1	W					1120	6					X		X	X			
GW-1	GW					1325	6					X		X	X			
GW-2	GW					1420	6					X		X	X			
DUP-1	GW					—	6					X		X	X			
TB-1	W				6/5/25	—	2						X					
TX-1	SS				6/10/25	1500	2									X	X	HOLD CONGENERS
TX-DUP	SS	↓			↓	—	2									X	X	HOLD CONGENERS

Additional Instructions from Pace®:

Collected By: (Printed Name) EMERY LOVEKAMP
Signature:

Customer Remarks / Special Conditions / Possible Hazards:

# Coolers:	Thermometer ID:	Correction Factor (°C):	Obs. Temp. (°C)	Corrected Temp. (°C)	On Ice:
1	92T082		2.2	2.2	

Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Tracking Number:
EL	6/10/25 1545	Erick Hawkins/Pace	6/11/25 735	
Erick Hawkins/Pace	6/11/25 1332	LJ Pace HVL	6/11/25 13:32	Delivered by: [ ] In-Person [ ] Courier [ ] FedEX [ ] UPS [ ] Other
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Page: 2 of 3

Submitting a sample via this chain of custody constitutes acknowledgment and acceptance of the Pace® Terms and Conditions found at https://www.pacelabs.com/resource-library/resource/pace-terms-and-conditions/

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

June 25, 2025

Emery Lovekamp
ECS Southeast, LLC-Charlotte
1812 Center Park Drive
Suite D
Charlotte, NC 28217

RE: Project: Fortress Wood Products
Pace Project No.: 92802378

Dear Emery Lovekamp:

Enclosed are the analytical results for sample(s) received by the laboratory on June 13, 2025. The results relate only to the samples included in this report. Results reported herein conform to the applicable TNI/NELAC Standards and the laboratory's Quality Manual, where applicable, unless otherwise noted in the body of the report.

The test results provided in this final report were generated by each of the following laboratories within the Pace Network:

- Pace Analytical Services - Charlotte
- Pace Analytical Services - Ormond Beach

If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Angela M. Baioni

Angela Baioni
angela.baioni@pacelabs.com
612-473-6801
Project Manager

Enclosures

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

CERTIFICATIONS

Project: Fortress Wood Products
Pace Project No.: 92802378

Pace Analytical Services Ormond Beach
8 East Tower Circle, Ormond Beach, FL 32174
Alaska DEC- CS/UST/LUST
Alabama Certification #: 41320
California Certification# 3096
Colorado Certification: FL NELAC Reciprocity
Connecticut Certification #: PH-0216
Delaware Certification: FL NELAC Reciprocity
DoD-ANAB #:ADE-3199
Florida Certification #: E83079
Georgia Certification #: 955
Guam Certification: FL NELAC Reciprocity
Hawaii Certification: FL NELAC Reciprocity
Illinois Certification #: 200068
Indiana Certification: FL NELAC Reciprocity
Kansas Certification #: E-10383
Kentucky Certification #: 90050
Louisiana Certification #: FL NELAC Reciprocity
Louisiana Environmental Certificate #: 05007
Maine Certification #: FL01264
Maryland Certification: #346
Massachusetts Certification #: M-FL1264
Michigan Certification #: 9911
Mississippi Certification: FL NELAC Reciprocity
Missouri Certification #: 236
Montana Certification #: Cert 0074
Nebraska Certification: NE-OS-28-14
Nevada Certification: FL NELAC Reciprocity
New Hampshire Certification #: 2958
New Jersey Certification #: FL022
New York Certification #: 11608
North Carolina Environmental Certificate #: 667
North Carolina Certification #: 12710
North Dakota Certification #: R-216
Ohio DEP 87780
Oklahoma Certification #: D9947
Pennsylvania Certification #: 68-00547
Puerto Rico Certification #: FL01264
South Carolina Certification: #96042001
Tennessee Certification #: TN02974
Texas Certification: FL NELAC Reciprocity
US Virgin Islands Certification: FL NELAC Reciprocity
Utah
Utah FL NELAC Reciprocity
Virginia Environmental Certification #: 460165
West Virginia Certification #: 9962C
Wisconsin Certification #: 399079670
Wyoming (EPA Region 8): FL NELAC Reciprocity

Pace Analytical Services Charlotte
South Carolina Laboratory ID: 99006
9800 Kincey Ave. Ste 100, Huntersville, NC 28078
North Carolina Drinking Water Certification #: 37706
North Carolina Field Services Certification #: 5342
North Carolina Wastewater Certification #: 12
South Carolina Laboratory ID: 99006
South Carolina Certification #: 99006001
South Carolina Drinking Water Cert. #: 99006003
Florida/NELAP Certification #: E87627
Kentucky UST Certification #: 84
Louisiana DoH Drinking Water #: LA029
Virginia/VELAP Certification #: 460221

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE SUMMARY

Project: Fortress Wood Products
Pace Project No.: 92802378

Lab ID	Sample ID	Matrix	Date Collected	Date Received
92802378001	**GW-9**	Water	06/12/25 17:45	06/13/25 12:00
92802378002	**EB-3**	Water	06/12/25 17:50	06/13/25 12:00
92802378003	**GW-8**	Water	06/12/25 18:35	06/13/25 12:00
92802378004	**TB-3**	Water	06/11/25 00:00	06/13/25 12:00

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE ANALYTE COUNT

Project: Fortress Wood Products
Pace Project No.: 92802378

Lab ID	Sample ID	Method	Analysts	Analytes Reported	Laboratory
92802378001	**GW-9**	EPA 6020	BSL	12	PASI-O
		EPA 7470	JNK	1	PASI-O
		EPA 8270E	PKS	74	PASI-C
		EPA 8260D	LMB	63	PASI-C
92802378002	**EB-3**	EPA 6020	BSL	12	PASI-O
		EPA 7470	JNK	1	PASI-O
		EPA 8270E	PKS	74	PASI-C
		EPA 8260D	LMB	63	PASI-C
92802378003	**GW-8**	EPA 6020	BSL	12	PASI-O
		EPA 7470	JNK	1	PASI-O
		EPA 8270E	PKS	74	PASI-C
		EPA 8260D	LMB	63	PASI-C
92802378004	**TB-3**	EPA 8260D	LMB	63	PASI-C

PASI-C = Pace Analytical Services - Charlotte
PASI-O = Pace Analytical Services - Ormond Beach

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802378

Sample: GW-9 **Lab ID: 92802378001** Collected: 06/12/25 17:45 Received: 06/13/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3010 Pace Analytical Services - Ormond Beach								
Antimony	ND	ug/L	1.0	0.50	1	06/24/25 00:10	06/24/25 20:01	7440-36-0	
Arsenic	ND	ug/L	1.0	0.50	1	06/24/25 00:10	06/24/25 20:01	7440-38-2	
Beryllium	ND	ug/L	0.10	0.033	1	06/24/25 00:10	06/24/25 20:01	7440-41-7	
Cadmium	**0.22**	ug/L	0.10	0.067	1	06/24/25 00:10	06/24/25 20:01	7440-43-9	
Chromium	**1.1**	ug/L	1.0	0.50	1	06/24/25 00:10	06/24/25 20:01	7440-47-3	
Copper	**8.8**	ug/L	1.0	0.42	1	06/24/25 00:10	06/24/25 20:01	7440-50-8	
Lead	**1.5**	ug/L	1.0	0.22	1	06/24/25 00:10	06/24/25 20:01	7439-92-1	
Nickel	**2.0**	ug/L	1.0	0.26	1	06/24/25 00:10	06/24/25 20:01	7440-02-0	
Selenium	ND	ug/L	2.0	0.20	1	06/24/25 00:10	06/24/25 20:01	7782-49-2	
Silver	ND	ug/L	0.50	0.028	1	06/24/25 00:10	06/24/25 20:01	7440-22-4	
Thallium	ND	ug/L	1.0	0.11	1	06/24/25 00:10	06/24/25 20:01	7440-28-0	
Zinc	ND	ug/L	10.0	6.7	1	06/24/25 00:10	06/24/25 20:01	7440-66-6	
7470 Mercury	Analytical Method: EPA 7470 Preparation Method: EPA 7470 Pace Analytical Services - Ormond Beach								
Mercury	ND	ug/L	0.20	0.14	1	06/23/25 09:12	06/23/25 14:23	7439-97-6	
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Acenaphthene	ND	ug/L	10.0	2.0	1	06/19/25 13:05	06/20/25 18:51	83-32-9	
Acenaphthylene	ND	ug/L	10.0	2.0	1	06/19/25 13:05	06/20/25 18:51	208-96-8	
Aniline	ND	ug/L	10.0	1.6	1	06/19/25 13:05	06/20/25 18:51	62-53-3	
Anthracene	ND	ug/L	10.0	2.3	1	06/19/25 13:05	06/20/25 18:51	120-12-7	
Benzo(a)anthracene	ND	ug/L	10.0	2.7	1	06/19/25 13:05	06/20/25 18:51	56-55-3	
Benzo(a)pyrene	ND	ug/L	10.0	2.8	1	06/19/25 13:05	06/20/25 18:51	50-32-8	
Benzo(b)fluoranthene	ND	ug/L	10.0	2.6	1	06/19/25 13:05	06/20/25 18:51	205-99-2	
Benzo(g,h,i)perylene	ND	ug/L	10.0	2.8	1	06/19/25 13:05	06/20/25 18:51	191-24-2	
Benzo(k)fluoranthene	ND	ug/L	10.0	2.7	1	06/19/25 13:05	06/20/25 18:51	207-08-9	
Benzoic Acid	ND	ug/L	50.0	22.0	1	06/19/25 13:05	06/20/25 18:51	65-85-0	
Benzyl alcohol	ND	ug/L	20.0	2.9	1	06/19/25 13:05	06/20/25 18:51	100-51-6	
4-Bromophenylphenyl ether	ND	ug/L	10.0	1.8	1	06/19/25 13:05	06/20/25 18:51	101-55-3	
Butylbenzylphthalate	ND	ug/L	10.0	3.1	1	06/19/25 13:05	06/20/25 18:51	85-68-7	
4-Chloro-3-methylphenol	ND	ug/L	10.0	3.3	1	06/19/25 13:05	06/20/25 18:51	59-50-7	
4-Chloroaniline	ND	ug/L	20.0	3.6	1	06/19/25 13:05	06/20/25 18:51	106-47-8	
bis(2-Chloroethoxy)methane	ND	ug/L	10.0	1.8	1	06/19/25 13:05	06/20/25 18:51	111-91-1	
bis(2-Chloroethyl) ether	ND	ug/L	10.0	1.9	1	06/19/25 13:05	06/20/25 18:51	111-44-4	
2-Chloronaphthalene	ND	ug/L	10.0	1.7	1	06/19/25 13:05	06/20/25 18:51	91-58-7	
2-Chlorophenol	ND	ug/L	10.0	1.2	1	06/19/25 13:05	06/20/25 18:51	95-57-8	
4-Chlorophenylphenyl ether	ND	ug/L	10.0	2.0	1	06/19/25 13:05	06/20/25 18:51	7005-72-3	
Chrysene	ND	ug/L	10.0	2.8	1	06/19/25 13:05	06/20/25 18:51	218-01-9	
Dibenz(a,h)anthracene	ND	ug/L	10.0	3.0	1	06/19/25 13:05	06/20/25 18:51	53-70-3	
Dibenzofuran	ND	ug/L	10.0	2.1	1	06/19/25 13:05	06/20/25 18:51	132-64-9	
1,2-Dichlorobenzene	ND	ug/L	10.0	1.8	1	06/19/25 13:05	06/20/25 18:51	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	10.0	1.6	1	06/19/25 13:05	06/20/25 18:51	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	10.0	1.7	1	06/19/25 13:05	06/20/25 18:51	106-46-7	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802378

Sample: GW-9 **Lab ID: 92802378001** Collected: 06/12/25 17:45 Received: 06/13/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
3,3'-Dichlorobenzidine	ND	ug/L	20.0	8.1	1	06/19/25 13:05	06/20/25 18:51	91-94-1	
2,4-Dichlorophenol	ND	ug/L	10.0	1.4	1	06/19/25 13:05	06/20/25 18:51	120-83-2	
Diethylphthalate	ND	ug/L	10.0	2.0	1	06/19/25 13:05	06/20/25 18:51	84-66-2	
2,4-Dimethylphenol	ND	ug/L	10.0	1.7	1	06/19/25 13:05	06/20/25 18:51	105-67-9	
Dimethylphthalate	ND	ug/L	10.0	2.1	1	06/19/25 13:05	06/20/25 18:51	131-11-3	
Di-n-butylphthalate	ND	ug/L	10.0	2.2	1	06/19/25 13:05	06/20/25 18:51	84-74-2	
4,6-Dinitro-2-methylphenol	ND	ug/L	20.0	7.8	1	06/19/25 13:05	06/20/25 18:51	534-52-1	
2,4-Dinitrophenol	ND	ug/L	50.0	26.0	1	06/19/25 13:05	06/20/25 18:51	51-28-5	
2,4-Dinitrotoluene	ND	ug/L	10.0	1.6	1	06/19/25 13:05	06/20/25 18:51	121-14-2	
2,6-Dinitrotoluene	ND	ug/L	10.0	1.7	1	06/19/25 13:05	06/20/25 18:51	606-20-2	
Di-n-octylphthalate	ND	ug/L	10.0	3.9	1	06/19/25 13:05	06/20/25 18:51	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	ug/L	6.0	3.7	1	06/19/25 13:05	06/20/25 18:51	117-81-7	
Fluoranthene	ND	ug/L	10.0	2.2	1	06/19/25 13:05	06/20/25 18:51	206-44-0	
Fluorene	ND	ug/L	10.0	2.1	1	06/19/25 13:05	06/20/25 18:51	86-73-7	
Hexachloro-1,3-butadiene	ND	ug/L	10.0	1.8	1	06/19/25 13:05	06/20/25 18:51	87-68-3	
Hexachlorobenzene	ND	ug/L	10.0	2.2	1	06/19/25 13:05	06/20/25 18:51	118-74-1	
Hexachlorocyclopentadiene	ND	ug/L	10.0	1.6	1	06/19/25 13:05	06/20/25 18:51	77-47-4	
Hexachloroethane	ND	ug/L	10.0	1.4	1	06/19/25 13:05	06/20/25 18:51	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	ug/L	10.0	2.9	1	06/19/25 13:05	06/20/25 18:51	193-39-5	
Isophorone	ND	ug/L	10.0	1.7	1	06/19/25 13:05	06/20/25 18:51	78-59-1	
1-Methylnaphthalene	ND	ug/L	10.0	2.0	1	06/19/25 13:05	06/20/25 18:51	90-12-0	
2-Methylnaphthalene	ND	ug/L	10.0	1.9	1	06/19/25 13:05	06/20/25 18:51	91-57-6	
2-Methylphenol(o-Cresol)	ND	ug/L	10.0	1.9	1	06/19/25 13:05	06/20/25 18:51	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	ug/L	10.0	1.2	1	06/19/25 13:05	06/20/25 18:51	15831-10-4	
Naphthalene	ND	ug/L	10.0	2.1	1	06/19/25 13:05	06/20/25 18:51	91-20-3	
2-Nitroaniline	ND	ug/L	20.0	3.0	1	06/19/25 13:05	06/20/25 18:51	88-74-4	
3-Nitroaniline	ND	ug/L	20.0	3.8	1	06/19/25 13:05	06/20/25 18:51	99-09-2	
4-Nitroaniline	ND	ug/L	20.0	5.1	1	06/19/25 13:05	06/20/25 18:51	100-01-6	
Nitrobenzene	ND	ug/L	10.0	1.9	1	06/19/25 13:05	06/20/25 18:51	98-95-3	
2-Nitrophenol	ND	ug/L	10.0	1.4	1	06/19/25 13:05	06/20/25 18:51	88-75-5	
4-Nitrophenol	ND	ug/L	50.0	6.6	1	06/19/25 13:05	06/20/25 18:51	100-02-7	
N-Nitrosodimethylamine	ND	ug/L	10.0	1.9	1	06/19/25 13:05	06/20/25 18:51	62-75-9	
N-Nitroso-di-n-propylamine	ND	ug/L	10.0	1.3	1	06/19/25 13:05	06/20/25 18:51	621-64-7	
N-Nitrosodiphenylamine	ND	ug/L	10.0	3.0	1	06/19/25 13:05	06/20/25 18:51	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	ug/L	10.0	1.2	1	06/19/25 13:05	06/20/25 18:51	108-60-1	
Pentachlorophenol	ND	ug/L	20.0	3.8	1	06/19/25 13:05	06/20/25 18:51	87-86-5	
Phenanthrene	ND	ug/L	10.0	2.0	1	06/19/25 13:05	06/20/25 18:51	85-01-8	
Phenol	ND	ug/L	10.0	1.4	1	06/19/25 13:05	06/20/25 18:51	108-95-2	
Pyrene	ND	ug/L	10.0	2.2	1	06/19/25 13:05	06/20/25 18:51	129-00-0	
1,2,4-Trichlorobenzene	ND	ug/L	10.0	1.7	1	06/19/25 13:05	06/20/25 18:51	120-82-1	
2,4,5-Trichlorophenol	ND	ug/L	10.0	1.4	1	06/19/25 13:05	06/20/25 18:51	95-95-4	
2,4,6-Trichlorophenol	ND	ug/L	10.0	1.6	1	06/19/25 13:05	06/20/25 18:51	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	24	%	10-133		1	06/19/25 13:05	06/20/25 18:51	4165-60-0	
2-Fluorobiphenyl (S)	17	%	10-130		1	06/19/25 13:05	06/20/25 18:51	321-60-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802378

Sample: GW-9 **Lab ID: 92802378001** Collected: 06/12/25 17:45 Received: 06/13/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Surrogates									
Terphenyl-d14 (S)	81	%	10-193		1	06/19/25 13:05	06/20/25 18:51	1718-51-0	
Phenol-d6 (S)	14	%	10-130		1	06/19/25 13:05	06/20/25 18:51	13127-88-3	
2-Fluorophenol (S)	19	%	10-130		1	06/19/25 13:05	06/20/25 18:51	367-12-4	
2,4,6-Tribromophenol (S)	66	%	10-166		1	06/19/25 13:05	06/20/25 18:51	118-79-6	
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		06/18/25 00:01	67-64-1	
Benzene	ND	ug/L	1.0	0.34	1		06/18/25 00:01	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		06/18/25 00:01	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		06/18/25 00:01	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		06/18/25 00:01	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		06/18/25 00:01	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		06/18/25 00:01	74-83-9	
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		06/18/25 00:01	78-93-3	
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		06/18/25 00:01	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		06/18/25 00:01	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		06/18/25 00:01	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		06/18/25 00:01	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		06/18/25 00:01	74-87-3	
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/18/25 00:01	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/18/25 00:01	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		06/18/25 00:01	96-12-8	
Dibromochloromethane	ND	ug/L	1.0	0.36	1		06/18/25 00:01	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		06/18/25 00:01	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		06/18/25 00:01	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/18/25 00:01	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/18/25 00:01	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		06/18/25 00:01	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		06/18/25 00:01	75-71-8	
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		06/18/25 00:01	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		06/18/25 00:01	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		06/18/25 00:01	75-35-4	
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		06/18/25 00:01	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		06/18/25 00:01	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		06/18/25 00:01	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		06/18/25 00:01	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		06/18/25 00:01	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		06/18/25 00:01	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/18/25 00:01	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/18/25 00:01	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		06/18/25 00:01	108-20-3	
Ethylbenzene	ND	ug/L	1.0	0.30	1		06/18/25 00:01	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		06/18/25 00:01	87-68-3	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802378

Sample: GW-9 **Lab ID: 92802378001** Collected: 06/12/25 17:45 Received: 06/13/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
2-Hexanone	ND	ug/L	5.0	0.48	1		06/18/25 00:01	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		06/18/25 00:01	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		06/18/25 00:01	75-09-2	
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		06/18/25 00:01	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		06/18/25 00:01	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		06/18/25 00:01	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		06/18/25 00:01	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		06/18/25 00:01	630-20-6	
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		06/18/25 00:01	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		06/18/25 00:01	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		06/18/25 00:01	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		06/18/25 00:01	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		06/18/25 00:01	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		06/18/25 00:01	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		06/18/25 00:01	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		06/18/25 00:01	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		06/18/25 00:01	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		06/18/25 00:01	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		06/18/25 00:01	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		06/18/25 00:01	75-01-4	
Xylene (Total)	ND	ug/L	1.0	0.34	1		06/18/25 00:01	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		06/18/25 00:01	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		06/18/25 00:01	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	96	%	70-130		1		06/18/25 00:01	460-00-4	
1,2-Dichloroethane-d4 (S)	103	%	70-130		1		06/18/25 00:01	17060-07-0	
Toluene-d8 (S)	102	%	70-130		1		06/18/25 00:01	2037-26-5	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802378

Sample: EB-3 **Lab ID: 92802378002** Collected: 06/12/25 17:50 Received: 06/13/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3010 Pace Analytical Services - Ormond Beach								
Antimony	ND	ug/L	1.0	0.50	1	06/24/25 00:10	06/24/25 20:04	7440-36-0	
Arsenic	ND	ug/L	1.0	0.50	1	06/24/25 00:10	06/24/25 20:04	7440-38-2	
Beryllium	ND	ug/L	0.10	0.033	1	06/24/25 00:10	06/24/25 20:04	7440-41-7	
Cadmium	ND	ug/L	0.10	0.067	1	06/24/25 00:10	06/24/25 20:04	7440-43-9	
Chromium	**1.3**	ug/L	1.0	0.50	1	06/24/25 00:10	06/24/25 20:04	7440-47-3	
Copper	ND	ug/L	1.0	0.42	1	06/24/25 00:10	06/24/25 20:04	7440-50-8	
Lead	ND	ug/L	1.0	0.22	1	06/24/25 00:10	06/24/25 20:04	7439-92-1	
Nickel	ND	ug/L	1.0	0.26	1	06/24/25 00:10	06/24/25 20:04	7440-02-0	
Selenium	ND	ug/L	2.0	0.20	1	06/24/25 00:10	06/24/25 20:04	7782-49-2	
Silver	ND	ug/L	0.50	0.028	1	06/24/25 00:10	06/24/25 20:04	7440-22-4	
Thallium	ND	ug/L	1.0	0.11	1	06/24/25 00:10	06/24/25 20:04	7440-28-0	
Zinc	ND	ug/L	10.0	6.7	1	06/24/25 00:10	06/24/25 20:04	7440-66-6	
7470 Mercury	Analytical Method: EPA 7470 Preparation Method: EPA 7470 Pace Analytical Services - Ormond Beach								
Mercury	ND	ug/L	0.20	0.14	1	06/23/25 09:12	06/23/25 14:25	7439-97-6	
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Acenaphthene	ND	ug/L	10.0	2.0	1	06/19/25 13:05	06/20/25 19:17	83-32-9	
Acenaphthylene	ND	ug/L	10.0	2.0	1	06/19/25 13:05	06/20/25 19:17	208-96-8	
Aniline	ND	ug/L	10.0	1.6	1	06/19/25 13:05	06/20/25 19:17	62-53-3	
Anthracene	ND	ug/L	10.0	2.3	1	06/19/25 13:05	06/20/25 19:17	120-12-7	
Benzo(a)anthracene	ND	ug/L	10.0	2.7	1	06/19/25 13:05	06/20/25 19:17	56-55-3	
Benzo(a)pyrene	ND	ug/L	10.0	2.8	1	06/19/25 13:05	06/20/25 19:17	50-32-8	
Benzo(b)fluoranthene	ND	ug/L	10.0	2.6	1	06/19/25 13:05	06/20/25 19:17	205-99-2	
Benzo(g,h,i)perylene	ND	ug/L	10.0	2.8	1	06/19/25 13:05	06/20/25 19:17	191-24-2	
Benzo(k)fluoranthene	ND	ug/L	10.0	2.7	1	06/19/25 13:05	06/20/25 19:17	207-08-9	
Benzoic Acid	ND	ug/L	50.0	22.0	1	06/19/25 13:05	06/20/25 19:17	65-85-0	
Benzyl alcohol	ND	ug/L	20.0	2.9	1	06/19/25 13:05	06/20/25 19:17	100-51-6	
4-Bromophenylphenyl ether	ND	ug/L	10.0	1.8	1	06/19/25 13:05	06/20/25 19:17	101-55-3	
Butylbenzylphthalate	ND	ug/L	10.0	3.1	1	06/19/25 13:05	06/20/25 19:17	85-68-7	
4-Chloro-3-methylphenol	ND	ug/L	10.0	3.3	1	06/19/25 13:05	06/20/25 19:17	59-50-7	
4-Chloroaniline	ND	ug/L	20.0	3.6	1	06/19/25 13:05	06/20/25 19:17	106-47-8	
bis(2-Chloroethoxy)methane	ND	ug/L	10.0	1.8	1	06/19/25 13:05	06/20/25 19:17	111-91-1	
bis(2-Chloroethyl) ether	ND	ug/L	10.0	1.9	1	06/19/25 13:05	06/20/25 19:17	111-44-4	
2-Chloronaphthalene	ND	ug/L	10.0	1.7	1	06/19/25 13:05	06/20/25 19:17	91-58-7	
2-Chlorophenol	ND	ug/L	10.0	1.2	1	06/19/25 13:05	06/20/25 19:17	95-57-8	
4-Chlorophenylphenyl ether	ND	ug/L	10.0	2.0	1	06/19/25 13:05	06/20/25 19:17	7005-72-3	
Chrysene	ND	ug/L	10.0	2.8	1	06/19/25 13:05	06/20/25 19:17	218-01-9	
Dibenz(a,h)anthracene	ND	ug/L	10.0	3.0	1	06/19/25 13:05	06/20/25 19:17	53-70-3	
Dibenzofuran	ND	ug/L	10.0	2.1	1	06/19/25 13:05	06/20/25 19:17	132-64-9	
1,2-Dichlorobenzene	ND	ug/L	10.0	1.8	1	06/19/25 13:05	06/20/25 19:17	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	10.0	1.6	1	06/19/25 13:05	06/20/25 19:17	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	10.0	1.7	1	06/19/25 13:05	06/20/25 19:17	106-46-7	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802378

Sample: EB-3 **Lab ID: 92802378002** Collected: 06/12/25 17:50 Received: 06/13/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
3,3'-Dichlorobenzidine	ND	ug/L	20.0	8.1	1	06/19/25 13:05	06/20/25 19:17	91-94-1	
2,4-Dichlorophenol	ND	ug/L	10.0	1.4	1	06/19/25 13:05	06/20/25 19:17	120-83-2	
Diethylphthalate	ND	ug/L	10.0	2.0	1	06/19/25 13:05	06/20/25 19:17	84-66-2	
2,4-Dimethylphenol	ND	ug/L	10.0	1.7	1	06/19/25 13:05	06/20/25 19:17	105-67-9	
Dimethylphthalate	ND	ug/L	10.0	2.1	1	06/19/25 13:05	06/20/25 19:17	131-11-3	
Di-n-butylphthalate	ND	ug/L	10.0	2.2	1	06/19/25 13:05	06/20/25 19:17	84-74-2	
4,6-Dinitro-2-methylphenol	ND	ug/L	20.0	7.8	1	06/19/25 13:05	06/20/25 19:17	534-52-1	
2,4-Dinitrophenol	ND	ug/L	50.0	26.0	1	06/19/25 13:05	06/20/25 19:17	51-28-5	
2,4-Dinitrotoluene	ND	ug/L	10.0	1.6	1	06/19/25 13:05	06/20/25 19:17	121-14-2	
2,6-Dinitrotoluene	ND	ug/L	10.0	1.7	1	06/19/25 13:05	06/20/25 19:17	606-20-2	
Di-n-octylphthalate	ND	ug/L	10.0	3.9	1	06/19/25 13:05	06/20/25 19:17	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	ug/L	6.0	3.7	1	06/19/25 13:05	06/20/25 19:17	117-81-7	
Fluoranthene	ND	ug/L	10.0	2.2	1	06/19/25 13:05	06/20/25 19:17	206-44-0	
Fluorene	ND	ug/L	10.0	2.1	1	06/19/25 13:05	06/20/25 19:17	86-73-7	
Hexachloro-1,3-butadiene	ND	ug/L	10.0	1.8	1	06/19/25 13:05	06/20/25 19:17	87-68-3	
Hexachlorobenzene	ND	ug/L	10.0	2.2	1	06/19/25 13:05	06/20/25 19:17	118-74-1	
Hexachlorocyclopentadiene	ND	ug/L	10.0	1.6	1	06/19/25 13:05	06/20/25 19:17	77-47-4	
Hexachloroethane	ND	ug/L	10.0	1.4	1	06/19/25 13:05	06/20/25 19:17	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	ug/L	10.0	2.9	1	06/19/25 13:05	06/20/25 19:17	193-39-5	
Isophorone	ND	ug/L	10.0	1.7	1	06/19/25 13:05	06/20/25 19:17	78-59-1	
1-Methylnaphthalene	ND	ug/L	10.0	2.0	1	06/19/25 13:05	06/20/25 19:17	90-12-0	
2-Methylnaphthalene	ND	ug/L	10.0	1.9	1	06/19/25 13:05	06/20/25 19:17	91-57-6	
2-Methylphenol(o-Cresol)	ND	ug/L	10.0	1.9	1	06/19/25 13:05	06/20/25 19:17	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	ug/L	10.0	1.2	1	06/19/25 13:05	06/20/25 19:17	15831-10-4	
Naphthalene	ND	ug/L	10.0	2.1	1	06/19/25 13:05	06/20/25 19:17	91-20-3	
2-Nitroaniline	ND	ug/L	20.0	3.0	1	06/19/25 13:05	06/20/25 19:17	88-74-4	
3-Nitroaniline	ND	ug/L	20.0	3.8	1	06/19/25 13:05	06/20/25 19:17	99-09-2	
4-Nitroaniline	ND	ug/L	20.0	5.1	1	06/19/25 13:05	06/20/25 19:17	100-01-6	
Nitrobenzene	ND	ug/L	10.0	1.9	1	06/19/25 13:05	06/20/25 19:17	98-95-3	
2-Nitrophenol	ND	ug/L	10.0	1.4	1	06/19/25 13:05	06/20/25 19:17	88-75-5	
4-Nitrophenol	ND	ug/L	50.0	6.6	1	06/19/25 13:05	06/20/25 19:17	100-02-7	
N-Nitrosodimethylamine	ND	ug/L	10.0	1.9	1	06/19/25 13:05	06/20/25 19:17	62-75-9	
N-Nitroso-di-n-propylamine	ND	ug/L	10.0	1.3	1	06/19/25 13:05	06/20/25 19:17	621-64-7	
N-Nitrosodiphenylamine	ND	ug/L	10.0	3.0	1	06/19/25 13:05	06/20/25 19:17	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	ug/L	10.0	1.2	1	06/19/25 13:05	06/20/25 19:17	108-60-1	
Pentachlorophenol	ND	ug/L	20.0	3.8	1	06/19/25 13:05	06/20/25 19:17	87-86-5	
Phenanthrene	ND	ug/L	10.0	2.0	1	06/19/25 13:05	06/20/25 19:17	85-01-8	
Phenol	ND	ug/L	10.0	1.4	1	06/19/25 13:05	06/20/25 19:17	108-95-2	
Pyrene	ND	ug/L	10.0	2.2	1	06/19/25 13:05	06/20/25 19:17	129-00-0	
1,2,4-Trichlorobenzene	ND	ug/L	10.0	1.7	1	06/19/25 13:05	06/20/25 19:17	120-82-1	
2,4,5-Trichlorophenol	ND	ug/L	10.0	1.4	1	06/19/25 13:05	06/20/25 19:17	95-95-4	
2,4,6-Trichlorophenol	ND	ug/L	10.0	1.6	1	06/19/25 13:05	06/20/25 19:17	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	5	%	10-133		1	06/19/25 13:05	06/20/25 19:17	4165-60-0	1g,S0
2-Fluorobiphenyl (S)	8	%	10-130		1	06/19/25 13:05	06/20/25 19:17	321-60-8	S0

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802378

Sample: EB-3 **Lab ID: 92802378002** Collected: 06/12/25 17:50 Received: 06/13/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Surrogates									
Terphenyl-d14 (S)	73	%	10-193		1	06/19/25 13:05	06/20/25 19:17	1718-51-0	
Phenol-d6 (S)	7	%	10-130		1	06/19/25 13:05	06/20/25 19:17	13127-88-3	S0
2-Fluorophenol (S)	7	%	10-130		1	06/19/25 13:05	06/20/25 19:17	367-12-4	S0
2,4,6-Tribromophenol (S)	59	%	10-166		1	06/19/25 13:05	06/20/25 19:17	118-79-6	
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		06/15/25 00:53	67-64-1	
Benzene	ND	ug/L	1.0	0.34	1		06/15/25 00:53	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		06/15/25 00:53	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		06/15/25 00:53	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		06/15/25 00:53	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		06/15/25 00:53	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		06/15/25 00:53	74-83-9	
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		06/15/25 00:53	78-93-3	
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		06/15/25 00:53	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		06/15/25 00:53	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		06/15/25 00:53	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		06/15/25 00:53	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		06/15/25 00:53	74-87-3	
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/15/25 00:53	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/15/25 00:53	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		06/15/25 00:53	96-12-8	
Dibromochloromethane	ND	ug/L	1.0	0.36	1		06/15/25 00:53	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		06/15/25 00:53	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		06/15/25 00:53	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/15/25 00:53	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/15/25 00:53	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		06/15/25 00:53	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		06/15/25 00:53	75-71-8	
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		06/15/25 00:53	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		06/15/25 00:53	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		06/15/25 00:53	75-35-4	v1
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		06/15/25 00:53	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		06/15/25 00:53	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		06/15/25 00:53	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		06/15/25 00:53	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		06/15/25 00:53	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		06/15/25 00:53	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/15/25 00:53	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/15/25 00:53	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		06/15/25 00:53	108-20-3	
Ethylbenzene	ND	ug/L	1.0	0.30	1		06/15/25 00:53	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		06/15/25 00:53	87-68-3	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802378

Sample: EB-3 **Lab ID: 92802378002** Collected: 06/12/25 17:50 Received: 06/13/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
2-Hexanone	ND	ug/L	5.0	0.48	1		06/15/25 00:53	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		06/15/25 00:53	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		06/15/25 00:53	75-09-2	
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		06/15/25 00:53	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		06/15/25 00:53	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		06/15/25 00:53	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		06/15/25 00:53	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		06/15/25 00:53	630-20-6	
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		06/15/25 00:53	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		06/15/25 00:53	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		06/15/25 00:53	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		06/15/25 00:53	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		06/15/25 00:53	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		06/15/25 00:53	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		06/15/25 00:53	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		06/15/25 00:53	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		06/15/25 00:53	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		06/15/25 00:53	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		06/15/25 00:53	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		06/15/25 00:53	75-01-4	
Xylene (Total)	ND	ug/L	1.0	0.34	1		06/15/25 00:53	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		06/15/25 00:53	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		06/15/25 00:53	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	96	%	70-130		1		06/15/25 00:53	460-00-4	
1,2-Dichloroethane-d4 (S)	101	%	70-130		1		06/15/25 00:53	17060-07-0	
Toluene-d8 (S)	102	%	70-130		1		06/15/25 00:53	2037-26-5	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802378

Sample: GW-8 **Lab ID: 92802378003** Collected: 06/12/25 18:35 Received: 06/13/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
6020 MET ICPMS	Analytical Method: EPA 6020 Preparation Method: EPA 3010 Pace Analytical Services - Ormond Beach								
Antimony	ND	ug/L	1.0	0.50	1	06/24/25 00:10	06/24/25 20:06	7440-36-0	
Arsenic	ND	ug/L	1.0	0.50	1	06/24/25 00:10	06/24/25 20:06	7440-38-2	
Beryllium	ND	ug/L	0.10	0.033	1	06/24/25 00:10	06/24/25 20:06	7440-41-7	
Cadmium	ND	ug/L	0.10	0.067	1	06/24/25 00:10	06/24/25 20:06	7440-43-9	
Chromium	**8.4**	ug/L	1.0	0.50	1	06/24/25 00:10	06/24/25 20:06	7440-47-3	
Copper	**2.6**	ug/L	1.0	0.42	1	06/24/25 00:10	06/24/25 20:06	7440-50-8	
Lead	ND	ug/L	1.0	0.22	1	06/24/25 00:10	06/24/25 20:06	7439-92-1	
Nickel	**2.2**	ug/L	1.0	0.26	1	06/24/25 00:10	06/24/25 20:06	7440-02-0	
Selenium	ND	ug/L	2.0	0.20	1	06/24/25 00:10	06/24/25 20:06	7782-49-2	
Silver	ND	ug/L	0.50	0.028	1	06/24/25 00:10	06/24/25 20:06	7440-22-4	
Thallium	ND	ug/L	1.0	0.11	1	06/24/25 00:10	06/24/25 20:06	7440-28-0	
Zinc	ND	ug/L	10.0	6.7	1	06/24/25 00:10	06/24/25 20:06	7440-66-6	
7470 Mercury	Analytical Method: EPA 7470 Preparation Method: EPA 7470 Pace Analytical Services - Ormond Beach								
Mercury	ND	ug/L	0.20	0.14	1	06/23/25 09:12	06/23/25 14:28	7439-97-6	
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Acenaphthene	ND	ug/L	10.0	2.0	1	06/19/25 13:05	06/20/25 19:42	83-32-9	
Acenaphthylene	ND	ug/L	10.0	2.0	1	06/19/25 13:05	06/20/25 19:42	208-96-8	
Aniline	ND	ug/L	10.0	1.6	1	06/19/25 13:05	06/20/25 19:42	62-53-3	
Anthracene	ND	ug/L	10.0	2.3	1	06/19/25 13:05	06/20/25 19:42	120-12-7	
Benzo(a)anthracene	ND	ug/L	10.0	2.7	1	06/19/25 13:05	06/20/25 19:42	56-55-3	
Benzo(a)pyrene	ND	ug/L	10.0	2.8	1	06/19/25 13:05	06/20/25 19:42	50-32-8	
Benzo(b)fluoranthene	ND	ug/L	10.0	2.6	1	06/19/25 13:05	06/20/25 19:42	205-99-2	
Benzo(g,h,i)perylene	ND	ug/L	10.0	2.8	1	06/19/25 13:05	06/20/25 19:42	191-24-2	
Benzo(k)fluoranthene	ND	ug/L	10.0	2.7	1	06/19/25 13:05	06/20/25 19:42	207-08-9	
Benzoic Acid	ND	ug/L	50.0	22.0	1	06/19/25 13:05	06/20/25 19:42	65-85-0	
Benzyl alcohol	ND	ug/L	20.0	2.9	1	06/19/25 13:05	06/20/25 19:42	100-51-6	
4-Bromophenylphenyl ether	ND	ug/L	10.0	1.8	1	06/19/25 13:05	06/20/25 19:42	101-55-3	
Butylbenzylphthalate	ND	ug/L	10.0	3.1	1	06/19/25 13:05	06/20/25 19:42	85-68-7	
4-Chloro-3-methylphenol	ND	ug/L	10.0	3.3	1	06/19/25 13:05	06/20/25 19:42	59-50-7	
4-Chloroaniline	ND	ug/L	20.0	3.6	1	06/19/25 13:05	06/20/25 19:42	106-47-8	
bis(2-Chloroethoxy)methane	ND	ug/L	10.0	1.8	1	06/19/25 13:05	06/20/25 19:42	111-91-1	
bis(2-Chloroethyl) ether	ND	ug/L	10.0	1.9	1	06/19/25 13:05	06/20/25 19:42	111-44-4	
2-Chloronaphthalene	ND	ug/L	10.0	1.7	1	06/19/25 13:05	06/20/25 19:42	91-58-7	
2-Chlorophenol	ND	ug/L	10.0	1.2	1	06/19/25 13:05	06/20/25 19:42	95-57-8	
4-Chlorophenylphenyl ether	ND	ug/L	10.0	2.0	1	06/19/25 13:05	06/20/25 19:42	7005-72-3	
Chrysene	ND	ug/L	10.0	2.8	1	06/19/25 13:05	06/20/25 19:42	218-01-9	
Dibenz(a,h)anthracene	ND	ug/L	10.0	3.0	1	06/19/25 13:05	06/20/25 19:42	53-70-3	
Dibenzofuran	ND	ug/L	10.0	2.1	1	06/19/25 13:05	06/20/25 19:42	132-64-9	
1,2-Dichlorobenzene	ND	ug/L	10.0	1.8	1	06/19/25 13:05	06/20/25 19:42	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	10.0	1.6	1	06/19/25 13:05	06/20/25 19:42	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	10.0	1.7	1	06/19/25 13:05	06/20/25 19:42	106-46-7	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802378

Sample: GW-8 **Lab ID: 92802378003** Collected: 06/12/25 18:35 Received: 06/13/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
3,3'-Dichlorobenzidine	ND	ug/L	20.0	8.1	1	06/19/25 13:05	06/20/25 19:42	91-94-1	
2,4-Dichlorophenol	ND	ug/L	10.0	1.4	1	06/19/25 13:05	06/20/25 19:42	120-83-2	
Diethylphthalate	ND	ug/L	10.0	2.0	1	06/19/25 13:05	06/20/25 19:42	84-66-2	
2,4-Dimethylphenol	ND	ug/L	10.0	1.7	1	06/19/25 13:05	06/20/25 19:42	105-67-9	
Dimethylphthalate	ND	ug/L	10.0	2.1	1	06/19/25 13:05	06/20/25 19:42	131-11-3	
Di-n-butylphthalate	ND	ug/L	10.0	2.2	1	06/19/25 13:05	06/20/25 19:42	84-74-2	
4,6-Dinitro-2-methylphenol	ND	ug/L	20.0	7.8	1	06/19/25 13:05	06/20/25 19:42	534-52-1	
2,4-Dinitrophenol	ND	ug/L	50.0	26.0	1	06/19/25 13:05	06/20/25 19:42	51-28-5	
2,4-Dinitrotoluene	ND	ug/L	10.0	1.6	1	06/19/25 13:05	06/20/25 19:42	121-14-2	
2,6-Dinitrotoluene	ND	ug/L	10.0	1.7	1	06/19/25 13:05	06/20/25 19:42	606-20-2	
Di-n-octylphthalate	ND	ug/L	10.0	3.9	1	06/19/25 13:05	06/20/25 19:42	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	ug/L	6.0	3.7	1	06/19/25 13:05	06/20/25 19:42	117-81-7	
Fluoranthene	ND	ug/L	10.0	2.2	1	06/19/25 13:05	06/20/25 19:42	206-44-0	
Fluorene	ND	ug/L	10.0	2.1	1	06/19/25 13:05	06/20/25 19:42	86-73-7	
Hexachloro-1,3-butadiene	ND	ug/L	10.0	1.8	1	06/19/25 13:05	06/20/25 19:42	87-68-3	
Hexachlorobenzene	ND	ug/L	10.0	2.2	1	06/19/25 13:05	06/20/25 19:42	118-74-1	
Hexachlorocyclopentadiene	ND	ug/L	10.0	1.6	1	06/19/25 13:05	06/20/25 19:42	77-47-4	
Hexachloroethane	ND	ug/L	10.0	1.4	1	06/19/25 13:05	06/20/25 19:42	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	ug/L	10.0	2.9	1	06/19/25 13:05	06/20/25 19:42	193-39-5	
Isophorone	ND	ug/L	10.0	1.7	1	06/19/25 13:05	06/20/25 19:42	78-59-1	
1-Methylnaphthalene	ND	ug/L	10.0	2.0	1	06/19/25 13:05	06/20/25 19:42	90-12-0	
2-Methylnaphthalene	ND	ug/L	10.0	1.9	1	06/19/25 13:05	06/20/25 19:42	91-57-6	
2-Methylphenol(o-Cresol)	ND	ug/L	10.0	1.9	1	06/19/25 13:05	06/20/25 19:42	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	ug/L	10.0	1.2	1	06/19/25 13:05	06/20/25 19:42	15831-10-4	
Naphthalene	ND	ug/L	10.0	2.1	1	06/19/25 13:05	06/20/25 19:42	91-20-3	
2-Nitroaniline	ND	ug/L	20.0	3.0	1	06/19/25 13:05	06/20/25 19:42	88-74-4	
3-Nitroaniline	ND	ug/L	20.0	3.8	1	06/19/25 13:05	06/20/25 19:42	99-09-2	
4-Nitroaniline	ND	ug/L	20.0	5.1	1	06/19/25 13:05	06/20/25 19:42	100-01-6	
Nitrobenzene	ND	ug/L	10.0	1.9	1	06/19/25 13:05	06/20/25 19:42	98-95-3	
2-Nitrophenol	ND	ug/L	10.0	1.4	1	06/19/25 13:05	06/20/25 19:42	88-75-5	
4-Nitrophenol	ND	ug/L	50.0	6.6	1	06/19/25 13:05	06/20/25 19:42	100-02-7	
N-Nitrosodimethylamine	ND	ug/L	10.0	1.9	1	06/19/25 13:05	06/20/25 19:42	62-75-9	
N-Nitroso-di-n-propylamine	ND	ug/L	10.0	1.3	1	06/19/25 13:05	06/20/25 19:42	621-64-7	
N-Nitrosodiphenylamine	ND	ug/L	10.0	3.0	1	06/19/25 13:05	06/20/25 19:42	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	ug/L	10.0	1.2	1	06/19/25 13:05	06/20/25 19:42	108-60-1	
Pentachlorophenol	ND	ug/L	20.0	3.8	1	06/19/25 13:05	06/20/25 19:42	87-86-5	
Phenanthrene	ND	ug/L	10.0	2.0	1	06/19/25 13:05	06/20/25 19:42	85-01-8	
Phenol	ND	ug/L	10.0	1.4	1	06/19/25 13:05	06/20/25 19:42	108-95-2	
Pyrene	ND	ug/L	10.0	2.2	1	06/19/25 13:05	06/20/25 19:42	129-00-0	
1,2,4-Trichlorobenzene	ND	ug/L	10.0	1.7	1	06/19/25 13:05	06/20/25 19:42	120-82-1	
2,4,5-Trichlorophenol	ND	ug/L	10.0	1.4	1	06/19/25 13:05	06/20/25 19:42	95-95-4	
2,4,6-Trichlorophenol	ND	ug/L	10.0	1.6	1	06/19/25 13:05	06/20/25 19:42	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	34	%	10-133		1	06/19/25 13:05	06/20/25 19:42	4165-60-0	
2-Fluorobiphenyl (S)	37	%	10-130		1	06/19/25 13:05	06/20/25 19:42	321-60-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802378

Sample: GW-8 **Lab ID: 92802378003** Collected: 06/12/25 18:35 Received: 06/13/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Surrogates									
Terphenyl-d14 (S)	70	%	10-193		1	06/19/25 13:05	06/20/25 19:42	1718-51-0	
Phenol-d6 (S)	32	%	10-130		1	06/19/25 13:05	06/20/25 19:42	13127-88-3	
2-Fluorophenol (S)	32	%	10-130		1	06/19/25 13:05	06/20/25 19:42	367-12-4	
2,4,6-Tribromophenol (S)	53	%	10-166		1	06/19/25 13:05	06/20/25 19:42	118-79-6	
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		06/18/25 00:19	67-64-1	
Benzene	ND	ug/L	1.0	0.34	1		06/18/25 00:19	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		06/18/25 00:19	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		06/18/25 00:19	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		06/18/25 00:19	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		06/18/25 00:19	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		06/18/25 00:19	74-83-9	
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		06/18/25 00:19	78-93-3	
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		06/18/25 00:19	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		06/18/25 00:19	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		06/18/25 00:19	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		06/18/25 00:19	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		06/18/25 00:19	74-87-3	
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/18/25 00:19	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/18/25 00:19	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		06/18/25 00:19	96-12-8	v2
Dibromochloromethane	ND	ug/L	1.0	0.36	1		06/18/25 00:19	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		06/18/25 00:19	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		06/18/25 00:19	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/18/25 00:19	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/18/25 00:19	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		06/18/25 00:19	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		06/18/25 00:19	75-71-8	
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		06/18/25 00:19	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		06/18/25 00:19	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		06/18/25 00:19	75-35-4	
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		06/18/25 00:19	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		06/18/25 00:19	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		06/18/25 00:19	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		06/18/25 00:19	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		06/18/25 00:19	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		06/18/25 00:19	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/18/25 00:19	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/18/25 00:19	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		06/18/25 00:19	108-20-3	
Ethylbenzene	ND	ug/L	1.0	0.30	1		06/18/25 00:19	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		06/18/25 00:19	87-68-3	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802378

Sample: GW-8 **Lab ID: 92802378003** Collected: 06/12/25 18:35 Received: 06/13/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
2-Hexanone	ND	ug/L	5.0	0.48	1		06/18/25 00:19	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		06/18/25 00:19	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		06/18/25 00:19	75-09-2	
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		06/18/25 00:19	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		06/18/25 00:19	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		06/18/25 00:19	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		06/18/25 00:19	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		06/18/25 00:19	630-20-6	
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		06/18/25 00:19	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		06/18/25 00:19	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		06/18/25 00:19	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		06/18/25 00:19	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		06/18/25 00:19	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		06/18/25 00:19	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		06/18/25 00:19	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		06/18/25 00:19	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		06/18/25 00:19	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		06/18/25 00:19	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		06/18/25 00:19	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		06/18/25 00:19	75-01-4	
Xylene (Total)	ND	ug/L	1.0	0.34	1		06/18/25 00:19	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		06/18/25 00:19	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		06/18/25 00:19	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	94	%	70-130		1		06/18/25 00:19	460-00-4	
1,2-Dichloroethane-d4 (S)	101	%	70-130		1		06/18/25 00:19	17060-07-0	
Toluene-d8 (S)	103	%	70-130		1		06/18/25 00:19	2037-26-5	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802378

Sample: TB-3 **Lab ID: 92802378004** Collected: 06/11/25 00:00 Received: 06/13/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		06/15/25 01:11	67-64-1	
Benzene	ND	ug/L	1.0	0.34	1		06/15/25 01:11	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		06/15/25 01:11	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		06/15/25 01:11	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		06/15/25 01:11	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		06/15/25 01:11	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		06/15/25 01:11	74-83-9	
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		06/15/25 01:11	78-93-3	
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		06/15/25 01:11	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		06/15/25 01:11	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		06/15/25 01:11	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		06/15/25 01:11	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		06/15/25 01:11	74-87-3	
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/15/25 01:11	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/15/25 01:11	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		06/15/25 01:11	96-12-8	
Dibromochloromethane	ND	ug/L	1.0	0.36	1		06/15/25 01:11	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		06/15/25 01:11	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		06/15/25 01:11	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/15/25 01:11	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/15/25 01:11	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		06/15/25 01:11	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		06/15/25 01:11	75-71-8	
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		06/15/25 01:11	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		06/15/25 01:11	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		06/15/25 01:11	75-35-4	v1
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		06/15/25 01:11	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		06/15/25 01:11	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		06/15/25 01:11	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		06/15/25 01:11	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		06/15/25 01:11	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		06/15/25 01:11	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/15/25 01:11	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/15/25 01:11	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		06/15/25 01:11	108-20-3	
Ethylbenzene	ND	ug/L	1.0	0.30	1		06/15/25 01:11	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		06/15/25 01:11	87-68-3	
2-Hexanone	ND	ug/L	5.0	0.48	1		06/15/25 01:11	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		06/15/25 01:11	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		06/15/25 01:11	75-09-2	
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		06/15/25 01:11	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		06/15/25 01:11	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		06/15/25 01:11	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		06/15/25 01:11	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		06/15/25 01:11	630-20-6	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802378

Sample: TB-3 **Lab ID: 92802378004** Collected: 06/11/25 00:00 Received: 06/13/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		06/15/25 01:11	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		06/15/25 01:11	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		06/15/25 01:11	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		06/15/25 01:11	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		06/15/25 01:11	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		06/15/25 01:11	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		06/15/25 01:11	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		06/15/25 01:11	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		06/15/25 01:11	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		06/15/25 01:11	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		06/15/25 01:11	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		06/15/25 01:11	75-01-4	
Xylene (Total)	ND	ug/L	1.0	0.34	1		06/15/25 01:11	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		06/15/25 01:11	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		06/15/25 01:11	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	97	%	70-130		1		06/15/25 01:11	460-00-4	
1,2-Dichloroethane-d4 (S)	100	%	70-130		1		06/15/25 01:11	17060-07-0	
Toluene-d8 (S)	102	%	70-130		1		06/15/25 01:11	2037-26-5	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

QC Batch: 1107960
QC Batch Method: EPA 7470
Analysis Method: EPA 7470
Analysis Description: 7470 Mercury
Laboratory: Pace Analytical Services - Ormond Beach
Associated Lab Samples: 92802378001, 92802378002, 92802378003

METHOD BLANK: 6077889 Matrix: Water
Associated Lab Samples: 92802378001, 92802378002, 92802378003

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Mercury	ug/L	ND	0.20	0.14	06/23/25 13:19	

LABORATORY CONTROL SAMPLE: 6077890

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Mercury	ug/L	2	2.2	110	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6077891 6077892

Parameter	Units	35961367003 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Mercury	ug/L	<0.14	2	2	2.1	2.2	105	107	75-125	2	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

QC Batch: 1108184
QC Batch Method: EPA 3010
Analysis Method: EPA 6020
Analysis Description: 6020 MET
Laboratory: Pace Analytical Services - Ormond Beach
Associated Lab Samples: 92802378001, 92802378002, 92802378003

METHOD BLANK: 6078687 Matrix: Water
Associated Lab Samples: 92802378001, 92802378002, 92802378003

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Antimony	ug/L	ND	1.0	0.50	06/24/25 19:43	
Arsenic	ug/L	ND	1.0	0.50	06/24/25 19:43	
Beryllium	ug/L	ND	0.10	0.033	06/24/25 19:43	
Cadmium	ug/L	ND	0.10	0.067	06/24/25 19:43	
Chromium	ug/L	ND	1.0	0.50	06/24/25 19:43	
Copper	ug/L	ND	1.0	0.42	06/24/25 19:43	
Lead	ug/L	ND	1.0	0.22	06/24/25 19:43	
Nickel	ug/L	ND	1.0	0.26	06/24/25 19:43	
Selenium	ug/L	ND	2.0	0.20	06/24/25 19:43	
Silver	ug/L	ND	0.50	0.028	06/24/25 19:43	
Thallium	ug/L	ND	1.0	0.11	06/24/25 19:43	
Zinc	ug/L	ND	10.0	6.7	06/24/25 19:43	

LABORATORY CONTROL SAMPLE: 6078688

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Antimony	ug/L	50	49.7	99	80-120	
Arsenic	ug/L	50	50.9	102	80-120	
Beryllium	ug/L	5	5.3	105	80-120	
Cadmium	ug/L	5	5.4	107	80-120	
Chromium	ug/L	50	51.5	103	80-120	
Copper	ug/L	50	52.8	106	80-120	
Lead	ug/L	50	53.4	107	80-120	
Nickel	ug/L	50	52.6	105	80-120	
Selenium	ug/L	50	53.7	107	80-120	
Silver	ug/L	5	5.3	106	80-120	
Thallium	ug/L	50	52.8	106	80-120	
Zinc	ug/L	250	259	104	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6078689 6078690

Parameter	Units	92802074001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Antimony	ug/L	ND	50	50	50.7	50.3	101	101	75-125	1	20	
Arsenic	ug/L	83.7	50	50	136	135	105	102	75-125	1	20	
Beryllium	ug/L	0.059J	5	5	4.9	5.0	98	98	75-125	1	20	
Cadmium	ug/L	ND	5	5	5.1	5.0	101	101	75-125	0	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 6078689 6078690

Parameter	Units	92802074001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Chromium	ug/L	1.0	50	50	50.4	50.4	99	99	75-125	0	20	
Copper	ug/L	6.8	50	50	56.4	56.5	99	99	75-125	0	20	
Lead	ug/L	ND	50	50	51.9	52.2	104	104	75-125	1	20	
Nickel	ug/L	ND	50	50	49.7	49.7	99	99	75-125	0	20	
Selenium	ug/L	0.37J	50	50	50.6	50.5	100	100	75-125	0	20	
Silver	ug/L	ND	5	5	5.0	5.0	99	100	75-125	1	20	
Thallium	ug/L	ND	50	50	51.7	52.3	103	104	75-125	1	20	
Zinc	ug/L	ND	250	250	245	246	98	98	75-125	0	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

QC Batch: 941998
QC Batch Method: EPA 8260D
Analysis Method: EPA 8260D
Analysis Description: 8260D MSV Low Level
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92802378002, 92802378004

METHOD BLANK: 4841551 Matrix: Water
Associated Lab Samples: 92802378002, 92802378004

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	1.0	0.31	06/14/25 18:15	
1,1,1-Trichloroethane	ug/L	ND	1.0	0.33	06/14/25 18:15	
1,1,2,2-Tetrachloroethane	ug/L	ND	1.0	0.22	06/14/25 18:15	
1,1,2-Trichloroethane	ug/L	ND	1.0	0.32	06/14/25 18:15	
1,1-Dichloroethane	ug/L	ND	1.0	0.37	06/14/25 18:15	
1,1-Dichloroethene	ug/L	ND	1.0	0.35	06/14/25 18:15	v1
1,1-Dichloropropene	ug/L	ND	1.0	0.43	06/14/25 18:15	
1,2,3-Trichlorobenzene	ug/L	ND	1.0	0.81	06/14/25 18:15	
1,2,3-Trichloropropane	ug/L	ND	1.0	0.26	06/14/25 18:15	
1,2,4-Trichlorobenzene	ug/L	ND	1.0	0.64	06/14/25 18:15	
1,2-Dibromo-3-chloropropane	ug/L	ND	2.0	0.34	06/14/25 18:15	
1,2-Dibromoethane (EDB)	ug/L	ND	1.0	0.27	06/14/25 18:15	
1,2-Dichlorobenzene	ug/L	ND	1.0	0.34	06/14/25 18:15	
1,2-Dichloroethane	ug/L	ND	1.0	0.32	06/14/25 18:15	
1,2-Dichloropropane	ug/L	ND	1.0	0.36	06/14/25 18:15	
1,3-Dichlorobenzene	ug/L	ND	1.0	0.34	06/14/25 18:15	
1,3-Dichloropropane	ug/L	ND	1.0	0.28	06/14/25 18:15	
1,4-Dichlorobenzene	ug/L	ND	1.0	0.33	06/14/25 18:15	
2,2-Dichloropropane	ug/L	ND	1.0	0.39	06/14/25 18:15	
2-Butanone (MEK)	ug/L	ND	5.0	4.0	06/14/25 18:15	
2-Chlorotoluene	ug/L	ND	1.0	0.32	06/14/25 18:15	
2-Hexanone	ug/L	ND	5.0	0.48	06/14/25 18:15	
4-Chlorotoluene	ug/L	ND	1.0	0.32	06/14/25 18:15	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	5.0	2.7	06/14/25 18:15	
Acetone	ug/L	ND	25.0	5.1	06/14/25 18:15	
Benzene	ug/L	ND	1.0	0.34	06/14/25 18:15	
Bromobenzene	ug/L	ND	1.0	0.29	06/14/25 18:15	
Bromochloromethane	ug/L	ND	1.0	0.47	06/14/25 18:15	
Bromodichloromethane	ug/L	ND	1.0	0.31	06/14/25 18:15	
Bromoform	ug/L	ND	1.0	0.34	06/14/25 18:15	
Bromomethane	ug/L	ND	2.0	1.7	06/14/25 18:15	
Carbon tetrachloride	ug/L	ND	1.0	0.33	06/14/25 18:15	
Chlorobenzene	ug/L	ND	1.0	0.28	06/14/25 18:15	
Chloroethane	ug/L	ND	1.0	0.65	06/14/25 18:15	
Chloroform	ug/L	ND	1.0	0.43	06/14/25 18:15	
Chloromethane	ug/L	ND	1.0	0.54	06/14/25 18:15	
cis-1,2-Dichloroethene	ug/L	ND	1.0	0.38	06/14/25 18:15	
cis-1,3-Dichloropropene	ug/L	ND	1.0	0.36	06/14/25 18:15	
Dibromochloromethane	ug/L	ND	1.0	0.36	06/14/25 18:15	
Dibromomethane	ug/L	ND	1.0	0.39	06/14/25 18:15	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

METHOD BLANK: 4841551 Matrix: Water
Associated Lab Samples: 92802378002, 92802378004

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Dichlorodifluoromethane	ug/L	ND	1.0	0.35	06/14/25 18:15	
Diisopropyl ether	ug/L	ND	1.0	0.31	06/14/25 18:15	
Ethylbenzene	ug/L	ND	1.0	0.30	06/14/25 18:15	
Hexachloro-1,3-butadiene	ug/L	ND	2.0	1.5	06/14/25 18:15	
m&p-Xylene	ug/L	ND	2.0	0.71	06/14/25 18:15	
Methyl-tert-butyl ether	ug/L	ND	1.0	0.42	06/14/25 18:15	
Methylene Chloride	ug/L	ND	5.0	2.0	06/14/25 18:15	
Naphthalene	ug/L	ND	1.0	0.64	06/14/25 18:15	
o-Xylene	ug/L	ND	1.0	0.34	06/14/25 18:15	
p-Isopropyltoluene	ug/L	ND	1.0	0.41	06/14/25 18:15	
Styrene	ug/L	ND	1.0	0.29	06/14/25 18:15	
Tetrachloroethene	ug/L	ND	1.0	0.29	06/14/25 18:15	
Toluene	ug/L	ND	1.0	0.24	06/14/25 18:15	
trans-1,2-Dichloroethene	ug/L	ND	1.0	0.40	06/14/25 18:15	
trans-1,3-Dichloropropene	ug/L	ND	1.0	0.36	06/14/25 18:15	
Trichloroethene	ug/L	ND	1.0	0.38	06/14/25 18:15	
Trichlorofluoromethane	ug/L	ND	1.0	0.30	06/14/25 18:15	
Vinyl acetate	ug/L	ND	2.0	1.3	06/14/25 18:15	
Vinyl chloride	ug/L	ND	1.0	0.39	06/14/25 18:15	
Xylene (Total)	ug/L	ND	1.0	0.34	06/14/25 18:15	
1,2-Dichloroethane-d4 (S)	%	105	70-130		06/14/25 18:15	
4-Bromofluorobenzene (S)	%	97	70-130		06/14/25 18:15	
Toluene-d8 (S)	%	102	70-130		06/14/25 18:15	

LABORATORY CONTROL SAMPLE: 4841552

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	20	18.4	92	70-130	
1,1,1-Trichloroethane	ug/L	20	20.9	104	70-130	
1,1,2,2-Tetrachloroethane	ug/L	20	18.4	92	70-130	
1,1,2-Trichloroethane	ug/L	20	18.5	93	70-130	
1,1-Dichloroethane	ug/L	20	21.5	107	70-130	
1,1-Dichloroethene	ug/L	20	25.0	125	69-131	v1
1,1-Dichloropropene	ug/L	20	21.0	105	70-132	
1,2,3-Trichlorobenzene	ug/L	20	18.8	94	70-132	
1,2,3-Trichloropropane	ug/L	20	18.0	90	70-130	
1,2,4-Trichlorobenzene	ug/L	20	19.0	95	70-130	
1,2-Dibromo-3-chloropropane	ug/L	20	18.8	94	70-130	
1,2-Dibromoethane (EDB)	ug/L	20	18.7	94	70-130	
1,2-Dichlorobenzene	ug/L	20	18.6	93	70-130	
1,2-Dichloroethane	ug/L	20	20.4	102	70-130	
1,2-Dichloropropane	ug/L	20	19.5	98	70-130	
1,3-Dichlorobenzene	ug/L	20	18.7	94	70-130	
1,3-Dichloropropane	ug/L	20	18.1	90	70-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

LABORATORY CONTROL SAMPLE: 4841552

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,4-Dichlorobenzene	ug/L	20	18.5	93	70-130	
2,2-Dichloropropane	ug/L	20	21.1	105	69-130	
2-Butanone (MEK)	ug/L	40	39.8	99	67-133	
2-Chlorotoluene	ug/L	20	19.3	97	70-130	
2-Hexanone	ug/L	40	36.9	92	70-133	
4-Chlorotoluene	ug/L	20	19.7	99	70-130	
4-Methyl-2-pentanone (MIBK)	ug/L	40	38.9	97	70-130	
Acetone	ug/L	40	39.5	99	67-130	
Benzene	ug/L	20	19.9	99	70-130	
Bromobenzene	ug/L	20	19.0	95	70-130	
Bromochloromethane	ug/L	20	20.3	101	70-130	
Bromodichloromethane	ug/L	20	20.0	100	70-130	
Bromoform	ug/L	20	19.1	95	70-133	
Bromomethane	ug/L	20	22.8	114	41-148	
Carbon tetrachloride	ug/L	20	19.6	98	70-130	
Chlorobenzene	ug/L	20	18.2	91	70-130	
Chloroethane	ug/L	20	18.8	94	41-157	
Chloroform	ug/L	20	20.5	102	70-130	
Chloromethane	ug/L	20	22.9	115	59-141	
cis-1,2-Dichloroethene	ug/L	20	21.5	108	70-130	
cis-1,3-Dichloropropene	ug/L	20	20.3	102	70-130	
Dibromochloromethane	ug/L	20	19.1	95	70-130	
Dibromomethane	ug/L	20	18.5	92	70-130	
Dichlorodifluoromethane	ug/L	20	20.8	104	54-147	
Diisopropyl ether	ug/L	20	20.9	105	70-130	
Ethylbenzene	ug/L	20	18.5	92	70-130	
Hexachloro-1,3-butadiene	ug/L	20	19.1	95	70-134	
m&p-Xylene	ug/L	40	37.2	93	70-130	
Methyl-tert-butyl ether	ug/L	20	19.7	98	70-130	
Methylene Chloride	ug/L	20	20.5	102	62-130	
Naphthalene	ug/L	20	19.0	95	70-135	
o-Xylene	ug/L	20	19.1	95	70-130	
p-Isopropyltoluene	ug/L	20	20.0	100	70-130	
Styrene	ug/L	20	18.4	92	70-130	
Tetrachloroethene	ug/L	20	17.8	89	70-130	
Toluene	ug/L	20	18.8	94	70-130	
trans-1,2-Dichloroethene	ug/L	20	22.9	115	70-130	
trans-1,3-Dichloropropene	ug/L	20	20.3	102	70-130	
Trichloroethene	ug/L	20	18.7	94	70-130	
Trichlorofluoromethane	ug/L	20	18.9	95	57-130	
Vinyl acetate	ug/L	40	43.9	110	70-141	
Vinyl chloride	ug/L	20	19.9	100	66-140	
Xylene (Total)	ug/L	60	56.3	94	70-130	
1,2-Dichloroethane-d4 (S)	%			106	70-130	
4-Bromofluorobenzene (S)	%			100	70-130	
Toluene-d8 (S)	%			101	70-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 4841553 4841554

Parameter	Units	92801375005 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
1,1,1,2-Tetrachloroethane	ug/L	ND	20	20	20.3	22.8	102	114	70-146	11	30	
1,1,1-Trichloroethane	ug/L	ND	20	20	22.5	24.9	113	125	70-150	10	30	
1,1,2,2-Tetrachloroethane	ug/L	ND	20	20	18.9	21.7	94	109	66-144	14	30	
1,1,2-Trichloroethane	ug/L	ND	20	20	19.3	21.7	97	109	70-142	12	30	
1,1-Dichloroethane	ug/L	ND	20	20	22.1	24.4	111	122	68-150	10	30	
1,1-Dichloroethene	ug/L	ND	20	20	24.9	27.9	124	139	64-162	12	30	v1
1,1-Dichloropropene	ug/L	ND	20	20	22.6	25.0	113	125	70-160	10	30	
1,2,3-Trichlorobenzene	ug/L	ND	20	20	19.6	21.9	98	109	66-151	11	30	
1,2,3-Trichloropropane	ug/L	ND	20	20	18.7	22.1	94	110	66-144	16	30	
1,2,4-Trichlorobenzene	ug/L	ND	20	20	20.4	22.6	102	113	69-147	11	30	
1,2-Dibromo-3-chloropropane	ug/L	ND	20	20	19.0	21.5	95	108	62-146	12	30	
1,2-Dibromoethane (EDB)	ug/L	ND	20	20	19.6	22.5	98	113	70-143	14	30	
1,2-Dichlorobenzene	ug/L	ND	20	20	19.5	21.8	97	109	70-142	11	30	
1,2-Dichloroethane	ug/L	ND	20	20	21.0	23.5	105	118	68-145	11	30	
1,2-Dichloropropane	ug/L	ND	20	20	20.1	22.7	100	114	70-144	12	30	
1,3-Dichlorobenzene	ug/L	ND	20	20	20.2	22.4	101	112	70-142	11	30	
1,3-Dichloropropane	ug/L	ND	20	20	19.5	22.0	98	110	70-141	12	30	
1,4-Dichlorobenzene	ug/L	ND	20	20	19.8	21.8	99	109	70-140	10	30	
2,2-Dichloropropane	ug/L	ND	20	20	22.6	25.7	113	128	58-160	13	30	
2-Butanone (MEK)	ug/L	ND	40	40	39.4	44.5	98	111	57-156	12	30	
2-Chlorotoluene	ug/L	ND	20	20	20.8	23.0	104	115	70-148	10	30	
2-Hexanone	ug/L	ND	40	40	37.5	43.3	94	108	62-153	14	30	
4-Chlorotoluene	ug/L	ND	20	20	20.8	23.3	104	117	70-144	11	30	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	40	40	37.7	43.7	94	109	65-144	15	30	
Acetone	ug/L	ND	40	40	37.8	45.3	94	113	49-162	18	30	
Benzene	ug/L	ND	20	20	20.8	23.2	104	116	68-144	11	30	
Bromobenzene	ug/L	ND	20	20	20.1	22.3	100	111	70-144	10	30	
Bromochloromethane	ug/L	ND	20	20	21.1	23.2	106	116	70-148	9	30	
Bromodichloromethane	ug/L	ND	20	20	20.7	23.0	104	115	70-141	10	30	
Bromoform	ug/L	ND	20	20	19.4	23.2	97	116	59-144	17	30	
Bromomethane	ug/L	ND	20	20	21.3	25.3	107	127	23-190	17	30	
Carbon tetrachloride	ug/L	ND	20	20	21.4	23.8	107	119	70-147	11	30	
Chlorobenzene	ug/L	ND	20	20	20.2	22.5	101	112	70-143	10	30	
Chloroethane	ug/L	ND	20	20	18.8	20.8	94	104	55-190	11	30	
Chloroform	ug/L	3.0	20	20	24.8	27.4	109	122	67-148	10	30	
Chloromethane	ug/L	ND	20	20	20.4	21.6	102	108	38-180	6	30	
cis-1,2-Dichloroethene	ug/L	ND	20	20	22.5	24.7	113	124	67-151	9	30	
cis-1,3-Dichloropropene	ug/L	ND	20	20	21.2	23.5	106	117	70-142	10	30	
Dibromochloromethane	ug/L	ND	20	20	20.2	22.9	101	115	68-140	13	30	
Dibromomethane	ug/L	ND	20	20	19.2	21.5	96	107	70-142	11	30	
Dichlorodifluoromethane	ug/L	ND	20	20	14.2	15.6	71	78	15-200	9	30	
Diisopropyl ether	ug/L	ND	20	20	21.1	24.0	106	120	62-149	13	30	
Ethylbenzene	ug/L	ND	20	20	20.5	22.7	103	113	70-145	10	30	
Hexachloro-1,3-butadiene	ug/L	ND	20	20	22.2	24.3	111	122	64-164	9	30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 4841553 4841554

Parameter	Units	92801375005 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
m&p-Xylene	ug/L	ND	40	40	40.6	46.1	102	115	70-148	13	30	
Methyl-tert-butyl ether	ug/L	ND	20	20	19.7	22.3	99	112	64-146	12	30	
Methylene Chloride	ug/L	ND	20	20	21.0	23.0	105	115	54-149	9	30	
Naphthalene	ug/L	ND	20	20	20.8	22.3	104	111	62-154	7	30	
o-Xylene	ug/L	ND	20	20	20.5	23.5	102	117	70-145	14	30	
p-Isopropyltoluene	ug/L	ND	20	20	21.6	24.3	108	122	70-153	12	30	
Styrene	ug/L	ND	20	20	20.2	22.9	101	115	70-147	13	30	
Tetrachloroethene	ug/L	ND	20	20	20.1	22.4	100	112	70-145	11	30	
Toluene	ug/L	ND	20	20	20.0	22.0	100	110	65-146	10	30	
trans-1,2-Dichloroethene	ug/L	ND	20	20	24.1	26.5	121	133	69-155	9	30	
trans-1,3-Dichloropropene	ug/L	ND	20	20	21.1	23.8	106	119	70-142	12	30	
Trichloroethene	ug/L	ND	20	20	20.5	22.4	102	112	70-152	9	30	
Trichlorofluoromethane	ug/L	ND	20	20	19.9	21.9	99	110	60-158	10	30	
Vinyl acetate	ug/L	ND	40	40	43.1	49.6	108	124	56-157	14	30	
Vinyl chloride	ug/L	ND	20	20	18.6	20.0	93	100	51-178	7	30	
Xylene (Total)	ug/L	ND	60	60	61.1	69.6	102	116	70-146	13	30	
1,2-Dichloroethane-d4 (S)	%						106	104	70-130			
4-Bromofluorobenzene (S)	%						101	101	70-130			
Toluene-d8 (S)	%						101	101	70-130			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

QC Batch: 942251
QC Batch Method: EPA 8260D
Analysis Method: EPA 8260D
Analysis Description: 8260D MSV Low Level
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92802378001, 92802378003

METHOD BLANK: 4842764 Matrix: Water
Associated Lab Samples: 92802378001, 92802378003

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	1.0	0.31	06/17/25 23:43	
1,1,1-Trichloroethane	ug/L	ND	1.0	0.33	06/17/25 23:43	
1,1,2,2-Tetrachloroethane	ug/L	ND	1.0	0.22	06/17/25 23:43	
1,1,2-Trichloroethane	ug/L	ND	1.0	0.32	06/17/25 23:43	
1,1-Dichloroethane	ug/L	ND	1.0	0.37	06/17/25 23:43	
1,1-Dichloroethene	ug/L	ND	1.0	0.35	06/17/25 23:43	
1,1-Dichloropropene	ug/L	ND	1.0	0.43	06/17/25 23:43	
1,2,3-Trichlorobenzene	ug/L	ND	1.0	0.81	06/17/25 23:43	
1,2,3-Trichloropropane	ug/L	ND	1.0	0.26	06/17/25 23:43	
1,2,4-Trichlorobenzene	ug/L	ND	1.0	0.64	06/17/25 23:43	
1,2-Dibromo-3-chloropropane	ug/L	ND	2.0	0.34	06/17/25 23:43	
1,2-Dibromoethane (EDB)	ug/L	ND	1.0	0.27	06/17/25 23:43	
1,2-Dichlorobenzene	ug/L	ND	1.0	0.34	06/17/25 23:43	
1,2-Dichloroethane	ug/L	ND	1.0	0.32	06/17/25 23:43	
1,2-Dichloropropane	ug/L	ND	1.0	0.36	06/17/25 23:43	
1,3-Dichlorobenzene	ug/L	ND	1.0	0.34	06/17/25 23:43	
1,3-Dichloropropane	ug/L	ND	1.0	0.28	06/17/25 23:43	
1,4-Dichlorobenzene	ug/L	ND	1.0	0.33	06/17/25 23:43	
2,2-Dichloropropane	ug/L	ND	1.0	0.39	06/17/25 23:43	
2-Butanone (MEK)	ug/L	ND	5.0	4.0	06/17/25 23:43	
2-Chlorotoluene	ug/L	ND	1.0	0.32	06/17/25 23:43	
2-Hexanone	ug/L	ND	5.0	0.48	06/17/25 23:43	
4-Chlorotoluene	ug/L	ND	1.0	0.32	06/17/25 23:43	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	5.0	2.7	06/17/25 23:43	
Acetone	ug/L	ND	25.0	5.1	06/17/25 23:43	
Benzene	ug/L	ND	1.0	0.34	06/17/25 23:43	
Bromobenzene	ug/L	ND	1.0	0.29	06/17/25 23:43	
Bromochloromethane	ug/L	ND	1.0	0.47	06/17/25 23:43	
Bromodichloromethane	ug/L	ND	1.0	0.31	06/17/25 23:43	
Bromoform	ug/L	ND	1.0	0.34	06/17/25 23:43	
Bromomethane	ug/L	ND	2.0	1.7	06/17/25 23:43	
Carbon tetrachloride	ug/L	ND	1.0	0.33	06/17/25 23:43	
Chlorobenzene	ug/L	ND	1.0	0.28	06/17/25 23:43	
Chloroethane	ug/L	ND	1.0	0.65	06/17/25 23:43	
Chloroform	ug/L	ND	1.0	0.43	06/17/25 23:43	
Chloromethane	ug/L	ND	1.0	0.54	06/17/25 23:43	
cis-1,2-Dichloroethene	ug/L	ND	1.0	0.38	06/17/25 23:43	
cis-1,3-Dichloropropene	ug/L	ND	1.0	0.36	06/17/25 23:43	
Dibromochloromethane	ug/L	ND	1.0	0.36	06/17/25 23:43	
Dibromomethane	ug/L	ND	1.0	0.39	06/17/25 23:43	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

METHOD BLANK: 4842764 Matrix: Water
Associated Lab Samples: 92802378001, 92802378003

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Dichlorodifluoromethane	ug/L	ND	1.0	0.35	06/17/25 23:43	
Diisopropyl ether	ug/L	ND	1.0	0.31	06/17/25 23:43	
Ethylbenzene	ug/L	ND	1.0	0.30	06/17/25 23:43	
Hexachloro-1,3-butadiene	ug/L	ND	2.0	1.5	06/17/25 23:43	
m&p-Xylene	ug/L	ND	2.0	0.71	06/17/25 23:43	
Methyl-tert-butyl ether	ug/L	ND	1.0	0.42	06/17/25 23:43	
Methylene Chloride	ug/L	ND	5.0	2.0	06/17/25 23:43	
Naphthalene	ug/L	ND	1.0	0.64	06/17/25 23:43	
o-Xylene	ug/L	ND	1.0	0.34	06/17/25 23:43	
p-Isopropyltoluene	ug/L	ND	1.0	0.41	06/17/25 23:43	
Styrene	ug/L	ND	1.0	0.29	06/17/25 23:43	
Tetrachloroethene	ug/L	ND	1.0	0.29	06/17/25 23:43	
Toluene	ug/L	ND	1.0	0.24	06/17/25 23:43	
trans-1,2-Dichloroethene	ug/L	ND	1.0	0.40	06/17/25 23:43	
trans-1,3-Dichloropropene	ug/L	ND	1.0	0.36	06/17/25 23:43	
Trichloroethene	ug/L	ND	1.0	0.38	06/17/25 23:43	
Trichlorofluoromethane	ug/L	ND	1.0	0.30	06/17/25 23:43	
Vinyl acetate	ug/L	ND	2.0	1.3	06/17/25 23:43	
Vinyl chloride	ug/L	ND	1.0	0.39	06/17/25 23:43	
Xylene (Total)	ug/L	ND	1.0	0.34	06/17/25 23:43	
1,2-Dichloroethane-d4 (S)	%	102	70-130		06/17/25 23:43	
4-Bromofluorobenzene (S)	%	96	70-130		06/17/25 23:43	
Toluene-d8 (S)	%	102	70-130		06/17/25 23:43	

LABORATORY CONTROL SAMPLE: 4842765

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	20	17.6	88	70-130	
1,1,1-Trichloroethane	ug/L	20	18.8	94	70-130	
1,1,2,2-Tetrachloroethane	ug/L	20	18.2	91	70-130	
1,1,2-Trichloroethane	ug/L	20	17.9	90	70-130	
1,1-Dichloroethane	ug/L	20	19.1	95	70-130	
1,1-Dichloroethene	ug/L	20	21.6	108	69-131	
1,1-Dichloropropene	ug/L	20	19.0	95	70-132	
1,2,3-Trichlorobenzene	ug/L	20	17.9	90	70-132	
1,2,3-Trichloropropane	ug/L	20	18.0	90	70-130	
1,2,4-Trichlorobenzene	ug/L	20	17.6	88	70-130	
1,2-Dibromo-3-chloropropane	ug/L	20	16.9	84	70-130	
1,2-Dibromoethane (EDB)	ug/L	20	18.4	92	70-130	
1,2-Dichlorobenzene	ug/L	20	17.5	88	70-130	
1,2-Dichloroethane	ug/L	20	18.8	94	70-130	
1,2-Dichloropropane	ug/L	20	18.5	92	70-130	
1,3-Dichlorobenzene	ug/L	20	17.8	89	70-130	
1,3-Dichloropropane	ug/L	20	18.2	91	70-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

LABORATORY CONTROL SAMPLE: 4842765

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,4-Dichlorobenzene	ug/L	20	17.2	86	70-130	
2,2-Dichloropropane	ug/L	20	16.7	84	69-130	
2-Butanone (MEK)	ug/L	40	37.1	93	67-133	
2-Chlorotoluene	ug/L	20	18.5	92	70-130	
2-Hexanone	ug/L	40	36.0	90	70-133	
4-Chlorotoluene	ug/L	20	18.4	92	70-130	
4-Methyl-2-pentanone (MIBK)	ug/L	40	36.8	92	70-130	
Acetone	ug/L	40	36.5	91	67-130	
Benzene	ug/L	20	18.6	93	70-130	
Bromobenzene	ug/L	20	17.8	89	70-130	
Bromochloromethane	ug/L	20	18.7	93	70-130	
Bromodichloromethane	ug/L	20	18.1	90	70-130	
Bromoform	ug/L	20	16.9	84	70-133	
Bromomethane	ug/L	20	21.5	108	41-148	
Carbon tetrachloride	ug/L	20	17.7	89	70-130	
Chlorobenzene	ug/L	20	17.8	89	70-130	
Chloroethane	ug/L	20	18.2	91	41-157	
Chloroform	ug/L	20	18.5	93	70-130	
Chloromethane	ug/L	20	20.7	103	59-141	
cis-1,2-Dichloroethene	ug/L	20	19.3	97	70-130	
cis-1,3-Dichloropropene	ug/L	20	18.1	91	70-130	
Dibromochloromethane	ug/L	20	17.5	88	70-130	
Dibromomethane	ug/L	20	17.6	88	70-130	
Dichlorodifluoromethane	ug/L	20	19.1	95	54-147	
Diisopropyl ether	ug/L	20	18.7	94	70-130	
Ethylbenzene	ug/L	20	17.6	88	70-130	
Hexachloro-1,3-butadiene	ug/L	20	17.1	86	70-134	
m&p-Xylene	ug/L	40	35.6	89	70-130	
Methyl-tert-butyl ether	ug/L	20	18.0	90	70-130	
Methylene Chloride	ug/L	20	19.4	97	62-130	
Naphthalene	ug/L	20	18.1	91	70-135	
o-Xylene	ug/L	20	18.0	90	70-130	
p-Isopropyltoluene	ug/L	20	18.3	91	70-130	
Styrene	ug/L	20	17.9	89	70-130	
Tetrachloroethene	ug/L	20	16.7	84	70-130	
Toluene	ug/L	20	17.6	88	70-130	
trans-1,2-Dichloroethene	ug/L	20	20.1	101	70-130	
trans-1,3-Dichloropropene	ug/L	20	18.2	91	70-130	
Trichloroethene	ug/L	20	17.6	88	70-130	
Trichlorofluoromethane	ug/L	20	17.4	87	57-130	
Vinyl acetate	ug/L	40	37.6	94	70-141	
Vinyl chloride	ug/L	20	18.1	91	66-140	
Xylene (Total)	ug/L	60	53.6	89	70-130	
1,2-Dichloroethane-d4 (S)	%			101	70-130	
4-Bromofluorobenzene (S)	%			100	70-130	
Toluene-d8 (S)	%			100	70-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

MATRIX SPIKE SAMPLE: 4842766

Parameter	Units	92802378001 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	20	19.3	97	70-146	
1,1,1-Trichloroethane	ug/L	ND	20	20.3	102	70-150	
1,1,2,2-Tetrachloroethane	ug/L	ND	20	19.8	99	66-144	
1,1,2-Trichloroethane	ug/L	ND	20	19.2	96	70-142	
1,1-Dichloroethane	ug/L	ND	20	20.8	104	68-150	
1,1-Dichloroethene	ug/L	ND	20	22.5	112	64-162	
1,1-Dichloropropene	ug/L	ND	20	20.5	102	70-160	
1,2,3-Trichlorobenzene	ug/L	ND	20	19.9	99	66-151	
1,2,3-Trichloropropane	ug/L	ND	20	19.1	96	66-144	
1,2,4-Trichlorobenzene	ug/L	ND	20	19.9	100	69-147	
1,2-Dibromo-3-chloropropane	ug/L	ND	20	18.9	94	62-146	v3
1,2-Dibromoethane (EDB)	ug/L	ND	20	18.8	94	70-143	
1,2-Dichlorobenzene	ug/L	ND	20	19.9	100	70-142	
1,2-Dichloroethane	ug/L	ND	20	19.7	99	68-145	
1,2-Dichloropropane	ug/L	ND	20	19.9	99	70-144	
1,3-Dichlorobenzene	ug/L	ND	20	20.2	101	70-142	
1,3-Dichloropropane	ug/L	ND	20	19.0	95	70-141	
1,4-Dichlorobenzene	ug/L	ND	20	19.5	97	70-140	
2,2-Dichloropropane	ug/L	ND	20	20.3	101	58-160	
2-Butanone (MEK)	ug/L	ND	40	39.8	99	57-156	
2-Chlorotoluene	ug/L	ND	20	20.8	104	70-148	
2-Hexanone	ug/L	ND	40	39.4	99	62-153	
4-Chlorotoluene	ug/L	ND	20	20.6	103	70-144	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	40	38.9	97	65-144	
Acetone	ug/L	ND	40	39.1	98	49-162	
Benzene	ug/L	ND	20	19.8	99	68-144	
Bromobenzene	ug/L	ND	20	20.2	101	70-144	
Bromochloromethane	ug/L	ND	20	19.5	97	70-148	
Bromodichloromethane	ug/L	ND	20	19.6	98	70-141	
Bromoform	ug/L	ND	20	17.7	88	59-144	
Bromomethane	ug/L	ND	20	17.3	87	23-190	
Carbon tetrachloride	ug/L	ND	20	18.7	93	70-147	
Chlorobenzene	ug/L	ND	20	19.1	96	70-143	
Chloroethane	ug/L	ND	20	17.9	90	55-190	
Chloroform	ug/L	ND	20	19.8	99	67-148	
Chloromethane	ug/L	ND	20	19.0	95	38-180	
cis-1,2-Dichloroethene	ug/L	ND	20	21.1	106	67-151	
cis-1,3-Dichloropropene	ug/L	ND	20	19.1	95	70-142	
Dibromochloromethane	ug/L	ND	20	18.5	93	68-140	
Dibromomethane	ug/L	ND	20	17.9	90	70-142	
Dichlorodifluoromethane	ug/L	ND	20	19.3	96	15-200	
Diisopropyl ether	ug/L	ND	20	20.5	102	62-149	
Ethylbenzene	ug/L	ND	20	19.6	98	70-145	
Hexachloro-1,3-butadiene	ug/L	ND	20	20.5	103	64-164	
m&p-Xylene	ug/L	ND	40	38.6	97	70-148	
Methyl-tert-butyl ether	ug/L	ND	20	18.4	92	64-146	
Methylene Chloride	ug/L	ND	20	20.2	101	54-149	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

MATRIX SPIKE SAMPLE: 4842766

Parameter	Units	92802378001 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Naphthalene	ug/L	ND	20	22.5	113	62-154	
o-Xylene	ug/L	ND	20	19.7	98	70-145	
p-Isopropyltoluene	ug/L	ND	20	21.1	105	70-153	
Styrene	ug/L	ND	20	19.1	95	70-147	
Tetrachloroethene	ug/L	ND	20	17.9	90	70-145	
Toluene	ug/L	ND	20	18.9	95	65-146	
trans-1,2-Dichloroethene	ug/L	ND	20	22.2	111	69-155	
trans-1,3-Dichloropropene	ug/L	ND	20	19.3	97	70-142	
Trichloroethene	ug/L	ND	20	18.6	93	70-152	
Trichlorofluoromethane	ug/L	ND	20	17.9	89	60-158	
Vinyl acetate	ug/L	ND	40	39.6	99	56-157	
Vinyl chloride	ug/L	ND	20	18.2	91	51-178	
Xylene (Total)	ug/L	ND	60	58.3	97	70-146	
1,2-Dichloroethane-d4 (S)	%				107	70-130	
4-Bromofluorobenzene (S)	%				99	70-130	
Toluene-d8 (S)	%				100	70-130	

SAMPLE DUPLICATE: 4842767

Parameter	Units	92802378003 Result	Dup Result	RPD	Max RPD	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	ND		30	
1,1,1-Trichloroethane	ug/L	ND	ND		30	
1,1,2,2-Tetrachloroethane	ug/L	ND	ND		30	
1,1,2-Trichloroethane	ug/L	ND	ND		30	
1,1-Dichloroethane	ug/L	ND	ND		30	
1,1-Dichloroethene	ug/L	ND	ND		30	
1,1-Dichloropropene	ug/L	ND	ND		30	
1,2,3-Trichlorobenzene	ug/L	ND	ND		30	
1,2,3-Trichloropropane	ug/L	ND	ND		30	
1,2,4-Trichlorobenzene	ug/L	ND	ND		30	
1,2-Dibromo-3-chloropropane	ug/L	ND	ND		30	v2
1,2-Dibromoethane (EDB)	ug/L	ND	ND		30	
1,2-Dichlorobenzene	ug/L	ND	ND		30	
1,2-Dichloroethane	ug/L	ND	ND		30	
1,2-Dichloropropane	ug/L	ND	ND		30	
1,3-Dichlorobenzene	ug/L	ND	ND		30	
1,3-Dichloropropane	ug/L	ND	ND		30	
1,4-Dichlorobenzene	ug/L	ND	ND		30	
2,2-Dichloropropane	ug/L	ND	ND		30	
2-Butanone (MEK)	ug/L	ND	ND		30	
2-Chlorotoluene	ug/L	ND	ND		30	
2-Hexanone	ug/L	ND	ND		30	
4-Chlorotoluene	ug/L	ND	ND		30	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	ND		30	
Acetone	ug/L	ND	ND		30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

SAMPLE DUPLICATE: 4842767

Parameter	Units	92802378003 Result	Dup Result	RPD	Max RPD	Qualifiers
Benzene	ug/L	ND	ND		30	
Bromobenzene	ug/L	ND	ND		30	
Bromochloromethane	ug/L	ND	ND		30	
Bromodichloromethane	ug/L	ND	ND		30	
Bromoform	ug/L	ND	ND		30	
Bromomethane	ug/L	ND	ND		30	
Carbon tetrachloride	ug/L	ND	ND		30	
Chlorobenzene	ug/L	ND	ND		30	
Chloroethane	ug/L	ND	ND		30	
Chloroform	ug/L	ND	ND		30	
Chloromethane	ug/L	ND	ND		30	
cis-1,2-Dichloroethene	ug/L	ND	ND		30	
cis-1,3-Dichloropropene	ug/L	ND	ND		30	
Dibromochloromethane	ug/L	ND	ND		30	
Dibromomethane	ug/L	ND	ND		30	
Dichlorodifluoromethane	ug/L	ND	ND		30	
Diisopropyl ether	ug/L	ND	ND		30	
Ethylbenzene	ug/L	ND	ND		30	
Hexachloro-1,3-butadiene	ug/L	ND	ND		30	
m&p-Xylene	ug/L	ND	ND		30	
Methyl-tert-butyl ether	ug/L	ND	ND		30	
Methylene Chloride	ug/L	ND	ND		30	
Naphthalene	ug/L	ND	ND		30	
o-Xylene	ug/L	ND	ND		30	
p-Isopropyltoluene	ug/L	ND	ND		30	
Styrene	ug/L	ND	ND		30	
Tetrachloroethene	ug/L	ND	ND		30	
Toluene	ug/L	ND	ND		30	
trans-1,2-Dichloroethene	ug/L	ND	ND		30	
trans-1,3-Dichloropropene	ug/L	ND	ND		30	
Trichloroethene	ug/L	ND	ND		30	
Trichlorofluoromethane	ug/L	ND	ND		30	
Vinyl acetate	ug/L	ND	ND		30	
Vinyl chloride	ug/L	ND	ND		30	
Xylene (Total)	ug/L	ND	ND		30	
1,2-Dichloroethane-d4 (S)	%	101	104			
4-Bromofluorobenzene (S)	%	94	96			
Toluene-d8 (S)	%	103	103			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

QC Batch: 942957
QC Batch Method: EPA 3510C
Analysis Method: EPA 8270E
Analysis Description: 8270E Water MSSV RVE
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92802378001, 92802378002, 92802378003

METHOD BLANK: 4846048 Matrix: Water
Associated Lab Samples: 92802378001, 92802378002, 92802378003

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,2,4-Trichlorobenzene	ug/L	ND	10.0	1.7	06/20/25 13:45	
1,2-Dichlorobenzene	ug/L	ND	10.0	1.8	06/20/25 13:45	
1,3-Dichlorobenzene	ug/L	ND	10.0	1.6	06/20/25 13:45	
1,4-Dichlorobenzene	ug/L	ND	10.0	1.7	06/20/25 13:45	
1-Methylnaphthalene	ug/L	ND	10.0	2.0	06/20/25 13:45	
2,2'-Oxybis(1-chloropropane)	ug/L	ND	10.0	1.2	06/20/25 13:45	
2,4,5-Trichlorophenol	ug/L	ND	10.0	1.4	06/20/25 13:45	
2,4,6-Trichlorophenol	ug/L	ND	10.0	1.6	06/20/25 13:45	
2,4-Dichlorophenol	ug/L	ND	10.0	1.4	06/20/25 13:45	
2,4-Dimethylphenol	ug/L	ND	10.0	1.7	06/20/25 13:45	
2,4-Dinitrophenol	ug/L	ND	50.0	26.0	06/20/25 13:45	
2,4-Dinitrotoluene	ug/L	ND	10.0	1.6	06/20/25 13:45	
2,6-Dinitrotoluene	ug/L	ND	10.0	1.7	06/20/25 13:45	
2-Chloronaphthalene	ug/L	ND	10.0	1.7	06/20/25 13:45	
2-Chlorophenol	ug/L	ND	10.0	1.2	06/20/25 13:45	
2-Methylnaphthalene	ug/L	ND	10.0	1.9	06/20/25 13:45	
2-Methylphenol(o-Cresol)	ug/L	ND	10.0	1.9	06/20/25 13:45	
2-Nitroaniline	ug/L	ND	20.0	3.0	06/20/25 13:45	
2-Nitrophenol	ug/L	ND	10.0	1.4	06/20/25 13:45	
3&4-Methylphenol(m&p Cresol)	ug/L	ND	10.0	1.2	06/20/25 13:45	
3,3'-Dichlorobenzidine	ug/L	ND	20.0	8.1	06/20/25 13:45	
3-Nitroaniline	ug/L	ND	20.0	3.8	06/20/25 13:45	
4,6-Dinitro-2-methylphenol	ug/L	ND	20.0	7.8	06/20/25 13:45	
4-Bromophenylphenyl ether	ug/L	ND	10.0	1.8	06/20/25 13:45	
4-Chloro-3-methylphenol	ug/L	ND	10.0	3.3	06/20/25 13:45	
4-Chloroaniline	ug/L	ND	20.0	3.6	06/20/25 13:45	
4-Chlorophenylphenyl ether	ug/L	ND	10.0	2.0	06/20/25 13:45	
4-Nitroaniline	ug/L	ND	20.0	5.1	06/20/25 13:45	
4-Nitrophenol	ug/L	ND	50.0	6.6	06/20/25 13:45	
Acenaphthene	ug/L	ND	10.0	2.0	06/20/25 13:45	
Acenaphthylene	ug/L	ND	10.0	2.0	06/20/25 13:45	
Aniline	ug/L	ND	10.0	1.6	06/20/25 13:45	
Anthracene	ug/L	ND	10.0	2.3	06/20/25 13:45	
Benzo(a)anthracene	ug/L	ND	10.0	2.7	06/20/25 13:45	
Benzo(a)pyrene	ug/L	ND	10.0	2.8	06/20/25 13:45	
Benzo(b)fluoranthene	ug/L	ND	10.0	2.6	06/20/25 13:45	
Benzo(g,h,i)perylene	ug/L	ND	10.0	2.8	06/20/25 13:45	
Benzo(k)fluoranthene	ug/L	ND	10.0	2.7	06/20/25 13:45	
Benzoic Acid	ug/L	ND	50.0	22.0	06/20/25 13:45	
Benzyl alcohol	ug/L	ND	20.0	2.9	06/20/25 13:45	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

METHOD BLANK: 4846048 Matrix: Water
Associated Lab Samples: 92802378001, 92802378002, 92802378003

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
bis(2-Chloroethoxy)methane	ug/L	ND	10.0	1.8	06/20/25 13:45	
bis(2-Chloroethyl) ether	ug/L	ND	10.0	1.9	06/20/25 13:45	
bis(2-Ethylhexyl)phthalate	ug/L	ND	6.0	3.7	06/20/25 13:45	
Butylbenzylphthalate	ug/L	ND	10.0	3.1	06/20/25 13:45	
Chrysene	ug/L	ND	10.0	2.8	06/20/25 13:45	
Di-n-butylphthalate	ug/L	ND	10.0	2.2	06/20/25 13:45	
Di-n-octylphthalate	ug/L	ND	10.0	3.9	06/20/25 13:45	
Dibenz(a,h)anthracene	ug/L	ND	10.0	3.0	06/20/25 13:45	
Dibenzofuran	ug/L	ND	10.0	2.1	06/20/25 13:45	
Diethylphthalate	ug/L	ND	10.0	2.0	06/20/25 13:45	
Dimethylphthalate	ug/L	ND	10.0	2.1	06/20/25 13:45	
Fluoranthene	ug/L	ND	10.0	2.2	06/20/25 13:45	
Fluorene	ug/L	ND	10.0	2.1	06/20/25 13:45	
Hexachloro-1,3-butadiene	ug/L	ND	10.0	1.8	06/20/25 13:45	
Hexachlorobenzene	ug/L	ND	10.0	2.2	06/20/25 13:45	
Hexachlorocyclopentadiene	ug/L	ND	10.0	1.6	06/20/25 13:45	
Hexachloroethane	ug/L	ND	10.0	1.4	06/20/25 13:45	
Indeno(1,2,3-cd)pyrene	ug/L	ND	10.0	2.9	06/20/25 13:45	
Isophorone	ug/L	ND	10.0	1.7	06/20/25 13:45	
N-Nitroso-di-n-propylamine	ug/L	ND	10.0	1.3	06/20/25 13:45	
N-Nitrosodimethylamine	ug/L	ND	10.0	1.9	06/20/25 13:45	
N-Nitrosodiphenylamine	ug/L	ND	10.0	3.0	06/20/25 13:45	
Naphthalene	ug/L	ND	10.0	2.1	06/20/25 13:45	
Nitrobenzene	ug/L	ND	10.0	1.9	06/20/25 13:45	
Pentachlorophenol	ug/L	ND	20.0	3.8	06/20/25 13:45	
Phenanthrene	ug/L	ND	10.0	2.0	06/20/25 13:45	
Phenol	ug/L	ND	10.0	1.4	06/20/25 13:45	
Pyrene	ug/L	ND	10.0	2.2	06/20/25 13:45	
2,4,6-Tribromophenol (S)	%	62	10-166		06/20/25 13:45	
2-Fluorobiphenyl (S)	%	22	10-130		06/20/25 13:45	
2-Fluorophenol (S)	%	24	10-130		06/20/25 13:45	
Nitrobenzene-d5 (S)	%	29	10-133		06/20/25 13:45	
Phenol-d6 (S)	%	18	10-130		06/20/25 13:45	
Terphenyl-d14 (S)	%	74	10-193		06/20/25 13:45	

LABORATORY CONTROL SAMPLE: 4846049

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,2,4-Trichlorobenzene	ug/L	50	15.3	31	14-130	
1,2-Dichlorobenzene	ug/L	50	9.6J	19	10-130	
1,3-Dichlorobenzene	ug/L	50	8.3J	17	10-130	
1,4-Dichlorobenzene	ug/L	50	9.0J	18	10-130	
1-Methylnaphthalene	ug/L	50	26.9	54	26-131	
2,2'-Oxybis(1-chloropropane)	ug/L	50	20.0	40	23-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

LABORATORY CONTROL SAMPLE: 4846049

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
2,4,5-Trichlorophenol	ug/L	50	31.3	63	36-150	
2,4,6-Trichlorophenol	ug/L	50	29.5	59	30-151	
2,4-Dichlorophenol	ug/L	50	26.4	53	36-140	
2,4-Dimethylphenol	ug/L	50	28.1	56	36-155	
2,4-Dinitrophenol	ug/L	250	187	75	10-169	
2,4-Dinitrotoluene	ug/L	50	37.1	74	46-160	
2,6-Dinitrotoluene	ug/L	50	33.8	68	47-161	
2-Chloronaphthalene	ug/L	50	27.0	54	29-134	
2-Chlorophenol	ug/L	50	21.7	43	29-130	
2-Methylnaphthalene	ug/L	50	26.0	52	26-130	
2-Methylphenol(o-Cresol)	ug/L	50	24.2	48	32-130	
2-Nitroaniline	ug/L	100	61.3	61	41-150	
2-Nitrophenol	ug/L	50	24.8	50	31-145	
3&4-Methylphenol(m&p Cresol)	ug/L	50	22.4	45	29-130	
3,3'-Dichlorobenzidine	ug/L	100	73.1	73	46-153	
3-Nitroaniline	ug/L	100	66.8	67	47-156	
4,6-Dinitro-2-methylphenol	ug/L	100	73.9	74	23-161	
4-Bromophenylphenyl ether	ug/L	50	34.1	68	45-143	
4-Chloro-3-methylphenol	ug/L	100	62.0	62	42-143	
4-Chloroaniline	ug/L	100	51.1	51	37-135	
4-Chlorophenylphenyl ether	ug/L	50	30.8	62	43-140	
4-Nitroaniline	ug/L	100	71.5	72	47-157	
4-Nitrophenol	ug/L	250	94.4	38	10-130	
Acenaphthene	ug/L	50	30.7	61	38-138	
Acenaphthylene	ug/L	50	31.3	63	39-139	
Aniline	ug/L	50	16.2	32	16-130	
Anthracene	ug/L	50	38.2	76	45-136	
Benzo(a)anthracene	ug/L	50	37.8	76	52-151	
Benzo(a)pyrene	ug/L	50	40.1	80	46-165	
Benzo(b)fluoranthene	ug/L	50	38.6	77	44-170	
Benzo(g,h,i)perylene	ug/L	50	43.4	87	39-171	
Benzo(k)fluoranthene	ug/L	50	42.1	84	43-168	
Benzoic Acid	ug/L	250	95.0	38	10-130	
Benzyl alcohol	ug/L	100	45.1	45	33-134	
bis(2-Chloroethoxy)methane	ug/L	50	25.6	51	37-140	
bis(2-Chloroethyl) ether	ug/L	50	24.1	48	33-136	
bis(2-Ethylhexyl)phthalate	ug/L	50	42.5	85	50-169	
Butylbenzylphthalate	ug/L	50	39.7	79	50-174	
Chrysene	ug/L	50	38.9	78	52-148	
Di-n-butylphthalate	ug/L	50	41.0	82	51-154	
Di-n-octylphthalate	ug/L	50	41.8	84	44-170	
Dibenz(a,h)anthracene	ug/L	50	42.5	85	41-171	
Dibenzofuran	ug/L	50	31.7	63	42-157	
Diethylphthalate	ug/L	50	36.3	73	50-149	
Dimethylphthalate	ug/L	50	35.0	70	47-146	
Fluoranthene	ug/L	50	39.7	79	51-152	
Fluorene	ug/L	50	33.6	67	46-143	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

LABORATORY CONTROL SAMPLE: 4846049

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Hexachloro-1,3-butadiene	ug/L	50	11.1	22	10-130	
Hexachlorobenzene	ug/L	50	35.5	71	40-139	
Hexachlorocyclopentadiene	ug/L	50	12.7	25	10-130	
Hexachloroethane	ug/L	50	7.4J	15	10-130	
Indeno(1,2,3-cd)pyrene	ug/L	50	39.7	79	40-172	
Isophorone	ug/L	50	30.7	61	37-143	
N-Nitroso-di-n-propylamine	ug/L	50	26.5	53	38-145	
N-Nitrosodimethylamine	ug/L	50	21.7	43	30-130	
N-Nitrosodiphenylamine	ug/L	50	37.0	74	46-144	
Naphthalene	ug/L	50	19.9	40	21-130	
Nitrobenzene	ug/L	50	24.5	49	33-136	
Pentachlorophenol	ug/L	100	71.1	71	19-156	
Phenanthrene	ug/L	50	38.4	77	49-143	
Phenol	ug/L	50	15.7	31	18-130	
Pyrene	ug/L	50	37.6	75	48-156	
2,4,6-Tribromophenol (S)	%			81	10-166	
2-Fluorobiphenyl (S)	%			55	10-130	
2-Fluorophenol (S)	%			46	10-130	
Nitrobenzene-d5 (S)	%			62	10-133	
Phenol-d6 (S)	%			37	10-130	
Terphenyl-d14 (S)	%			78	10-193	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 4846050 4846051

Parameter	Units	92802065001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
1,2,4-Trichlorobenzene	ug/L	ND	83.3	83.3	31.9	22.6	38	27	10-130	34	30	R1
1,2-Dichlorobenzene	ug/L	ND	83.3	83.3	16.3J	13.9J	20	17	10-130		30	
1,3-Dichlorobenzene	ug/L	ND	83.3	83.3	12.5J	12.2J	15	15	10-130		30	
1,4-Dichlorobenzene	ug/L	ND	83.3	83.3	13.8J	12.1J	17	15	10-130		30	
1-Methylnaphthalene	ug/L	ND	83.3	83.3	55.6	38.0	67	46	10-130	38	30	R1
2,2'-Oxybis(1-chloropropane)	ug/L	ND	83.3	83.3	37.1	25.7	44	31	10-132	36	30	R1
2,4,5-Trichlorophenol	ug/L	ND	83.3	83.3	66.9	47.7	80	57	10-174	34	30	R1
2,4,6-Trichlorophenol	ug/L	ND	83.3	83.3	64.0	44.1	77	53	10-173	37	30	R1
2,4-Dichlorophenol	ug/L	ND	83.3	83.3	57.3	39.5	69	47	10-153	37	30	R1
2,4-Dimethylphenol	ug/L	ND	83.3	83.3	60.0	41.9	72	50	12-157	36	30	R1
2,4-Dinitrophenol	ug/L	ND	417	417	374	312	90	75	10-165	18	30	
2,4-Dinitrotoluene	ug/L	ND	83.3	83.3	77.5	62.0	93	74	29-168	22	30	
2,6-Dinitrotoluene	ug/L	ND	83.3	83.3	73.4	54.1	88	65	28-168	30	30	
2-Chloronaphthalene	ug/L	ND	83.3	83.3	60.1	40.8	72	49	11-136	38	30	R1
2-Chlorophenol	ug/L	ND	83.3	83.3	41.3	30.2	50	36	10-134	31	30	R1
2-Methylnaphthalene	ug/L	ND	83.3	83.3	54.8	37.1	66	44	10-131	39	30	R1
2-Methylphenol(o-Cresol)	ug/L	ND	83.3	83.3	48.7	34.5	58	41	10-130	34	30	R1
2-Nitroaniline	ug/L	ND	167	167	129	94.3	78	57	19-156	31	30	R1

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 4846050 4846051

Parameter	Units	92802065001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
2-Nitrophenol	ug/L	ND	83.3	83.3	51.8	36.3	62	44	10-160	35	30	R1
3&4-Methylphenol(m&p Cresol)	ug/L	ND	83.3	83.3	50.7	34.0	61	41	10-132	39	30	R1
3,3'-Dichlorobenzidine	ug/L	ND	167	167	146	119	87	71	10-173	20	30	
3-Nitroaniline	ug/L	ND	167	167	137	110	82	66	19-169	22	30	
4,6-Dinitro-2-methylphenol	ug/L	ND	167	167	156	127	94	76	10-178	21	30	
4-Bromophenylphenyl ether	ug/L	ND	83.3	83.3	70.2	53.1	84	64	28-149	28	30	
4-Chloro-3-methylphenol	ug/L	ND	167	167	128	90.2	77	54	18-148	35	30	R1
4-Chloroaniline	ug/L	ND	167	167	110	75.1	66	45	10-141	37	30	R1
4-Chlorophenylphenyl ether	ug/L	ND	83.3	83.3	66.3	47.8	80	57	24-144	32	30	R1
4-Nitroaniline	ug/L	ND	167	167	151	125	91	75	18-170	19	30	
4-Nitrophenol	ug/L	ND	417	417	198	170	48	41	10-130	16	30	
Acenaphthene	ug/L	ND	83.3	83.3	67.1	45.9	81	55	18-142	37	30	R1
Acenaphthylene	ug/L	ND	83.3	83.3	69.0	46.7	83	56	18-143	38	30	R1
Aniline	ug/L	ND	83.3	83.3	24.0	16.8	29	20	10-130	35	30	R1
Anthracene	ug/L	ND	83.3	83.3	80.0	63.7	96	76	32-138	23	30	
Benzo(a)anthracene	ug/L	ND	83.3	83.3	78.2	64.9	94	78	41-155	19	30	
Benzo(a)pyrene	ug/L	ND	83.3	83.3	84.2	68.5	101	82	10-167	21	30	
Benzo(b)fluoranthene	ug/L	ND	83.3	83.3	79.5	65.8	95	79	31-172	19	30	
Benzo(g,h,i)perylene	ug/L	ND	83.3	83.3	91.9	70.8	110	85	26-177	26	30	
Benzo(k)fluoranthene	ug/L	ND	83.3	83.3	86.1	69.0	103	83	31-168	22	30	
Benzoic Acid	ug/L	ND	417	417	174	128	42	31	10-130	31	30	R1
Benzyl alcohol	ug/L	ND	167	167	102	68.7	61	41	10-136	39	30	R1
bis(2-Chloroethoxy)methane	ug/L	ND	83.3	83.3	55.0	37.3	66	45	12-143	38	30	R1
bis(2-Chloroethyl) ether	ug/L	ND	83.3	83.3	42.2	30.1	51	36	10-139	34	30	R1
bis(2-Ethylhexyl)phthalate	ug/L	ND	83.3	83.3	87.3	72.9	105	88	41-173	18	30	
Butylbenzylphthalate	ug/L	ND	83.3	83.3	85.0	73.0	102	88	38-182	15	30	
Chrysene	ug/L	ND	83.3	83.3	83.3	69.7	100	84	41-152	18	30	
Di-n-butylphthalate	ug/L	ND	83.3	83.3	89.3	74.2	104	86	37-162	19	30	
Di-n-octylphthalate	ug/L	ND	83.3	83.3	89.4	73.5	107	88	36-176	20	30	
Dibenz(a,h)anthracene	ug/L	ND	83.3	83.3	89.0	70.1	107	84	29-175	24	30	
Dibenzofuran	ug/L	ND	83.3	83.3	68.0	48.2	82	58	23-144	34	30	R1
Diethylphthalate	ug/L	ND	83.3	83.3	75.4	60.3	91	72	33-154	22	30	
Dimethylphthalate	ug/L	ND	83.3	83.3	72.2	54.1	87	65	29-150	29	30	
Fluoranthene	ug/L	ND	83.3	83.3	84.7	69.5	102	83	40-156	20	30	
Fluorene	ug/L	ND	83.3	83.3	70.4	51.2	84	61	26-148	32	30	R1
Hexachloro-1,3-butadiene	ug/L	ND	83.3	83.3	21.8	16.4J	26	20	10-130		30	
Hexachlorobenzene	ug/L	ND	83.3	83.3	71.4	56.7	86	68	27-145	23	30	
Hexachlorocyclopentadiene	ug/L	ND	83.3	83.3	29.4	20.2	35	24	10-130	37	30	R1
Hexachloroethane	ug/L	ND	83.3	83.3	11.4J	10.9J	14	13	10-130		30	
Indeno(1,2,3-cd)pyrene	ug/L	ND	83.3	83.3	83.2	64.9	100	78	28-176	25	30	
Isophorone	ug/L	ND	83.3	83.3	66.6	43.4	80	52	14-145	42	30	R1
N-Nitroso-di-n-propylamine	ug/L	ND	83.3	83.3	59.5	38.0	71	46	12-149	44	30	R1
N-Nitrosodimethylamine	ug/L	ND	83.3	83.3	41.8	32.0	50	38	10-130	27	30	
N-Nitrosodiphenylamine	ug/L	ND	83.3	83.3	75.5	58.5	91	70	29-149	25	30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802378

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 4846050 4846051

Parameter	Units	92802065001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Naphthalene	ug/L	ND	83.3	83.3	40.2	27.9	48	33	10-130	36	30	R1
Nitrobenzene	ug/L	ND	83.3	83.3	45.9	32.3	55	39	10-145	35	30	R1
Pentachlorophenol	ug/L	ND	167	167	147	126	88	76	10-178	15	30	
Phenanthrene	ug/L	ND	83.3	83.3	78.5	63.2	94	76	36-146	22	30	
Phenol	ug/L	ND	83.3	83.3	30.2	22.0	36	26	10-130	31	30	R1
Pyrene	ug/L	ND	83.3	83.3	77.3	66.1	93	79	42-156	16	30	
2,4,6-Tribromophenol (S)	%						71	57	10-166			
2-Fluorobiphenyl (S)	%						24	25	10-130			
2-Fluorophenol (S)	%						21	20	10-130			
Nitrobenzene-d5 (S)	%						22	23	10-133			
Phenol-d6 (S)	%						22	20	10-130			
Terphenyl-d14 (S)	%						73	65	10-193			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALIFIERS

Project: Fortress Wood Products
Pace Project No.: 92802378

DEFINITIONS

DF - Dilution Factor, if reported, represents the factor applied to the reported data due to dilution of the sample aliquot.

ND - Not Detected at or above adjusted reporting limit.

TNTC - Too Numerous To Count

J - Estimated concentration above the adjusted method detection limit and below the adjusted reporting limit.

MDL - Adjusted Method Detection Limit.

PQL - Practical Quantitation Limit.

RL - Reporting Limit - The lowest concentration value that meets project requirements for quantitative data with known precision and bias for a specific analyte in a specific matrix.

S - Surrogate

1,2-Diphenylhydrazine decomposes to and cannot be separated from Azobenzene using Method 8270. The result for each analyte is a combined concentration.

Consistent with EPA guidelines, unrounded data are displayed and have been used to calculate % recovery and RPD values.

LCS(D) - Laboratory Control Sample (Duplicate)

MS(D) - Matrix Spike (Duplicate)

DUP - Sample Duplicate

RPD - Relative Percent Difference

NC - Not Calculable.

SG - Silica Gel - Clean-Up

U - Indicates the compound was analyzed for, but not detected.

Acid preservation may not be appropriate for 2 Chloroethylvinyl ether.

A separate vial preserved to a pH of 4-5 is recommended in SW846 Chapter 4 for the analysis of Acrolein and Acrylonitrile by EPA Method 8260.

N-Nitrosodiphenylamine decomposes and cannot be separated from Diphenylamine using Method 8270. The result reported for each analyte is a combined concentration.

Reported results are not rounded until the final step prior to reporting. Therefore, calculated parameters that are typically reported as "Total" may vary slightly from the sum of the reported component parameters.

Pace Analytical is TNI accredited. Contact your Pace PM for the current list of accredited analytes.

TNI - The NELAC Institute.

ANALYTE QUALIFIERS

1g	Re-extraction conducted in excess of EPA method holding time. Results confirm original analysis performed in hold time.
R1	RPD value was outside control limits.
S0	Surrogate recovery outside laboratory control limits.
v1	The continuing calibration verification was above the method acceptance limit. Any detection for the analyte in the associated samples may have a high bias.
v2	The continuing calibration verification was below the method acceptance limit. The analyte was not detected in the associated samples and the sensitivity of the instrument was verified with a reporting limit check standard.
v3	The continuing calibration verification was below the method acceptance limit. Any detection for the analyte in the associated samples may have low bias.

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA CROSS REFERENCE TABLE

Project: Fortress Wood Products
Pace Project No.: 92802378

Lab ID	Sample ID	QC Batch Method	QC Batch	Analytical Method	Analytical Batch
92802378001	**GW-9**	EPA 3010	1108184	EPA 6020	1108195
92802378002	**EB-3**	EPA 3010	1108184	EPA 6020	1108195
92802378003	**GW-8**	EPA 3010	1108184	EPA 6020	1108195
92802378001	**GW-9**	EPA 7470	1107960	EPA 7470	1107984
92802378002	**EB-3**	EPA 7470	1107960	EPA 7470	1107984
92802378003	**GW-8**	EPA 7470	1107960	EPA 7470	1107984
92802378001	**GW-9**	EPA 3510C	942957	EPA 8270E	943299
92802378002	**EB-3**	EPA 3510C	942957	EPA 8270E	943299
92802378003	**GW-8**	EPA 3510C	942957	EPA 8270E	943299
92802378001	**GW-9**	EPA 8260D	942251		
92802378002	**EB-3**	EPA 8260D	941998		
92802378003	**GW-8**	EPA 8260D	942251		
92802378004	**TB-3**	EPA 8260D	941998		

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Laboratory receiving samples:
Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☑ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☐

Sample Condition Upon Receipt

Client Name: ECS Southeast

Project #: WO# : 92802378

92802378

Courier: ☐ Fed Ex ☐ UPS ☐ USPS ☑ Client ☐ Commercial ☐ Pace ☐ Other:____

Custody Seal Present? ☐ Yes ☑ No Seals Intact? ☐ Yes ☐ No ☑ N/A

Date/Initials Person Examining Contents: WA 6/13/25

Packing Material: ☐ Bubble Wrap ☑ Bubble Bags ☐ None ☐ Other

Biological Tissue Frozen? ☐ Yes ☐ No ☑ N/A

Thermometer:
☑ IR Gun ID: 92683 Type of Ice: ☑ Wet ☐ Blue ☐ None

Cooler Temp: 2.1 Correction Factor: Add/Subtract (°C) 0

Temp should be above freezing to 6°C
☐ Samples out of temp criteria. Samples on ice, cooling process has begun

Cooler Temp Corrected (°C): 2.1

USDA Regulated Soil (☑ N/A, water sample)
Did samples originate in a quarantine zone within the United States: CA, NY, or SC (check maps)? ☐ Yes ☐ No

Did samples originate from a foreign source (internationally, including Hawaii and Puerto Rico)? ☐ Yes ☐ No

				Comments/Discrepancy:
Chain of Custody Present?	☑ Yes	☐ No	☐ N/A	1.
Samples Arrived within Hold Time?	☑ Yes	☐ No	☐ N/A	2.
Short Hold Time Analysis (<72 hr.)?	☐ Yes	☑ No	☐ N/A	3.
Rush Turn Around Time Requested?	☐ Yes	☑ No	☐ N/A	4.
Sufficient Volume?	☑ Yes	☐ No	☐ N/A	5.
Correct Containers Used?	☑ Yes	☐ No	☐ N/A	6.
-Pace Containers Used?	☑ Yes	☐ No	☐ N/A	
Containers Intact?	☑ Yes	☐ No	☐ N/A	7.
Dissolved analysis: Samples Field Filtered?	☐ Yes	☑ No	☐ N/A	8.
Sample Labels Match COC? -Includes Date/Time/ID/Analysis Matrix: WT	☑ Yes	☐ No	☐ N/A	9.
Headspace in VOA Vials (>5-6mm)?	☐ Yes	☑ No	☐ N/A	10.
Trip Blank Present?	☑ Yes	☐ No	☐ N/A	11.
Trip Blank Custody Seals Present?	☑ Yes	☐ No	☐ N/A	

COMMENTS/SAMPLE DISCREPANCY

Field Data Required? ☐ Yes ☐ No

Lot ID of split containers:

CLIENT NOTIFICATION/RESOLUTION

Person contacted: Date/Time:

Project Manager SCURF Review: Date:

Project Manager SRF Review: Date:

WO#: 92802378

*Check mark top half of box if pH and/or dechlorination is verified and within the acceptance range for preservation samples.
Exceptions: VOA, Coliform, TOC, Oil and Grease, DRO/8015 (water) DOC, LLHg
**Bottom half of box is to list number of bottles
***Check all unpreserved Nitrates for chlorine

Project # PM: AMB Due Date: 06/20/25
CLIENT: 92-ECS

Laboratory Receiving location: Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☑ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☐

Client ECS Profile (EZ) (Circle one) 32700063 Notes

Item#	BP4U-125 mL Plastic Unpreserved (N/A) (Cl-)	BP3U-250 mL Plastic Unpreserved (N/A)	BP2U-500 mL Plastic Unpreserved (N/A)	BP1U-1 liter Plastic Unpreserved (N/A)		BP4S-125 mL Plastic H2SO4 (pH < 2) (Cl-)	BP3N-250 mL plastic HNO3 (pH < 2)	BP4Z-125 mL Plastic Zn Acetate & NaOH (>9)	BP4B-125 mL Plastic NaOH (pH > 12) (Cl-)	WGFU-Wide-mouthed Glass Jar Unpreserved	AG1U-1 liter Amber Unpreserved (N/A) (Cl-)	AG1H-1 liter Amber HCl (pH < 2)	AG3U-250 mL Amber Unpreserved (N/A) (Cl-)	AG1S-1 liter Amber H2SO4 (pH < 2)	AG3S-250 mL Amber H2SO4 (pH < 2)	DG9A-40 mL Amber NH4Cl (N/A)(Cl-)	DG9H-40 mL VOA HCl (N/A)	VG9T-40 mL VOA Na2S2O3 (N/A)	VG9U-40 mL VOA Unpreserved (N/A)	DG9V-40 mL VOA H3PO4 (N/A)	KP7U-50 mL Plastic Unpreserved (N/A)	V/GK (3 vials per kit)-VPH/Gasket (N/A)	SP5T-125 mL Sterile Plastic (N/A - lab)	SP2T-250 mL Sterile Plastic (N/A - lab)		BP3R-250 mL Plastic (NH4)2SO4 (9.3-9.7)	AG0U-100 mL Amber Unpreserved (N/A) (Cl-)	VSGU-20 mL Scintillation vials (N/A)	DG9U-40 mL Amber Unpreserved vials (N/A)
CC							SI										dl											dl		
1							1										3											2		
2							1										3											2		
3							1										3											2		
4																	2													
5																														
6																														
7																														
8																														
9																														
10																														
11																														
12																														

pH Adjustment Log for Preserved Samples

Sample ID	Type of Preservative	pH upon receipt	Date preservation adjusted	Time preservation adjusted	Amount of Preservative added	Lot #

Note: Whenever there is a discrepancy affecting North Carolina compliance samples, a copy of this form will be sent to the North Carolina DENR Certification Office (i.e. Out of hold, incorrect preservative, out of temp, incorrect containers.

Pace® Location Requested (City/State):
Pace Analytical Charlotte
9800 Kincey Ave. Suite 100, Huntersville, NC 28078

CHAIN-OF-CUSTODY Analytical Request Document

Chain-of-Custody is a LEGAL DOCUMENT - Complete all relevant fields

LAB USE ONLY- Affix Workorder/Login Label Here

Scan QR Code for instructions

Company Name:	ECS Southeast, LLC-Charlotte	Contact/Report To:	Emery Lovekamp
Street Address:	1812 Center Park Drive Suite D Charlotte, NC 28217	Phone #:	704-525-5152
		E-Mail:	elovekamp@ecslimited.com
		Cc E-Mail:	
Customer Project #:	24413-C		
Project Name:	Fortress Wood Products	Invoice To:	AP-ECS Charlotte
		Invoice E-Mail:	ecs-49@ecslimited.com
Site Collection Info/Facility ID (as applicable):	GUILFORD COUNTY	Purchase Order # (if applicable):	
		Quote #:	

Time Zone Collected: [ ] AK [ ] PT [ ] MT [ ] CT [X] ET

County / State origin of sample(s): North Carolina GUILFORD

Data Deliverables:
[ ] Level II [ ] Level III [ ] Level IV
[ ] EQUIS
[ ] Other

Regulatory Program (DW, RCRA, etc.) as applicable: BROWNFIELDS — Reportable [ ] Yes [ ] No

Rush (Pre-approval required):
[ ] Same Day [ ] 1 Day [ ] 2 Day [ ] 3 Day [ ] Other _____

DW PWSID # or WW Permit # as applicable:

Date Results Requested: STANDARD

Field Filtered (if applicable): [ ] Yes [X] No
Analysis:

* Matrix Codes (Insert in Matrix box below): Drinking Water (DW), Ground Water (GW), Waste Water (WW), Product (P), Soil/Solid (SS), Oil (OL), Wipe (WP), Tissue (TS), Bioassay (B), Vapor (V), Surface Water (SW),Sediment (SED), Sludge (SL), Caulk (CK), Leachate (LL), Biosolid (BS), Other (OT)

Specify Container Size **

Identify Container Preservative Type***

Analysis Requested

Customer Sample ID	Matrix *	Comp / Grab	Composite Start Date	Composite Start Time	Collected or Composite End Date	Collected or Composite End Time	# Cont.	Res. Chlorine Results	Res. Chlorine Units	8260 VOC-trip blank	8260 VOCs	8270 SVOCs	RPL METALS 6020/7470	Sample Comment
GW-9	GW	G			6/12/25	1745	6				X	X	X	
EB-3	W	↓			↓	1750	6				X	X	X	
GW-8	GW	↓			↓	1935	6				X	X	X	
TB-3	W	↓			6/11/25	—	2			X				

**Container Size: (1) 1L, (2) 500mL, (3) 250mL, (4) 125mL, (5) 100mL, (6) 40mL vial, (7) EnCore, (8) TerraCore, (9) 90mL, (10) Other

*** Preservative Types: (1) None, (2) HNO3, (3) H2SO4, (4) HCl, (5) NaOH, (6) Zn Acetate, (7) NaHSO4, (8) Sod. Thiosulfate, (9) Ascorbic Acid, (10) MeOH, (11) Other

Lab Use Only
Proj. Mgr: Angela Baioni
AcctNum / Client ID:
Table #:
Profile / Template: 18978
Prelog / Bottle Ord. ID: EZ 3270063

Preservation non-conformance identified for sample.

Additional Instructions from Pace®:

Collected By:
(Printed Name) EMERY LOVEKAMP
Signature:

Customer Remarks / Special Conditions / Possible Hazards:

# Coolers:	Thermometer ID:	Correction Factor (°C):	Obs. Temp. (°C)	Corrected Temp. (°C)	On Ice:

Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Tracking Number:
ECS	6/12/25 1840	Pace	6/13/25 1200	
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature) Pace AW	Date/Time: 6/13/25 1600	Delivered by: [ ] In- Person [ ] Courier
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	[ ] FedEx [ ] UPS [ ] Other
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Page: 1 of 1

Submitting a sample via this chain of custody constitutes acknowledgment and acceptance of the Pace® Terms and Conditions found at https://www.pacelabs.com/resource-library/resource/pace-terms-and-conditions/

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

July 14, 2025

Emery Lovekamp
ECS Southeast, LLC-Charlotte
1812 Center Park Drive
Suite D
Charlotte, NC 28217

RE: Project: Fortress Wood Products
Pace Project No.: 92802132

Dear Emery Lovekamp:

Enclosed are the analytical results for sample(s) received by the laboratory on June 12, 2025. The results relate only to the samples included in this report. Results reported herein conform to the applicable TNI/NELAC Standards and the laboratory's Quality Manual, where applicable, unless otherwise noted in the body of the report.

The test results provided in this final report were generated by each of the following laboratories within the Pace Network:

- Pace National - Mt. Juliet
- Pace Analytical Services - Charlotte

If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Angela M. Baioni

Angela Baioni
angela.baioni@pacelabs.com
612-473-6801
Project Manager

Enclosures

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

CERTIFICATIONS

Project: Fortress Wood Products
Pace Project No.: 92802132

Pace Analytical Services National

12065 Lebanon Road, Mt. Juliet, TN 37122
Alabama Certification #: 40660
Alaska Certification 17-026
Arizona Certification #: AZ0612
Arkansas Certification #: 88-0469
California Certification #: 2932
Canada Certification #: 1461.01
Colorado Certification #: TN00003
Connecticut Certification #: PH-0197
DOD Certification: #1461.01
EPA# TN00003
Florida Certification #: E87487
Georgia DW Certification #: 923
Georgia Certification: NELAP
Idaho Certification #: TN00003
Illinois Certification #: 200008
Indiana Certification #: C-TN-01
Iowa Certification #: 364
Kansas Certification #: E-10277
Kentucky UST Certification #: 16
Kentucky Certification #: 90010
Louisiana Certification #: AI30792
Louisiana DW Certification #: LA180010
Maine Certification #: TN0002
Maryland Certification #: 324
Massachusetts Certification #: M-TN003
Michigan Certification #: 9958
Minnesota Certification #: 047-999-395
Mississippi Certification #: TN00003
Missouri Certification #: 340
Montana Certification #: CERT0086
Nebraska Certification #: NE-OS-15-05
Nevada Certification #: TN-03-2002-34
New Hampshire Certification #: 2975
New Jersey Certification #: TN002
New Mexico DW Certification
New York Certification #: 11742
North Carolina Aquatic Toxicity Certification #: 41
North Carolina Drinking Water Certification #: 21704
North Carolina Environmental Certificate #: 375
North Dakota Certification #: R-140
Ohio VAP Certification #: CL0069
Oklahoma Certification #: 9915
Oregon Certification #: TN200002
Pennsylvania Certification #: 68-02979
Rhode Island Certification #: LAO00356
South Carolina Certification #: 84004
South Dakota Certification
Tennessee DW/Chem/Micro Certification #: 2006
Texas Certification #: T 104704245-17-14
Texas Mold Certification #: LAB0152
USDA Soil Permit #: P330-15-00234
Utah Certification #: TN00003
Vermont Dept. of Health: ID# VT-2006
Virginia Certification #: VT2006
Virginia Certification #: 460132
Washington Certification #: C847
West Virginia Certification #: 233
Wisconsin Certification #: 998093910
Wyoming UST Certification #: via A2LA 2926.01
A2LA-ISO 17025 Certification #: 1461.01
A2LA-ISO 17025 Certification #: 1461.02
AIHA-LAP/LLC EMLAP Certification #:100789

Pace Analytical Services Charlotte

South Carolina Laboratory ID: 99006
9800 Kincey Ave. Ste 100, Huntersville, NC 28078
North Carolina Drinking Water Certification #: 37706
North Carolina Field Services Certification #: 5342
North Carolina Wastewater Certification #: 12
South Carolina Laboratory ID: 99006
South Carolina Certification #: 99006001
South Carolina Drinking Water Cert. #: 99006003
Florida/NELAP Certification #: E87627
Kentucky UST Certification #: 84
Louisiana DoH Drinking Water #: LA029
Virginia/VELAP Certification #: 460221

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE SUMMARY

Project: Fortress Wood Products
Pace Project No.: 92802132

Lab ID	Sample ID	Matrix	Date Collected	Date Received
92802132001	**GW-5**	Water	06/11/25 09:45	06/12/25 13:10
92802132002	**GW-4**	Water	06/11/25 11:10	06/12/25 13:10
92802132003	**EB-2**	Water	06/11/25 11:20	06/12/25 13:10
92802132004	**GW-3**	Water	06/11/25 12:45	06/12/25 13:10
92802132005	**GW-10**	Water	06/11/25 14:55	06/12/25 13:10
92802132006	**GW-6**	Water	06/11/25 16:20	06/12/25 13:10
92802132007	**WC-1**	Solid	06/11/25 13:45	06/12/25 13:10
92802132008	**TB-2**	Water	06/11/25 00:00	06/12/25 13:10

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE ANALYTE COUNT

Project: Fortress Wood Products
Pace Project No.: 92802132

Lab ID	Sample ID	Method	Analysts	Analytes Reported	Laboratory
92802132001	**GW-5**	EPA 6020B	JPD	12	PAN
		EPA 7470A	NDL	1	PAN
		EPA 8270E	ICO	74	PASI-C
		EPA 8260D	LMB	63	PASI-C
92802132002	**GW-4**	EPA 6020B	JPD	12	PAN
		EPA 7470A	NDL	1	PAN
		EPA 8270E	ICO	74	PASI-C
		EPA 8260D	LMB	63	PASI-C
92802132003	**EB-2**	EPA 6020B	JPD	12	PAN
		EPA 7470A	NDL	1	PAN
		EPA 8270E	ICO	74	PASI-C
		EPA 8260D	LMB	63	PASI-C
92802132004	**GW-3**	EPA 6020B	JPD	12	PAN
		EPA 7470A	NDL	1	PAN
		EPA 8270E	ICO	74	PASI-C
		EPA 8260D	LMB	63	PASI-C
92802132005	**GW-10**	EPA 6020B	JPD	12	PAN
		EPA 7470A	NDL	1	PAN
		EPA 8270E	ICO	74	PASI-C
		EPA 8260D	LMB	63	PASI-C
92802132006	**GW-6**	EPA 6020B	JPD	12	PAN
		EPA 7470A	NDL	1	PAN
		EPA 8270E	ICO	74	PASI-C
		EPA 8260D	LMB	63	PASI-C
92802132007	**WC-1**	EPA 6020B	LD	12	PAN
		EPA 7471B	AKB	1	PAN
		SM 2540G	CMB	1	PAN
92802132008	**TB-2**	EPA 8260D	LMB	63	PASI-C

PAN = Pace National - Mt. Juliet
PASI-C = Pace Analytical Services - Charlotte

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-5 **Lab ID: 92802132001** Collected: 06/11/25 09:45 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Metals (ICPMS) 6020B	Analytical Method: EPA 6020B Preparation Method: 3015 Pace National - Mt. Juliet								
Antimony	ND	ug/L	4.00	0.310	1	06/24/25 23:40	07/11/25 16:02	7440-36-0	
Arsenic	**0.291J**	ug/L	2.00	0.120	1	06/24/25 23:40	07/11/25 16:02	7440-38-2	J
Beryllium	ND	ug/L	2.00	0.200	1	06/24/25 23:40	07/11/25 16:02	7440-41-7	
Cadmium	**0.362J**	ug/L	1.00	0.120	1	06/24/25 23:40	07/11/25 16:02	7440-43-9	J
Chromium	**4.53**	ug/L	2.00	0.900	1	06/24/25 23:40	07/11/25 16:02	7440-47-3	
Copper	**2.19J**	ug/L	5.00	0.700	1	06/24/25 23:40	07/11/25 16:02	7440-50-8	J
Lead	ND	ug/L	2.00	0.500	1	06/24/25 23:40	07/11/25 16:02	7439-92-1	
Nickel	**19.6**	ug/L	2.00	0.500	1	06/24/25 23:40	07/11/25 16:02	7440-02-0	
Selenium	**0.348J**	ug/L	2.00	0.250	1	06/24/25 23:40	07/11/25 16:02	7782-49-2	J
Silver	ND	ug/L	2.00	0.110	1	06/24/25 23:40	07/11/25 16:02	7440-22-4	
Thallium	ND	ug/L	2.00	0.130	1	06/24/25 23:40	07/11/25 16:02	7440-28-0	
Zinc	**24.4J**	ug/L	25.0	4.00	1	06/24/25 23:40	07/11/25 16:02	7440-66-6	B,J
Mercury 7470A	Analytical Method: EPA 7470A Preparation Method: 7470A Pace National - Mt. Juliet								
Mercury	ND	ug/L	0.200	0.0700	1	06/23/25 14:43	06/24/25 15:05	7439-97-6	
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Acenaphthene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 11:56	83-32-9	
Acenaphthylene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 11:56	208-96-8	
Aniline	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 11:56	62-53-3	
Anthracene	ND	ug/L	10.0	2.3	1	06/18/25 23:54	06/19/25 11:56	120-12-7	
Benzo(a)anthracene	ND	ug/L	10.0	2.7	1	06/18/25 23:54	06/19/25 11:56	56-55-3	
Benzo(a)pyrene	ND	ug/L	10.0	2.8	1	06/18/25 23:54	06/19/25 11:56	50-32-8	
Benzo(b)fluoranthene	ND	ug/L	10.0	2.6	1	06/18/25 23:54	06/19/25 11:56	205-99-2	
Benzo(g,h,i)perylene	ND	ug/L	10.0	2.8	1	06/18/25 23:54	06/19/25 11:56	191-24-2	
Benzo(k)fluoranthene	ND	ug/L	10.0	2.7	1	06/18/25 23:54	06/19/25 11:56	207-08-9	
Benzoic Acid	ND	ug/L	50.0	22.0	1	06/18/25 23:54	06/19/25 11:56	65-85-0	M1
Benzyl alcohol	ND	ug/L	20.0	2.9	1	06/18/25 23:54	06/19/25 11:56	100-51-6	
4-Bromophenylphenyl ether	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 11:56	101-55-3	
Butylbenzylphthalate	ND	ug/L	10.0	3.1	1	06/18/25 23:54	06/19/25 11:56	85-68-7	
4-Chloro-3-methylphenol	ND	ug/L	10.0	3.3	1	06/18/25 23:54	06/19/25 11:56	59-50-7	
4-Chloroaniline	ND	ug/L	20.0	3.6	1	06/18/25 23:54	06/19/25 11:56	106-47-8	
bis(2-Chloroethoxy)methane	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 11:56	111-91-1	
bis(2-Chloroethyl) ether	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 11:56	111-44-4	
2-Chloronaphthalene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 11:56	91-58-7	
2-Chlorophenol	ND	ug/L	10.0	1.2	1	06/18/25 23:54	06/19/25 11:56	95-57-8	
4-Chlorophenylphenyl ether	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 11:56	7005-72-3	R1
Chrysene	ND	ug/L	10.0	2.8	1	06/18/25 23:54	06/19/25 11:56	218-01-9	
Dibenz(a,h)anthracene	ND	ug/L	10.0	3.0	1	06/18/25 23:54	06/19/25 11:56	53-70-3	
Dibenzofuran	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 11:56	132-64-9	
1,2-Dichlorobenzene	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 11:56	95-50-1	R1
1,3-Dichlorobenzene	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 11:56	541-73-1	R1
1,4-Dichlorobenzene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 11:56	106-46-7	R1

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-5 **Lab ID: 92802132001** Collected: 06/11/25 09:45 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
3,3'-Dichlorobenzidine	ND	ug/L	20.0	8.1	1	06/18/25 23:54	06/19/25 11:56	91-94-1	
2,4-Dichlorophenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 11:56	120-83-2	
Diethylphthalate	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 11:56	84-66-2	
2,4-Dimethylphenol	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 11:56	105-67-9	
Dimethylphthalate	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 11:56	131-11-3	
Di-n-butylphthalate	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 11:56	84-74-2	
4,6-Dinitro-2-methylphenol	ND	ug/L	20.0	7.8	1	06/18/25 23:54	06/19/25 11:56	534-52-1	
2,4-Dinitrophenol	ND	ug/L	50.0	26.0	1	06/18/25 23:54	06/19/25 11:56	51-28-5	M1
2,4-Dinitrotoluene	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 11:56	121-14-2	
2,6-Dinitrotoluene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 11:56	606-20-2	
Di-n-octylphthalate	ND	ug/L	10.0	3.9	1	06/18/25 23:54	06/19/25 11:56	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	ug/L	6.0	3.7	1	06/18/25 23:54	06/19/25 11:56	117-81-7	
Fluoranthene	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 11:56	206-44-0	
Fluorene	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 11:56	86-73-7	
Hexachloro-1,3-butadiene	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 11:56	87-68-3	
Hexachlorobenzene	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 11:56	118-74-1	R1
Hexachlorocyclopentadiene	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 11:56	77-47-4	
Hexachloroethane	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 11:56	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	ug/L	10.0	2.9	1	06/18/25 23:54	06/19/25 11:56	193-39-5	
Isophorone	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 11:56	78-59-1	
1-Methylnaphthalene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 11:56	90-12-0	
2-Methylnaphthalene	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 11:56	91-57-6	
2-Methylphenol(o-Cresol)	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 11:56	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	ug/L	10.0	1.2	1	06/18/25 23:54	06/19/25 11:56	15831-10-4	
Naphthalene	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 11:56	91-20-3	
2-Nitroaniline	ND	ug/L	20.0	3.0	1	06/18/25 23:54	06/19/25 11:56	88-74-4	
3-Nitroaniline	ND	ug/L	20.0	3.8	1	06/18/25 23:54	06/19/25 11:56	99-09-2	
4-Nitroaniline	ND	ug/L	20.0	5.1	1	06/18/25 23:54	06/19/25 11:56	100-01-6	
Nitrobenzene	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 11:56	98-95-3	
2-Nitrophenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 11:56	88-75-5	
4-Nitrophenol	ND	ug/L	50.0	6.6	1	06/18/25 23:54	06/19/25 11:56	100-02-7	
N-Nitrosodimethylamine	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 11:56	62-75-9	
N-Nitroso-di-n-propylamine	ND	ug/L	10.0	1.3	1	06/18/25 23:54	06/19/25 11:56	621-64-7	
N-Nitrosodiphenylamine	ND	ug/L	10.0	3.0	1	06/18/25 23:54	06/19/25 11:56	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	ug/L	10.0	1.2	1	06/18/25 23:54	06/19/25 11:56	108-60-1	
Pentachlorophenol	ND	ug/L	20.0	3.8	1	06/18/25 23:54	06/19/25 11:56	87-86-5	
Phenanthrene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 11:56	85-01-8	
Phenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 11:56	108-95-2	
Pyrene	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 11:56	129-00-0	
1,2,4-Trichlorobenzene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 11:56	120-82-1	
2,4,5-Trichlorophenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 11:56	95-95-4	
2,4,6-Trichlorophenol	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 11:56	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	53	%	10-133		1	06/18/25 23:54	06/19/25 11:56	4165-60-0	P2
2-Fluorobiphenyl (S)	44	%	10-130		1	06/18/25 23:54	06/19/25 11:56	321-60-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-5 **Lab ID: 92802132001** Collected: 06/11/25 09:45 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Surrogates									
Terphenyl-d14 (S)	76	%	10-193		1	06/18/25 23:54	06/19/25 11:56	1718-51-0	
Phenol-d6 (S)	11	%	10-130		1	06/18/25 23:54	06/19/25 11:56	13127-88-3	
2-Fluorophenol (S)	3	%	10-130		1	06/18/25 23:54	06/19/25 11:56	367-12-4	S0
2,4,6-Tribromophenol (S)	5	%	10-166		1	06/18/25 23:54	06/19/25 11:56	118-79-6	S0
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		06/14/25 00:17	67-64-1	v2
Benzene	ND	ug/L	1.0	0.34	1		06/14/25 00:17	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		06/14/25 00:17	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		06/14/25 00:17	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		06/14/25 00:17	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		06/14/25 00:17	75-25-2	
Bromomethane	**1.9J**	ug/L	2.0	1.7	1		06/14/25 00:17	74-83-9	
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		06/14/25 00:17	78-93-3	v2
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		06/14/25 00:17	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		06/14/25 00:17	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		06/14/25 00:17	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		06/14/25 00:17	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		06/14/25 00:17	74-87-3	v2
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/14/25 00:17	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/14/25 00:17	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		06/14/25 00:17	96-12-8	
Dibromochloromethane	ND	ug/L	1.0	0.36	1		06/14/25 00:17	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		06/14/25 00:17	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		06/14/25 00:17	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/14/25 00:17	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/14/25 00:17	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		06/14/25 00:17	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		06/14/25 00:17	75-71-8	
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		06/14/25 00:17	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		06/14/25 00:17	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		06/14/25 00:17	75-35-4	
cis-1,2-Dichloroethene	**1.4**	ug/L	1.0	0.38	1		06/14/25 00:17	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		06/14/25 00:17	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		06/14/25 00:17	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		06/14/25 00:17	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		06/14/25 00:17	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		06/14/25 00:17	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/14/25 00:17	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/14/25 00:17	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		06/14/25 00:17	108-20-3	
Ethylbenzene	ND	ug/L	1.0	0.30	1		06/14/25 00:17	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		06/14/25 00:17	87-68-3	IK

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-5 **Lab ID: 92802132001** Collected: 06/11/25 09:45 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
2-Hexanone	ND	ug/L	5.0	0.48	1		06/14/25 00:17	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		06/14/25 00:17	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		06/14/25 00:17	75-09-2	v2
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		06/14/25 00:17	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		06/14/25 00:17	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		06/14/25 00:17	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		06/14/25 00:17	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		06/14/25 00:17	630-20-6	
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		06/14/25 00:17	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		06/14/25 00:17	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		06/14/25 00:17	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		06/14/25 00:17	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		06/14/25 00:17	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		06/14/25 00:17	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		06/14/25 00:17	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		06/14/25 00:17	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		06/14/25 00:17	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		06/14/25 00:17	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		06/14/25 00:17	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		06/14/25 00:17	75-01-4	v2
Xylene (Total)	ND	ug/L	1.0	0.34	1		06/14/25 00:17	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		06/14/25 00:17	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		06/14/25 00:17	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	97	%	70-130		1		06/14/25 00:17	460-00-4	
1,2-Dichloroethane-d4 (S)	95	%	70-130		1		06/14/25 00:17	17060-07-0	
Toluene-d8 (S)	99	%	70-130		1		06/14/25 00:17	2037-26-5	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-4 **Lab ID: 92802132002** Collected: 06/11/25 11:10 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Metals (ICPMS) 6020B	Analytical Method: EPA 6020B Preparation Method: 3015 Pace National - Mt. Juliet								
Antimony	ND	ug/L	4.00	0.310	1	06/24/25 23:40	07/11/25 16:05	7440-36-0	
Arsenic	ND	ug/L	2.00	0.120	1	06/24/25 23:40	07/11/25 16:05	7440-38-2	
Beryllium	ND	ug/L	2.00	0.200	1	06/24/25 23:40	07/11/25 16:05	7440-41-7	
Cadmium	ND	ug/L	1.00	0.120	1	06/24/25 23:40	07/11/25 16:05	7440-43-9	
Chromium	**1.53J**	ug/L	2.00	0.900	1	06/24/25 23:40	07/11/25 16:05	7440-47-3	J
Copper	**1.14J**	ug/L	5.00	0.700	1	06/24/25 23:40	07/11/25 16:05	7440-50-8	J
Lead	ND	ug/L	2.00	0.500	1	06/24/25 23:40	07/11/25 16:05	7439-92-1	
Nickel	**3.80**	ug/L	2.00	0.500	1	06/24/25 23:40	07/11/25 16:05	7440-02-0	
Selenium	**0.690J**	ug/L	2.00	0.250	1	06/24/25 23:40	07/11/25 16:05	7782-49-2	J
Silver	ND	ug/L	2.00	0.110	1	06/24/25 23:40	07/11/25 16:05	7440-22-4	
Thallium	ND	ug/L	2.00	0.130	1	06/24/25 23:40	07/11/25 16:05	7440-28-0	
Zinc	**6.69J**	ug/L	25.0	4.00	1	06/24/25 23:40	07/11/25 16:05	7440-66-6	B,J
Mercury 7470A	Analytical Method: EPA 7470A Preparation Method: 7470A Pace National - Mt. Juliet								
Mercury	ND	ug/L	0.200	0.0700	1	06/23/25 14:43	06/24/25 15:07	7439-97-6	
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Acenaphthene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 12:22	83-32-9	
Acenaphthylene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 12:22	208-96-8	
Aniline	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 12:22	62-53-3	
Anthracene	ND	ug/L	10.0	2.3	1	06/18/25 23:54	06/19/25 12:22	120-12-7	
Benzo(a)anthracene	ND	ug/L	10.0	2.7	1	06/18/25 23:54	06/19/25 12:22	56-55-3	
Benzo(a)pyrene	ND	ug/L	10.0	2.8	1	06/18/25 23:54	06/19/25 12:22	50-32-8	
Benzo(b)fluoranthene	ND	ug/L	10.0	2.6	1	06/18/25 23:54	06/19/25 12:22	205-99-2	
Benzo(g,h,i)perylene	ND	ug/L	10.0	2.8	1	06/18/25 23:54	06/19/25 12:22	191-24-2	
Benzo(k)fluoranthene	ND	ug/L	10.0	2.7	1	06/18/25 23:54	06/19/25 12:22	207-08-9	
Benzoic Acid	ND	ug/L	50.0	22.0	1	06/18/25 23:54	06/19/25 12:22	65-85-0	
Benzyl alcohol	ND	ug/L	20.0	2.9	1	06/18/25 23:54	06/19/25 12:22	100-51-6	
4-Bromophenylphenyl ether	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 12:22	101-55-3	
Butylbenzylphthalate	ND	ug/L	10.0	3.1	1	06/18/25 23:54	06/19/25 12:22	85-68-7	
4-Chloro-3-methylphenol	ND	ug/L	10.0	3.3	1	06/18/25 23:54	06/19/25 12:22	59-50-7	
4-Chloroaniline	ND	ug/L	20.0	3.6	1	06/18/25 23:54	06/19/25 12:22	106-47-8	
bis(2-Chloroethoxy)methane	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 12:22	111-91-1	
bis(2-Chloroethyl) ether	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 12:22	111-44-4	
2-Chloronaphthalene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 12:22	91-58-7	
2-Chlorophenol	ND	ug/L	10.0	1.2	1	06/18/25 23:54	06/19/25 12:22	95-57-8	
4-Chlorophenylphenyl ether	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 12:22	7005-72-3	
Chrysene	ND	ug/L	10.0	2.8	1	06/18/25 23:54	06/19/25 12:22	218-01-9	
Dibenz(a,h)anthracene	ND	ug/L	10.0	3.0	1	06/18/25 23:54	06/19/25 12:22	53-70-3	
Dibenzofuran	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 12:22	132-64-9	
1,2-Dichlorobenzene	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 12:22	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 12:22	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 12:22	106-46-7	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-4 **Lab ID: 92802132002** Collected: 06/11/25 11:10 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
3,3'-Dichlorobenzidine	ND	ug/L	20.0	8.1	1	06/18/25 23:54	06/19/25 12:22	91-94-1	
2,4-Dichlorophenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 12:22	120-83-2	
Diethylphthalate	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 12:22	84-66-2	
2,4-Dimethylphenol	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 12:22	105-67-9	
Dimethylphthalate	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 12:22	131-11-3	
Di-n-butylphthalate	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 12:22	84-74-2	
4,6-Dinitro-2-methylphenol	ND	ug/L	20.0	7.8	1	06/18/25 23:54	06/19/25 12:22	534-52-1	
2,4-Dinitrophenol	ND	ug/L	50.0	26.0	1	06/18/25 23:54	06/19/25 12:22	51-28-5	
2,4-Dinitrotoluene	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 12:22	121-14-2	
2,6-Dinitrotoluene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 12:22	606-20-2	
Di-n-octylphthalate	ND	ug/L	10.0	3.9	1	06/18/25 23:54	06/19/25 12:22	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	ug/L	6.0	3.7	1	06/18/25 23:54	06/19/25 12:22	117-81-7	
Fluoranthene	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 12:22	206-44-0	
Fluorene	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 12:22	86-73-7	
Hexachloro-1,3-butadiene	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 12:22	87-68-3	
Hexachlorobenzene	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 12:22	118-74-1	
Hexachlorocyclopentadiene	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 12:22	77-47-4	
Hexachloroethane	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 12:22	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	ug/L	10.0	2.9	1	06/18/25 23:54	06/19/25 12:22	193-39-5	
Isophorone	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 12:22	78-59-1	
1-Methylnaphthalene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 12:22	90-12-0	
2-Methylnaphthalene	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 12:22	91-57-6	
2-Methylphenol(o-Cresol)	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 12:22	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	ug/L	10.0	1.2	1	06/18/25 23:54	06/19/25 12:22	15831-10-4	
Naphthalene	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 12:22	91-20-3	
2-Nitroaniline	ND	ug/L	20.0	3.0	1	06/18/25 23:54	06/19/25 12:22	88-74-4	
3-Nitroaniline	ND	ug/L	20.0	3.8	1	06/18/25 23:54	06/19/25 12:22	99-09-2	
4-Nitroaniline	ND	ug/L	20.0	5.1	1	06/18/25 23:54	06/19/25 12:22	100-01-6	
Nitrobenzene	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 12:22	98-95-3	
2-Nitrophenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 12:22	88-75-5	
4-Nitrophenol	ND	ug/L	50.0	6.6	1	06/18/25 23:54	06/19/25 12:22	100-02-7	
N-Nitrosodimethylamine	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 12:22	62-75-9	
N-Nitroso-di-n-propylamine	ND	ug/L	10.0	1.3	1	06/18/25 23:54	06/19/25 12:22	621-64-7	
N-Nitrosodiphenylamine	ND	ug/L	10.0	3.0	1	06/18/25 23:54	06/19/25 12:22	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	ug/L	10.0	1.2	1	06/18/25 23:54	06/19/25 12:22	108-60-1	
Pentachlorophenol	ND	ug/L	20.0	3.8	1	06/18/25 23:54	06/19/25 12:22	87-86-5	
Phenanthrene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 12:22	85-01-8	
Phenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 12:22	108-95-2	
Pyrene	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 12:22	129-00-0	
1,2,4-Trichlorobenzene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 12:22	120-82-1	
2,4,5-Trichlorophenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 12:22	95-95-4	
2,4,6-Trichlorophenol	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 12:22	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	53	%	10-133		1	06/18/25 23:54	06/19/25 12:22	4165-60-0	
2-Fluorobiphenyl (S)	61	%	10-130		1	06/18/25 23:54	06/19/25 12:22	321-60-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-4 **Lab ID: 92802132002** Collected: 06/11/25 11:10 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Surrogates									
Terphenyl-d14 (S)	95	%	10-193		1	06/18/25 23:54	06/19/25 12:22	1718-51-0	
Phenol-d6 (S)	33	%	10-130		1	06/18/25 23:54	06/19/25 12:22	13127-88-3	
2-Fluorophenol (S)	37	%	10-130		1	06/18/25 23:54	06/19/25 12:22	367-12-4	
2,4,6-Tribromophenol (S)	77	%	10-166		1	06/18/25 23:54	06/19/25 12:22	118-79-6	
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		06/14/25 00:36	67-64-1	v2
Benzene	ND	ug/L	1.0	0.34	1		06/14/25 00:36	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		06/14/25 00:36	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		06/14/25 00:36	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		06/14/25 00:36	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		06/14/25 00:36	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		06/14/25 00:36	74-83-9	
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		06/14/25 00:36	78-93-3	v2
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		06/14/25 00:36	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		06/14/25 00:36	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		06/14/25 00:36	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		06/14/25 00:36	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		06/14/25 00:36	74-87-3	v2
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/14/25 00:36	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/14/25 00:36	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		06/14/25 00:36	96-12-8	
Dibromochloromethane	ND	ug/L	1.0	0.36	1		06/14/25 00:36	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		06/14/25 00:36	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		06/14/25 00:36	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/14/25 00:36	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/14/25 00:36	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		06/14/25 00:36	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		06/14/25 00:36	75-71-8	
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		06/14/25 00:36	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		06/14/25 00:36	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		06/14/25 00:36	75-35-4	
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		06/14/25 00:36	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		06/14/25 00:36	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		06/14/25 00:36	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		06/14/25 00:36	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		06/14/25 00:36	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		06/14/25 00:36	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/14/25 00:36	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/14/25 00:36	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		06/14/25 00:36	108-20-3	
Ethylbenzene	ND	ug/L	1.0	0.30	1		06/14/25 00:36	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		06/14/25 00:36	87-68-3	IK

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-4 **Lab ID: 92802132002** Collected: 06/11/25 11:10 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
2-Hexanone	ND	ug/L	5.0	0.48	1		06/14/25 00:36	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		06/14/25 00:36	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		06/14/25 00:36	75-09-2	v2
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		06/14/25 00:36	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		06/14/25 00:36	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		06/14/25 00:36	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		06/14/25 00:36	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		06/14/25 00:36	630-20-6	
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		06/14/25 00:36	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		06/14/25 00:36	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		06/14/25 00:36	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		06/14/25 00:36	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		06/14/25 00:36	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		06/14/25 00:36	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		06/14/25 00:36	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		06/14/25 00:36	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		06/14/25 00:36	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		06/14/25 00:36	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		06/14/25 00:36	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		06/14/25 00:36	75-01-4	v2
Xylene (Total)	ND	ug/L	1.0	0.34	1		06/14/25 00:36	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		06/14/25 00:36	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		06/14/25 00:36	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	99	%	70-130		1		06/14/25 00:36	460-00-4	
1,2-Dichloroethane-d4 (S)	97	%	70-130		1		06/14/25 00:36	17060-07-0	
Toluene-d8 (S)	98	%	70-130		1		06/14/25 00:36	2037-26-5	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: EB-2 **Lab ID: 92802132003** Collected: 06/11/25 11:20 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Metals (ICPMS) 6020B	Analytical Method: EPA 6020B Preparation Method: 3015 Pace National - Mt. Juliet								
Antimony	ND	ug/L	4.00	0.310	1	06/24/25 23:40	07/11/25 16:08	7440-36-0	
Arsenic	ND	ug/L	2.00	0.120	1	06/24/25 23:40	07/11/25 16:08	7440-38-2	
Beryllium	ND	ug/L	2.00	0.200	1	06/24/25 23:40	07/11/25 16:08	7440-41-7	
Cadmium	ND	ug/L	1.00	0.120	1	06/24/25 23:40	07/11/25 16:08	7440-43-9	
Chromium	ND	ug/L	2.00	0.900	1	06/24/25 23:40	07/11/25 16:08	7440-47-3	
Copper	ND	ug/L	5.00	0.700	1	06/24/25 23:40	07/11/25 16:08	7440-50-8	
Lead	ND	ug/L	2.00	0.500	1	06/24/25 23:40	07/11/25 16:08	7439-92-1	
Nickel	ND	ug/L	2.00	0.500	1	06/24/25 23:40	07/11/25 16:08	7440-02-0	
Selenium	ND	ug/L	2.00	0.250	1	06/24/25 23:40	07/11/25 16:08	7782-49-2	
Silver	ND	ug/L	2.00	0.110	1	06/24/25 23:40	07/11/25 16:08	7440-22-4	
Thallium	ND	ug/L	2.00	0.130	1	06/24/25 23:40	07/11/25 16:08	7440-28-0	
Zinc	ND	ug/L	25.0	4.00	1	06/24/25 23:40	07/11/25 16:08	7440-66-6	
Mercury 7470A	Analytical Method: EPA 7470A Preparation Method: 7470A Pace National - Mt. Juliet								
Mercury	ND	ug/L	0.200	0.0700	1	06/23/25 14:43	06/24/25 15:09	7439-97-6	
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Acenaphthene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 13:13	83-32-9	
Acenaphthylene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 13:13	208-96-8	
Aniline	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 13:13	62-53-3	
Anthracene	ND	ug/L	10.0	2.3	1	06/18/25 23:54	06/19/25 13:13	120-12-7	
Benzo(a)anthracene	ND	ug/L	10.0	2.7	1	06/18/25 23:54	06/19/25 13:13	56-55-3	
Benzo(a)pyrene	ND	ug/L	10.0	2.8	1	06/18/25 23:54	06/19/25 13:13	50-32-8	
Benzo(b)fluoranthene	ND	ug/L	10.0	2.6	1	06/18/25 23:54	06/19/25 13:13	205-99-2	
Benzo(g,h,i)perylene	ND	ug/L	10.0	2.8	1	06/18/25 23:54	06/19/25 13:13	191-24-2	
Benzo(k)fluoranthene	ND	ug/L	10.0	2.7	1	06/18/25 23:54	06/19/25 13:13	207-08-9	
Benzoic Acid	ND	ug/L	50.0	22.0	1	06/18/25 23:54	06/19/25 13:13	65-85-0	
Benzyl alcohol	ND	ug/L	20.0	2.9	1	06/18/25 23:54	06/19/25 13:13	100-51-6	
4-Bromophenylphenyl ether	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 13:13	101-55-3	
Butylbenzylphthalate	ND	ug/L	10.0	3.1	1	06/18/25 23:54	06/19/25 13:13	85-68-7	
4-Chloro-3-methylphenol	ND	ug/L	10.0	3.3	1	06/18/25 23:54	06/19/25 13:13	59-50-7	
4-Chloroaniline	ND	ug/L	20.0	3.6	1	06/18/25 23:54	06/19/25 13:13	106-47-8	
bis(2-Chloroethoxy)methane	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 13:13	111-91-1	
bis(2-Chloroethyl) ether	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 13:13	111-44-4	
2-Chloronaphthalene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 13:13	91-58-7	
2-Chlorophenol	ND	ug/L	10.0	1.2	1	06/18/25 23:54	06/19/25 13:13	95-57-8	
4-Chlorophenylphenyl ether	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 13:13	7005-72-3	
Chrysene	ND	ug/L	10.0	2.8	1	06/18/25 23:54	06/19/25 13:13	218-01-9	
Dibenz(a,h)anthracene	ND	ug/L	10.0	3.0	1	06/18/25 23:54	06/19/25 13:13	53-70-3	
Dibenzofuran	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 13:13	132-64-9	
1,2-Dichlorobenzene	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 13:13	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 13:13	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 13:13	106-46-7	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: EB-2 **Lab ID: 92802132003** Collected: 06/11/25 11:20 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
3,3'-Dichlorobenzidine	ND	ug/L	20.0	8.1	1	06/18/25 23:54	06/19/25 13:13	91-94-1	
2,4-Dichlorophenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 13:13	120-83-2	
Diethylphthalate	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 13:13	84-66-2	
2,4-Dimethylphenol	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 13:13	105-67-9	
Dimethylphthalate	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 13:13	131-11-3	
Di-n-butylphthalate	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 13:13	84-74-2	
4,6-Dinitro-2-methylphenol	ND	ug/L	20.0	7.8	1	06/18/25 23:54	06/19/25 13:13	534-52-1	
2,4-Dinitrophenol	ND	ug/L	50.0	26.0	1	06/18/25 23:54	06/19/25 13:13	51-28-5	
2,4-Dinitrotoluene	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 13:13	121-14-2	
2,6-Dinitrotoluene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 13:13	606-20-2	
Di-n-octylphthalate	ND	ug/L	10.0	3.9	1	06/18/25 23:54	06/19/25 13:13	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	ug/L	6.0	3.7	1	06/18/25 23:54	06/19/25 13:13	117-81-7	
Fluoranthene	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 13:13	206-44-0	
Fluorene	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 13:13	86-73-7	
Hexachloro-1,3-butadiene	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 13:13	87-68-3	
Hexachlorobenzene	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 13:13	118-74-1	
Hexachlorocyclopentadiene	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 13:13	77-47-4	
Hexachloroethane	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 13:13	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	ug/L	10.0	2.9	1	06/18/25 23:54	06/19/25 13:13	193-39-5	
Isophorone	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 13:13	78-59-1	
1-Methylnaphthalene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 13:13	90-12-0	
2-Methylnaphthalene	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 13:13	91-57-6	
2-Methylphenol(o-Cresol)	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 13:13	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	ug/L	10.0	1.2	1	06/18/25 23:54	06/19/25 13:13	15831-10-4	
Naphthalene	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 13:13	91-20-3	
2-Nitroaniline	ND	ug/L	20.0	3.0	1	06/18/25 23:54	06/19/25 13:13	88-74-4	
3-Nitroaniline	ND	ug/L	20.0	3.8	1	06/18/25 23:54	06/19/25 13:13	99-09-2	
4-Nitroaniline	ND	ug/L	20.0	5.1	1	06/18/25 23:54	06/19/25 13:13	100-01-6	
Nitrobenzene	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 13:13	98-95-3	
2-Nitrophenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 13:13	88-75-5	
4-Nitrophenol	ND	ug/L	50.0	6.6	1	06/18/25 23:54	06/19/25 13:13	100-02-7	
N-Nitrosodimethylamine	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 13:13	62-75-9	
N-Nitroso-di-n-propylamine	ND	ug/L	10.0	1.3	1	06/18/25 23:54	06/19/25 13:13	621-64-7	
N-Nitrosodiphenylamine	ND	ug/L	10.0	3.0	1	06/18/25 23:54	06/19/25 13:13	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	ug/L	10.0	1.2	1	06/18/25 23:54	06/19/25 13:13	108-60-1	
Pentachlorophenol	ND	ug/L	20.0	3.8	1	06/18/25 23:54	06/19/25 13:13	87-86-5	
Phenanthrene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 13:13	85-01-8	
Phenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 13:13	108-95-2	
Pyrene	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 13:13	129-00-0	
1,2,4-Trichlorobenzene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 13:13	120-82-1	
2,4,5-Trichlorophenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 13:13	95-95-4	
2,4,6-Trichlorophenol	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 13:13	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	24	%	10-133		1	06/18/25 23:54	06/19/25 13:13	4165-60-0	
2-Fluorobiphenyl (S)	25	%	10-130		1	06/18/25 23:54	06/19/25 13:13	321-60-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: EB-2 **Lab ID: 92802132003** Collected: 06/11/25 11:20 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Surrogates									
Terphenyl-d14 (S)	75	%	10-193		1	06/18/25 23:54	06/19/25 13:13	1718-51-0	
Phenol-d6 (S)	18	%	10-130		1	06/18/25 23:54	06/19/25 13:13	13127-88-3	
2-Fluorophenol (S)	20	%	10-130		1	06/18/25 23:54	06/19/25 13:13	367-12-4	
2,4,6-Tribromophenol (S)	56	%	10-166		1	06/18/25 23:54	06/19/25 13:13	118-79-6	
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		06/13/25 21:14	67-64-1	v2
Benzene	ND	ug/L	1.0	0.34	1		06/13/25 21:14	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		06/13/25 21:14	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		06/13/25 21:14	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		06/13/25 21:14	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		06/13/25 21:14	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		06/13/25 21:14	74-83-9	
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		06/13/25 21:14	78-93-3	v2
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		06/13/25 21:14	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		06/13/25 21:14	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		06/13/25 21:14	75-00-3	
Chloroform	**1.7**	ug/L	1.0	0.43	1		06/13/25 21:14	67-66-3	C0
Chloromethane	ND	ug/L	1.0	0.54	1		06/13/25 21:14	74-87-3	v2
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/13/25 21:14	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/13/25 21:14	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		06/13/25 21:14	96-12-8	
Dibromochloromethane	ND	ug/L	1.0	0.36	1		06/13/25 21:14	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		06/13/25 21:14	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		06/13/25 21:14	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/13/25 21:14	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/13/25 21:14	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		06/13/25 21:14	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		06/13/25 21:14	75-71-8	
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		06/13/25 21:14	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		06/13/25 21:14	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		06/13/25 21:14	75-35-4	
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		06/13/25 21:14	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		06/13/25 21:14	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		06/13/25 21:14	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		06/13/25 21:14	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		06/13/25 21:14	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		06/13/25 21:14	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/13/25 21:14	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/13/25 21:14	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		06/13/25 21:14	108-20-3	
Ethylbenzene	ND	ug/L	1.0	0.30	1		06/13/25 21:14	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		06/13/25 21:14	87-68-3	IK

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: EB-2 **Lab ID: 92802132003** Collected: 06/11/25 11:20 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
2-Hexanone	ND	ug/L	5.0	0.48	1		06/13/25 21:14	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		06/13/25 21:14	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		06/13/25 21:14	75-09-2	v2
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		06/13/25 21:14	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		06/13/25 21:14	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		06/13/25 21:14	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		06/13/25 21:14	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		06/13/25 21:14	630-20-6	
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		06/13/25 21:14	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		06/13/25 21:14	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		06/13/25 21:14	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		06/13/25 21:14	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		06/13/25 21:14	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		06/13/25 21:14	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		06/13/25 21:14	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		06/13/25 21:14	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		06/13/25 21:14	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		06/13/25 21:14	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		06/13/25 21:14	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		06/13/25 21:14	75-01-4	v2
Xylene (Total)	ND	ug/L	1.0	0.34	1		06/13/25 21:14	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		06/13/25 21:14	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		06/13/25 21:14	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	97	%	70-130		1		06/13/25 21:14	460-00-4	
1,2-Dichloroethane-d4 (S)	97	%	70-130		1		06/13/25 21:14	17060-07-0	
Toluene-d8 (S)	98	%	70-130		1		06/13/25 21:14	2037-26-5	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-3 **Lab ID: 92802132004** Collected: 06/11/25 12:45 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Metals (ICPMS) 6020B	Analytical Method: EPA 6020B Preparation Method: 3015 Pace National - Mt. Juliet								
Antimony	ND	ug/L	4.00	0.310	1	06/24/25 23:40	07/11/25 16:33	7440-36-0	
Arsenic	**0.170J**	ug/L	2.00	0.120	1	06/24/25 23:40	07/11/25 16:33	7440-38-2	J
Beryllium	ND	ug/L	2.00	0.200	1	06/24/25 23:40	07/11/25 16:33	7440-41-7	
Cadmium	ND	ug/L	1.00	0.120	1	06/24/25 23:40	07/11/25 16:33	7440-43-9	
Chromium	**1.64J**	ug/L	2.00	0.900	1	06/24/25 23:40	07/11/25 16:33	7440-47-3	J
Copper	**2.50J**	ug/L	5.00	0.700	1	06/24/25 23:40	07/11/25 16:33	7440-50-8	J
Lead	ND	ug/L	2.00	0.500	1	06/24/25 23:40	07/11/25 16:33	7439-92-1	
Nickel	**6.47**	ug/L	2.00	0.500	1	06/24/25 23:40	07/11/25 16:33	7440-02-0	
Selenium	ND	ug/L	2.00	0.250	1	06/24/25 23:40	07/11/25 16:33	7782-49-2	
Silver	ND	ug/L	2.00	0.110	1	06/24/25 23:40	07/11/25 16:33	7440-22-4	
Thallium	ND	ug/L	2.00	0.130	1	06/24/25 23:40	07/11/25 16:33	7440-28-0	
Zinc	**9.32J**	ug/L	25.0	4.00	1	06/24/25 23:40	07/11/25 16:33	7440-66-6	B,J
Mercury 7470A	Analytical Method: EPA 7470A Preparation Method: 7470A Pace National - Mt. Juliet								
Mercury	ND	ug/L	0.200	0.0700	1	06/23/25 14:43	06/24/25 15:12	7439-97-6	
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Acenaphthene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 13:39	83-32-9	
Acenaphthylene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 13:39	208-96-8	
Aniline	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 13:39	62-53-3	
Anthracene	ND	ug/L	10.0	2.3	1	06/18/25 23:54	06/19/25 13:39	120-12-7	
Benzo(a)anthracene	ND	ug/L	10.0	2.7	1	06/18/25 23:54	06/19/25 13:39	56-55-3	
Benzo(a)pyrene	ND	ug/L	10.0	2.8	1	06/18/25 23:54	06/19/25 13:39	50-32-8	
Benzo(b)fluoranthene	ND	ug/L	10.0	2.6	1	06/18/25 23:54	06/19/25 13:39	205-99-2	
Benzo(g,h,i)perylene	ND	ug/L	10.0	2.8	1	06/18/25 23:54	06/19/25 13:39	191-24-2	
Benzo(k)fluoranthene	ND	ug/L	10.0	2.7	1	06/18/25 23:54	06/19/25 13:39	207-08-9	
Benzoic Acid	ND	ug/L	50.0	22.0	1	06/18/25 23:54	06/19/25 13:39	65-85-0	
Benzyl alcohol	ND	ug/L	20.0	2.9	1	06/18/25 23:54	06/19/25 13:39	100-51-6	
4-Bromophenylphenyl ether	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 13:39	101-55-3	
Butylbenzylphthalate	ND	ug/L	10.0	3.1	1	06/18/25 23:54	06/19/25 13:39	85-68-7	
4-Chloro-3-methylphenol	ND	ug/L	10.0	3.3	1	06/18/25 23:54	06/19/25 13:39	59-50-7	
4-Chloroaniline	ND	ug/L	20.0	3.6	1	06/18/25 23:54	06/19/25 13:39	106-47-8	
bis(2-Chloroethoxy)methane	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 13:39	111-91-1	
bis(2-Chloroethyl) ether	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 13:39	111-44-4	
2-Chloronaphthalene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 13:39	91-58-7	
2-Chlorophenol	ND	ug/L	10.0	1.2	1	06/18/25 23:54	06/19/25 13:39	95-57-8	
4-Chlorophenylphenyl ether	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 13:39	7005-72-3	
Chrysene	ND	ug/L	10.0	2.8	1	06/18/25 23:54	06/19/25 13:39	218-01-9	
Dibenz(a,h)anthracene	ND	ug/L	10.0	3.0	1	06/18/25 23:54	06/19/25 13:39	53-70-3	
Dibenzofuran	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 13:39	132-64-9	
1,2-Dichlorobenzene	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 13:39	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 13:39	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 13:39	106-46-7	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-3 **Lab ID: 92802132004** Collected: 06/11/25 12:45 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
3,3'-Dichlorobenzidine	ND	ug/L	20.0	8.1	1	06/18/25 23:54	06/19/25 13:39	91-94-1	
2,4-Dichlorophenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 13:39	120-83-2	
Diethylphthalate	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 13:39	84-66-2	
2,4-Dimethylphenol	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 13:39	105-67-9	
Dimethylphthalate	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 13:39	131-11-3	
Di-n-butylphthalate	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 13:39	84-74-2	
4,6-Dinitro-2-methylphenol	ND	ug/L	20.0	7.8	1	06/18/25 23:54	06/19/25 13:39	534-52-1	
2,4-Dinitrophenol	ND	ug/L	50.0	26.0	1	06/18/25 23:54	06/19/25 13:39	51-28-5	
2,4-Dinitrotoluene	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 13:39	121-14-2	
2,6-Dinitrotoluene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 13:39	606-20-2	
Di-n-octylphthalate	ND	ug/L	10.0	3.9	1	06/18/25 23:54	06/19/25 13:39	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	ug/L	6.0	3.7	1	06/18/25 23:54	06/19/25 13:39	117-81-7	
Fluoranthene	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 13:39	206-44-0	
Fluorene	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 13:39	86-73-7	
Hexachloro-1,3-butadiene	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 13:39	87-68-3	
Hexachlorobenzene	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 13:39	118-74-1	
Hexachlorocyclopentadiene	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 13:39	77-47-4	
Hexachloroethane	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 13:39	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	ug/L	10.0	2.9	1	06/18/25 23:54	06/19/25 13:39	193-39-5	
Isophorone	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 13:39	78-59-1	
1-Methylnaphthalene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 13:39	90-12-0	
2-Methylnaphthalene	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 13:39	91-57-6	
2-Methylphenol(o-Cresol)	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 13:39	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	ug/L	10.0	1.2	1	06/18/25 23:54	06/19/25 13:39	15831-10-4	
Naphthalene	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 13:39	91-20-3	
2-Nitroaniline	ND	ug/L	20.0	3.0	1	06/18/25 23:54	06/19/25 13:39	88-74-4	
3-Nitroaniline	ND	ug/L	20.0	3.8	1	06/18/25 23:54	06/19/25 13:39	99-09-2	
4-Nitroaniline	ND	ug/L	20.0	5.1	1	06/18/25 23:54	06/19/25 13:39	100-01-6	
Nitrobenzene	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 13:39	98-95-3	
2-Nitrophenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 13:39	88-75-5	
4-Nitrophenol	ND	ug/L	50.0	6.6	1	06/18/25 23:54	06/19/25 13:39	100-02-7	
N-Nitrosodimethylamine	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 13:39	62-75-9	
N-Nitroso-di-n-propylamine	ND	ug/L	10.0	1.3	1	06/18/25 23:54	06/19/25 13:39	621-64-7	
N-Nitrosodiphenylamine	ND	ug/L	10.0	3.0	1	06/18/25 23:54	06/19/25 13:39	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	ug/L	10.0	1.2	1	06/18/25 23:54	06/19/25 13:39	108-60-1	
Pentachlorophenol	ND	ug/L	20.0	3.8	1	06/18/25 23:54	06/19/25 13:39	87-86-5	
Phenanthrene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 13:39	85-01-8	
Phenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 13:39	108-95-2	
Pyrene	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 13:39	129-00-0	
1,2,4-Trichlorobenzene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 13:39	120-82-1	
2,4,5-Trichlorophenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 13:39	95-95-4	
2,4,6-Trichlorophenol	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 13:39	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	28	%	10-133		1	06/18/25 23:54	06/19/25 13:39	4165-60-0	
2-Fluorobiphenyl (S)	22	%	10-130		1	06/18/25 23:54	06/19/25 13:39	321-60-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-3 **Lab ID: 92802132004** Collected: 06/11/25 12:45 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Surrogates									
Terphenyl-d14 (S)	98	%	10-193		1	06/18/25 23:54	06/19/25 13:39	1718-51-0	
Phenol-d6 (S)	25	%	10-130		1	06/18/25 23:54	06/19/25 13:39	13127-88-3	
2-Fluorophenol (S)	27	%	10-130		1	06/18/25 23:54	06/19/25 13:39	367-12-4	
2,4,6-Tribromophenol (S)	71	%	10-166		1	06/18/25 23:54	06/19/25 13:39	118-79-6	
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		06/14/25 00:54	67-64-1	v2
Benzene	ND	ug/L	1.0	0.34	1		06/14/25 00:54	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		06/14/25 00:54	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		06/14/25 00:54	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		06/14/25 00:54	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		06/14/25 00:54	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		06/14/25 00:54	74-83-9	
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		06/14/25 00:54	78-93-3	v2,v3
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		06/14/25 00:54	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		06/14/25 00:54	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		06/14/25 00:54	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		06/14/25 00:54	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		06/14/25 00:54	74-87-3	v2
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/14/25 00:54	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/14/25 00:54	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		06/14/25 00:54	96-12-8	
Dibromochloromethane	ND	ug/L	1.0	0.36	1		06/14/25 00:54	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		06/14/25 00:54	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		06/14/25 00:54	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/14/25 00:54	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/14/25 00:54	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		06/14/25 00:54	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		06/14/25 00:54	75-71-8	
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		06/14/25 00:54	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		06/14/25 00:54	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		06/14/25 00:54	75-35-4	
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		06/14/25 00:54	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		06/14/25 00:54	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		06/14/25 00:54	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		06/14/25 00:54	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		06/14/25 00:54	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		06/14/25 00:54	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/14/25 00:54	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/14/25 00:54	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		06/14/25 00:54	108-20-3	
Ethylbenzene	ND	ug/L	1.0	0.30	1		06/14/25 00:54	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		06/14/25 00:54	87-68-3	IK

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-3 **Lab ID: 92802132004** Collected: 06/11/25 12:45 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
2-Hexanone	ND	ug/L	5.0	0.48	1		06/14/25 00:54	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		06/14/25 00:54	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		06/14/25 00:54	75-09-2	v2
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		06/14/25 00:54	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		06/14/25 00:54	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		06/14/25 00:54	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		06/14/25 00:54	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		06/14/25 00:54	630-20-6	
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		06/14/25 00:54	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		06/14/25 00:54	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		06/14/25 00:54	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		06/14/25 00:54	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		06/14/25 00:54	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		06/14/25 00:54	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		06/14/25 00:54	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		06/14/25 00:54	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		06/14/25 00:54	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		06/14/25 00:54	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		06/14/25 00:54	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		06/14/25 00:54	75-01-4	v2,v3
Xylene (Total)	ND	ug/L	1.0	0.34	1		06/14/25 00:54	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		06/14/25 00:54	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		06/14/25 00:54	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	98	%	70-130		1		06/14/25 00:54	460-00-4	
1,2-Dichloroethane-d4 (S)	101	%	70-130		1		06/14/25 00:54	17060-07-0	
Toluene-d8 (S)	99	%	70-130		1		06/14/25 00:54	2037-26-5	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-10 **Lab ID: 92802132005** Collected: 06/11/25 14:55 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Metals (ICPMS) 6020B	Analytical Method: EPA 6020B Preparation Method: 3015 Pace National - Mt. Juliet								
Antimony	ND	ug/L	4.00	0.310	1	06/24/25 23:40	07/11/25 16:36	7440-36-0	
Arsenic	**0.616J**	ug/L	2.00	0.120	1	06/24/25 23:40	07/11/25 16:36	7440-38-2	J
Beryllium	ND	ug/L	2.00	0.200	1	06/24/25 23:40	07/11/25 16:36	7440-41-7	
Cadmium	ND	ug/L	1.00	0.120	1	06/24/25 23:40	07/11/25 16:36	7440-43-9	
Chromium	**4.59**	ug/L	2.00	0.900	1	06/24/25 23:40	07/11/25 16:36	7440-47-3	
Copper	**1.75J**	ug/L	5.00	0.700	1	06/24/25 23:40	07/11/25 16:36	7440-50-8	J
Lead	ND	ug/L	2.00	0.500	1	06/24/25 23:40	07/11/25 16:36	7439-92-1	
Nickel	**8.64**	ug/L	2.00	0.500	1	06/24/25 23:40	07/11/25 16:36	7440-02-0	
Selenium	ND	ug/L	2.00	0.250	1	06/24/25 23:40	07/11/25 16:36	7782-49-2	
Silver	ND	ug/L	2.00	0.110	1	06/24/25 23:40	07/11/25 16:36	7440-22-4	
Thallium	ND	ug/L	2.00	0.130	1	06/24/25 23:40	07/11/25 16:36	7440-28-0	
Zinc	**8.01J**	ug/L	25.0	4.00	1	06/24/25 23:40	07/11/25 16:36	7440-66-6	B,J
Mercury 7470A	Analytical Method: EPA 7470A Preparation Method: 7470A Pace National - Mt. Juliet								
Mercury	ND	ug/L	0.200	0.0700	1	06/23/25 14:43	06/24/25 15:14	7439-97-6	
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Acenaphthene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 14:05	83-32-9	
Acenaphthylene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 14:05	208-96-8	
Aniline	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 14:05	62-53-3	
Anthracene	ND	ug/L	10.0	2.3	1	06/18/25 23:54	06/19/25 14:05	120-12-7	
Benzo(a)anthracene	ND	ug/L	10.0	2.7	1	06/18/25 23:54	06/19/25 14:05	56-55-3	
Benzo(a)pyrene	ND	ug/L	10.0	2.8	1	06/18/25 23:54	06/19/25 14:05	50-32-8	
Benzo(b)fluoranthene	ND	ug/L	10.0	2.6	1	06/18/25 23:54	06/19/25 14:05	205-99-2	
Benzo(g,h,i)perylene	ND	ug/L	10.0	2.8	1	06/18/25 23:54	06/19/25 14:05	191-24-2	
Benzo(k)fluoranthene	ND	ug/L	10.0	2.7	1	06/18/25 23:54	06/19/25 14:05	207-08-9	
Benzoic Acid	ND	ug/L	50.0	22.0	1	06/18/25 23:54	06/19/25 14:05	65-85-0	
Benzyl alcohol	ND	ug/L	20.0	2.9	1	06/18/25 23:54	06/19/25 14:05	100-51-6	
4-Bromophenylphenyl ether	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 14:05	101-55-3	
Butylbenzylphthalate	ND	ug/L	10.0	3.1	1	06/18/25 23:54	06/19/25 14:05	85-68-7	
4-Chloro-3-methylphenol	ND	ug/L	10.0	3.3	1	06/18/25 23:54	06/19/25 14:05	59-50-7	
4-Chloroaniline	ND	ug/L	20.0	3.6	1	06/18/25 23:54	06/19/25 14:05	106-47-8	
bis(2-Chloroethoxy)methane	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 14:05	111-91-1	
bis(2-Chloroethyl) ether	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 14:05	111-44-4	
2-Chloronaphthalene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 14:05	91-58-7	
2-Chlorophenol	ND	ug/L	10.0	1.2	1	06/18/25 23:54	06/19/25 14:05	95-57-8	
4-Chlorophenylphenyl ether	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 14:05	7005-72-3	
Chrysene	ND	ug/L	10.0	2.8	1	06/18/25 23:54	06/19/25 14:05	218-01-9	
Dibenz(a,h)anthracene	ND	ug/L	10.0	3.0	1	06/18/25 23:54	06/19/25 14:05	53-70-3	
Dibenzofuran	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 14:05	132-64-9	
1,2-Dichlorobenzene	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 14:05	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 14:05	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 14:05	106-46-7	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-10 **Lab ID: 92802132005** Collected: 06/11/25 14:55 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
3,3'-Dichlorobenzidine	ND	ug/L	20.0	8.1	1	06/18/25 23:54	06/19/25 14:05	91-94-1	
2,4-Dichlorophenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 14:05	120-83-2	
Diethylphthalate	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 14:05	84-66-2	
2,4-Dimethylphenol	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 14:05	105-67-9	
Dimethylphthalate	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 14:05	131-11-3	
Di-n-butylphthalate	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 14:05	84-74-2	
4,6-Dinitro-2-methylphenol	ND	ug/L	20.0	7.8	1	06/18/25 23:54	06/19/25 14:05	534-52-1	
2,4-Dinitrophenol	ND	ug/L	50.0	26.0	1	06/18/25 23:54	06/19/25 14:05	51-28-5	
2,4-Dinitrotoluene	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 14:05	121-14-2	
2,6-Dinitrotoluene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 14:05	606-20-2	
Di-n-octylphthalate	ND	ug/L	10.0	3.9	1	06/18/25 23:54	06/19/25 14:05	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	ug/L	6.0	3.7	1	06/18/25 23:54	06/19/25 14:05	117-81-7	
Fluoranthene	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 14:05	206-44-0	
Fluorene	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 14:05	86-73-7	
Hexachloro-1,3-butadiene	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 14:05	87-68-3	
Hexachlorobenzene	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 14:05	118-74-1	
Hexachlorocyclopentadiene	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 14:05	77-47-4	
Hexachloroethane	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 14:05	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	ug/L	10.0	2.9	1	06/18/25 23:54	06/19/25 14:05	193-39-5	
Isophorone	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 14:05	78-59-1	
1-Methylnaphthalene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 14:05	90-12-0	
2-Methylnaphthalene	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 14:05	91-57-6	
2-Methylphenol(o-Cresol)	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 14:05	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	ug/L	10.0	1.2	1	06/18/25 23:54	06/19/25 14:05	15831-10-4	
Naphthalene	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 14:05	91-20-3	
2-Nitroaniline	ND	ug/L	20.0	3.0	1	06/18/25 23:54	06/19/25 14:05	88-74-4	
3-Nitroaniline	ND	ug/L	20.0	3.8	1	06/18/25 23:54	06/19/25 14:05	99-09-2	
4-Nitroaniline	ND	ug/L	20.0	5.1	1	06/18/25 23:54	06/19/25 14:05	100-01-6	
Nitrobenzene	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 14:05	98-95-3	
2-Nitrophenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 14:05	88-75-5	
4-Nitrophenol	ND	ug/L	50.0	6.6	1	06/18/25 23:54	06/19/25 14:05	100-02-7	
N-Nitrosodimethylamine	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 14:05	62-75-9	
N-Nitroso-di-n-propylamine	ND	ug/L	10.0	1.3	1	06/18/25 23:54	06/19/25 14:05	621-64-7	
N-Nitrosodiphenylamine	ND	ug/L	10.0	3.0	1	06/18/25 23:54	06/19/25 14:05	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	ug/L	10.0	1.2	1	06/18/25 23:54	06/19/25 14:05	108-60-1	
Pentachlorophenol	ND	ug/L	20.0	3.8	1	06/18/25 23:54	06/19/25 14:05	87-86-5	
Phenanthrene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 14:05	85-01-8	
Phenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 14:05	108-95-2	
Pyrene	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 14:05	129-00-0	
1,2,4-Trichlorobenzene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 14:05	120-82-1	
2,4,5-Trichlorophenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 14:05	95-95-4	
2,4,6-Trichlorophenol	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 14:05	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	44	%	10-133		1	06/18/25 23:54	06/19/25 14:05	4165-60-0	
2-Fluorobiphenyl (S)	27	%	10-130		1	06/18/25 23:54	06/19/25 14:05	321-60-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-10 **Lab ID: 92802132005** Collected: 06/11/25 14:55 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Surrogates									
Terphenyl-d14 (S)	76	%	10-193		1	06/18/25 23:54	06/19/25 14:05	1718-51-0	
Phenol-d6 (S)	22	%	10-130		1	06/18/25 23:54	06/19/25 14:05	13127-88-3	
2-Fluorophenol (S)	30	%	10-130		1	06/18/25 23:54	06/19/25 14:05	367-12-4	
2,4,6-Tribromophenol (S)	57	%	10-166		1	06/18/25 23:54	06/19/25 14:05	118-79-6	
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		06/14/25 01:12	67-64-1	v2
Benzene	ND	ug/L	1.0	0.34	1		06/14/25 01:12	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		06/14/25 01:12	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		06/14/25 01:12	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		06/14/25 01:12	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		06/14/25 01:12	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		06/14/25 01:12	74-83-9	
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		06/14/25 01:12	78-93-3	v2
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		06/14/25 01:12	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		06/14/25 01:12	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		06/14/25 01:12	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		06/14/25 01:12	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		06/14/25 01:12	74-87-3	v2
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/14/25 01:12	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/14/25 01:12	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		06/14/25 01:12	96-12-8	
Dibromochloromethane	ND	ug/L	1.0	0.36	1		06/14/25 01:12	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		06/14/25 01:12	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		06/14/25 01:12	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/14/25 01:12	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/14/25 01:12	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		06/14/25 01:12	106-46-7	
Dichlorodifluoromethane	**0.64J**	ug/L	1.0	0.35	1		06/14/25 01:12	75-71-8	
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		06/14/25 01:12	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		06/14/25 01:12	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		06/14/25 01:12	75-35-4	
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		06/14/25 01:12	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		06/14/25 01:12	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		06/14/25 01:12	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		06/14/25 01:12	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		06/14/25 01:12	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		06/14/25 01:12	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/14/25 01:12	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/14/25 01:12	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		06/14/25 01:12	108-20-3	
Ethylbenzene	ND	ug/L	1.0	0.30	1		06/14/25 01:12	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		06/14/25 01:12	87-68-3	IK

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-10 **Lab ID: 92802132005** Collected: 06/11/25 14:55 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
2-Hexanone	ND	ug/L	5.0	0.48	1		06/14/25 01:12	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		06/14/25 01:12	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		06/14/25 01:12	75-09-2	v2
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		06/14/25 01:12	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		06/14/25 01:12	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		06/14/25 01:12	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		06/14/25 01:12	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		06/14/25 01:12	630-20-6	
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		06/14/25 01:12	79-34-5	
Tetrachloroethene	**8.4**	ug/L	1.0	0.29	1		06/14/25 01:12	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		06/14/25 01:12	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		06/14/25 01:12	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		06/14/25 01:12	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		06/14/25 01:12	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		06/14/25 01:12	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		06/14/25 01:12	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		06/14/25 01:12	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		06/14/25 01:12	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		06/14/25 01:12	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		06/14/25 01:12	75-01-4	v2
Xylene (Total)	ND	ug/L	1.0	0.34	1		06/14/25 01:12	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		06/14/25 01:12	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		06/14/25 01:12	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	98	%	70-130		1		06/14/25 01:12	460-00-4	
1,2-Dichloroethane-d4 (S)	100	%	70-130		1		06/14/25 01:12	17060-07-0	
Toluene-d8 (S)	96	%	70-130		1		06/14/25 01:12	2037-26-5	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-6 **Lab ID: 92802132006** Collected: 06/11/25 16:20 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Metals (ICPMS) 6020B	Analytical Method: EPA 6020B Preparation Method: 3015 Pace National - Mt. Juliet								
Antimony	ND	ug/L	4.00	0.310	1	06/24/25 23:40	07/11/25 16:39	7440-36-0	
Arsenic	ND	ug/L	2.00	0.120	1	06/24/25 23:40	07/11/25 16:39	7440-38-2	
Beryllium	ND	ug/L	2.00	0.200	1	06/24/25 23:40	07/11/25 16:39	7440-41-7	
Cadmium	ND	ug/L	1.00	0.120	1	06/24/25 23:40	07/11/25 16:39	7440-43-9	
Chromium	**2.50**	ug/L	2.00	0.900	1	06/24/25 23:40	07/11/25 16:39	7440-47-3	
Copper	**0.995J**	ug/L	5.00	0.700	1	06/24/25 23:40	07/11/25 16:39	7440-50-8	J
Lead	ND	ug/L	2.00	0.500	1	06/24/25 23:40	07/11/25 16:39	7439-92-1	
Nickel	**16.8**	ug/L	2.00	0.500	1	06/24/25 23:40	07/11/25 16:39	7440-02-0	
Selenium	ND	ug/L	2.00	0.250	1	06/24/25 23:40	07/11/25 16:39	7782-49-2	
Silver	ND	ug/L	2.00	0.110	1	06/24/25 23:40	07/11/25 16:39	7440-22-4	
Thallium	ND	ug/L	2.00	0.130	1	06/24/25 23:40	07/11/25 16:39	7440-28-0	
Zinc	**7.42J**	ug/L	25.0	4.00	1	06/24/25 23:40	07/11/25 16:39	7440-66-6	B,J
Mercury 7470A	Analytical Method: EPA 7470A Preparation Method: 7470A Pace National - Mt. Juliet								
Mercury	ND	ug/L	0.200	0.0700	1	06/23/25 14:43	06/24/25 15:24	7439-97-6	
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Acenaphthene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 14:31	83-32-9	
Acenaphthylene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 14:31	208-96-8	
Aniline	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 14:31	62-53-3	
Anthracene	ND	ug/L	10.0	2.3	1	06/18/25 23:54	06/19/25 14:31	120-12-7	
Benzo(a)anthracene	ND	ug/L	10.0	2.7	1	06/18/25 23:54	06/19/25 14:31	56-55-3	
Benzo(a)pyrene	ND	ug/L	10.0	2.8	1	06/18/25 23:54	06/19/25 14:31	50-32-8	
Benzo(b)fluoranthene	ND	ug/L	10.0	2.6	1	06/18/25 23:54	06/19/25 14:31	205-99-2	
Benzo(g,h,i)perylene	ND	ug/L	10.0	2.8	1	06/18/25 23:54	06/19/25 14:31	191-24-2	
Benzo(k)fluoranthene	ND	ug/L	10.0	2.7	1	06/18/25 23:54	06/19/25 14:31	207-08-9	
Benzoic Acid	ND	ug/L	50.0	22.0	1	06/18/25 23:54	06/19/25 14:31	65-85-0	
Benzyl alcohol	ND	ug/L	20.0	2.9	1	06/18/25 23:54	06/19/25 14:31	100-51-6	
4-Bromophenylphenyl ether	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 14:31	101-55-3	
Butylbenzylphthalate	ND	ug/L	10.0	3.1	1	06/18/25 23:54	06/19/25 14:31	85-68-7	
4-Chloro-3-methylphenol	ND	ug/L	10.0	3.3	1	06/18/25 23:54	06/19/25 14:31	59-50-7	
4-Chloroaniline	ND	ug/L	20.0	3.6	1	06/18/25 23:54	06/19/25 14:31	106-47-8	
bis(2-Chloroethoxy)methane	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 14:31	111-91-1	
bis(2-Chloroethyl) ether	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 14:31	111-44-4	
2-Chloronaphthalene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 14:31	91-58-7	
2-Chlorophenol	ND	ug/L	10.0	1.2	1	06/18/25 23:54	06/19/25 14:31	95-57-8	
4-Chlorophenylphenyl ether	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 14:31	7005-72-3	
Chrysene	ND	ug/L	10.0	2.8	1	06/18/25 23:54	06/19/25 14:31	218-01-9	
Dibenz(a,h)anthracene	ND	ug/L	10.0	3.0	1	06/18/25 23:54	06/19/25 14:31	53-70-3	
Dibenzofuran	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 14:31	132-64-9	
1,2-Dichlorobenzene	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 14:31	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 14:31	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 14:31	106-46-7	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-6 **Lab ID: 92802132006** Collected: 06/11/25 16:20 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
3,3'-Dichlorobenzidine	ND	ug/L	20.0	8.1	1	06/18/25 23:54	06/19/25 14:31	91-94-1	
2,4-Dichlorophenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 14:31	120-83-2	
Diethylphthalate	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 14:31	84-66-2	
2,4-Dimethylphenol	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 14:31	105-67-9	
Dimethylphthalate	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 14:31	131-11-3	
Di-n-butylphthalate	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 14:31	84-74-2	
4,6-Dinitro-2-methylphenol	ND	ug/L	20.0	7.8	1	06/18/25 23:54	06/19/25 14:31	534-52-1	
2,4-Dinitrophenol	ND	ug/L	50.0	26.0	1	06/18/25 23:54	06/19/25 14:31	51-28-5	
2,4-Dinitrotoluene	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 14:31	121-14-2	
2,6-Dinitrotoluene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 14:31	606-20-2	
Di-n-octylphthalate	ND	ug/L	10.0	3.9	1	06/18/25 23:54	06/19/25 14:31	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	ug/L	6.0	3.7	1	06/18/25 23:54	06/19/25 14:31	117-81-7	
Fluoranthene	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 14:31	206-44-0	
Fluorene	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 14:31	86-73-7	
Hexachloro-1,3-butadiene	ND	ug/L	10.0	1.8	1	06/18/25 23:54	06/19/25 14:31	87-68-3	
Hexachlorobenzene	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 14:31	118-74-1	
Hexachlorocyclopentadiene	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 14:31	77-47-4	
Hexachloroethane	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 14:31	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	ug/L	10.0	2.9	1	06/18/25 23:54	06/19/25 14:31	193-39-5	
Isophorone	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 14:31	78-59-1	
1-Methylnaphthalene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 14:31	90-12-0	
2-Methylnaphthalene	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 14:31	91-57-6	
2-Methylphenol(o-Cresol)	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 14:31	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	ug/L	10.0	1.2	1	06/18/25 23:54	06/19/25 14:31	15831-10-4	
Naphthalene	ND	ug/L	10.0	2.1	1	06/18/25 23:54	06/19/25 14:31	91-20-3	
2-Nitroaniline	ND	ug/L	20.0	3.0	1	06/18/25 23:54	06/19/25 14:31	88-74-4	
3-Nitroaniline	ND	ug/L	20.0	3.8	1	06/18/25 23:54	06/19/25 14:31	99-09-2	
4-Nitroaniline	ND	ug/L	20.0	5.1	1	06/18/25 23:54	06/19/25 14:31	100-01-6	
Nitrobenzene	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 14:31	98-95-3	
2-Nitrophenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 14:31	88-75-5	
4-Nitrophenol	ND	ug/L	50.0	6.6	1	06/18/25 23:54	06/19/25 14:31	100-02-7	
N-Nitrosodimethylamine	ND	ug/L	10.0	1.9	1	06/18/25 23:54	06/19/25 14:31	62-75-9	
N-Nitroso-di-n-propylamine	ND	ug/L	10.0	1.3	1	06/18/25 23:54	06/19/25 14:31	621-64-7	
N-Nitrosodiphenylamine	ND	ug/L	10.0	3.0	1	06/18/25 23:54	06/19/25 14:31	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	ug/L	10.0	1.2	1	06/18/25 23:54	06/19/25 14:31	108-60-1	
Pentachlorophenol	ND	ug/L	20.0	3.8	1	06/18/25 23:54	06/19/25 14:31	87-86-5	
Phenanthrene	ND	ug/L	10.0	2.0	1	06/18/25 23:54	06/19/25 14:31	85-01-8	
Phenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 14:31	108-95-2	
Pyrene	ND	ug/L	10.0	2.2	1	06/18/25 23:54	06/19/25 14:31	129-00-0	
1,2,4-Trichlorobenzene	ND	ug/L	10.0	1.7	1	06/18/25 23:54	06/19/25 14:31	120-82-1	
2,4,5-Trichlorophenol	ND	ug/L	10.0	1.4	1	06/18/25 23:54	06/19/25 14:31	95-95-4	
2,4,6-Trichlorophenol	ND	ug/L	10.0	1.6	1	06/18/25 23:54	06/19/25 14:31	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	39	%	10-133		1	06/18/25 23:54	06/19/25 14:31	4165-60-0	
2-Fluorobiphenyl (S)	27	%	10-130		1	06/18/25 23:54	06/19/25 14:31	321-60-8	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-6 **Lab ID: 92802132006** Collected: 06/11/25 16:20 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Surrogates									
Terphenyl-d14 (S)	76	%	10-193		1	06/18/25 23:54	06/19/25 14:31	1718-51-0	
Phenol-d6 (S)	23	%	10-130		1	06/18/25 23:54	06/19/25 14:31	13127-88-3	
2-Fluorophenol (S)	28	%	10-130		1	06/18/25 23:54	06/19/25 14:31	367-12-4	
2,4,6-Tribromophenol (S)	61	%	10-166		1	06/18/25 23:54	06/19/25 14:31	118-79-6	
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		06/14/25 01:31	67-64-1	v2
Benzene	ND	ug/L	1.0	0.34	1		06/14/25 01:31	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		06/14/25 01:31	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		06/14/25 01:31	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		06/14/25 01:31	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		06/14/25 01:31	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		06/14/25 01:31	74-83-9	
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		06/14/25 01:31	78-93-3	v2
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		06/14/25 01:31	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		06/14/25 01:31	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		06/14/25 01:31	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		06/14/25 01:31	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		06/14/25 01:31	74-87-3	v2
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/14/25 01:31	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/14/25 01:31	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		06/14/25 01:31	96-12-8	
Dibromochloromethane	ND	ug/L	1.0	0.36	1		06/14/25 01:31	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		06/14/25 01:31	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		06/14/25 01:31	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/14/25 01:31	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/14/25 01:31	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		06/14/25 01:31	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		06/14/25 01:31	75-71-8	
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		06/14/25 01:31	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		06/14/25 01:31	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		06/14/25 01:31	75-35-4	
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		06/14/25 01:31	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		06/14/25 01:31	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		06/14/25 01:31	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		06/14/25 01:31	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		06/14/25 01:31	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		06/14/25 01:31	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/14/25 01:31	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/14/25 01:31	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		06/14/25 01:31	108-20-3	
Ethylbenzene	ND	ug/L	1.0	0.30	1		06/14/25 01:31	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		06/14/25 01:31	87-68-3	IK

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: GW-6 **Lab ID: 92802132006** Collected: 06/11/25 16:20 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
2-Hexanone	ND	ug/L	5.0	0.48	1		06/14/25 01:31	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		06/14/25 01:31	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		06/14/25 01:31	75-09-2	v2
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		06/14/25 01:31	108-10-1	
Methyl-tert-butyl ether	**1.8**	ug/L	1.0	0.42	1		06/14/25 01:31	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		06/14/25 01:31	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		06/14/25 01:31	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		06/14/25 01:31	630-20-6	
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		06/14/25 01:31	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		06/14/25 01:31	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		06/14/25 01:31	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		06/14/25 01:31	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		06/14/25 01:31	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		06/14/25 01:31	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		06/14/25 01:31	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		06/14/25 01:31	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		06/14/25 01:31	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		06/14/25 01:31	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		06/14/25 01:31	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		06/14/25 01:31	75-01-4	v2
Xylene (Total)	ND	ug/L	1.0	0.34	1		06/14/25 01:31	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		06/14/25 01:31	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		06/14/25 01:31	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	97	%	70-130		1		06/14/25 01:31	460-00-4	
1,2-Dichloroethane-d4 (S)	96	%	70-130		1		06/14/25 01:31	17060-07-0	
Toluene-d8 (S)	97	%	70-130		1		06/14/25 01:31	2037-26-5	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: WC-1 **Lab ID: 92802132007** Collected: 06/11/25 13:45 Received: 06/12/25 13:10 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Metals (ICPMS) 6020B	Analytical Method: EPA 6020B Preparation Method: 3050B Pace National - Mt. Juliet								
Antimony	**0.322J**	mg/kg	4.00	0.221	5	06/24/25 22:40	07/09/25 18:57	7440-36-0	J
Arsenic	**39.9**	mg/kg	1.33	0.133	5	06/24/25 22:40	07/09/25 18:57	7440-38-2	
Beryllium	**0.464J**	mg/kg	3.33	0.184	5	06/24/25 22:40	07/09/25 18:57	7440-41-7	J
Cadmium	**0.381J**	mg/kg	1.33	0.114	5	06/24/25 22:40	07/09/25 18:57	7440-43-9	J
Chromium	**91.7**	mg/kg	6.66	0.394	5	06/24/25 22:40	07/09/25 18:57	7440-47-3	
Copper	**83.7**	mg/kg	6.66	0.176	5	06/24/25 22:40	07/09/25 18:57	7440-50-8	
Lead	**32.3**	mg/kg	2.66	0.132	5	06/24/25 22:40	07/09/25 18:57	7439-92-1	
Nickel	**24.2**	mg/kg	3.33	0.262	5	06/24/25 22:40	07/09/25 18:57	7440-02-0	
Selenium	**0.414J**	mg/kg	3.33	0.240	5	06/24/25 22:40	07/09/25 18:57	7782-49-2	J
Silver	ND	mg/kg	0.666	0.115	5	06/24/25 22:40	07/09/25 18:57	7440-22-4	
Thallium	**0.142J**	mg/kg	2.66	0.0866	5	06/24/25 22:40	07/09/25 18:57	7440-28-0	J
Zinc	**120**	mg/kg	33.3	0.986	5	06/24/25 22:40	07/09/25 18:57	7440-66-6	
Mercury 7471B	Analytical Method: EPA 7471B Preparation Method: 7471A Pace National - Mt. Juliet								
Mercury	**0.0623**	mg/kg	0.0533	0.0274	1	06/22/25 16:30	06/23/25 16:40	7439-97-6	
Total Solids 2540 G-2011	Analytical Method: SM 2540G Preparation Method: SM 2540 G Pace National - Mt. Juliet								
Total Solids	**75.1**	%			1	06/23/25 13:15	06/23/25 13:22		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: TB-2 **Lab ID: 92802132008** Collected: 06/11/25 00:00 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		06/13/25 21:32	67-64-1	v2
Benzene	ND	ug/L	1.0	0.34	1		06/13/25 21:32	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		06/13/25 21:32	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		06/13/25 21:32	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		06/13/25 21:32	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		06/13/25 21:32	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		06/13/25 21:32	74-83-9	
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		06/13/25 21:32	78-93-3	v2
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		06/13/25 21:32	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		06/13/25 21:32	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		06/13/25 21:32	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		06/13/25 21:32	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		06/13/25 21:32	74-87-3	v2
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/13/25 21:32	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		06/13/25 21:32	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		06/13/25 21:32	96-12-8	
Dibromochloromethane	ND	ug/L	1.0	0.36	1		06/13/25 21:32	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		06/13/25 21:32	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		06/13/25 21:32	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/13/25 21:32	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		06/13/25 21:32	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		06/13/25 21:32	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		06/13/25 21:32	75-71-8	
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		06/13/25 21:32	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		06/13/25 21:32	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		06/13/25 21:32	75-35-4	
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		06/13/25 21:32	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		06/13/25 21:32	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		06/13/25 21:32	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		06/13/25 21:32	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		06/13/25 21:32	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		06/13/25 21:32	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/13/25 21:32	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		06/13/25 21:32	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		06/13/25 21:32	108-20-3	
Ethylbenzene	ND	ug/L	1.0	0.30	1		06/13/25 21:32	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		06/13/25 21:32	87-68-3	IK
2-Hexanone	ND	ug/L	5.0	0.48	1		06/13/25 21:32	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		06/13/25 21:32	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		06/13/25 21:32	75-09-2	v2
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		06/13/25 21:32	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		06/13/25 21:32	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		06/13/25 21:32	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		06/13/25 21:32	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		06/13/25 21:32	630-20-6	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802132

Sample: TB-2 **Lab ID: 92802132008** Collected: 06/11/25 00:00 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		06/13/25 21:32	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		06/13/25 21:32	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		06/13/25 21:32	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		06/13/25 21:32	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		06/13/25 21:32	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		06/13/25 21:32	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		06/13/25 21:32	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		06/13/25 21:32	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		06/13/25 21:32	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		06/13/25 21:32	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		06/13/25 21:32	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		06/13/25 21:32	75-01-4	v2
Xylene (Total)	ND	ug/L	1.0	0.34	1		06/13/25 21:32	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		06/13/25 21:32	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		06/13/25 21:32	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	99	%	70-130		1		06/13/25 21:32	460-00-4	
1,2-Dichloroethane-d4 (S)	94	%	70-130		1		06/13/25 21:32	17060-07-0	
Toluene-d8 (S)	100	%	70-130		1		06/13/25 21:32	2037-26-5	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

QC Batch: 2542364
QC Batch Method: 3015
Analysis Method: EPA 6020B
Analysis Description: Metals (ICPMS) 6020B
Laboratory: Pace National - Mt. Juliet
Associated Lab Samples: 92802132001, 92802132002, 92802132003, 92802132004, 92802132005, 92802132006

METHOD BLANK: R4243893-1 Matrix: Water
Associated Lab Samples: 92802132001, 92802132002, 92802132003, 92802132004, 92802132005, 92802132006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Antimony	ug/L	ND	4.00	0.310	07/11/25 15:42	
Arsenic	ug/L	ND	2.00	0.120	07/11/25 15:42	
Beryllium	ug/L	ND	2.00	0.200	07/11/25 15:42	
Cadmium	ug/L	ND	1.00	0.120	07/11/25 15:42	
Chromium	ug/L	ND	2.00	0.900	07/11/25 15:42	
Copper	ug/L	ND	5.00	0.700	07/11/25 15:42	
Lead	ug/L	ND	2.00	0.500	07/11/25 15:42	
Nickel	ug/L	ND	2.00	0.500	07/11/25 15:42	
Selenium	ug/L	ND	2.00	0.250	07/11/25 15:42	
Silver	ug/L	ND	2.00	0.110	07/11/25 15:42	
Thallium	ug/L	ND	2.00	0.130	07/11/25 15:42	
Zinc	ug/L	5.01J	25.0	4.00	07/11/25 15:42	J

LABORATORY CONTROL SAMPLE: R4243893-2

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Antimony	ug/L	50.0	54.0	108	80.0-120	
Arsenic	ug/L	50.0	51.1	102	80.0-120	
Beryllium	ug/L	50.0	50.4	101	80.0-120	
Cadmium	ug/L	50.0	51.9	104	80.0-120	
Chromium	ug/L	50.0	51.8	104	80.0-120	
Copper	ug/L	50.0	52.6	105	80.0-120	
Lead	ug/L	50.0	51.0	102	80.0-120	
Nickel	ug/L	50.0	52.2	104	80.0-120	
Selenium	ug/L	50.0	50.2	100	80.0-120	
Silver	ug/L	50.0	51.5	103	80.0-120	
Thallium	ug/L	50.0	51.9	104	80.0-120	
Zinc	ug/L	50.0	53.2	106	80.0-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: R4243893-7 R4243893-8

Parameter	Units	L1870497-02 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Antimony	ug/L	0.347	50.0	50.0	56.9	56.5	113	112	75.0-125	0.651	20	
Arsenic	ug/L	11.0	50.0	50.0	64.3	63.6	107	105	75.0-125	1.05	20	
Beryllium	ug/L	ND	50.0	50.0	48.9	47.8	97.7	95.5	75.0-125	2.28	20	
Cadmium	ug/L	ND	50.0	50.0	54.8	53.5	110	107	75.0-125	2.30	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: R4243893-7 R4243893-8

Parameter	Units	L1870497-02 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Chromium	ug/L	4.66	50.0	50.0	57.3	56.8	105	104	75.0-125	0.782	20	
Copper	ug/L	0.795	50.0	50.0	53.3	52.5	105	103	75.0-125	1.54	20	
Lead	ug/L	0.584	50.0	50.0	52.1	51.5	103	102	75.0-125	1.13	20	
Nickel	ug/L	5.58	50.0	50.0	57.5	55.8	104	100	75.0-125	2.95	20	
Selenium	ug/L	ND	50.0	50.0	54.8	55.6	110	111	75.0-125	1.43	20	
Silver	ug/L	ND	50.0	50.0	51.5	50.8	103	102	75.0-125	1.20	20	
Thallium	ug/L	ND	50.0	50.0	52.0	51.4	104	103	75.0-125	1.12	20	
Zinc	ug/L	15.3	50.0	50.0	65.0	65.3	99.3	99.9	75.0-125	0.491	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

QC Batch: 2544226
QC Batch Method: 3050B
Analysis Method: EPA 6020B
Analysis Description: Metals (ICPMS) 6020B
Laboratory: Pace National - Mt. Juliet

Associated Lab Samples: 92802132007

METHOD BLANK: R4242821-1 Matrix: Solid
Associated Lab Samples: 92802132007

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Antimony	mg/kg	ND	3.00	0.166	07/09/25 18:35	
Arsenic	mg/kg	ND	1.00	0.100	07/09/25 18:35	
Beryllium	mg/kg	ND	2.50	0.138	07/09/25 18:35	
Cadmium	mg/kg	ND	1.00	0.0855	07/09/25 18:35	
Chromium	mg/kg	ND	5.00	0.297	07/09/25 18:35	
Copper	mg/kg	ND	5.00	0.133	07/09/25 18:35	
Lead	mg/kg	ND	2.00	0.0990	07/09/25 18:35	
Nickel	mg/kg	ND	2.50	0.197	07/09/25 18:35	
Selenium	mg/kg	ND	2.50	0.180	07/09/25 18:35	
Silver	mg/kg	ND	0.500	0.0865	07/09/25 18:35	
Thallium	mg/kg	ND	2.00	0.0650	07/09/25 18:35	
Zinc	mg/kg	ND	25.0	0.740	07/09/25 18:35	

LABORATORY CONTROL SAMPLE: R4242821-2

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Antimony	mg/kg	100	109	109	80.0-120	
Arsenic	mg/kg	100	105	105	80.0-120	
Beryllium	mg/kg	100	98.9	98.9	80.0-120	
Cadmium	mg/kg	100	114	114	80.0-120	
Chromium	mg/kg	100	107	107	80.0-120	
Copper	mg/kg	100	109	109	80.0-120	
Lead	mg/kg	100	107	107	80.0-120	
Nickel	mg/kg	100	111	111	80.0-120	
Selenium	mg/kg	100	101	101	80.0-120	
Silver	mg/kg	20.0	22.7	114	80.0-120	
Thallium	mg/kg	100	119	119	80.0-120	
Zinc	mg/kg	100	105	105	80.0-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: R4242821-5 R4242821-6

Parameter	Units	L1870320-08 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Antimony	mg/kg	ND	100	100	36.5	43.1	36.5	43.1	75.0-125	16.8	20	ML
Arsenic	mg/kg	4.54	100	100	98.6	115	94.1	110	75.0-125	15.3	20	
Beryllium	mg/kg	0.742	100	100	89.2	105	88.4	105	75.0-125	16.5	20	
Cadmium	mg/kg	0.240	100	100	98.8	115	98.6	114	75.0-125	14.9	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: R4242821-5 R4242821-6

Parameter	Units	L1870320-08 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Chromium	mg/kg	19.6	100	100	115	136	95.3	116	75.0-125	16.9	20	
Copper	mg/kg	13.3	100	100	104	121	91.1	108	75.0-125	15.0	20	
Lead	mg/kg	10.9	100	100	104	119	92.7	109	75.0-125	14.3	20	
Nickel	mg/kg	15.6	100	100	112	131	96.5	116	75.0-125	15.8	20	
Selenium	mg/kg	0.347	100	100	94.3	107	93.9	107	75.0-125	12.9	20	
Silver	mg/kg	ND	20.0	20.0	20.1	22.5	100	113	75.0-125	11.4	20	
Thallium	mg/kg	0.287	100	100	102	120	102	119	75.0-125	15.8	20	
Zinc	mg/kg	53.9	100	100	139	163	85.4	110	75.0-125	16.0	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

QC Batch: 2540439
QC Batch Method: 7470A
Analysis Method: EPA 7470A
Analysis Description: Mercury 7470A
Laboratory: Pace National - Mt. Juliet
Associated Lab Samples: 92802132001, 92802132002, 92802132003, 92802132004, 92802132005, 92802132006

METHOD BLANK: R4235395-1 Matrix: Water
Associated Lab Samples: 92802132001, 92802132002, 92802132003, 92802132004, 92802132005, 92802132006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Mercury	ug/L	ND	0.200	0.0700	06/24/25 14:29	

LABORATORY CONTROL SAMPLE: R4235395-8

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Mercury	ug/L	3.00	3.23	108	80.0-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: R4235395-4 R4235395-5

Parameter	Units	L1870298-04 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Mercury	ug/L	ND	3.00	3.00	2.92	2.84	97.5	94.7	75.0-125	2.89	20	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: R4235395-6 R4235395-7

Parameter	Units	L1870298-11 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Mercury	ug/L	ND	3.00	3.00	2.98	2.93	99.2	97.7	75.0-125	1.49	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

QC Batch: 2544326
QC Batch Method: 7471A
Analysis Method: EPA 7471B
Analysis Description: Mercury 7471B
Laboratory: Pace National - Mt. Juliet
Associated Lab Samples: 92802132007

METHOD BLANK: R4234798-1 Matrix: Solid
Associated Lab Samples: 92802132007

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Mercury	mg/kg	ND	0.0400	0.0206	06/23/25 16:00	

LABORATORY CONTROL SAMPLE: R4234798-2

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Mercury	mg/kg	0.500	0.565	113	80.0-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: R4234798-4 R4234798-5

Parameter	Units	L1870426-05 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Mercury	mg/kg	ND	0.517	0.517	0.544	0.540	105	105	75.0-125	0.623	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

QC Batch: 941743 | Analysis Method: EPA 8260D
QC Batch Method: EPA 8260D | Analysis Description: 8260D MSV Low Level
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92802132001, 92802132002, 92802132003, 92802132004, 92802132005, 92802132006, 92802132008

METHOD BLANK: 4839822 Matrix: Water
Associated Lab Samples: 92802132001, 92802132002, 92802132003, 92802132004, 92802132005, 92802132006, 92802132008

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	1.0	0.31	06/13/25 20:56	
1,1,1-Trichloroethane	ug/L	ND	1.0	0.33	06/13/25 20:56	
1,1,2,2-Tetrachloroethane	ug/L	ND	1.0	0.22	06/13/25 20:56	
1,1,2-Trichloroethane	ug/L	ND	1.0	0.32	06/13/25 20:56	
1,1-Dichloroethane	ug/L	ND	1.0	0.37	06/13/25 20:56	
1,1-Dichloroethene	ug/L	ND	1.0	0.35	06/13/25 20:56	
1,1-Dichloropropene	ug/L	ND	1.0	0.43	06/13/25 20:56	
1,2,3-Trichlorobenzene	ug/L	ND	1.0	0.81	06/13/25 20:56	
1,2,3-Trichloropropane	ug/L	ND	1.0	0.26	06/13/25 20:56	
1,2,4-Trichlorobenzene	ug/L	ND	1.0	0.64	06/13/25 20:56	
1,2-Dibromo-3-chloropropane	ug/L	ND	2.0	0.34	06/13/25 20:56	
1,2-Dibromoethane (EDB)	ug/L	ND	1.0	0.27	06/13/25 20:56	
1,2-Dichlorobenzene	ug/L	ND	1.0	0.34	06/13/25 20:56	
1,2-Dichloroethane	ug/L	ND	1.0	0.32	06/13/25 20:56	
1,2-Dichloropropane	ug/L	ND	1.0	0.36	06/13/25 20:56	
1,3-Dichlorobenzene	ug/L	ND	1.0	0.34	06/13/25 20:56	
1,3-Dichloropropane	ug/L	ND	1.0	0.28	06/13/25 20:56	
1,4-Dichlorobenzene	ug/L	ND	1.0	0.33	06/13/25 20:56	
2,2-Dichloropropane	ug/L	ND	1.0	0.39	06/13/25 20:56	
2-Butanone (MEK)	ug/L	ND	5.0	4.0	06/13/25 20:56	v2
2-Chlorotoluene	ug/L	ND	1.0	0.32	06/13/25 20:56	
2-Hexanone	ug/L	ND	5.0	0.48	06/13/25 20:56	
4-Chlorotoluene	ug/L	ND	1.0	0.32	06/13/25 20:56	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	5.0	2.7	06/13/25 20:56	
Acetone	ug/L	ND	25.0	5.1	06/13/25 20:56	v2
Benzene	ug/L	ND	1.0	0.34	06/13/25 20:56	
Bromobenzene	ug/L	ND	1.0	0.29	06/13/25 20:56	
Bromochloromethane	ug/L	ND	1.0	0.47	06/13/25 20:56	
Bromodichloromethane	ug/L	ND	1.0	0.31	06/13/25 20:56	
Bromoform	ug/L	ND	1.0	0.34	06/13/25 20:56	
Bromomethane	ug/L	ND	2.0	1.7	06/13/25 20:56	
Carbon tetrachloride	ug/L	ND	1.0	0.33	06/13/25 20:56	
Chlorobenzene	ug/L	ND	1.0	0.28	06/13/25 20:56	
Chloroethane	ug/L	ND	1.0	0.65	06/13/25 20:56	
Chloroform	ug/L	ND	1.0	0.43	06/13/25 20:56	
Chloromethane	ug/L	ND	1.0	0.54	06/13/25 20:56	v2
cis-1,2-Dichloroethene	ug/L	ND	1.0	0.38	06/13/25 20:56	
cis-1,3-Dichloropropene	ug/L	ND	1.0	0.36	06/13/25 20:56	
Dibromochloromethane	ug/L	ND	1.0	0.36	06/13/25 20:56	
Dibromomethane	ug/L	ND	1.0	0.39	06/13/25 20:56	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

METHOD BLANK: 4839822 Matrix: Water
Associated Lab Samples: 92802132001, 92802132002, 92802132003, 92802132004, 92802132005, 92802132006, 92802132008

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Dichlorodifluoromethane	ug/L	ND	1.0	0.35	06/13/25 20:56	
Diisopropyl ether	ug/L	ND	1.0	0.31	06/13/25 20:56	
Ethylbenzene	ug/L	ND	1.0	0.30	06/13/25 20:56	
Hexachloro-1,3-butadiene	ug/L	ND	2.0	1.5	06/13/25 20:56	IK
m&p-Xylene	ug/L	ND	2.0	0.71	06/13/25 20:56	
Methyl-tert-butyl ether	ug/L	ND	1.0	0.42	06/13/25 20:56	
Methylene Chloride	ug/L	ND	5.0	2.0	06/13/25 20:56	v2
Naphthalene	ug/L	ND	1.0	0.64	06/13/25 20:56	
o-Xylene	ug/L	ND	1.0	0.34	06/13/25 20:56	
p-Isopropyltoluene	ug/L	ND	1.0	0.41	06/13/25 20:56	
Styrene	ug/L	ND	1.0	0.29	06/13/25 20:56	
Tetrachloroethene	ug/L	ND	1.0	0.29	06/13/25 20:56	
Toluene	ug/L	ND	1.0	0.24	06/13/25 20:56	
trans-1,2-Dichloroethene	ug/L	ND	1.0	0.40	06/13/25 20:56	
trans-1,3-Dichloropropene	ug/L	ND	1.0	0.36	06/13/25 20:56	
Trichloroethene	ug/L	ND	1.0	0.38	06/13/25 20:56	
Trichlorofluoromethane	ug/L	ND	1.0	0.30	06/13/25 20:56	
Vinyl acetate	ug/L	ND	2.0	1.3	06/13/25 20:56	
Vinyl chloride	ug/L	ND	1.0	0.39	06/13/25 20:56	v2
Xylene (Total)	ug/L	ND	1.0	0.34	06/13/25 20:56	
1,2-Dichloroethane-d4 (S)	%	95	70-130		06/13/25 20:56	
4-Bromofluorobenzene (S)	%	96	70-130		06/13/25 20:56	
Toluene-d8 (S)	%	97	70-130		06/13/25 20:56	

LABORATORY CONTROL SAMPLE: 4839823

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	20	18.8	94	70-130	
1,1,1-Trichloroethane	ug/L	20	18.4	92	70-130	
1,1,2,2-Tetrachloroethane	ug/L	20	18.2	91	70-130	
1,1,2-Trichloroethane	ug/L	20	18.6	93	70-130	
1,1-Dichloroethane	ug/L	20	17.1	85	70-130	
1,1-Dichloroethene	ug/L	20	19.8	99	69-131	
1,1-Dichloropropene	ug/L	20	17.5	87	70-132	
1,2,3-Trichlorobenzene	ug/L	20	18.0	90	70-132	
1,2,3-Trichloropropane	ug/L	20	18.6	93	70-130	
1,2,4-Trichlorobenzene	ug/L	20	18.9	94	70-130	
1,2-Dibromo-3-chloropropane	ug/L	20	16.3	81	70-130	
1,2-Dibromoethane (EDB)	ug/L	20	19.3	96	70-130	
1,2-Dichlorobenzene	ug/L	20	19.6	98	70-130	
1,2-Dichloroethane	ug/L	20	17.3	87	70-130	
1,2-Dichloropropane	ug/L	20	17.4	87	70-130	
1,3-Dichlorobenzene	ug/L	20	19.9	99	70-130	
1,3-Dichloropropane	ug/L	20	19.0	95	70-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

LABORATORY CONTROL SAMPLE: 4839823

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,4-Dichlorobenzene	ug/L	20	19.6	98	70-130	
2,2-Dichloropropane	ug/L	20	16.5	83	69-130	
2-Butanone (MEK)	ug/L	40	30.2	75	67-133	v3
2-Chlorotoluene	ug/L	20	19.2	96	70-130	
2-Hexanone	ug/L	40	33.1	83	70-133	
4-Chlorotoluene	ug/L	20	19.0	95	70-130	
4-Methyl-2-pentanone (MIBK)	ug/L	40	33.9	85	70-130	
Acetone	ug/L	40	29.9	75	67-130	v3
Benzene	ug/L	20	18.4	92	70-130	
Bromobenzene	ug/L	20	20.3	102	70-130	
Bromochloromethane	ug/L	20	18.1	91	70-130	
Bromodichloromethane	ug/L	20	18.3	91	70-130	
Bromoform	ug/L	20	17.7	89	70-133	
Bromomethane	ug/L	20	23.3	117	41-148	
Carbon tetrachloride	ug/L	20	19.2	96	70-130	
Chlorobenzene	ug/L	20	19.6	98	70-130	
Chloroethane	ug/L	20	16.6	83	41-157	
Chloroform	ug/L	20	16.3	82	70-130	
Chloromethane	ug/L	20	15.0	75	59-141	v3
cis-1,2-Dichloroethene	ug/L	20	17.3	87	70-130	
cis-1,3-Dichloropropene	ug/L	20	17.6	88	70-130	
Dibromochloromethane	ug/L	20	18.2	91	70-130	
Dibromomethane	ug/L	20	18.0	90	70-130	
Dichlorodifluoromethane	ug/L	20	17.0	85	54-147	
Diisopropyl ether	ug/L	20	17.2	86	70-130	
Ethylbenzene	ug/L	20	19.1	96	70-130	
Hexachloro-1,3-butadiene	ug/L	20	18.5	92	70-134	IK
m&p-Xylene	ug/L	40	38.0	95	70-130	
Methyl-tert-butyl ether	ug/L	20	17.2	86	70-130	
Methylene Chloride	ug/L	20	15.8	79	62-130	v3
Naphthalene	ug/L	20	17.9	90	70-135	
o-Xylene	ug/L	20	19.6	98	70-130	
p-Isopropyltoluene	ug/L	20	20.3	102	70-130	
Styrene	ug/L	20	18.8	94	70-130	
Tetrachloroethene	ug/L	20	18.8	94	70-130	
Toluene	ug/L	20	18.0	90	70-130	
trans-1,2-Dichloroethene	ug/L	20	18.5	92	70-130	
trans-1,3-Dichloropropene	ug/L	20	17.5	87	70-130	
Trichloroethene	ug/L	20	18.6	93	70-130	
Trichlorofluoromethane	ug/L	20	17.0	85	57-130	
Vinyl acetate	ug/L	40	40.7	102	70-141	
Vinyl chloride	ug/L	20	15.2	76	66-140	v3
Xylene (Total)	ug/L	60	57.6	96	70-130	
1,2-Dichloroethane-d4 (S)	%			93	70-130	
4-Bromofluorobenzene (S)	%			98	70-130	
Toluene-d8 (S)	%			96	70-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

MATRIX SPIKE SAMPLE: 4839825

Parameter	Units	92802132004 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	20	20.0	100	70-146	
1,1,1-Trichloroethane	ug/L	ND	20	20.9	104	70-150	
1,1,2,2-Tetrachloroethane	ug/L	ND	20	18.6	93	66-144	
1,1,2-Trichloroethane	ug/L	ND	20	20.0	100	70-142	
1,1-Dichloroethane	ug/L	ND	20	19.4	97	68-150	
1,1-Dichloroethene	ug/L	ND	20	23.0	115	64-162	
1,1-Dichloropropene	ug/L	ND	20	20.4	102	70-160	
1,2,3-Trichlorobenzene	ug/L	ND	20	20.3	102	66-151	
1,2,3-Trichloropropane	ug/L	ND	20	19.2	96	66-144	
1,2,4-Trichlorobenzene	ug/L	ND	20	21.6	108	69-147	
1,2-Dibromo-3-chloropropane	ug/L	ND	20	17.6	88	62-146	
1,2-Dibromoethane (EDB)	ug/L	ND	20	20.6	103	70-143	
1,2-Dichlorobenzene	ug/L	ND	20	21.6	108	70-142	
1,2-Dichloroethane	ug/L	ND	20	19.7	99	68-145	
1,2-Dichloropropane	ug/L	ND	20	19.6	98	70-144	
1,3-Dichlorobenzene	ug/L	ND	20	21.7	108	70-142	
1,3-Dichloropropane	ug/L	ND	20	19.4	97	70-141	
1,4-Dichlorobenzene	ug/L	ND	20	21.3	106	70-140	
2,2-Dichloropropane	ug/L	ND	20	20.0	100	58-160	
2-Butanone (MEK)	ug/L	ND	40	32.8	82	57-156	v3
2-Chlorotoluene	ug/L	ND	20	21.2	106	70-148	
2-Hexanone	ug/L	ND	40	36.0	90	62-153	
4-Chlorotoluene	ug/L	ND	20	21.0	105	70-144	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	40	37.1	93	65-144	
Acetone	ug/L	ND	40	32.8	82	49-162	
Benzene	ug/L	ND	20	21.1	105	68-144	
Bromobenzene	ug/L	ND	20	22.3	111	70-144	
Bromochloromethane	ug/L	ND	20	18.9	95	70-148	
Bromodichloromethane	ug/L	ND	20	20.2	101	70-141	
Bromoform	ug/L	ND	20	18.8	94	59-144	
Bromomethane	ug/L	ND	20	26.9	128	23-190	v1
Carbon tetrachloride	ug/L	ND	20	22.4	112	70-147	
Chlorobenzene	ug/L	ND	20	21.2	106	70-143	
Chloroethane	ug/L	ND	20	18.3	92	55-190	
Chloroform	ug/L	ND	20	18.7	93	67-148	
Chloromethane	ug/L	ND	20	15.3	76	38-180	
cis-1,2-Dichloroethene	ug/L	ND	20	20.2	101	67-151	
cis-1,3-Dichloropropene	ug/L	ND	20	19.7	98	70-142	
Dibromochloromethane	ug/L	ND	20	20.1	100	68-140	
Dibromomethane	ug/L	ND	20	21.9	109	70-142	
Dichlorodifluoromethane	ug/L	ND	20	13.3	67	15-200	
Diisopropyl ether	ug/L	ND	20	18.6	93	62-149	
Ethylbenzene	ug/L	ND	20	21.0	105	70-145	
Hexachloro-1,3-butadiene	ug/L	ND	20	22.5	113	64-164	IK
m&p-Xylene	ug/L	ND	40	42.5	106	70-148	
Methyl-tert-butyl ether	ug/L	ND	20	18.9	95	64-146	
Methylene Chloride	ug/L	ND	20	17.7	89	54-149	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

MATRIX SPIKE SAMPLE: 4839825

Parameter	Units	92802132004 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Naphthalene	ug/L	ND	20	19.4	97	62-154	
o-Xylene	ug/L	ND	20	21.6	108	70-145	
p-Isopropyltoluene	ug/L	ND	20	23.6	118	70-153	
Styrene	ug/L	ND	20	20.7	104	70-147	
Tetrachloroethene	ug/L	ND	20	21.4	107	70-145	
Toluene	ug/L	ND	20	20.3	102	65-146	
trans-1,2-Dichloroethene	ug/L	ND	20	21.5	108	69-155	
trans-1,3-Dichloropropene	ug/L	ND	20	20.0	100	70-142	
Trichloroethene	ug/L	ND	20	22.0	110	70-152	
Trichlorofluoromethane	ug/L	ND	20	19.5	98	60-158	
Vinyl acetate	ug/L	ND	40	46.2	115	56-157	
Vinyl chloride	ug/L	ND	20	15.3	76	51-178	v3
Xylene (Total)	ug/L	ND	60	64.1	107	70-146	
1,2-Dichloroethane-d4 (S)	%				93	70-130	
4-Bromofluorobenzene (S)	%				98	70-130	
Toluene-d8 (S)	%				99	70-130	

SAMPLE DUPLICATE: 4839824

Parameter	Units	92802132001 Result	Dup Result	RPD	Max RPD	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	ND		30	
1,1,1-Trichloroethane	ug/L	ND	ND		30	
1,1,2,2-Tetrachloroethane	ug/L	ND	ND		30	
1,1,2-Trichloroethane	ug/L	ND	ND		30	
1,1-Dichloroethane	ug/L	ND	ND		30	
1,1-Dichloroethene	ug/L	ND	ND		30	
1,1-Dichloropropene	ug/L	ND	ND		30	
1,2,3-Trichlorobenzene	ug/L	ND	ND		30	
1,2,3-Trichloropropane	ug/L	ND	ND		30	
1,2,4-Trichlorobenzene	ug/L	ND	ND		30	
1,2-Dibromo-3-chloropropane	ug/L	ND	ND		30	
1,2-Dibromoethane (EDB)	ug/L	ND	ND		30	
1,2-Dichlorobenzene	ug/L	ND	ND		30	
1,2-Dichloroethane	ug/L	ND	ND		30	
1,2-Dichloropropane	ug/L	ND	ND		30	
1,3-Dichlorobenzene	ug/L	ND	ND		30	
1,3-Dichloropropane	ug/L	ND	ND		30	
1,4-Dichlorobenzene	ug/L	ND	ND		30	
2,2-Dichloropropane	ug/L	ND	ND		30	
2-Butanone (MEK)	ug/L	ND	ND		30	v2
2-Chlorotoluene	ug/L	ND	ND		30	
2-Hexanone	ug/L	ND	ND		30	
4-Chlorotoluene	ug/L	ND	ND		30	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	ND		30	
Acetone	ug/L	ND	ND		30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

SAMPLE DUPLICATE: 4839824

Parameter	Units	92802132001 Result	Dup Result	RPD	Max RPD	Qualifiers
Benzene	ug/L	ND	ND		30	
Bromobenzene	ug/L	ND	ND		30	
Bromochloromethane	ug/L	ND	ND		30	
Bromodichloromethane	ug/L	ND	ND		30	
Bromoform	ug/L	ND	ND		30	
Bromomethane	ug/L	1.9J	ND		30	v1
Carbon tetrachloride	ug/L	ND	ND		30	
Chlorobenzene	ug/L	ND	ND		30	
Chloroethane	ug/L	ND	ND		30	
Chloroform	ug/L	ND	ND		30	
Chloromethane	ug/L	ND	ND		30	
cis-1,2-Dichloroethene	ug/L	1.4	1.5	5	30	
cis-1,3-Dichloropropene	ug/L	ND	ND		30	
Dibromochloromethane	ug/L	ND	ND		30	
Dibromomethane	ug/L	ND	ND		30	
Dichlorodifluoromethane	ug/L	ND	ND		30	
Diisopropyl ether	ug/L	ND	ND		30	
Ethylbenzene	ug/L	ND	ND		30	
Hexachloro-1,3-butadiene	ug/L	ND	ND		30	IK
m&p-Xylene	ug/L	ND	ND		30	
Methyl-tert-butyl ether	ug/L	ND	ND		30	
Methylene Chloride	ug/L	ND	ND		30	
Naphthalene	ug/L	ND	ND		30	
o-Xylene	ug/L	ND	ND		30	
p-Isopropyltoluene	ug/L	ND	ND		30	
Styrene	ug/L	ND	ND		30	
Tetrachloroethene	ug/L	ND	ND		30	
Toluene	ug/L	ND	0.41J		30	
trans-1,2-Dichloroethene	ug/L	ND	ND		30	
trans-1,3-Dichloropropene	ug/L	ND	ND		30	
Trichloroethene	ug/L	ND	ND		30	
Trichlorofluoromethane	ug/L	ND	ND		30	
Vinyl acetate	ug/L	ND	ND		30	
Vinyl chloride	ug/L	ND	0.53J		30	v2
Xylene (Total)	ug/L	ND	ND		30	
1,2-Dichloroethane-d4 (S)	%	95	97			
4-Bromofluorobenzene (S)	%	97	100			
Toluene-d8 (S)	%	99	100			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

QC Batch: 942693 | Analysis Method: EPA 8270E
QC Batch Method: EPA 3510C | Analysis Description: 8270E Water MSSV RVE
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92802132001, 92802132002, 92802132003, 92802132004, 92802132005, 92802132006

METHOD BLANK: 4844520 Matrix: Water
Associated Lab Samples: 92802132001, 92802132002, 92802132003, 92802132004, 92802132005, 92802132006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,2,4-Trichlorobenzene	ug/L	ND	10.0	1.7	06/19/25 12:48	
1,2-Dichlorobenzene	ug/L	ND	10.0	1.8	06/19/25 12:48	
1,3-Dichlorobenzene	ug/L	ND	10.0	1.6	06/19/25 12:48	
1,4-Dichlorobenzene	ug/L	ND	10.0	1.7	06/19/25 12:48	
1-Methylnaphthalene	ug/L	ND	10.0	2.0	06/19/25 12:48	
2,2'-Oxybis(1-chloropropane)	ug/L	ND	10.0	1.2	06/19/25 12:48	
2,4,5-Trichlorophenol	ug/L	ND	10.0	1.4	06/19/25 12:48	
2,4,6-Trichlorophenol	ug/L	ND	10.0	1.6	06/19/25 12:48	
2,4-Dichlorophenol	ug/L	ND	10.0	1.4	06/19/25 12:48	
2,4-Dimethylphenol	ug/L	ND	10.0	1.7	06/19/25 12:48	
2,4-Dinitrophenol	ug/L	ND	50.0	26.0	06/19/25 12:48	
2,4-Dinitrotoluene	ug/L	ND	10.0	1.6	06/19/25 12:48	
2,6-Dinitrotoluene	ug/L	ND	10.0	1.7	06/19/25 12:48	
2-Chloronaphthalene	ug/L	ND	10.0	1.7	06/19/25 12:48	
2-Chlorophenol	ug/L	ND	10.0	1.2	06/19/25 12:48	
2-Methylnaphthalene	ug/L	ND	10.0	1.9	06/19/25 12:48	
2-Methylphenol(o-Cresol)	ug/L	ND	10.0	1.9	06/19/25 12:48	
2-Nitroaniline	ug/L	ND	20.0	3.0	06/19/25 12:48	
2-Nitrophenol	ug/L	ND	10.0	1.4	06/19/25 12:48	
3&4-Methylphenol(m&p Cresol)	ug/L	ND	10.0	1.2	06/19/25 12:48	
3,3'-Dichlorobenzidine	ug/L	ND	20.0	8.1	06/19/25 12:48	
3-Nitroaniline	ug/L	ND	20.0	3.8	06/19/25 12:48	
4,6-Dinitro-2-methylphenol	ug/L	ND	20.0	7.8	06/19/25 12:48	
4-Bromophenylphenyl ether	ug/L	ND	10.0	1.8	06/19/25 12:48	
4-Chloro-3-methylphenol	ug/L	ND	10.0	3.3	06/19/25 12:48	
4-Chloroaniline	ug/L	ND	20.0	3.6	06/19/25 12:48	
4-Chlorophenylphenyl ether	ug/L	ND	10.0	2.0	06/19/25 12:48	
4-Nitroaniline	ug/L	ND	20.0	5.1	06/19/25 12:48	
4-Nitrophenol	ug/L	ND	50.0	6.6	06/19/25 12:48	
Acenaphthene	ug/L	ND	10.0	2.0	06/19/25 12:48	
Acenaphthylene	ug/L	ND	10.0	2.0	06/19/25 12:48	
Aniline	ug/L	ND	10.0	1.6	06/19/25 12:48	
Anthracene	ug/L	ND	10.0	2.3	06/19/25 12:48	
Benzo(a)anthracene	ug/L	ND	10.0	2.7	06/19/25 12:48	
Benzo(a)pyrene	ug/L	ND	10.0	2.8	06/19/25 12:48	
Benzo(b)fluoranthene	ug/L	ND	10.0	2.6	06/19/25 12:48	
Benzo(g,h,i)perylene	ug/L	ND	10.0	2.8	06/19/25 12:48	
Benzo(k)fluoranthene	ug/L	ND	10.0	2.7	06/19/25 12:48	
Benzoic Acid	ug/L	ND	50.0	22.0	06/19/25 12:48	
Benzyl alcohol	ug/L	ND	20.0	2.9	06/19/25 12:48	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

METHOD BLANK: 4844520 Matrix: Water
Associated Lab Samples: 92802132001, 92802132002, 92802132003, 92802132004, 92802132005, 92802132006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
bis(2-Chloroethoxy)methane	ug/L	ND	10.0	1.8	06/19/25 12:48	
bis(2-Chloroethyl) ether	ug/L	ND	10.0	1.9	06/19/25 12:48	
bis(2-Ethylhexyl)phthalate	ug/L	ND	6.0	3.7	06/19/25 12:48	
Butylbenzylphthalate	ug/L	ND	10.0	3.1	06/19/25 12:48	
Chrysene	ug/L	ND	10.0	2.8	06/19/25 12:48	
Di-n-butylphthalate	ug/L	ND	10.0	2.2	06/19/25 12:48	
Di-n-octylphthalate	ug/L	ND	10.0	3.9	06/19/25 12:48	
Dibenz(a,h)anthracene	ug/L	ND	10.0	3.0	06/19/25 12:48	
Dibenzofuran	ug/L	ND	10.0	2.1	06/19/25 12:48	
Diethylphthalate	ug/L	ND	10.0	2.0	06/19/25 12:48	
Dimethylphthalate	ug/L	ND	10.0	2.1	06/19/25 12:48	
Fluoranthene	ug/L	ND	10.0	2.2	06/19/25 12:48	
Fluorene	ug/L	ND	10.0	2.1	06/19/25 12:48	
Hexachloro-1,3-butadiene	ug/L	ND	10.0	1.8	06/19/25 12:48	
Hexachlorobenzene	ug/L	ND	10.0	2.2	06/19/25 12:48	
Hexachlorocyclopentadiene	ug/L	ND	10.0	1.6	06/19/25 12:48	
Hexachloroethane	ug/L	ND	10.0	1.4	06/19/25 12:48	
Indeno(1,2,3-cd)pyrene	ug/L	ND	10.0	2.9	06/19/25 12:48	
Isophorone	ug/L	ND	10.0	1.7	06/19/25 12:48	
N-Nitroso-di-n-propylamine	ug/L	ND	10.0	1.3	06/19/25 12:48	
N-Nitrosodimethylamine	ug/L	ND	10.0	1.9	06/19/25 12:48	
N-Nitrosodiphenylamine	ug/L	ND	10.0	3.0	06/19/25 12:48	
Naphthalene	ug/L	ND	10.0	2.1	06/19/25 12:48	
Nitrobenzene	ug/L	ND	10.0	1.9	06/19/25 12:48	
Pentachlorophenol	ug/L	ND	20.0	3.8	06/19/25 12:48	
Phenanthrene	ug/L	ND	10.0	2.0	06/19/25 12:48	
Phenol	ug/L	ND	10.0	1.4	06/19/25 12:48	
Pyrene	ug/L	ND	10.0	2.2	06/19/25 12:48	
2,4,6-Tribromophenol (S)	%	39	10-166		06/19/25 12:48	
2-Fluorobiphenyl (S)	%	43	10-130		06/19/25 12:48	
2-Fluorophenol (S)	%	36	10-130		06/19/25 12:48	
Nitrobenzene-d5 (S)	%	51	10-133		06/19/25 12:48	
Phenol-d6 (S)	%	25	10-130		06/19/25 12:48	
Terphenyl-d14 (S)	%	51	10-193		06/19/25 12:48	

LABORATORY CONTROL SAMPLE: 4844521

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,2,4-Trichlorobenzene	ug/L	50	26.4	53	14-130	
1,2-Dichlorobenzene	ug/L	50	18.8	38	10-130	
1,3-Dichlorobenzene	ug/L	50	16.6	33	10-130	
1,4-Dichlorobenzene	ug/L	50	17.2	34	10-130	
1-Methylnaphthalene	ug/L	50	39.8	80	26-131	
2,2'-Oxybis(1-chloropropane)	ug/L	50	34.1	68	23-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

LABORATORY CONTROL SAMPLE: 4844521

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
2,4,5-Trichlorophenol	ug/L	50	43.4	87	36-150	
2,4,6-Trichlorophenol	ug/L	50	42.9	86	30-151	
2,4-Dichlorophenol	ug/L	50	43.2	86	36-140	
2,4-Dimethylphenol	ug/L	50	46.2	92	36-155	
2,4-Dinitrophenol	ug/L	250	270	108	10-169	
2,4-Dinitrotoluene	ug/L	50	48.7	97	46-160	
2,6-Dinitrotoluene	ug/L	50	48.3	97	47-161	
2-Chloronaphthalene	ug/L	50	40.9	82	29-134	
2-Chlorophenol	ug/L	50	38.0	76	29-130	
2-Methylnaphthalene	ug/L	50	38.8	78	26-130	
2-Methylphenol(o-Cresol)	ug/L	50	41.8	84	32-130	
2-Nitroaniline	ug/L	100	92.1	92	41-150	
2-Nitrophenol	ug/L	50	42.8	86	31-145	
3&4-Methylphenol(m&p Cresol)	ug/L	50	40.1	80	29-130	
3,3'-Dichlorobenzidine	ug/L	100	92.0	92	46-153	
3-Nitroaniline	ug/L	100	90.2	90	47-156	
4,6-Dinitro-2-methylphenol	ug/L	100	101	101	23-161	
4-Bromophenylphenyl ether	ug/L	50	45.0	90	45-143	
4-Chloro-3-methylphenol	ug/L	100	94.0	94	42-143	
4-Chloroaniline	ug/L	100	79.2	79	37-135	
4-Chlorophenylphenyl ether	ug/L	50	43.5	87	43-140	
4-Nitroaniline	ug/L	100	91.3	91	47-157	
4-Nitrophenol	ug/L	250	139	56	10-130	
Acenaphthene	ug/L	50	43.7	87	38-138	
Acenaphthylene	ug/L	50	45.9	92	39-139	
Aniline	ug/L	50	30.3	61	16-130	
Anthracene	ug/L	50	48.9	98	45-136	
Benzo(a)anthracene	ug/L	50	47.2	94	52-151	
Benzo(a)pyrene	ug/L	50	51.0	102	46-165	
Benzo(b)fluoranthene	ug/L	50	48.3	97	44-170	
Benzo(g,h,i)perylene	ug/L	50	51.9	104	39-171	
Benzo(k)fluoranthene	ug/L	50	52.8	106	43-168	
Benzoic Acid	ug/L	250	156	63	10-130	
Benzyl alcohol	ug/L	100	82.3	82	33-134	
bis(2-Chloroethoxy)methane	ug/L	50	47.0	94	37-140	
bis(2-Chloroethyl) ether	ug/L	50	43.9	88	33-136	
bis(2-Ethylhexyl)phthalate	ug/L	50	53.5	107	50-169	
Butylbenzylphthalate	ug/L	50	52.0	104	50-174	
Chrysene	ug/L	50	49.6	99	52-148	
Di-n-butylphthalate	ug/L	50	51.9	104	51-154	
Di-n-octylphthalate	ug/L	50	53.8	108	44-170	
Dibenz(a,h)anthracene	ug/L	50	51.0	102	41-171	
Dibenzofuran	ug/L	50	44.8	90	42-157	
Diethylphthalate	ug/L	50	48.1	96	50-149	
Dimethylphthalate	ug/L	50	46.3	93	47-146	
Fluoranthene	ug/L	50	49.2	98	51-152	
Fluorene	ug/L	50	45.5	91	46-143	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

LABORATORY CONTROL SAMPLE: 4844521

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Hexachloro-1,3-butadiene	ug/L	50	20.7	41	10-130	
Hexachlorobenzene	ug/L	50	46.1	92	40-139	
Hexachlorocyclopentadiene	ug/L	50	25.6	51	10-130	
Hexachloroethane	ug/L	50	15.4	31	10-130	
Indeno(1,2,3-cd)pyrene	ug/L	50	47.7	95	40-172	
Isophorone	ug/L	50	50.2	100	37-143	
N-Nitroso-di-n-propylamine	ug/L	50	48.7	97	38-145	
N-Nitrosodimethylamine	ug/L	50	40.4	81	30-130	
N-Nitrosodiphenylamine	ug/L	50	49.1	98	46-144	
Naphthalene	ug/L	50	32.3	65	21-130	
Nitrobenzene	ug/L	50	44.1	88	33-136	
Pentachlorophenol	ug/L	100	93.1	93	19-156	
Phenanthrene	ug/L	50	48.5	97	49-143	
Phenol	ug/L	50	28.3	57	18-130	
Pyrene	ug/L	50	48.1	96	48-156	
2,4,6-Tribromophenol (S)	%			88	10-166	
2-Fluorobiphenyl (S)	%			63	10-130	
2-Fluorophenol (S)	%			55	10-130	
Nitrobenzene-d5 (S)	%			75	10-133	
Phenol-d6 (S)	%			48	10-130	
Terphenyl-d14 (S)	%			89	10-193	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 4844522 4844523

Parameter	Units	92802132001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
1,2,4-Trichlorobenzene	ug/L	ND	100	100	37.9	34.0	38	34	10-130	11	30	
1,2-Dichlorobenzene	ug/L	ND	100	100	33.6	23.9	34	24	10-130	34	30	R1
1,3-Dichlorobenzene	ug/L	ND	100	100	30.7	21.6	31	22	10-130	35	30	R1
1,4-Dichlorobenzene	ug/L	ND	100	100	31.9	22.1	32	22	10-130	36	30	R1
1-Methylnaphthalene	ug/L	ND	100	100	52.6	53.3	53	53	10-130	1	30	
2,2'-Oxybis(1-chloropropane)	ug/L	ND	100	100	41.9	39.9	42	40	10-132	5	30	
2,4,5-Trichlorophenol	ug/L	ND	100	100	68.2	74.1	68	74	10-174	8	30	
2,4,6-Trichlorophenol	ug/L	ND	100	100	60.9	63.2	61	63	10-173	4	30	
2,4-Dichlorophenol	ug/L	ND	100	100	61.1	59.0	61	59	10-153	4	30	
2,4-Dimethylphenol	ug/L	ND	100	100	67.0	65.5	67	66	12-157	2	30	
2,4-Dinitrophenol	ug/L	ND	500	500	ND	ND	7	6	10-165		30	M1
2,4-Dinitrotoluene	ug/L	ND	100	100	73.2	90.6	73	91	29-168	21	30	
2,6-Dinitrotoluene	ug/L	ND	100	100	72.5	85.5	72	86	28-168	17	30	
2-Chloronaphthalene	ug/L	ND	100	100	51.0	59.8	51	60	11-136	16	30	
2-Chlorophenol	ug/L	ND	100	100	44.9	45.8	45	46	10-134	2	30	
2-Methylnaphthalene	ug/L	ND	100	100	50.8	53.3	51	53	10-131	5	30	
2-Methylphenol(o-Cresol)	ug/L	ND	100	100	55.8	57.1	56	57	10-130	2	30	
2-Nitroaniline	ug/L	ND	200	200	142	157	71	78	19-156	10	30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 4844522 4844523

Parameter	Units	92802132001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
2-Nitrophenol	ug/L	ND	100	100	53.2	52.7	53	53	10-160	1	30	
3&4-Methylphenol(m&p Cresol)	ug/L	ND	100	100	53.8	56.6	54	57	10-132	5	30	
3,3'-Dichlorobenzidine	ug/L	ND	200	200	164	205	82	103	10-173	22	30	
3-Nitroaniline	ug/L	ND	200	200	144	177	72	88	19-169	20	30	
4,6-Dinitro-2-methylphenol	ug/L	ND	200	200	91.6	81.6	46	41	10-178	12	30	
4-Bromophenylphenyl ether	ug/L	ND	100	100	61.8	83.8	62	84	28-149	30	30	
4-Chloro-3-methylphenol	ug/L	ND	200	200	141	146	71	73	18-148	3	30	
4-Chloroaniline	ug/L	ND	200	200	116	115	58	58	10-141	0	30	
4-Chlorophenylphenyl ether	ug/L	ND	100	100	52.7	71.9	53	72	24-144	31	30	R1
4-Nitroaniline	ug/L	ND	200	200	140	181	70	90	18-170	26	30	
4-Nitrophenol	ug/L	ND	500	500	82.1J	83.3J	16	17	10-130		30	
Acenaphthene	ug/L	ND	100	100	56.2	67.4	56	67	18-142	18	30	
Acenaphthylene	ug/L	ND	100	100	60.4	68.9	60	69	18-143	13	30	
Aniline	ug/L	ND	100	100	39.2	41.4	39	41	10-130	6	30	
Anthracene	ug/L	ND	100	100	72.6	98.0	73	98	32-138	30	30	
Benzo(a)anthracene	ug/L	ND	100	100	79.8	103	80	103	41-155	26	30	
Benzo(a)pyrene	ug/L	ND	100	100	85.9	111	86	111	10-167	25	30	
Benzo(b)fluoranthene	ug/L	ND	100	100	81.7	102	82	102	31-172	23	30	
Benzo(g,h,i)perylene	ug/L	ND	100	100	84.8	109	85	109	26-177	25	30	
Benzo(k)fluoranthene	ug/L	ND	100	100	86.0	111	86	111	31-168	25	30	
Benzoic Acid	ug/L	ND	500	500	ND	ND	0	0	10-130		30	M1
Benzyl alcohol	ug/L	ND	200	200	117	115	58	58	10-136	1	30	
bis(2-Chloroethoxy)methane	ug/L	ND	100	100	63.3	62.0	63	62	12-143	2	30	
bis(2-Chloroethyl) ether	ug/L	ND	100	100	51.4	51.0	51	51	10-139	1	30	
bis(2-Ethylhexyl)phthalate	ug/L	ND	100	100	94.4	119	94	119	41-173	23	30	
Butylbenzylphthalate	ug/L	ND	100	100	93.2	118	93	118	38-182	24	30	
Chrysene	ug/L	ND	100	100	84.1	107	84	107	41-152	24	30	
Di-n-butylphthalate	ug/L	ND	100	100	85.7	107	86	107	37-162	22	30	
Di-n-octylphthalate	ug/L	ND	100	100	94.2	119	94	119	36-176	23	30	
Dibenz(a,h)anthracene	ug/L	ND	100	100	85.4	110	85	110	29-175	25	30	
Dibenzofuran	ug/L	ND	100	100	55.5	70.0	55	70	23-144	23	30	
Diethylphthalate	ug/L	ND	100	100	77.6	94.5	78	95	33-154	20	30	
Dimethylphthalate	ug/L	ND	100	100	72.1	85.0	72	85	29-150	16	30	
Fluoranthene	ug/L	ND	100	100	77.1	101	77	101	40-156	27	30	
Fluorene	ug/L	ND	100	100	58.1	75.7	58	76	26-148	26	30	
Hexachloro-1,3-butadiene	ug/L	ND	100	100	34.6	26.7	35	27	10-130	26	30	
Hexachlorobenzene	ug/L	ND	100	100	65.4	89.6	65	90	27-145	31	30	R1
Hexachlorocyclopentadiene	ug/L	ND	100	100	33.4	33.2	33	33	10-130	0	30	
Hexachloroethane	ug/L	ND	100	100	23.8	20.7	24	21	10-130	14	30	
Indeno(1,2,3-cd)pyrene	ug/L	ND	100	100	79.6	103	80	103	28-176	25	30	
Isophorone	ug/L	ND	100	100	70.2	72.3	70	72	14-145	3	30	
N-Nitroso-di-n-propylamine	ug/L	ND	100	100	64.4	67.7	64	68	12-149	5	30	
N-Nitrosodimethylamine	ug/L	ND	100	100	48.7	51.4	49	51	10-130	6	30	
N-Nitrosodiphenylamine	ug/L	ND	100	100	77.6	94.9	78	95	29-149	20	30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 4844522 4844523

Parameter	Units	92802132001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Naphthalene	ug/L	ND	100	100	48.6	41.4	49	41	10-130	16	30	
Nitrobenzene	ug/L	ND	100	100	56.7	53.9	57	54	10-145	5	30	
Pentachlorophenol	ug/L	ND	200	200	126	143	63	71	10-178	13	30	
Phenanthrene	ug/L	ND	100	100	71.3	95.4	71	95	36-146	29	30	
Phenol	ug/L	ND	100	100	36.6	39.4	37	39	10-130	7	30	
Pyrene	ug/L	ND	100	100	81.5	109	82	109	42-156	29	30	
2,4,6-Tribromophenol (S)	%						65	79	10-166			
2-Fluorobiphenyl (S)	%						46	35	10-130			
2-Fluorophenol (S)	%						36	30	10-130			
Nitrobenzene-d5 (S)	%						55	36	10-133			
Phenol-d6 (S)	%						33	33	10-130			
Terphenyl-d14 (S)	%						77	94	10-193			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802132

QC Batch: 2543423
QC Batch Method: SM 2540 G
Analysis Method: SM 2540G
Analysis Description: Total Solids 2540 G-2011
Laboratory: Pace National - Mt. Juliet
Associated Lab Samples: 92802132007

METHOD BLANK: R4234984-1 Matrix: Solid
Associated Lab Samples: 92802132007

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Total Solids	%	0.00200			06/23/25 13:22	

LABORATORY CONTROL SAMPLE: R4234984-2

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Total Solids	%	50.0	50.0	100	90.0-110	

SAMPLE DUPLICATE: R4234984-3

Parameter	Units	L1870299-04 Result	Dup Result	RPD	Max RPD	Qualifiers
Total Solids	%	83.4	84.9	1.73	10	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALIFIERS

Project: Fortress Wood Products
Pace Project No.: 92802132

DEFINITIONS

DF - Dilution Factor, if reported, represents the factor applied to the reported data due to dilution of the sample aliquot.

ND - Not Detected at or above adjusted reporting limit.

TNTC - Too Numerous To Count

J - Estimated concentration above the adjusted method detection limit and below the adjusted reporting limit.

MDL - Adjusted Method Detection Limit.

PQL - Practical Quantitation Limit.

RL - Reporting Limit - The lowest concentration value that meets project requirements for quantitative data with known precision and bias for a specific analyte in a specific matrix.

S - Surrogate

1,2-Diphenylhydrazine decomposes to and cannot be separated from Azobenzene using Method 8270. The result for each analyte is a combined concentration.

Consistent with EPA guidelines, unrounded data are displayed and have been used to calculate % recovery and RPD values.

LCS(D) - Laboratory Control Sample (Duplicate)

MS(D) - Matrix Spike (Duplicate)

DUP - Sample Duplicate

RPD - Relative Percent Difference

NC - Not Calculable.

SG - Silica Gel - Clean-Up

U - Indicates the compound was analyzed for, but not detected.

Acid preservation may not be appropriate for 2 Chloroethylvinyl ether.

A separate vial preserved to a pH of 4-5 is recommended in SW846 Chapter 4 for the analysis of Acrolein and Acrylonitrile by EPA Method 8260.

N-Nitrosodiphenylamine decomposes and cannot be separated from Diphenylamine using Method 8270. The result reported for each analyte is a combined concentration.

Reported results are not rounded until the final step prior to reporting. Therefore, calculated parameters that are typically reported as "Total" may vary slightly from the sum of the reported component parameters.

Pace Analytical is TNI accredited. Contact your Pace PM for the current list of accredited analytes.

TNI - The NELAC Institute.

ANALYTE QUALIFIERS

B	Analyte was detected in the associated method blank.
C0	Result confirmed by second analysis.
IK	The recalculated concentration of the calibration standard(s) did not meet method acceptance criteria; this result should be considered an estimated value.
J	Analyte detected below the reporting limit, therefore result is an estimate. This qualifier is also used for all TICs.
M1	Matrix spike recovery exceeded QC limits. Batch accepted based on laboratory control sample (LCS) recovery.
ML	Matrix spike recovery and/or matrix spike duplicate recovery was below laboratory control limits. Result may be biased low.
P2	Re-extraction or re-analysis could not be performed due to insufficient sample amount.
R1	RPD value was outside control limits.
S0	Surrogate recovery outside laboratory control limits.
v1	The continuing calibration verification was above the method acceptance limit. Any detection for the analyte in the associated samples may have a high bias.
v2	The continuing calibration verification was below the method acceptance limit. The analyte was not detected in the associated samples and the sensitivity of the instrument was verified with a reporting limit check standard.
v3	The continuing calibration verification was below the method acceptance limit. Any detection for the analyte in the associated samples may have low bias.

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA CROSS REFERENCE TABLE

Project: Fortress Wood Products
Pace Project No.: 92802132

Lab ID	Sample ID	QC Batch Method	QC Batch	Analytical Method	Analytical Batch
92802132001	**GW-5**	3015	2542364	EPA 6020B	2542364
92802132002	**GW-4**	3015	2542364	EPA 6020B	2542364
92802132003	**EB-2**	3015	2542364	EPA 6020B	2542364
92802132004	**GW-3**	3015	2542364	EPA 6020B	2542364
92802132005	**GW-10**	3015	2542364	EPA 6020B	2542364
92802132006	**GW-6**	3015	2542364	EPA 6020B	2542364
92802132007	**WC-1**	3050B	2544226	EPA 6020B	2544226
92802132001	**GW-5**	7470A	2540439	EPA 7470A	2540439
92802132002	**GW-4**	7470A	2540439	EPA 7470A	2540439
92802132003	**EB-2**	7470A	2540439	EPA 7470A	2540439
92802132004	**GW-3**	7470A	2540439	EPA 7470A	2540439
92802132005	**GW-10**	7470A	2540439	EPA 7470A	2540439
92802132006	**GW-6**	7470A	2540439	EPA 7470A	2540439
92802132007	**WC-1**	7471A	2544326	EPA 7471B	2544326
92802132001	**GW-5**	EPA 3510C	942693	EPA 8270E	942953
92802132002	**GW-4**	EPA 3510C	942693	EPA 8270E	942953
92802132003	**EB-2**	EPA 3510C	942693	EPA 8270E	942953
92802132004	**GW-3**	EPA 3510C	942693	EPA 8270E	942953
92802132005	**GW-10**	EPA 3510C	942693	EPA 8270E	942953
92802132006	**GW-6**	EPA 3510C	942693	EPA 8270E	942953
92802132001	**GW-5**	EPA 8260D	941743		
92802132002	**GW-4**	EPA 8260D	941743		
92802132003	**EB-2**	EPA 8260D	941743		
92802132004	**GW-3**	EPA 8260D	941743		
92802132005	**GW-10**	EPA 8260D	941743		
92802132006	**GW-6**	EPA 8260D	941743		
92802132008	**TB-2**	EPA 8260D	941743		
92802132007	**WC-1**	SM 2540 G	2543423	SM 2540G	2543423

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Laboratory receiving samples:
Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☑ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☐

Sample Condition Upon Receipt

Client Name: ECS Southeast Llc Charlotte

Project #:

WO# : 92802132

92802132

Courier: ☐ Fed Ex ☐ UPS ☐ USPS ☐ Client ☐ Commercial ☑ Pace ☐ Other:____

Custody Seal Present? ☐ Yes ☑ No Seals Intact? ☐ Yes ☑ No ☐ N/A

Date/Initials Person Examining Contents: LS 6/12/25

Packing Material: ☑ Bubble Wrap ☑ Bubble Bags ☐ None ☑ Other

Biological Tissue Frozen? ☐ Yes ☐ No ☑ N/A

Thermometer: ☐ IR Gun ID: 92T078

Type of Ice: ☑ Wet ☐ Blue ☐ None

Cooler Temp: 3.4 Correction Factor: Add/Subtract (°C) 0

Temp should be above freezing to 6°C
☐ Samples out of temp criteria. Samples on ice, cooling process has begun

Cooler Temp Corrected (°C): 3.4

USDA Regulated Soil (☐ N/A, water sample)
Did samples originate in a quarantine zone within the United States: CA, NY, or SC (check maps)? ☐ Yes ☑ No

Did samples originate from a foreign source (internationally, including Hawaii and Puerto Rico)? ☐ Yes ☑ No

				Comments/Discrepancy:
Chain of Custody Present?	☑ Yes	☐ No	☐ N/A	1.
Samples Arrived within Hold Time?	☑ Yes	☐ No	☐ N/A	2.
Short Hold Time Analysis (<72 hr.)?	☐ Yes	☑ No	☐ N/A	3.
Rush Turn Around Time Requested?	☐ Yes	☑ No	☐ N/A	4.
Sufficient Volume?	☑ Yes	☐ No	☐ N/A	5.
Correct Containers Used?	☑ Yes	☐ No	☐ N/A	6.
-Pace Containers Used?	☑ Yes	☐ No	☐ N/A	
Containers Intact?	☑ Yes	☐ No	☐ N/A	7.
Dissolved analysis: Samples Field Filtered?	☐ Yes	☑ No	☐ N/A	8.
Sample Labels Match COC? -Includes Date/Time/ID/Analysis Matrix: WT	☑ Yes	☐ No	☐ N/A	9.
Headspace in VOA Vials (>5-6mm)?	☐ Yes	☑ No	☐ N/A	10.
Trip Blank Present?	☑ Yes	☐ No	☐ N/A	11.
Trip Blank Custody Seals Present?	☑ Yes	☐ No	☐ N/A	

COMMENTS/SAMPLE DISCREPANCY

Field Data Required? ☐ Yes ☐ No

Lot ID of split containers:

CLIENT NOTIFICATION/RESOLUTION

Person contacted: Date/Time:

Project Manager SCURF Review: Date:

Project Manager SRF Review: Date:

Pace

DC#_Title: ENV-FRM-HUN1-0083 v05_Sample Condition Upon Receipt

Effective Date: 05/24/2024

WO#: 92802132

PM: AMB Due Date: 06/19/25

CLIENT: 92-ECS

Project #

*Check mark top half of box if pH and/or dechlorination is verified and within the acceptance range for preservation samples.

Exceptions: VOA, Coliform, TOC, Oil and Grease, DRO/8015 (water) DOC, LLHg

**Bottom half of box is to list number of bottles

***Check all unpreserved Nitrates for chlorine

Laboratory Receiving location: Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☑ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☐

Client ECS Southeast Profile (EZ) (Circle one) 326817 Notes

Item#	BP4U-125 mL Plastic Unpreserved (N/A) (Cl-)	BP3U-250 mL Plastic Unpreserved (N/A)	BP2U-500 mL Plastic Unpreserved (N/A)	BP1U-1 liter Plastic Unpreserved (N/A)	BP4S-125 mL Plastic H2SO4 (pH < 2) (Cl-)	BP3N-250 mL plastic HNO3 (pH < 2)	BP4Z-125 mL Plastic Zn Acetate & NaOH (>9)	BP4B-125 mL Plastic NaOH (pH > 12) (Cl-)	WGFU-Wide-mouthed Glass jar Unpreserved	AG1U-1 liter Amber Unpreserved (N/A) (Cl-)	AG1H-1 liter Amber HCl (pH < 2)	AG3U-250 mL Amber Unpreserved (N/A) (Cl-)	AG1S-1 liter Amber H2SO4 (pH < 2)	AG3S-250 mL Amber H2SO4 (pH < 2)	DG9A-40 mL Amber NH4Cl (N/A)(Cl-)	DG9H-40 mL VOA HCl (N/A)	VG9T-40 mL VOA Na2S2O3 (N/A)	VG9U-40 mL VOA Unpreserved (N/A)	DG9V-40 mL VOA H3PO4 (N/A)	KP7U-50 mL Plastic Unpreserved (N/A)	V/GK (3 vials per kit)-VPH/Gas kit (N/A)	SP5T-125 mL Sterile Plastic (N/A - lab)	SP2T-250 mL Sterile Plastic (N/A - lab)		BP3R-250 mL Plastic (NH4)2SO4 (9.3-9.7)	AG0U-100 mL Amber Unpreserved (N/A) (Cl-)	VSGU-20 mL Scintillation vials (N/A)	DG9U-40 mL Amber Unpreserved vials (N/A)
CC						SI			SI							CH											CH		
1						1										3											2		
2						1										3											2		
3						1										3											2		
4						1										3											2		
5						1										3											2		
6						1										3											2		
7									1																				
8																2													
9																													
10																													
11																													
12																													

pH Adjustment Log for Preserved Samples

Sample ID	Type of Preservative	pH upon receipt	Date preservation adjusted	Time preservation adjusted	Amount of Preservative added	Lot #

Note: Whenever there is a discrepancy affecting North Carolina compliance samples, a copy of this form will be sent to the North Carolina DENR Certification Office (i.e. Out of hold, incorrect preservative, out of temp, incorrect containers.

Pace® Location Requested (City/State):
Pace Analytical Charlotte
9800 Kincey Ave. Suite 100, Huntersville, NC 28078

CHAIN-OF-CUSTODY Analytical Request Document

Chain-of-Custody is a LEGAL DOCUMENT - Complete all relevant fields

LAB USE ONLY- Affix Workorder/Login Label Here

Scan QR Code for instructions

Company Name:	ECS Southeast, LLC-Charlotte	Contact/Report To:	Emery Lovekamp
Street Address:	1812 Center Park Drive Suite D Charlotte, NC 28217	Phone #:	704-525-5152
		E-Mail:	elovekamp@ecslimited.com
		Cc E-Mail:	
Customer Project #:	24413-C		
Project Name:	Fortress Wood Products	Invoice To:	AP-ECS Charlotte
		Invoice E-Mail:	ecs-49@ecslimited.com
Site Collection Info/Facility ID (as applicable):		Purchase Order # (if applicable):	24413-C
		Quote #:	

Time Zone Collected: [ ] AK [ ] PT [ ] MT [ ] CT [X] ET

County / State origin of sample(s): North Carolina GUILFORD COUNTY

Data Deliverables: [ ] Level II [ ] Level III [ ] Level IV [ ] EQUIS [ ] Other

Regulatory Program (DW, RCRA, etc.) as applicable: BROWNFIELDS

Reportable [ ] Yes [ ] No

Rush (Pre-approval required): [ ] Same Day [ ] 1 Day [ ] 2 Day [ ] 3 Day [ ] Other

DW PWSID # or WW Permit # as applicable:

Date Results Requested: STANDARD

Field Filtered (if applicable): [ ] Yes [X] No

Analysis:

* Matrix Codes (Insert in Matrix box below): Drinking Water (DW), Ground Water (GW), Waste Water (WW), Product (P), Soil/Solid (SS), Oil (OL), Wipe (WP), Tissue (TS), Bioassay (B), Vapor (V), Surface Water (SW),Sediment (SED), Sludge (SL), Caulk (CK), Leachate (LL), Biosolid (BS), Other (OT)

Customer Sample ID	Matrix *	Comp / Grab	Composite Start Date	Composite Start Time	Collected or Composite End Date	Composite End Time	# Cont.	Res. Chlorine Results	Res. Chlorine Units	~~1600 PFAS~~	~~Z400 hex chrome~~	8260 VOC	8260 VOC-trip blank	8270 SVOC	PPL Metals 6020/7470	PPL METALS (SOIL)				Sample Comment
GW-5	GW	G			6/11/25	0945	6					X		X	X					
GW-4	GW	G				1110	6					X		X	X					
EB-2	W	G				1120	6					X		X	X					
GW-3	GW	G				1245	6					X		X	X					
GW-10	GW	G				1455	6					X		X	X					
GW-6	GW	G				1620	6					X		X	X					
WC-1	SS	G				1345	1									X				
TB-2	W	—				—	2						X							

Specify Container Size **

Identify Container Preservative Type***

Analysis Requested

**Container Size: (1) 1L, (2) 500mL, (3) 250mL, (4) 125mL, (5) 100mL, (6) 40mL vial, (7) EnCore, (8) TerraCore, (9) 90mL, (10) Other

*** Preservative Types: (1) None, (2) HNO3, (3) H2SO4, (4) HCl, (5) NaOH, (6) Zn Acetate, (7) NaHSO4, (8) Sod. Thiosulfate, (9) Ascorbic Acid, (10) MeOH, (11) Other

Lab Use Only

Proj. Mgr: Angela Baioni

AcctNum / Client ID:

Table #:

Profile / Template: 18978

Prelog / Bottle Ord. ID: EZ 3268171

Preservation non-conformance identified for sample.

Additional Instructions from Pace®:

Collected By: (Printed Name) EMERY LOVEKAMP

Signature:

Customer Remarks / Special Conditions / Possible Hazards:

# Coolers:	Thermometer ID:	Correction Factor (°C):	Obs. Temp. (°C)	Corrected Temp. (°C)	On Ice:
1	92107878		3.4	3.4	

Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Tracking Number:
ECS	6/11/25 1630		6-12-25 09:55	
Relinquished by/Company: (Signature)	Date/Time: 6-12-25 13:10	Received by/Company: (Signature) PACE ENC	Date/Time: 6/12/25 13:10	Delivered by: [ ] In-Person [ ] Courier [ ] FedEX [ ] UPS [ ] Other
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Page: 3 of 3

Submitting a sample via this chain of custody constitutes acknowledgment and acceptance of the Pace® Terms and Conditions found at https://www.pacelabs.com/resource-library/resource/pace-terms-and-conditions/

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

July 09, 2025

Emery Lovekamp
ECS Southeast, LLC-Charlotte
1812 Center Park Drive
Suite D
Charlotte, NC 28217

RE: Project: Fortress Wood Products
Pace Project No.: 92801849

Dear Emery Lovekamp:

Enclosed are the analytical results for sample(s) received by the laboratory on June 11, 2025. The results relate only to the samples included in this report. Results reported herein conform to the applicable TNI/NELAC Standards and the laboratory's Quality Manual, where applicable, unless otherwise noted in the body of the report.

The test results provided in this final report were generated by each of the following laboratories within the Pace Network:

- Pace Analytical Services - Minneapolis

If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Angela M. Baioni

Angela Baioni
angela.baioni@pacelabs.com
612-473-6801
Project Manager

Enclosures

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

CERTIFICATIONS

Project: Fortress Wood Products
Pace Project No.: 92801849

Pace Analytical Services, LLC - Minneapolis MN
1700 Elm Street SE, Minneapolis, MN 55414
Alabama Certification #: 40770
Alaska Contaminated Sites Certification #: 17-009
Alaska DW Certification #: MN00064
Arizona Certification #: AZ0014
Arkansas DW Certification #: MN00064
Arkansas WW Certification #: 88-0680
California Certification #: 2929
Colorado Certification #: MN00064
Connecticut Certification #: PH-0256
DoD Certification via A2LA #: 2926.01
EPA Region 8 Tribal Water Systems+Wyoming DW Certification #: via MN 027-053-137
Florida Certification #: E87605
Georgia Certification #: 959
Idaho Certification #: MN00064
Illinois Certification #: 200011
Indiana Certification #: C-MN-01
Iowa Certification #: 368
ISO/IEC 17025 Certification via A2LA #: 2926.01
Kansas Certification #: E-10167
Kentucky DW Certification #: 90062
Kentucky WW Certification #: 90062
Louisiana DEQ Certification #: AI-03086
Louisiana DW Certification #: MN00064
Maine Certification #: MN00064
Maryland Certification #: 322
Michigan Certification #: 9909
Minnesota Certification #: 027-053-137
Minnesota Dept of Ag Approval: via MN 027-053-137
Minnesota Petrofund Registration #: 1240
Mississippi Certification #: MN00064
Missouri Certification #: 10100
Montana Certification #: CERT0092
Nebraska Certification #: NE-OS-18-06
Nevada Certification #: MN00064
New Hampshire Certification #: 2081
New Jersey Certification #: MN002
New York Certification #: 11647
North Carolina DW Certification #: 27700
North Carolina WW Certification #: 530
North Dakota Certification via A2LA #: R-036
North Dakota Certification via MN #: R-036
Ohio DW Certification #: 41244
Ohio VAP Certification (1700) #: CL101
Oklahoma Certification #: 9507
Oregon Primary Certification #: MN300001
Oregon Secondary Certification #: MN200001
Pennsylvania Certification #: 68-00563
Puerto Rico Certification #: MN00064
South Carolina Certification #:74003001
Tennessee Certification #: TN02818
Texas Certification #: T104704192
Utah Certification #: MN00064
Vermont Certification #: VT-027053137
Virginia Certification #: 460163
Washington Certification #: C486
West Virginia DEP Certification #: 382
West Virginia DW Certification #: 9952 C
Wisconsin Certification #: 999407970
Wyoming UST Certification via A2LA #: 2926.01
USDA Permit #: P330-19-00208

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE SUMMARY

Project: Fortress Wood Products
Pace Project No.: 92801849

Lab ID	Sample ID	Matrix	Date Collected	Date Received
92801849001	**GW-7-P**	Water	06/10/25 11:00	06/11/25 13:32
92801849002	**EB-1-P**	Water	06/10/25 11:25	06/11/25 13:32
92801849003	**FB-4-P**	Water	06/10/25 11:35	06/11/25 13:32
92801849004	**GW-1-P**	Water	06/10/25 13:25	06/11/25 13:32
92801849005	**GW-2-P**	Water	06/10/25 14:20	06/11/25 13:32
92801849006	**DUP-1-P**	Water	06/10/25 00:00	06/11/25 13:32

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE ANALYTE COUNT

Project: Fortress Wood Products
Pace Project No.: 92801849

Lab ID	Sample ID	Method	Analysts	Analytes Reported	Laboratory
92801849001	**GW-7-P**	EPA 1633	MJL	65	PASI-M
92801849002	**EB-1-P**	EPA 1633	MJL	65	PASI-M
92801849003	**FB-4-P**	EPA 1633	MJL	65	PASI-M
92801849004	**GW-1-P**	EPA 1633	AJG	65	PASI-M
92801849005	**GW-2-P**	EPA 1633	MJL	65	PASI-M
92801849006	**DUP-1-P**	EPA 1633	MJL	65	PASI-M

PASI-M = Pace Analytical Services - Minneapolis

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801849

Sample: GW-7-P **Lab ID: 92801849001** Collected: 06/10/25 11:00 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ng/L	6.1	1.9	1	07/02/25 13:59	07/03/25 11:36	763051-92-9	
3:3 FTCA	ND	ng/L	7.7	2.1	1	07/02/25 13:59	07/03/25 11:36	356-02-5	
4:2 FTS	ND	ng/L	6.1	1.5	1	07/02/25 13:59	07/03/25 11:36	757124-72-4	
5:3 FTCA	ND	ng/L	38.4	9.2	1	07/02/25 13:59	07/03/25 11:36	914637-49-3	
6:2 FTS	ND	ng/L	6.1	1.8	1	07/02/25 13:59	07/03/25 11:36	27619-97-2	
7:3 FTCA	ND	ng/L	38.4	10.9	1	07/02/25 13:59	07/03/25 11:36	812-70-4	
8:2 FTS	ND	ng/L	6.1	1.6	1	07/02/25 13:59	07/03/25 11:36	39108-34-4	
9Cl-PF3ONS	ND	ng/L	6.1	1.6	1	07/02/25 13:59	07/03/25 11:36	756426-58-1	
ADONA	ND	ng/L	6.1	1.8	1	07/02/25 13:59	07/03/25 11:36	919005-14-4	
HFPO-DA	ND	ng/L	6.1	1.7	1	07/02/25 13:59	07/03/25 11:36	13252-13-6	
NEtFOSAA	ND	ng/L	1.5	0.64	1	07/02/25 13:59	07/03/25 11:36	2991-50-6	
NEtFOSA	ND	ng/L	1.5	0.49	1	07/02/25 13:59	07/03/25 11:36	4151-50-2	
NEtFOSE	ND	ng/L	15.4	4.0	1	07/02/25 13:59	07/03/25 11:36	1691-99-2	
NFDHA	ND	ng/L	3.1	1.3	1	07/02/25 13:59	07/03/25 11:36	151772-58-6	
NMeFOSAA	ND	ng/L	1.5	0.48	1	07/02/25 13:59	07/03/25 11:36	2355-31-9	
NMeFOSA	ND	ng/L	1.5	0.47	1	07/02/25 13:59	07/03/25 11:36	31506-32-8	
NMeFOSE	ND	ng/L	15.4	3.9	1	07/02/25 13:59	07/03/25 11:36	24448-09-7	
PFBS	ND	ng/L	1.5	0.40	1	07/02/25 13:59	07/03/25 11:36	375-73-5	
PFDA	ND	ng/L	1.5	0.48	1	07/02/25 13:59	07/03/25 11:36	335-76-2	
PFHxA	ND	ng/L	1.5	0.37	1	07/02/25 13:59	07/03/25 11:36	307-24-4	
PFBA	ND	ng/L	6.1	1.5	1	07/02/25 13:59	07/03/25 11:36	375-22-4	
PFDS	ND	ng/L	1.5	0.66	1	07/02/25 13:59	07/03/25 11:36	335-77-3	
PFDoS	ND	ng/L	1.5	0.33	1	07/02/25 13:59	07/03/25 11:36	79780-39-5	
PFEESA	ND	ng/L	3.1	0.66	1	07/02/25 13:59	07/03/25 11:36	113507-82-7	
PFHpS	ND	ng/L	1.5	0.45	1	07/02/25 13:59	07/03/25 11:36	375-92-8	
PFMBA	ND	ng/L	3.1	0.74	1	07/02/25 13:59	07/03/25 11:36	863090-89-5	
PFMPA	ND	ng/L	3.1	0.60	1	07/02/25 13:59	07/03/25 11:36	377-73-1	
PFNS	ND	ng/L	1.5	0.45	1	07/02/25 13:59	07/03/25 11:36	68259-12-1	
PFOSA	ND	ng/L	1.5	0.47	1	07/02/25 13:59	07/03/25 11:36	754-91-6	
PFPeA	ND	ng/L	3.1	0.91	1	07/02/25 13:59	07/03/25 11:36	2706-90-3	
PFPeS	ND	ng/L	1.5	0.36	1	07/02/25 13:59	07/03/25 11:36	2706-91-4	
PFDoA	ND	ng/L	1.5	0.47	1	07/02/25 13:59	07/03/25 11:36	307-55-1	
PFHpA	ND	ng/L	1.5	0.59	1	07/02/25 13:59	07/03/25 11:36	375-85-9	
PFHxS	ND	ng/L	1.5	0.39	1	07/02/25 13:59	07/03/25 11:36	355-46-4	
PFNA	ND	ng/L	1.5	0.50	1	07/02/25 13:59	07/03/25 11:36	375-95-1	
PFOS	ND	ng/L	1.5	0.38	1	07/02/25 13:59	07/03/25 11:36	1763-23-1	
PFOA	ND	ng/L	1.5	0.47	1	07/02/25 13:59	07/03/25 11:36	335-67-1	
PFTeDA	ND	ng/L	1.5	0.40	1	07/02/25 13:59	07/03/25 11:36	376-06-7	
PFTrDA	ND	ng/L	1.5	0.43	1	07/02/25 13:59	07/03/25 11:36	72629-94-8	
PFUnA	ND	ng/L	1.5	0.34	1	07/02/25 13:59	07/03/25 11:36	2058-94-8	
Surrogates									
13C2-PFDoA (S)	78	%.	10-130		1	07/02/25 13:59	07/03/25 11:36		
13C3HFPO-DA (S)	86	%.	40-130		1	07/02/25 13:59	07/03/25 11:36		
13C3-PFBS (S)	90	%.	40-135		1	07/02/25 13:59	07/03/25 11:36		
13C3-PFHxS (S)	86	%.	40-130		1	07/02/25 13:59	07/03/25 11:36		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801849

Sample: GW-7-P **Lab ID: 92801849001** Collected: 06/10/25 11:00 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C4-PFBA (S)	86	%.	5-130		1	07/02/25 13:59	07/03/25 11:36		
13C4-PFHpA (S)	88	%.	40-130		1	07/02/25 13:59	07/03/25 11:36		
13C5-PFHxA (S)	87	%.	40-130		1	07/02/25 13:59	07/03/25 11:36		
13C5-PFPeA (S)	86	%.	40-130		1	07/02/25 13:59	07/03/25 11:36		
13C6-PFDA (S)	85	%.	40-130		1	07/02/25 13:59	07/03/25 11:36		
13C8-PFOA (S)	88	%.	40-130		1	07/02/25 13:59	07/03/25 11:36		
13C8-PFOS (S)	83	%.	40-130		1	07/02/25 13:59	07/03/25 11:36		
13C8-PFOSA (S)	71	%.	40-130		1	07/02/25 13:59	07/03/25 11:36		
13C9-PFNA (S)	83	%.	40-130		1	07/02/25 13:59	07/03/25 11:36		
d3-MeFOSAA (S)	43	%.	40-170		1	07/02/25 13:59	07/03/25 11:36		
d3-NMeFOSA (S)	54	%.	10-130		1	07/02/25 13:59	07/03/25 11:36		
d5-EtFOSAA (S)	43	%.	25-135		1	07/02/25 13:59	07/03/25 11:36		
d5-NEtFOSA (S)	53	%.	10-130		1	07/02/25 13:59	07/03/25 11:36		
d7-NMeFOSE (S)	70	%.	10-130		1	07/02/25 13:59	07/03/25 11:36		
d9-NEtFOSE (S)	63	%.	10-130		1	07/02/25 13:59	07/03/25 11:36		
13C2-PFTA (S)	67	%.	10-130		1	07/02/25 13:59	07/03/25 11:36		
13C7-PFUdA (S)	94	%.	30-130		1	07/02/25 13:59	07/03/25 11:36		
13C24:2FTS (S)	34	%.	40-200		1	07/02/25 13:59	07/03/25 11:36		S0
13C26:2FTS (S)	62	%.	40-200		1	07/02/25 13:59	07/03/25 11:36		
13C28:2FTS (S)	78	%.	40-300		1	07/02/25 13:59	07/03/25 11:36		
13C3-PFPrA (S)	63	%.	5-130		1	07/02/25 13:59	07/03/25 11:36		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801849

Sample: EB-1-P **Lab ID: 92801849002** Collected: 06/10/25 11:25 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ng/L	6.2	1.9	1	07/02/25 13:59	07/03/25 11:46	763051-92-9	
3:3 FTCA	ND	ng/L	7.8	2.1	1	07/02/25 13:59	07/03/25 11:46	356-02-5	
4:2 FTS	ND	ng/L	6.2	1.6	1	07/02/25 13:59	07/03/25 11:46	757124-72-4	
5:3 FTCA	ND	ng/L	38.8	9.3	1	07/02/25 13:59	07/03/25 11:46	914637-49-3	
6:2 FTS	ND	ng/L	6.2	1.8	1	07/02/25 13:59	07/03/25 11:46	27619-97-2	
7:3 FTCA	ND	ng/L	38.8	11.0	1	07/02/25 13:59	07/03/25 11:46	812-70-4	
8:2 FTS	ND	ng/L	6.2	1.6	1	07/02/25 13:59	07/03/25 11:46	39108-34-4	
9Cl-PF3ONS	ND	ng/L	6.2	1.6	1	07/02/25 13:59	07/03/25 11:46	756426-58-1	
ADONA	ND	ng/L	6.2	1.8	1	07/02/25 13:59	07/03/25 11:46	919005-14-4	
HFPO-DA	ND	ng/L	6.2	1.7	1	07/02/25 13:59	07/03/25 11:46	13252-13-6	
NEtFOSAA	ND	ng/L	1.6	0.64	1	07/02/25 13:59	07/03/25 11:46	2991-50-6	
NEtFOSA	ND	ng/L	1.6	0.49	1	07/02/25 13:59	07/03/25 11:46	4151-50-2	
NEtFOSE	ND	ng/L	15.5	4.0	1	07/02/25 13:59	07/03/25 11:46	1691-99-2	
NFDHA	ND	ng/L	3.1	1.3	1	07/02/25 13:59	07/03/25 11:46	151772-58-6	
NMeFOSAA	ND	ng/L	1.6	0.48	1	07/02/25 13:59	07/03/25 11:46	2355-31-9	
NMeFOSA	ND	ng/L	1.6	0.48	1	07/02/25 13:59	07/03/25 11:46	31506-32-8	
NMeFOSE	ND	ng/L	15.5	4.0	1	07/02/25 13:59	07/03/25 11:46	24448-09-7	
PFBS	ND	ng/L	1.6	0.41	1	07/02/25 13:59	07/03/25 11:46	375-73-5	
PFDA	ND	ng/L	1.6	0.48	1	07/02/25 13:59	07/03/25 11:46	335-76-2	
PFHxA	ND	ng/L	1.6	0.37	1	07/02/25 13:59	07/03/25 11:46	307-24-4	
PFBA	ND	ng/L	6.2	1.5	1	07/02/25 13:59	07/03/25 11:46	375-22-4	
PFDS	ND	ng/L	1.6	0.67	1	07/02/25 13:59	07/03/25 11:46	335-77-3	
PFDoS	ND	ng/L	1.6	0.33	1	07/02/25 13:59	07/03/25 11:46	79780-39-5	
PFEESA	ND	ng/L	3.1	0.67	1	07/02/25 13:59	07/03/25 11:46	113507-82-7	
PFHpS	ND	ng/L	1.6	0.45	1	07/02/25 13:59	07/03/25 11:46	375-92-8	
PFMBA	ND	ng/L	3.1	0.75	1	07/02/25 13:59	07/03/25 11:46	863090-89-5	
PFMPA	ND	ng/L	3.1	0.60	1	07/02/25 13:59	07/03/25 11:46	377-73-1	
PFNS	ND	ng/L	1.6	0.46	1	07/02/25 13:59	07/03/25 11:46	68259-12-1	
PFOSA	ND	ng/L	1.6	0.47	1	07/02/25 13:59	07/03/25 11:46	754-91-6	
PFPeA	ND	ng/L	3.1	0.92	1	07/02/25 13:59	07/03/25 11:46	2706-90-3	
PFPeS	ND	ng/L	1.6	0.37	1	07/02/25 13:59	07/03/25 11:46	2706-91-4	
PFDoA	ND	ng/L	1.6	0.47	1	07/02/25 13:59	07/03/25 11:46	307-55-1	
PFHpA	ND	ng/L	1.6	0.60	1	07/02/25 13:59	07/03/25 11:46	375-85-9	
PFHxS	ND	ng/L	1.6	0.40	1	07/02/25 13:59	07/03/25 11:46	355-46-4	
PFNA	ND	ng/L	1.6	0.51	1	07/02/25 13:59	07/03/25 11:46	375-95-1	
PFOS	ND	ng/L	1.6	0.38	1	07/02/25 13:59	07/03/25 11:46	1763-23-1	
PFOA	ND	ng/L	1.6	0.47	1	07/02/25 13:59	07/03/25 11:46	335-67-1	
PFTeDA	ND	ng/L	1.6	0.40	1	07/02/25 13:59	07/03/25 11:46	376-06-7	
PFTrDA	ND	ng/L	1.6	0.44	1	07/02/25 13:59	07/03/25 11:46	72629-94-8	
PFUnA	ND	ng/L	1.6	0.34	1	07/02/25 13:59	07/03/25 11:46	2058-94-8	
Surrogates									
13C2-PFDoA (S)	88	%.	10-130		1	07/02/25 13:59	07/03/25 11:46		
13C3HFPO-DA (S)	88	%.	40-130		1	07/02/25 13:59	07/03/25 11:46		
13C3-PFBS (S)	94	%.	40-135		1	07/02/25 13:59	07/03/25 11:46		
13C3-PFHxS (S)	92	%.	40-130		1	07/02/25 13:59	07/03/25 11:46		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801849

Sample: EB-1-P **Lab ID: 92801849002** Collected: 06/10/25 11:25 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C4-PFBA (S)	93	%.	5-130		1	07/02/25 13:59	07/03/25 11:46		
13C4-PFHpA (S)	86	%.	40-130		1	07/02/25 13:59	07/03/25 11:46		
13C5-PFHxA (S)	92	%.	40-130		1	07/02/25 13:59	07/03/25 11:46		
13C5-PFPeA (S)	93	%.	40-130		1	07/02/25 13:59	07/03/25 11:46		
13C6-PFDA (S)	90	%.	40-130		1	07/02/25 13:59	07/03/25 11:46		
13C8-PFOA (S)	94	%.	40-130		1	07/02/25 13:59	07/03/25 11:46		
13C8-PFOS (S)	92	%.	40-130		1	07/02/25 13:59	07/03/25 11:46		
13C8-PFOSA (S)	81	%.	40-130		1	07/02/25 13:59	07/03/25 11:46		
13C9-PFNA (S)	90	%.	40-130		1	07/02/25 13:59	07/03/25 11:46		
d3-MeFOSAA (S)	77	%.	40-170		1	07/02/25 13:59	07/03/25 11:46		
d3-NMeFOSA (S)	67	%.	10-130		1	07/02/25 13:59	07/03/25 11:46		
d5-EtFOSAA (S)	76	%.	25-135		1	07/02/25 13:59	07/03/25 11:46		
d5-NEtFOSA (S)	65	%.	10-130		1	07/02/25 13:59	07/03/25 11:46		
d7-NMeFOSE (S)	77	%.	10-130		1	07/02/25 13:59	07/03/25 11:46		
d9-NEtFOSE (S)	73	%.	10-130		1	07/02/25 13:59	07/03/25 11:46		
13C2-PFTA (S)	78	%.	10-130		1	07/02/25 13:59	07/03/25 11:46		
13C7-PFUdA (S)	102	%.	30-130		1	07/02/25 13:59	07/03/25 11:46		
13C24:2FTS (S)	77	%.	40-200		1	07/02/25 13:59	07/03/25 11:46		
13C26:2FTS (S)	85	%.	40-200		1	07/02/25 13:59	07/03/25 11:46		
13C28:2FTS (S)	96	%.	40-300		1	07/02/25 13:59	07/03/25 11:46		
13C3-PFPrA (S)	101	%.	5-130		1	07/02/25 13:59	07/03/25 11:46		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801849

Sample: FB-4-P **Lab ID: 92801849003** Collected: 06/10/25 11:35 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ng/L	6.1	1.8	1	07/02/25 13:59	07/03/25 11:56	763051-92-9	
3:3 FTCA	ND	ng/L	7.6	2.1	1	07/02/25 13:59	07/03/25 11:56	356-02-5	
4:2 FTS	ND	ng/L	6.1	1.5	1	07/02/25 13:59	07/03/25 11:56	757124-72-4	
5:3 FTCA	ND	ng/L	38.0	9.1	1	07/02/25 13:59	07/03/25 11:56	914637-49-3	
6:2 FTS	ND	ng/L	6.1	1.8	1	07/02/25 13:59	07/03/25 11:56	27619-97-2	
7:3 FTCA	ND	ng/L	38.0	10.8	1	07/02/25 13:59	07/03/25 11:56	812-70-4	
8:2 FTS	ND	ng/L	6.1	1.6	1	07/02/25 13:59	07/03/25 11:56	39108-34-4	
9Cl-PF3ONS	ND	ng/L	6.1	1.6	1	07/02/25 13:59	07/03/25 11:56	756426-58-1	
ADONA	ND	ng/L	6.1	1.8	1	07/02/25 13:59	07/03/25 11:56	919005-14-4	
HFPO-DA	ND	ng/L	6.1	1.7	1	07/02/25 13:59	07/03/25 11:56	13252-13-6	
NEtFOSAA	ND	ng/L	1.5	0.63	1	07/02/25 13:59	07/03/25 11:56	2991-50-6	
NEtFOSA	ND	ng/L	1.5	0.48	1	07/02/25 13:59	07/03/25 11:56	4151-50-2	
NEtFOSE	ND	ng/L	15.2	3.9	1	07/02/25 13:59	07/03/25 11:56	1691-99-2	
NFDHA	ND	ng/L	3.0	1.2	1	07/02/25 13:59	07/03/25 11:56	151772-58-6	
NMeFOSAA	ND	ng/L	1.5	0.48	1	07/02/25 13:59	07/03/25 11:56	2355-31-9	
NMeFOSA	ND	ng/L	1.5	0.47	1	07/02/25 13:59	07/03/25 11:56	31506-32-8	
NMeFOSE	ND	ng/L	15.2	3.9	1	07/02/25 13:59	07/03/25 11:56	24448-09-7	
PFBS	ND	ng/L	1.5	0.40	1	07/02/25 13:59	07/03/25 11:56	375-73-5	
PFDA	ND	ng/L	1.5	0.47	1	07/02/25 13:59	07/03/25 11:56	335-76-2	
PFHxA	ND	ng/L	1.5	0.37	1	07/02/25 13:59	07/03/25 11:56	307-24-4	
PFBA	ND	ng/L	6.1	1.5	1	07/02/25 13:59	07/03/25 11:56	375-22-4	
PFDS	ND	ng/L	1.5	0.65	1	07/02/25 13:59	07/03/25 11:56	335-77-3	
PFDoS	ND	ng/L	1.5	0.33	1	07/02/25 13:59	07/03/25 11:56	79780-39-5	
PFEESA	ND	ng/L	3.0	0.66	1	07/02/25 13:59	07/03/25 11:56	113507-82-7	
PFHpS	ND	ng/L	1.5	0.44	1	07/02/25 13:59	07/03/25 11:56	375-92-8	
PFMBA	ND	ng/L	3.0	0.74	1	07/02/25 13:59	07/03/25 11:56	863090-89-5	
PFMPA	ND	ng/L	3.0	0.59	1	07/02/25 13:59	07/03/25 11:56	377-73-1	
PFNS	ND	ng/L	1.5	0.45	1	07/02/25 13:59	07/03/25 11:56	68259-12-1	
PFOSA	ND	ng/L	1.5	0.46	1	07/02/25 13:59	07/03/25 11:56	754-91-6	
PFPeA	ND	ng/L	3.0	0.91	1	07/02/25 13:59	07/03/25 11:56	2706-90-3	
PFPeS	ND	ng/L	1.5	0.36	1	07/02/25 13:59	07/03/25 11:56	2706-91-4	
PFDoA	ND	ng/L	1.5	0.47	1	07/02/25 13:59	07/03/25 11:56	307-55-1	
PFHpA	ND	ng/L	1.5	0.58	1	07/02/25 13:59	07/03/25 11:56	375-85-9	
PFHxS	ND	ng/L	1.5	0.39	1	07/02/25 13:59	07/03/25 11:56	355-46-4	
PFNA	ND	ng/L	1.5	0.50	1	07/02/25 13:59	07/03/25 11:56	375-95-1	
PFOS	ND	ng/L	1.5	0.37	1	07/02/25 13:59	07/03/25 11:56	1763-23-1	
PFOA	ND	ng/L	1.5	0.46	1	07/02/25 13:59	07/03/25 11:56	335-67-1	
PFTeDA	ND	ng/L	1.5	0.39	1	07/02/25 13:59	07/03/25 11:56	376-06-7	
PFTrDA	ND	ng/L	1.5	0.43	1	07/02/25 13:59	07/03/25 11:56	72629-94-8	
PFUnA	ND	ng/L	1.5	0.34	1	07/02/25 13:59	07/03/25 11:56	2058-94-8	
Surrogates									
13C2-PFDoA (S)	49	%.	10-130		1	07/02/25 13:59	07/03/25 11:56		
13C3HFPO-DA (S)	42	%.	40-130		1	07/02/25 13:59	07/03/25 11:56		
13C3-PFBS (S)	47	%.	40-135		1	07/02/25 13:59	07/03/25 11:56		
13C3-PFHxS (S)	44	%.	40-130		1	07/02/25 13:59	07/03/25 11:56		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801849

Sample: FB-4-P **Lab ID: 92801849003** Collected: 06/10/25 11:35 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C4-PFBA (S)	47	%.	5-130		1	07/02/25 13:59	07/03/25 11:56		
13C4-PFHpA (S)	41	%.	40-130		1	07/02/25 13:59	07/03/25 11:56		
13C5-PFHxA (S)	43	%.	40-130		1	07/02/25 13:59	07/03/25 11:56		
13C5-PFPeA (S)	44	%.	40-130		1	07/02/25 13:59	07/03/25 11:56		
13C6-PFDA (S)	44	%.	40-130		1	07/02/25 13:59	07/03/25 11:56		
13C8-PFOA (S)	45	%.	40-130		1	07/02/25 13:59	07/03/25 11:56		
13C8-PFOS (S)	43	%.	40-130		1	07/02/25 13:59	07/03/25 11:56		
13C8-PFOSA (S)	39	%.	40-130		1	07/02/25 13:59	07/03/25 11:56		S0
13C9-PFNA (S)	43	%.	40-130		1	07/02/25 13:59	07/03/25 11:56		
d3-MeFOSAA (S)	40	%.	40-170		1	07/02/25 13:59	07/03/25 11:56		
d3-NMeFOSA (S)	32	%.	10-130		1	07/02/25 13:59	07/03/25 11:56		
d5-EtFOSAA (S)	42	%.	25-135		1	07/02/25 13:59	07/03/25 11:56		
d5-NEtFOSA (S)	31	%.	10-130		1	07/02/25 13:59	07/03/25 11:56		
d7-NMeFOSE (S)	40	%.	10-130		1	07/02/25 13:59	07/03/25 11:56		
d9-NEtFOSE (S)	38	%.	10-130		1	07/02/25 13:59	07/03/25 11:56		
13C2-PFTA (S)	50	%.	10-130		1	07/02/25 13:59	07/03/25 11:56		
13C7-PFUdA (S)	48	%.	30-130		1	07/02/25 13:59	07/03/25 11:56		
13C24:2FTS (S)	48	%.	40-200		1	07/02/25 13:59	07/03/25 11:56		
13C26:2FTS (S)	48	%.	40-200		1	07/02/25 13:59	07/03/25 11:56		
13C28:2FTS (S)	52	%.	40-300		1	07/02/25 13:59	07/03/25 11:56		
13C3-PFPrA (S)	69	%.	5-130		1	07/02/25 13:59	07/03/25 11:56		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801849

Sample: GW-1-P **Lab ID: 92801849004** Collected: 06/10/25 13:25 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ng/L	12.5	3.8	1	07/02/25 13:30	07/03/25 12:01	763051-92-9	
3:3 FTCA	ND	ng/L	15.6	4.3	1	07/02/25 13:30	07/03/25 12:01	356-02-5	
4:2 FTS	ND	ng/L	12.5	3.1	1	07/02/25 13:30	07/03/25 12:01	757124-72-4	
5:3 FTCA	ND	ng/L	78.2	18.8	1	07/02/25 13:30	07/03/25 12:01	914637-49-3	
6:2 FTS	ND	ng/L	12.5	3.6	1	07/02/25 13:30	07/03/25 12:01	27619-97-2	
7:3 FTCA	ND	ng/L	78.2	22.3	1	07/02/25 13:30	07/03/25 12:01	812-70-4	
8:2 FTS	ND	ng/L	12.5	3.2	1	07/02/25 13:30	07/03/25 12:01	39108-34-4	
9Cl-PF3ONS	ND	ng/L	12.5	3.3	1	07/02/25 13:30	07/03/25 12:01	756426-58-1	
ADONA	ND	ng/L	12.5	3.7	1	07/02/25 13:30	07/03/25 12:01	919005-14-4	
HFPO-DA	ND	ng/L	12.5	3.5	1	07/02/25 13:30	07/03/25 12:01	13252-13-6	
NEtFOSAA	ND	ng/L	3.1	1.3	1	07/02/25 13:30	07/03/25 12:01	2991-50-6	
NEtFOSA	ND	ng/L	3.1	0.99	1	07/02/25 13:30	07/03/25 12:01	4151-50-2	
NEtFOSE	ND	ng/L	31.3	8.1	1	07/02/25 13:30	07/03/25 12:01	1691-99-2	
NFDHA	ND	ng/L	6.3	2.6	1	07/02/25 13:30	07/03/25 12:01	151772-58-6	
NMeFOSAA	ND	ng/L	3.1	0.98	1	07/02/25 13:30	07/03/25 12:01	2355-31-9	
NMeFOSA	ND	ng/L	3.1	0.96	1	07/02/25 13:30	07/03/25 12:01	31506-32-8	
NMeFOSE	ND	ng/L	31.3	8.0	1	07/02/25 13:30	07/03/25 12:01	24448-09-7	
PFBS	ND	ng/L	3.1	0.82	1	07/02/25 13:30	07/03/25 12:01	375-73-5	
PFDA	ND	ng/L	3.1	0.97	1	07/02/25 13:30	07/03/25 12:01	335-76-2	
PFHxA	ND	ng/L	3.1	0.75	1	07/02/25 13:30	07/03/25 12:01	307-24-4	
PFBA	ND	ng/L	12.5	3.0	1	07/02/25 13:30	07/03/25 12:01	375-22-4	
PFDS	ND	ng/L	3.1	1.3	1	07/02/25 13:30	07/03/25 12:01	335-77-3	
PFDoS	ND	ng/L	3.1	0.67	1	07/02/25 13:30	07/03/25 12:01	79780-39-5	
PFEESA	ND	ng/L	6.3	1.4	1	07/02/25 13:30	07/03/25 12:01	113507-82-7	
PFHpS	ND	ng/L	3.1	0.91	1	07/02/25 13:30	07/03/25 12:01	375-92-8	
PFMBA	ND	ng/L	6.3	1.5	1	07/02/25 13:30	07/03/25 12:01	863090-89-5	
PFMPA	ND	ng/L	6.3	1.2	1	07/02/25 13:30	07/03/25 12:01	377-73-1	
PFNS	ND	ng/L	3.1	0.92	1	07/02/25 13:30	07/03/25 12:01	68259-12-1	
PFOSA	ND	ng/L	3.1	0.96	1	07/02/25 13:30	07/03/25 12:01	754-91-6	
PFPeA	ND	ng/L	6.3	1.9	1	07/02/25 13:30	07/03/25 12:01	2706-90-3	
PFPeS	ND	ng/L	3.1	0.74	1	07/02/25 13:30	07/03/25 12:01	2706-91-4	
PFDoA	ND	ng/L	3.1	0.96	1	07/02/25 13:30	07/03/25 12:01	307-55-1	
PFHpA	ND	ng/L	3.1	1.2	1	07/02/25 13:30	07/03/25 12:01	375-85-9	
PFHxS	**2.9J**	ng/L	3.1	0.80	1	07/02/25 13:30	07/03/25 12:01	355-46-4	
PFNA	ND	ng/L	3.1	1.0	1	07/02/25 13:30	07/03/25 12:01	375-95-1	
PFOS	**8.7**	ng/L	3.1	0.77	1	07/02/25 13:30	07/03/25 12:01	1763-23-1	
PFOA	**3.9**	ng/L	3.1	0.95	1	07/02/25 13:30	07/03/25 12:01	335-67-1	
PFTeDA	ND	ng/L	3.1	0.81	1	07/02/25 13:30	07/03/25 12:01	376-06-7	
PFTrDA	ND	ng/L	3.1	0.89	1	07/02/25 13:30	07/03/25 12:01	72629-94-8	
PFUnA	ND	ng/L	3.1	0.69	1	07/02/25 13:30	07/03/25 12:01	2058-94-8	
Surrogates									
13C2-PFDoA (S)	72	%.	10-130		1	07/02/25 13:30	07/03/25 12:01		
13C3HFPO-DA (S)	82	%.	40-130		1	07/02/25 13:30	07/03/25 12:01		
13C3-PFBS (S)	83	%.	40-135		1	07/02/25 13:30	07/03/25 12:01		
13C3-PFHxS (S)	80	%.	40-130		1	07/02/25 13:30	07/03/25 12:01		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801849

Sample: GW-1-P **Lab ID: 92801849004** Collected: 06/10/25 13:25 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C4-PFBA (S)	84	%.	5-130		1	07/02/25 13:30	07/03/25 12:01		
13C4-PFHpA (S)	81	%.	40-130		1	07/02/25 13:30	07/03/25 12:01		
13C5-PFHxA (S)	81	%.	40-130		1	07/02/25 13:30	07/03/25 12:01		
13C5-PFPeA (S)	85	%.	40-130		1	07/02/25 13:30	07/03/25 12:01		
13C6-PFDA (S)	81	%.	40-130		1	07/02/25 13:30	07/03/25 12:01		
13C8-PFOA (S)	83	%.	40-130		1	07/02/25 13:30	07/03/25 12:01		
13C8-PFOS (S)	82	%.	40-130		1	07/02/25 13:30	07/03/25 12:01		
13C8-PFOSA (S)	74	%.	40-130		1	07/02/25 13:30	07/03/25 12:01		
13C9-PFNA (S)	78	%.	40-130		1	07/02/25 13:30	07/03/25 12:01		
d3-MeFOSAA (S)	77	%.	40-170		1	07/02/25 13:30	07/03/25 12:01		
d3-NMeFOSA (S)	55	%.	10-130		1	07/02/25 13:30	07/03/25 12:01		
d5-EtFOSAA (S)	76	%.	25-135		1	07/02/25 13:30	07/03/25 12:01		
d5-NEtFOSA (S)	54	%.	10-130		1	07/02/25 13:30	07/03/25 12:01		
d7-NMeFOSE (S)	72	%.	10-130		1	07/02/25 13:30	07/03/25 12:01		
d9-NEtFOSE (S)	72	%.	10-130		1	07/02/25 13:30	07/03/25 12:01		
13C2-PFTA (S)	61	%.	10-130		1	07/02/25 13:30	07/03/25 12:01		
13C7-PFUdA (S)	84	%.	30-130		1	07/02/25 13:30	07/03/25 12:01		
13C24:2FTS (S)	71	%.	40-200		1	07/02/25 13:30	07/03/25 12:01		
13C26:2FTS (S)	97	%.	40-200		1	07/02/25 13:30	07/03/25 12:01		
13C28:2FTS (S)	91	%.	40-300		1	07/02/25 13:30	07/03/25 12:01		
13C3-PFPrA (S)	69	%.	5-130		1	07/02/25 13:30	07/03/25 12:01		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801849

Sample: GW-2-P **Lab ID: 92801849005** Collected: 06/10/25 14:20 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ng/L	6.7	2.0	1	07/04/25 08:40	07/07/25 17:12	763051-92-9	
3:3 FTCA	ND	ng/L	8.3	2.3	1	07/04/25 08:40	07/07/25 17:12	356-02-5	
4:2 FTS	ND	ng/L	6.7	1.7	1	07/04/25 08:40	07/07/25 17:12	757124-72-4	
5:3 FTCA	ND	ng/L	41.6	10	1	07/04/25 08:40	07/07/25 17:12	914637-49-3	
6:2 FTS	ND	ng/L	6.7	1.9	1	07/04/25 08:40	07/07/25 17:12	27619-97-2	
7:3 FTCA	ND	ng/L	41.6	11.9	1	07/04/25 08:40	07/07/25 17:12	812-70-4	
8:2 FTS	ND	ng/L	6.7	1.7	1	07/04/25 08:40	07/07/25 17:12	39108-34-4	
9Cl-PF3ONS	ND	ng/L	6.7	1.8	1	07/04/25 08:40	07/07/25 17:12	756426-58-1	
ADONA	ND	ng/L	6.7	2.0	1	07/04/25 08:40	07/07/25 17:12	919005-14-4	
HFPO-DA	ND	ng/L	6.7	1.9	1	07/04/25 08:40	07/07/25 17:12	13252-13-6	
NEtFOSAA	ND	ng/L	1.7	0.69	1	07/04/25 08:40	07/07/25 17:12	2991-50-6	
NEtFOSA	ND	ng/L	1.7	0.53	1	07/04/25 08:40	07/07/25 17:12	4151-50-2	
NEtFOSE	ND	ng/L	16.6	4.3	1	07/04/25 08:40	07/07/25 17:12	1691-99-2	
NFDHA	ND	ng/L	3.3	1.4	1	07/04/25 08:40	07/07/25 17:12	151772-58-6	
NMeFOSAA	ND	ng/L	1.7	0.52	1	07/04/25 08:40	07/07/25 17:12	2355-31-9	
NMeFOSA	ND	ng/L	1.7	0.51	1	07/04/25 08:40	07/07/25 17:12	31506-32-8	
NMeFOSE	ND	ng/L	16.6	4.3	1	07/04/25 08:40	07/07/25 17:12	24448-09-7	
PFBS	**1.8**	ng/L	1.7	0.44	1	07/04/25 08:40	07/07/25 17:12	375-73-5	
PFDA	ND	ng/L	1.7	0.52	1	07/04/25 08:40	07/07/25 17:12	335-76-2	
PFHxA	**1.5J**	ng/L	1.7	0.40	1	07/04/25 08:40	07/07/25 17:12	307-24-4	
PFBA	**5.5J**	ng/L	6.7	1.6	1	07/04/25 08:40	07/07/25 17:12	375-22-4	
PFDS	ND	ng/L	1.7	0.72	1	07/04/25 08:40	07/07/25 17:12	335-77-3	
PFDoS	ND	ng/L	1.7	0.36	1	07/04/25 08:40	07/07/25 17:12	79780-39-5	
PFEESA	ND	ng/L	3.3	0.72	1	07/04/25 08:40	07/07/25 17:12	113507-82-7	
PFHpS	**0.70J**	ng/L	1.7	0.48	1	07/04/25 08:40	07/07/25 17:12	375-92-8	
PFMBA	ND	ng/L	3.3	0.81	1	07/04/25 08:40	07/07/25 17:12	863090-89-5	
PFMPA	ND	ng/L	3.3	0.65	1	07/04/25 08:40	07/07/25 17:12	377-73-1	
PFNS	ND	ng/L	1.7	0.49	1	07/04/25 08:40	07/07/25 17:12	68259-12-1	
PFOSA	ND	ng/L	1.7	0.51	1	07/04/25 08:40	07/07/25 17:12	754-91-6	
PFPeA	ND	ng/L	3.3	0.99	1	07/04/25 08:40	07/07/25 17:12	2706-90-3	
PFPeS	**1.0J**	ng/L	1.7	0.39	1	07/04/25 08:40	07/07/25 17:12	2706-91-4	
PFDoA	ND	ng/L	1.7	0.51	1	07/04/25 08:40	07/07/25 17:12	307-55-1	
PFHpA	**2.7**	ng/L	1.7	0.64	1	07/04/25 08:40	07/07/25 17:12	375-85-9	
PFHxS	**3.1**	ng/L	1.7	0.43	1	07/04/25 08:40	07/07/25 17:12	355-46-4	
PFNA	**1.2J**	ng/L	1.7	0.54	1	07/04/25 08:40	07/07/25 17:12	375-95-1	
PFOS	**62.1**	ng/L	1.7	0.41	1	07/04/25 08:40	07/07/25 17:12	1763-23-1	
PFOA	**15.1**	ng/L	1.7	0.51	1	07/04/25 08:40	07/07/25 17:12	335-67-1	
PFTeDA	ND	ng/L	1.7	0.43	1	07/04/25 08:40	07/07/25 17:12	376-06-7	
PFTrDA	ND	ng/L	1.7	0.47	1	07/04/25 08:40	07/07/25 17:12	72629-94-8	
PFUnA	ND	ng/L	1.7	0.37	1	07/04/25 08:40	07/07/25 17:12	2058-94-8	
Surrogates									
13C2-PFDoA (S)	47	%.	10-130		1	07/04/25 08:40	07/07/25 17:12		
13C3HFPO-DA (S)	67	%.	40-130		1	07/04/25 08:40	07/07/25 17:12		
13C3-PFBS (S)	62	%.	40-135		1	07/04/25 08:40	07/07/25 17:12		
13C3-PFHxS (S)	64	%.	40-130		1	07/04/25 08:40	07/07/25 17:12		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801849

Sample: GW-2-P **Lab ID: 92801849005** Collected: 06/10/25 14:20 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C4-PFBA (S)	68	%.	5-130		1	07/04/25 08:40	07/07/25 17:12		
13C4-PFHpA (S)	62	%.	40-130		1	07/04/25 08:40	07/07/25 17:12		
13C5-PFHxA (S)	65	%.	40-130		1	07/04/25 08:40	07/07/25 17:12		
13C5-PFPeA (S)	66	%.	40-130		1	07/04/25 08:40	07/07/25 17:12		
13C6-PFDA (S)	63	%.	40-130		1	07/04/25 08:40	07/07/25 17:12		
13C8-PFOA (S)	67	%.	40-130		1	07/04/25 08:40	07/07/25 17:12		
13C8-PFOS (S)	65	%.	40-130		1	07/04/25 08:40	07/07/25 17:12		
13C8-PFOSA (S)	56	%.	40-130		1	07/04/25 08:40	07/07/25 17:12		
13C9-PFNA (S)	64	%.	40-130		1	07/04/25 08:40	07/07/25 17:12		
d3-MeFOSAA (S)	55	%.	40-170		1	07/04/25 08:40	07/07/25 17:12		
d3-NMeFOSA (S)	42	%.	10-130		1	07/04/25 08:40	07/07/25 17:12		
d5-EtFOSAA (S)	53	%.	25-135		1	07/04/25 08:40	07/07/25 17:12		
d5-NEtFOSA (S)	39	%.	10-130		1	07/04/25 08:40	07/07/25 17:12		
d7-NMeFOSE (S)	43	%.	10-130		1	07/04/25 08:40	07/07/25 17:12		
d9-NEtFOSE (S)	37	%.	10-130		1	07/04/25 08:40	07/07/25 17:12		
13C2-PFTA (S)	39	%.	10-130		1	07/04/25 08:40	07/07/25 17:12		
13C7-PFUdA (S)	67	%.	30-130		1	07/04/25 08:40	07/07/25 17:12		
13C24:2FTS (S)	77	%.	40-200		1	07/04/25 08:40	07/07/25 17:12		
13C26:2FTS (S)	100	%.	40-200		1	07/04/25 08:40	07/07/25 17:12		
13C28:2FTS (S)	93	%.	40-300		1	07/04/25 08:40	07/07/25 17:12		
13C3-PFPrA (S)	21	%.	5-130		1	07/04/25 08:40	07/07/25 17:12		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801849

Sample: DUP-1-P **Lab ID: 92801849006** Collected: 06/10/25 00:00 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ng/L	12.6	3.8	1	07/04/25 08:40	07/07/25 17:22	763051-92-9	
3:3 FTCA	ND	ng/L	15.7	4.3	1	07/04/25 08:40	07/07/25 17:22	356-02-5	
4:2 FTS	ND	ng/L	12.6	3.1	1	07/04/25 08:40	07/07/25 17:22	757124-72-4	
5:3 FTCA	ND	ng/L	78.6	18.9	1	07/04/25 08:40	07/07/25 17:22	914637-49-3	
6:2 FTS	ND	ng/L	12.6	3.6	1	07/04/25 08:40	07/07/25 17:22	27619-97-2	
7:3 FTCA	ND	ng/L	78.6	22.4	1	07/04/25 08:40	07/07/25 17:22	812-70-4	
8:2 FTS	ND	ng/L	12.6	3.3	1	07/04/25 08:40	07/07/25 17:22	39108-34-4	
9Cl-PF3ONS	ND	ng/L	12.6	3.3	1	07/04/25 08:40	07/07/25 17:22	756426-58-1	
ADONA	ND	ng/L	12.6	3.7	1	07/04/25 08:40	07/07/25 17:22	919005-14-4	
HFPO-DA	ND	ng/L	12.6	3.5	1	07/04/25 08:40	07/07/25 17:22	13252-13-6	
NEtFOSAA	ND	ng/L	3.1	1.3	1	07/04/25 08:40	07/07/25 17:22	2991-50-6	
NEtFOSA	ND	ng/L	3.1	0.99	1	07/04/25 08:40	07/07/25 17:22	4151-50-2	
NEtFOSE	ND	ng/L	31.4	8.1	1	07/04/25 08:40	07/07/25 17:22	1691-99-2	
NFDHA	ND	ng/L	6.3	2.6	1	07/04/25 08:40	07/07/25 17:22	151772-58-6	
NMeFOSAA	ND	ng/L	3.1	0.98	1	07/04/25 08:40	07/07/25 17:22	2355-31-9	
NMeFOSA	ND	ng/L	3.1	0.97	1	07/04/25 08:40	07/07/25 17:22	31506-32-8	
NMeFOSE	ND	ng/L	31.4	8.1	1	07/04/25 08:40	07/07/25 17:22	24448-09-7	
PFBS	ND	ng/L	3.1	0.83	1	07/04/25 08:40	07/07/25 17:22	375-73-5	
PFDA	ND	ng/L	3.1	0.97	1	07/04/25 08:40	07/07/25 17:22	335-76-2	
PFHxA	ND	ng/L	3.1	0.75	1	07/04/25 08:40	07/07/25 17:22	307-24-4	
PFBA	ND	ng/L	12.6	3.0	1	07/04/25 08:40	07/07/25 17:22	375-22-4	
PFDS	ND	ng/L	3.1	1.4	1	07/04/25 08:40	07/07/25 17:22	335-77-3	
PFDoS	ND	ng/L	3.1	0.68	1	07/04/25 08:40	07/07/25 17:22	79780-39-5	
PFEESA	ND	ng/L	6.3	1.4	1	07/04/25 08:40	07/07/25 17:22	113507-82-7	
PFHpS	ND	ng/L	3.1	0.92	1	07/04/25 08:40	07/07/25 17:22	375-92-8	
PFMBA	ND	ng/L	6.3	1.5	1	07/04/25 08:40	07/07/25 17:22	863090-89-5	
PFMPA	ND	ng/L	6.3	1.2	1	07/04/25 08:40	07/07/25 17:22	377-73-1	
PFNS	ND	ng/L	3.1	0.93	1	07/04/25 08:40	07/07/25 17:22	68259-12-1	
PFOSA	ND	ng/L	3.1	0.96	1	07/04/25 08:40	07/07/25 17:22	754-91-6	
PFPeA	ND	ng/L	6.3	1.9	1	07/04/25 08:40	07/07/25 17:22	2706-90-3	
PFPeS	ND	ng/L	3.1	0.74	1	07/04/25 08:40	07/07/25 17:22	2706-91-4	
PFDoA	ND	ng/L	3.1	0.96	1	07/04/25 08:40	07/07/25 17:22	307-55-1	
PFHpA	ND	ng/L	3.1	1.2	1	07/04/25 08:40	07/07/25 17:22	375-85-9	
PFHxS	ND	ng/L	3.1	0.81	1	07/04/25 08:40	07/07/25 17:22	355-46-4	
PFNA	ND	ng/L	3.1	1.0	1	07/04/25 08:40	07/07/25 17:22	375-95-1	
PFOS	ND	ng/L	3.1	0.77	1	07/04/25 08:40	07/07/25 17:22	1763-23-1	
PFOA	ND	ng/L	3.1	0.96	1	07/04/25 08:40	07/07/25 17:22	335-67-1	
PFTeDA	ND	ng/L	3.1	0.81	1	07/04/25 08:40	07/07/25 17:22	376-06-7	
PFTrDA	ND	ng/L	3.1	0.89	1	07/04/25 08:40	07/07/25 17:22	72629-94-8	
PFUnA	ND	ng/L	3.1	0.70	1	07/04/25 08:40	07/07/25 17:22	2058-94-8	
Surrogates									
13C2-PFDoA (S)	74	%.	10-130		1	07/04/25 08:40	07/07/25 17:22		
13C3HFPO-DA (S)	89	%.	40-130		1	07/04/25 08:40	07/07/25 17:22		
13C3-PFBS (S)	85	%.	40-135		1	07/04/25 08:40	07/07/25 17:22		
13C3-PFHxS (S)	81	%.	40-130		1	07/04/25 08:40	07/07/25 17:22		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92801849

Sample: DUP-1-P **Lab ID: 92801849006** Collected: 06/10/25 00:00 Received: 06/11/25 13:32 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C4-PFBA (S)	90	%.	5-130		1	07/04/25 08:40	07/07/25 17:22		
13C4-PFHpA (S)	89	%.	40-130		1	07/04/25 08:40	07/07/25 17:22		
13C5-PFHxA (S)	95	%.	40-130		1	07/04/25 08:40	07/07/25 17:22		
13C5-PFPeA (S)	84	%.	40-130		1	07/04/25 08:40	07/07/25 17:22		
13C6-PFDA (S)	88	%.	40-130		1	07/04/25 08:40	07/07/25 17:22		
13C8-PFOA (S)	92	%.	40-130		1	07/04/25 08:40	07/07/25 17:22		
13C8-PFOS (S)	91	%.	40-130		1	07/04/25 08:40	07/07/25 17:22		
13C8-PFOSA (S)	74	%.	40-130		1	07/04/25 08:40	07/07/25 17:22		
13C9-PFNA (S)	89	%.	40-130		1	07/04/25 08:40	07/07/25 17:22		
d3-MeFOSAA (S)	51	%.	40-170		1	07/04/25 08:40	07/07/25 17:22		
d3-NMeFOSA (S)	59	%.	10-130		1	07/04/25 08:40	07/07/25 17:22		
d5-EtFOSAA (S)	49	%.	25-135		1	07/04/25 08:40	07/07/25 17:22		
d5-NEtFOSA (S)	54	%.	10-130		1	07/04/25 08:40	07/07/25 17:22		
d7-NMeFOSE (S)	68	%.	10-130		1	07/04/25 08:40	07/07/25 17:22		
d9-NEtFOSE (S)	63	%.	10-130		1	07/04/25 08:40	07/07/25 17:22		
13C2-PFTA (S)	61	%.	10-130		1	07/04/25 08:40	07/07/25 17:22		
13C7-PFUdA (S)	93	%.	30-130		1	07/04/25 08:40	07/07/25 17:22		
13C24:2FTS (S)	34	%.	40-200		1	07/04/25 08:40	07/07/25 17:22		S0
13C26:2FTS (S)	59	%.	40-200		1	07/04/25 08:40	07/07/25 17:22		
13C28:2FTS (S)	78	%.	40-300		1	07/04/25 08:40	07/07/25 17:22		
13C3-PFPrA (S)	39	%.	5-130		1	07/04/25 08:40	07/07/25 17:22		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

QC Batch: 1016049
QC Batch Method: EPA 1633
Analysis Method: EPA 1633
Analysis Description: EPA 1633F Water
Laboratory: Pace Analytical Services - Minneapolis

Associated Lab Samples: 92801849004

METHOD BLANK: 5296855 Matrix: Water
Associated Lab Samples: 92801849004

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
11Cl-PF3OUdS	ng/L	ND	6.4	1.9	07/03/25 10:10	
3:3 FTCA	ng/L	ND	8.0	2.2	07/03/25 10:10	
4:2 FTS	ng/L	ND	6.4	1.6	07/03/25 10:10	
5:3 FTCA	ng/L	ND	40.0	9.6	07/03/25 10:10	
6:2 FTS	ng/L	ND	6.4	1.8	07/03/25 10:10	
7:3 FTCA	ng/L	ND	40.0	11.4	07/03/25 10:10	
8:2 FTS	ng/L	ND	6.4	1.7	07/03/25 10:10	
9Cl-PF3ONS	ng/L	ND	6.4	1.7	07/03/25 10:10	
ADONA	ng/L	ND	6.4	1.9	07/03/25 10:10	
HFPO-DA	ng/L	ND	6.4	1.8	07/03/25 10:10	
NEtFOSA	ng/L	ND	1.6	0.51	07/03/25 10:10	
NEtFOSAA	ng/L	ND	1.6	0.66	07/03/25 10:10	
NEtFOSE	ng/L	ND	16.0	4.1	07/03/25 10:10	
NFDHA	ng/L	ND	3.2	1.3	07/03/25 10:10	
NMeFOSA	ng/L	ND	1.6	0.49	07/03/25 10:10	
NMeFOSAA	ng/L	ND	1.6	0.50	07/03/25 10:10	
NMeFOSE	ng/L	ND	16.0	4.1	07/03/25 10:10	
PFBA	ng/L	ND	6.4	1.6	07/03/25 10:10	
PFBS	ng/L	ND	1.6	0.42	07/03/25 10:10	
PFDA	ng/L	ND	1.6	0.50	07/03/25 10:10	
PFDoA	ng/L	ND	1.6	0.49	07/03/25 10:10	
PFDoS	ng/L	ND	1.6	0.34	07/03/25 10:10	
PFDS	ng/L	ND	1.6	0.69	07/03/25 10:10	
PFEESA	ng/L	ND	3.2	0.69	07/03/25 10:10	
PFHpA	ng/L	ND	1.6	0.62	07/03/25 10:10	
PFHpS	ng/L	ND	1.6	0.47	07/03/25 10:10	
PFHxA	ng/L	ND	1.6	0.38	07/03/25 10:10	
PFHxS	ng/L	ND	1.6	0.41	07/03/25 10:10	
PFMBA	ng/L	ND	3.2	0.78	07/03/25 10:10	
PFMPA	ng/L	ND	3.2	0.62	07/03/25 10:10	
PFNA	ng/L	ND	1.6	0.52	07/03/25 10:10	
PFNS	ng/L	ND	1.6	0.47	07/03/25 10:10	
PFOA	ng/L	ND	1.6	0.49	07/03/25 10:10	
PFOS	ng/L	ND	1.6	0.39	07/03/25 10:10	
PFOSA	ng/L	ND	1.6	0.49	07/03/25 10:10	
PFPeA	ng/L	ND	3.2	0.95	07/03/25 10:10	
PFPeS	ng/L	ND	1.6	0.38	07/03/25 10:10	
PFTeDA	ng/L	ND	1.6	0.41	07/03/25 10:10	
PFTrDA	ng/L	ND	1.6	0.45	07/03/25 10:10	
PFUnA	ng/L	ND	1.6	0.36	07/03/25 10:10	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

METHOD BLANK: 5296855 Matrix: Water
Associated Lab Samples: 92801849004

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
13C2-PFDoA (S)	%.	65	10-130		07/03/25 10:10	
13C2-PFTA (S)	%.	63	10-130		07/03/25 10:10	
13C24:2FTS (S)	%.	67	40-200		07/03/25 10:10	
13C26:2FTS (S)	%.	54	40-200		07/03/25 10:10	
13C28:2FTS (S)	%.	54	40-300		07/03/25 10:10	
13C3-PFBS (S)	%.	68	40-135		07/03/25 10:10	
13C3-PFHxS (S)	%.	65	40-130		07/03/25 10:10	
13C3-PFPrA (S)	%.	88	5-130		07/03/25 10:10	
13C3HFPO-DA (S)	%.	70	40-130		07/03/25 10:10	
13C4-PFBA (S)	%.	71	5-130		07/03/25 10:10	
13C4-PFHpA (S)	%.	68	40-130		07/03/25 10:10	
13C5-PFHxA (S)	%.	67	40-130		07/03/25 10:10	
13C5-PFPeA (S)	%.	70	40-130		07/03/25 10:10	
13C6-PFDA (S)	%.	69	40-130		07/03/25 10:10	
13C7-PFUdA (S)	%.	69	30-130		07/03/25 10:10	
13C8-PFOA (S)	%.	67	40-130		07/03/25 10:10	
13C8-PFOS (S)	%.	67	40-130		07/03/25 10:10	
13C8-PFOSA (S)	%.	60	40-130		07/03/25 10:10	
13C9-PFNA (S)	%.	66	40-130		07/03/25 10:10	
d3-MeFOSAA (S)	%.	58	40-170		07/03/25 10:10	
d3-NMeFOSA (S)	%.	53	10-130		07/03/25 10:10	
d5-EtFOSAA (S)	%.	56	25-135		07/03/25 10:10	
d5-NEtFOSA (S)	%.	55	10-130		07/03/25 10:10	
d7-NMeFOSE (S)	%.	59	10-130		07/03/25 10:10	
d9-NEtFOSE (S)	%.	59	10-130		07/03/25 10:10	

LABORATORY CONTROL SAMPLE: 5296856

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ng/L	75.2	80.2	107	55-160	
3:3 FTCA	ng/L	99.2	77.4	78	65-130	
4:2 FTS	ng/L	75.2	58.1	77	70-145	
5:3 FTCA	ng/L	496	395	80	70-135	
6:2 FTS	ng/L	76.8	61.0	79	65-155	
7:3 FTCA	ng/L	496	373	75	50-145	
8:2 FTS	ng/L	76.8	58.8	77	60-150	
9Cl-PF3ONS	ng/L	75.2	67.4	90	70-155	
ADONA	ng/L	75.2	61.4	82	65-145	
HFPO-DA	ng/L	80	64.3	80	70-140	
NEtFOSA	ng/L	19.2	16.3	85	65-145	
NEtFOSAA	ng/L	19.2	15.7	82	70-145	
NEtFOSE	ng/L	192	151	79	70-135	
NFDHA	ng/L	40	32.9	82	50-150	
NMeFOSA	ng/L	19.2	16.4	85	60-150	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

LABORATORY CONTROL SAMPLE: 5296856

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
NMeFOSAA	ng/L	19.2	14.9	78	50-140	
NMeFOSE	ng/L	192	157	82	70-145	
PFBA	ng/L	80	63.2	79	70-140	
PFBS	ng/L	17.6	13.9	79	60-145	
PFDA	ng/L	19.2	15.3	80	70-140	
PFDoA	ng/L	19.2	16.1	84	70-140	
PFDoS	ng/L	19.2	24.4	127	50-145	
PFDS	ng/L	19.2	19.0	99	60-145	
PFEESA	ng/L	35.2	29.0	82	70-140	
PFHpA	ng/L	19.2	16.1	84	70-150	
PFHpS	ng/L	19.2	15.0	78	70-150	
PFHxA	ng/L	19.2	15.9	83	70-145	
PFHxS	ng/L	17.6	13.9	79	65-145	
PFMBA	ng/L	40	31.1	78	60-150	
PFMPA	ng/L	40	31.7	79	55-140	
PFNA	ng/L	19.2	15.5	81	70-150	
PFNS	ng/L	19.2	16.7	87	65-145	
PFOA	ng/L	19.2	15.0	78	70-150	
PFOS	ng/L	19.2	15.0	78	55-150	
PFOSA	ng/L	19.2	15.4	80	70-145	
PFPeA	ng/L	40	31.7	79	65-135	
PFPeS	ng/L	19.2	14.7	77	65-140	
PFTeDA	ng/L	19.2	16.4	86	60-140	
PFTrDA	ng/L	19.2	20.2	105	65-140	
PFUnA	ng/L	19.2	15.3	80	70-145	
13C2-PFDoA (S)	%.			36	10-130	
13C2-PFTA (S)	%.			47	10-130	
13C24:2FTS (S)	%.			37	40-200	S0
13C26:2FTS (S)	%.			37	40-200	S0
13C28:2FTS (S)	%.			39	40-300	S0
13C3-PFBS (S)	%.			32	40-135	S0
13C3-PFHxS (S)	%.			30	40-130	S0
13C3-PFPrA (S)	%.			64	5-130	
13C3HFPO-DA (S)	%.			31	40-130	S0
13C4-PFBA (S)	%.			35	5-130	
13C4-PFHpA (S)	%.			29	40-130	S0
13C5-PFHxA (S)	%.			30	40-130	S0
13C5-PFPeA (S)	%.			32	40-130	S0
13C6-PFDA (S)	%.			31	40-130	S0
13C7-PFUdA (S)	%.			35	30-130	
13C8-PFOA (S)	%.			31	40-130	S0
13C8-PFOS (S)	%.			29	40-130	S0
13C8-PFOSA (S)	%.			30	40-130	S0
13C9-PFNA (S)	%.			29	40-130	S0
d3-MeFOSAA (S)	%.			30	40-170	S0
d3-NMeFOSA (S)	%.			24	10-130	
d5-EtFOSAA (S)	%.			30	25-135	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

LABORATORY CONTROL SAMPLE: 5296856

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
d5-NEtFOSA (S)	%.			23	10-130	
d7-NMeFOSE (S)	%.			28	10-130	
d9-NEtFOSE (S)	%.			27	10-130	

LABORATORY CONTROL SAMPLE: 5296857

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ng/L	12	9.5	79	55-160	
3:3 FTCA	ng/L	15.9	10.6	66	65-130	
4:2 FTS	ng/L	12	8.8	73	70-145	
5:3 FTCA	ng/L	79.4	65.3	82	70-135	
6:2 FTS	ng/L	12.3	9.1	74	65-155	
7:3 FTCA	ng/L	79.4	72.0	91	50-145	
8:2 FTS	ng/L	12.3	10.0	81	60-150	
9Cl-PF3ONS	ng/L	12	9.7	81	70-155	
ADONA	ng/L	12	9.6	80	65-145	
HFPO-DA	ng/L	12.8	9.5	74	70-140	
NEtFOSA	ng/L	3.1	2.2	73	65-145	
NEtFOSAA	ng/L	3.1	2.3	76	70-145	
NEtFOSE	ng/L	30.7	23.9	78	70-135	
NFDHA	ng/L	6.4	4.9	77	50-150	
NMeFOSA	ng/L	3.1	2.5	82	60-150	
NMeFOSAA	ng/L	3.1	2.3	76	50-140	
NMeFOSE	ng/L	30.7	24.4	79	70-145	
PFBA	ng/L	12.8	9.3	73	70-140	
PFBS	ng/L	2.8	2.0	70	60-145	
PFDA	ng/L	3.1	2.6	84	70-140	
PFDoA	ng/L	3.1	2.3	76	70-140	
PFDoS	ng/L	3.1	2.7	89	50-145	
PFDS	ng/L	3.1	2.4	79	60-145	
PFEESA	ng/L	5.6	4.1	73	70-140	
PFHpA	ng/L	3.1	2.4	77	70-150	
PFHpS	ng/L	3.1	2.4	77	70-150	
PFHxA	ng/L	3.1	2.5	81	70-145	
PFHxS	ng/L	2.8	2.2	77	65-145	
PFMBA	ng/L	6.4	4.5	71	60-150	
PFMPA	ng/L	6.4	4.6	71	55-140	
PFNA	ng/L	3.1	2.4	77	70-150	
PFNS	ng/L	3.1	2.7	88	65-145	
PFOA	ng/L	3.1	2.5	82	70-150	
PFOS	ng/L	3.1	2.2	73	55-150	
PFOSA	ng/L	3.1	2.4	78	70-145	
PFPeA	ng/L	6.4	4.8	75	65-135	
PFPeS	ng/L	3.1	2.3	75	65-140	
PFTeDA	ng/L	3.1	2.4	77	60-140	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

LABORATORY CONTROL SAMPLE: 5296857

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
PFTrDA	ng/L	3.1	2.4	79	65-140	
PFUnA	ng/L	3.1	2.3	76	70-145	
13C2-PFDoA (S)	%.			46	10-130	
13C2-PFTA (S)	%.			46	10-130	
13C24:2FTS (S)	%.			59	40-200	
13C26:2FTS (S)	%.			49	40-200	
13C28:2FTS (S)	%.			48	40-300	
13C3-PFBS (S)	%.			50	40-135	
13C3-PFHxS (S)	%.			42	40-130	
13C3-PFPrA (S)	%.			75	5-130	
13C3HFPO-DA (S)	%.			47	40-130	
13C4-PFBA (S)	%.			54	5-130	
13C4-PFHpA (S)	%.			43	40-130	
13C5-PFHxA (S)	%.			47	40-130	
13C5-PFPeA (S)	%.			52	40-130	
13C6-PFDA (S)	%.			44	40-130	
13C7-PFUdA (S)	%.			47	30-130	
13C8-PFOA (S)	%.			41	40-130	
13C8-PFOS (S)	%.			44	40-130	
13C8-PFOSA (S)	%.			44	40-130	
13C9-PFNA (S)	%.			44	40-130	
d3-MeFOSAA (S)	%.			49	40-170	
d3-NMeFOSA (S)	%.			34	10-130	
d5-EtFOSAA (S)	%.			49	25-135	
d5-NEtFOSA (S)	%.			33	10-130	
d7-NMeFOSE (S)	%.			36	10-130	
d9-NEtFOSE (S)	%.			33	10-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

QC Batch: 1016199
QC Batch Method: EPA 1633
Analysis Method: EPA 1633
Analysis Description: EPA 1633F Water
Laboratory: Pace Analytical Services - Minneapolis
Associated Lab Samples: 92801849001, 92801849002, 92801849003

METHOD BLANK: 5297759 Matrix: Water
Associated Lab Samples: 92801849001, 92801849002, 92801849003

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
11Cl-PF3OUdS	ng/L	ND	6.4	1.9	07/03/25 11:05	
3:3 FTCA	ng/L	ND	8.0	2.2	07/03/25 11:05	
4:2 FTS	ng/L	ND	6.4	1.6	07/03/25 11:05	
5:3 FTCA	ng/L	ND	40.0	9.6	07/03/25 11:05	
6:2 FTS	ng/L	ND	6.4	1.8	07/03/25 11:05	
7:3 FTCA	ng/L	ND	40.0	11.4	07/03/25 11:05	
8:2 FTS	ng/L	ND	6.4	1.7	07/03/25 11:05	
9Cl-PF3ONS	ng/L	ND	6.4	1.7	07/03/25 11:05	
ADONA	ng/L	ND	6.4	1.9	07/03/25 11:05	
HFPO-DA	ng/L	ND	6.4	1.8	07/03/25 11:05	
NEtFOSA	ng/L	ND	1.6	0.51	07/03/25 11:05	
NEtFOSAA	ng/L	ND	1.6	0.66	07/03/25 11:05	
NEtFOSE	ng/L	ND	16.0	4.1	07/03/25 11:05	
NFDHA	ng/L	ND	3.2	1.3	07/03/25 11:05	
NMeFOSA	ng/L	ND	1.6	0.49	07/03/25 11:05	
NMeFOSAA	ng/L	ND	1.6	0.50	07/03/25 11:05	
NMeFOSE	ng/L	ND	16.0	4.1	07/03/25 11:05	
PFBA	ng/L	ND	6.4	1.6	07/03/25 11:05	
PFBS	ng/L	ND	1.6	0.42	07/03/25 11:05	
PFDA	ng/L	ND	1.6	0.50	07/03/25 11:05	
PFDoA	ng/L	ND	1.6	0.49	07/03/25 11:05	
PFDoS	ng/L	ND	1.6	0.34	07/03/25 11:05	
PFDS	ng/L	ND	1.6	0.69	07/03/25 11:05	
PFEESA	ng/L	ND	3.2	0.69	07/03/25 11:05	
PFHpA	ng/L	ND	1.6	0.62	07/03/25 11:05	
PFHpS	ng/L	ND	1.6	0.47	07/03/25 11:05	
PFHxA	ng/L	ND	1.6	0.38	07/03/25 11:05	
PFHxS	ng/L	ND	1.6	0.41	07/03/25 11:05	
PFMBA	ng/L	ND	3.2	0.78	07/03/25 11:05	
PFMPA	ng/L	ND	3.2	0.62	07/03/25 11:05	
PFNA	ng/L	ND	1.6	0.52	07/03/25 11:05	
PFNS	ng/L	ND	1.6	0.47	07/03/25 11:05	
PFOA	ng/L	ND	1.6	0.49	07/03/25 11:05	
PFOS	ng/L	ND	1.6	0.39	07/03/25 11:05	
PFOSA	ng/L	ND	1.6	0.49	07/03/25 11:05	
PFPeA	ng/L	ND	3.2	0.95	07/03/25 11:05	
PFPeS	ng/L	ND	1.6	0.38	07/03/25 11:05	
PFTeDA	ng/L	ND	1.6	0.41	07/03/25 11:05	
PFTrDA	ng/L	ND	1.6	0.45	07/03/25 11:05	
PFUnA	ng/L	ND	1.6	0.36	07/03/25 11:05	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

METHOD BLANK: 5297759 Matrix: Water
Associated Lab Samples: 92801849001, 92801849002, 92801849003

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
13C2-PFDoA (S)	%.	71	10-130		07/03/25 11:05	
13C2-PFTA (S)	%.	65	10-130		07/03/25 11:05	
13C24:2FTS (S)	%.	93	40-200		07/03/25 11:05	
13C26:2FTS (S)	%.	82	40-200		07/03/25 11:05	
13C28:2FTS (S)	%.	88	40-300		07/03/25 11:05	
13C3-PFBS (S)	%.	82	40-135		07/03/25 11:05	
13C3-PFHxS (S)	%.	78	40-130		07/03/25 11:05	
13C3-PFPrA (S)	%.	92	5-130		07/03/25 11:05	
13C3HFPO-DA (S)	%.	78	40-130		07/03/25 11:05	
13C4-PFBA (S)	%.	78	5-130		07/03/25 11:05	
13C4-PFHpA (S)	%.	78	40-130		07/03/25 11:05	
13C5-PFHxA (S)	%.	78	40-130		07/03/25 11:05	
13C5-PFPeA (S)	%.	80	40-130		07/03/25 11:05	
13C6-PFDA (S)	%.	76	40-130		07/03/25 11:05	
13C7-PFUdA (S)	%.	82	30-130		07/03/25 11:05	
13C8-PFOA (S)	%.	80	40-130		07/03/25 11:05	
13C8-PFOS (S)	%.	75	40-130		07/03/25 11:05	
13C8-PFOSA (S)	%.	66	40-130		07/03/25 11:05	
13C9-PFNA (S)	%.	77	40-130		07/03/25 11:05	
d3-MeFOSAA (S)	%.	66	40-170		07/03/25 11:05	
d3-NMeFOSA (S)	%.	56	10-130		07/03/25 11:05	
d5-EtFOSAA (S)	%.	64	25-135		07/03/25 11:05	
d5-NEtFOSA (S)	%.	53	10-130		07/03/25 11:05	
d7-NMeFOSE (S)	%.	65	10-130		07/03/25 11:05	
d9-NEtFOSE (S)	%.	60	10-130		07/03/25 11:05	

LABORATORY CONTROL SAMPLE: 5297760

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ng/L	75.2	58.1	77	55-160	
3:3 FTCA	ng/L	99.2	75.8	76	65-130	
4:2 FTS	ng/L	75.2	60.0	80	70-145	
5:3 FTCA	ng/L	496	406	82	70-135	
6:2 FTS	ng/L	76.8	61.5	80	65-155	
7:3 FTCA	ng/L	496	393	79	50-145	
8:2 FTS	ng/L	76.8	60.8	79	60-150	
9Cl-PF3ONS	ng/L	75.2	61.0	81	70-155	
ADONA	ng/L	75.2	62.3	83	65-145	
HFPO-DA	ng/L	80	65.0	81	70-140	
NEtFOSA	ng/L	19.2	16.3	85	65-145	
NEtFOSAA	ng/L	19.2	15.1	79	70-145	
NEtFOSE	ng/L	192	156	81	70-135	
NFDHA	ng/L	40	29.5	74	50-150	
NMeFOSA	ng/L	19.2	16.5	86	60-150	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

LABORATORY CONTROL SAMPLE: 5297760

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
NMeFOSAA	ng/L	19.2	15.3	80	50-140	
NMeFOSE	ng/L	192	159	83	70-145	
PFBA	ng/L	80	63.4	79	70-140	
PFBS	ng/L	17.6	13.7	78	60-145	
PFDA	ng/L	19.2	15.7	82	70-140	
PFDoA	ng/L	19.2	15.7	82	70-140	
PFDoS	ng/L	19.2	13.8	72	50-145	
PFDS	ng/L	19.2	14.0	73	60-145	
PFEESA	ng/L	35.2	27.3	78	70-140	
PFHpA	ng/L	19.2	14.6	76	70-150	
PFHpS	ng/L	19.2	15.3	80	70-150	
PFHxA	ng/L	19.2	15.4	80	70-145	
PFHxS	ng/L	17.6	13.7	78	65-145	
PFMBA	ng/L	40	31.3	78	60-150	
PFMPA	ng/L	40	30.9	77	55-140	
PFNA	ng/L	19.2	15.4	80	70-150	
PFNS	ng/L	19.2	15.0	78	65-145	
PFOA	ng/L	19.2	15.0	78	70-150	
PFOS	ng/L	19.2	13.9	72	55-150	
PFOSA	ng/L	19.2	15.6	81	70-145	
PFPeA	ng/L	40	31.1	78	65-135	
PFPeS	ng/L	19.2	14.4	75	65-140	
PFTeDA	ng/L	19.2	16.1	84	60-140	
PFTrDA	ng/L	19.2	15.8	82	65-140	
PFUnA	ng/L	19.2	15.4	80	70-145	
13C2-PFDoA (S)	%.			83	10-130	
13C2-PFTA (S)	%.			76	10-130	
13C24:2FTS (S)	%.			83	40-200	
13C26:2FTS (S)	%.			74	40-200	
13C28:2FTS (S)	%.			89	40-300	
13C3-PFBS (S)	%.			84	40-135	
13C3-PFHxS (S)	%.			84	40-130	
13C3-PFPrA (S)	%.			97	5-130	
13C3HFPO-DA (S)	%.			81	40-130	
13C4-PFBA (S)	%.			86	5-130	
13C4-PFHpA (S)	%.			82	40-130	
13C5-PFHxA (S)	%.			84	40-130	
13C5-PFPeA (S)	%.			85	40-130	
13C6-PFDA (S)	%.			88	40-130	
13C7-PFUdA (S)	%.			96	30-130	
13C8-PFOA (S)	%.			84	40-130	
13C8-PFOS (S)	%.			86	40-130	
13C8-PFOSA (S)	%.			77	40-130	
13C9-PFNA (S)	%.			85	40-130	
d3-MeFOSAA (S)	%.			79	40-170	
d3-NMeFOSA (S)	%.			61	10-130	
d5-EtFOSAA (S)	%.			78	25-135	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

LABORATORY CONTROL SAMPLE: 5297760

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
d5-NEtFOSA (S)	%.			61	10-130	
d7-NMeFOSE (S)	%.			74	10-130	
d9-NEtFOSE (S)	%.			68	10-130	

LABORATORY CONTROL SAMPLE: 5297761

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ng/L	12	9.0	74	55-160	
3:3 FTCA	ng/L	15.9	12.0	75	65-130	
4:2 FTS	ng/L	12	9.4	78	70-145	
5:3 FTCA	ng/L	79.4	63.5	80	70-135	
6:2 FTS	ng/L	12.3	9.7	79	65-155	
7:3 FTCA	ng/L	79.4	61.8	78	50-145	
8:2 FTS	ng/L	12.3	10.0	82	60-150	
9Cl-PF3ONS	ng/L	12	9.2	76	70-155	
ADONA	ng/L	12	9.6	80	65-145	
HFPO-DA	ng/L	12.8	9.9	77	70-140	
NEtFOSA	ng/L	3.1	2.5	80	65-145	
NEtFOSAA	ng/L	3.1	2.5	80	70-145	
NEtFOSE	ng/L	30.7	24.3	79	70-135	
NFDHA	ng/L	6.4	4.8	76	50-150	
NMeFOSA	ng/L	3.1	2.7	88	60-150	
NMeFOSAA	ng/L	3.1	2.5	81	50-140	
NMeFOSE	ng/L	30.7	24.5	80	70-145	
PFBA	ng/L	12.8	9.7	76	70-140	
PFBS	ng/L	2.8	2.2	77	60-145	
PFDA	ng/L	3.1	2.4	78	70-140	
PFDoA	ng/L	3.1	2.6	84	70-140	
PFDoS	ng/L	3.1	2.2	70	50-145	
PFDS	ng/L	3.1	2.1	68	60-145	
PFEESA	ng/L	5.6	4.4	78	70-140	
PFHpA	ng/L	3.1	2.4	77	70-150	
PFHpS	ng/L	3.1	2.3	75	70-150	
PFHxA	ng/L	3.1	2.5	80	70-145	
PFHxS	ng/L	2.8	2.2	77	65-145	
PFMBA	ng/L	6.4	4.9	76	60-150	
PFMPA	ng/L	6.4	4.8	75	55-140	
PFNA	ng/L	3.1	2.6	86	70-150	
PFNS	ng/L	3.1	2.3	74	65-145	
PFOA	ng/L	3.1	2.4	78	70-150	
PFOS	ng/L	3.1	2.3	76	55-150	
PFOSA	ng/L	3.1	2.4	80	70-145	
PFPeA	ng/L	6.4	4.9	76	65-135	
PFPeS	ng/L	3.1	2.3	76	65-140	
PFTeDA	ng/L	3.1	2.5	81	60-140	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

LABORATORY CONTROL SAMPLE: 5297761

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
PFTrDA	ng/L	3.1	2.7	87	65-140	
PFUnA	ng/L	3.1	2.6	83	70-145	
13C2-PFDoA (S)	%.			60	10-130	
13C2-PFTA (S)	%.			59	10-130	
13C24:2FTS (S)	%.			71	40-200	
13C26:2FTS (S)	%.			71	40-200	
13C28:2FTS (S)	%.			73	40-300	
13C3-PFBS (S)	%.			68	40-135	
13C3-PFHxS (S)	%.			65	40-130	
13C3-PFPrA (S)	%.			83	5-130	
13C3HFPO-DA (S)	%.			65	40-130	
13C4-PFBA (S)	%.			68	5-130	
13C4-PFHpA (S)	%.			63	40-130	
13C5-PFHxA (S)	%.			65	40-130	
13C5-PFPeA (S)	%.			66	40-130	
13C6-PFDA (S)	%.			65	40-130	
13C7-PFUdA (S)	%.			67	30-130	
13C8-PFOA (S)	%.			67	40-130	
13C8-PFOS (S)	%.			67	40-130	
13C8-PFOSA (S)	%.			59	40-130	
13C9-PFNA (S)	%.			64	40-130	
d3-MeFOSAA (S)	%.			61	40-170	
d3-NMeFOSA (S)	%.			47	10-130	
d5-EtFOSAA (S)	%.			62	25-135	
d5-NEtFOSA (S)	%.			46	10-130	
d7-NMeFOSE (S)	%.			56	10-130	
d9-NEtFOSE (S)	%.			52	10-130	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 5297762 5297763

Parameter	Units	10740446009 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
11Cl-PF3OUdS	ng/L	ND	75.1	75.3	46.8	61.4	62	82	55-160	27	30	
3:3 FTCA	ng/L	ND	99.1	99.3	68.5	74.2	69	75	65-130	8	30	
4:2 FTS	ng/L	ND	75.1	75.3	58.0	60.4	77	80	70-145	4	30	
5:3 FTCA	ng/L	ND	495	497	397	396	80	80	70-135	0	30	
6:2 FTS	ng/L	ND	76.7	76.9	57.7	61.9	75	80	65-155	7	30	
7:3 FTCA	ng/L	ND	495	497	399	421	81	85	50-145	5	30	
8:2 FTS	ng/L	ND	76.7	76.9	59.8	57.3	78	75	60-150	4	30	
9Cl-PF3ONS	ng/L	ND	75.1	75.3	55.3	62.2	74	83	70-155	12	30	
ADONA	ng/L	ND	75.1	75.3	58.6	62.6	78	83	65-145	7	30	
HFPO-DA	ng/L	ND	79.9	80.1	60.0	61.9	75	77	70-140	3	30	
NEtFOSA	ng/L	ND	19.2	19.2	16.0	16.4	83	85	65-145	2	30	
NEtFOSAA	ng/L	ND	19.2	19.2	14.5	14.5	76	76	70-145	0	30	
NEtFOSE	ng/L	ND	192	192	145	150	75	78	70-135	4	30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 5297762 5297763

Parameter	Units	10740446009 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
NFDHA	ng/L	ND	39.9	40.1	28.5	30.3	71	76	50-150	6	30	
NMeFOSA	ng/L	ND	19.2	19.2	15.6	16.1	81	84	60-150	4	30	
NMeFOSAA	ng/L	ND	19.2	19.2	14.3	15.0	74	78	50-140	5	30	
NMeFOSE	ng/L	ND	192	192	148	155	77	81	70-145	5	30	
PFBA	ng/L	ND	79.9	80.1	61.9	63.2	76	78	70-140	2	30	
PFBS	ng/L	ND	17.6	17.6	12.8	13.1	73	74	60-145	2	30	
PFDA	ng/L	ND	19.2	19.2	14.8	15.8	77	82	70-140	7	30	
PFDoA	ng/L	ND	19.2	19.2	15.4	15.3	80	79	70-140	1	30	
PFDoS	ng/L	ND	19.2	19.2	11.4	15.0	59	78	50-145	28	30	
PFDS	ng/L	ND	19.2	19.2	12.1	14.8	63	77	60-145	21	30	
PFEESA	ng/L	ND	35.2	35.2	26.6	27.2	76	77	70-140	2	30	
PFHpA	ng/L	ND	19.2	19.2	13.9	14.7	72	76	70-150	6	30	
PFHpS	ng/L	ND	19.2	19.2	14.2	15.5	74	81	70-150	9	30	
PFHxA	ng/L	ND	19.2	19.2	14.4	15.0	75	78	70-145	4	30	
PFHxS	ng/L	ND	17.6	17.6	13.5	13.1	77	74	65-145	3	30	
PFMBA	ng/L	ND	39.9	40.1	30.5	31.7	76	79	60-150	4	30	
PFMPA	ng/L	ND	39.9	40.1	33.7	31.3	84	78	55-140	8	30	
PFNA	ng/L	ND	19.2	19.2	14.5	15.4	76	80	70-150	6	30	
PFNS	ng/L	ND	19.2	19.2	13.0	15.1	68	79	65-145	15	30	
PFOA	ng/L	ND	19.2	19.2	14.0	14.6	72	75	70-150	4	30	
PFOS	ng/L	ND	19.2	19.2	12.5	13.8	64	70	55-150	9	30	
PFOSA	ng/L	ND	19.2	19.2	14.8	15.6	77	81	70-145	5	30	
PFPeA	ng/L	ND	39.9	40.1	31.9	33.5	80	84	65-135	5	30	
PFPeS	ng/L	ND	19.2	19.2	14.2	14.7	74	76	65-140	4	30	
PFTeDA	ng/L	ND	19.2	19.2	15.2	15.8	79	82	60-140	4	30	
PFTrDA	ng/L	ND	19.2	19.2	15.3	16.2	80	84	65-140	5	30	
PFUnA	ng/L	ND	19.2	19.2	14.8	16.3	77	85	70-145	9	30	
13C2-PFDoA (S)	%.						69	47	10-130			
13C2-PFTA (S)	%.						64	46	10-130			
13C24:2FTS (S)	%.						100	59	40-200			
13C26:2FTS (S)	%.						103	55	40-200			
13C28:2FTS (S)	%.						101	58	40-300			
13C3-PFBS (S)	%.						86	52	40-135			
13C3-PFHxS (S)	%.						80	49	40-130			
13C3-PFPrA (S)	%.						20	25	5-130			
13C3HFPO-DA (S)	%.						78	48	40-130			
13C4-PFBA (S)	%.						79	51	5-130			
13C4-PFHpA (S)	%.						77	45	40-130			
13C5-PFHxA (S)	%.						80	50	40-130			
13C5-PFPeA (S)	%.						81	49	40-130			
13C6-PFDA (S)	%.						81	47	40-130			
13C7-PFUdA (S)	%.						85	49	30-130			
13C8-PFOA (S)	%.						89	50	40-130			
13C8-PFOS (S)	%.						85	45	40-130			
13C8-PFOSA (S)	%.						79	44	40-130			
13C9-PFNA (S)	%.						79	46	40-130			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 5297762 5297763

Parameter	Units	10740446009 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
d3-MeFOSAA (S)	%.						69	39	40-170			S0
d3-NMeFOSA (S)	%.						53	31	10-130			
d5-EtFOSAA (S)	%.						66	41	25-135			
d5-NEtFOSA (S)	%.						47	28	10-130			
d7-NMeFOSE (S)	%.						61	39	10-130			
d9-NEtFOSE (S)	%.						56	37	10-130			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

QC Batch: 1016457
QC Batch Method: EPA 1633
Analysis Method: EPA 1633
Analysis Description: EPA 1633F Water
Laboratory: Pace Analytical Services - Minneapolis
Associated Lab Samples: 92801849005, 92801849006

METHOD BLANK: 5298858 Matrix: Water
Associated Lab Samples: 92801849005, 92801849006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
11Cl-PF3OUdS	ng/L	ND	6.4	1.9	07/07/25 16:42	
3:3 FTCA	ng/L	ND	8.0	2.2	07/07/25 16:42	
4:2 FTS	ng/L	ND	6.4	1.6	07/07/25 16:42	
5:3 FTCA	ng/L	ND	40.0	9.6	07/07/25 16:42	
6:2 FTS	ng/L	ND	6.4	1.8	07/07/25 16:42	
7:3 FTCA	ng/L	ND	40.0	11.4	07/07/25 16:42	
8:2 FTS	ng/L	ND	6.4	1.7	07/07/25 16:42	
9Cl-PF3ONS	ng/L	ND	6.4	1.7	07/07/25 16:42	
ADONA	ng/L	ND	6.4	1.9	07/07/25 16:42	
HFPO-DA	ng/L	ND	6.4	1.8	07/07/25 16:42	
NEtFOSA	ng/L	ND	1.6	0.51	07/07/25 16:42	
NEtFOSAA	ng/L	ND	1.6	0.66	07/07/25 16:42	
NEtFOSE	ng/L	ND	16.0	4.1	07/07/25 16:42	
NFDHA	ng/L	ND	3.2	1.3	07/07/25 16:42	
NMeFOSA	ng/L	ND	1.6	0.49	07/07/25 16:42	
NMeFOSAA	ng/L	ND	1.6	0.50	07/07/25 16:42	
NMeFOSE	ng/L	ND	16.0	4.1	07/07/25 16:42	
PFBA	ng/L	ND	6.4	1.6	07/07/25 16:42	
PFBS	ng/L	ND	1.6	0.42	07/07/25 16:42	
PFDA	ng/L	ND	1.6	0.50	07/07/25 16:42	
PFDoA	ng/L	ND	1.6	0.49	07/07/25 16:42	
PFDoS	ng/L	ND	1.6	0.34	07/07/25 16:42	
PFDS	ng/L	ND	1.6	0.69	07/07/25 16:42	
PFEESA	ng/L	ND	3.2	0.69	07/07/25 16:42	
PFHpA	ng/L	ND	1.6	0.62	07/07/25 16:42	
PFHpS	ng/L	ND	1.6	0.47	07/07/25 16:42	
PFHxA	ng/L	ND	1.6	0.38	07/07/25 16:42	
PFHxS	ng/L	ND	1.6	0.41	07/07/25 16:42	
PFMBA	ng/L	ND	3.2	0.78	07/07/25 16:42	
PFMPA	ng/L	ND	3.2	0.62	07/07/25 16:42	
PFNA	ng/L	ND	1.6	0.52	07/07/25 16:42	
PFNS	ng/L	ND	1.6	0.47	07/07/25 16:42	
PFOA	ng/L	ND	1.6	0.49	07/07/25 16:42	
PFOS	ng/L	ND	1.6	0.39	07/07/25 16:42	
PFOSA	ng/L	ND	1.6	0.49	07/07/25 16:42	
PFPeA	ng/L	ND	3.2	0.95	07/07/25 16:42	
PFPeS	ng/L	ND	1.6	0.38	07/07/25 16:42	
PFTeDA	ng/L	ND	1.6	0.41	07/07/25 16:42	
PFTrDA	ng/L	ND	1.6	0.45	07/07/25 16:42	
PFUnA	ng/L	ND	1.6	0.36	07/07/25 16:42	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

METHOD BLANK: 5298858 Matrix: Water
Associated Lab Samples: 92801849005, 92801849006

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
13C2-PFDoA (S)	%.	75	10-130		07/07/25 16:42	
13C2-PFTA (S)	%.	59	10-130		07/07/25 16:42	
13C24:2FTS (S)	%.	95	40-200		07/07/25 16:42	
13C26:2FTS (S)	%.	98	40-200		07/07/25 16:42	
13C28:2FTS (S)	%.	97	40-300		07/07/25 16:42	
13C3-PFBS (S)	%.	84	40-135		07/07/25 16:42	
13C3-PFHxS (S)	%.	80	40-130		07/07/25 16:42	
13C3-PFPrA (S)	%.	66	5-130		07/07/25 16:42	
13C3HFPO-DA (S)	%.	84	40-130		07/07/25 16:42	
13C4-PFBA (S)	%.	82	5-130		07/07/25 16:42	
13C4-PFHpA (S)	%.	81	40-130		07/07/25 16:42	
13C5-PFHxA (S)	%.	82	40-130		07/07/25 16:42	
13C5-PFPeA (S)	%.	83	40-130		07/07/25 16:42	
13C6-PFDA (S)	%.	81	40-130		07/07/25 16:42	
13C7-PFUdA (S)	%.	86	30-130		07/07/25 16:42	
13C8-PFOA (S)	%.	83	40-130		07/07/25 16:42	
13C8-PFOS (S)	%.	81	40-130		07/07/25 16:42	
13C8-PFOSA (S)	%.	66	40-130		07/07/25 16:42	
13C9-PFNA (S)	%.	82	40-130		07/07/25 16:42	
d3-MeFOSAA (S)	%.	83	40-170		07/07/25 16:42	
d3-NMeFOSA (S)	%.	51	10-130		07/07/25 16:42	
d5-EtFOSAA (S)	%.	72	25-135		07/07/25 16:42	
d5-NEtFOSA (S)	%.	50	10-130		07/07/25 16:42	
d7-NMeFOSE (S)	%.	62	10-130		07/07/25 16:42	
d9-NEtFOSE (S)	%.	55	10-130		07/07/25 16:42	

LABORATORY CONTROL SAMPLE: 5298859

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ng/L	75.2	65.4	87	55-160	
3:3 FTCA	ng/L	99.2	83.4	84	65-130	
4:2 FTS	ng/L	75.2	70.7	94	70-145	
5:3 FTCA	ng/L	496	500	101	70-135	
6:2 FTS	ng/L	76.8	73.2	95	65-155	
7:3 FTCA	ng/L	496	486	98	50-145	
8:2 FTS	ng/L	76.8	71.5	93	60-150	
9Cl-PF3ONS	ng/L	75.2	71.6	95	70-155	
ADONA	ng/L	75.2	73.3	97	65-145	
HFPO-DA	ng/L	80	75.9	95	70-140	
NEtFOSA	ng/L	19.2	19.0	99	65-145	
NEtFOSAA	ng/L	19.2	18.7	97	70-145	
NEtFOSE	ng/L	192	187	97	70-135	
NFDHA	ng/L	40	38.2	96	50-150	
NMeFOSA	ng/L	19.2	19.8	103	60-150	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

LABORATORY CONTROL SAMPLE: 5298859

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
NMeFOSAA	ng/L	19.2	18.8	98	50-140	
NMeFOSE	ng/L	192	189	99	70-145	
PFBA	ng/L	80	75.7	95	70-140	
PFBS	ng/L	17.6	16.3	93	60-145	
PFDA	ng/L	19.2	18.7	98	70-140	
PFDoA	ng/L	19.2	18.8	98	70-140	
PFDoS	ng/L	19.2	15.3	80	50-145	
PFDS	ng/L	19.2	16.5	86	60-145	
PFEESA	ng/L	35.2	35.2	100	70-140	
PFHpA	ng/L	19.2	17.7	92	70-150	
PFHpS	ng/L	19.2	17.5	91	70-150	
PFHxA	ng/L	19.2	19.0	99	70-145	
PFHxS	ng/L	17.6	16.9	96	65-145	
PFMBA	ng/L	40	38.2	95	60-150	
PFMPA	ng/L	40	38.3	96	55-140	
PFNA	ng/L	19.2	19.0	99	70-150	
PFNS	ng/L	19.2	17.4	91	65-145	
PFOA	ng/L	19.2	18.1	94	70-150	
PFOS	ng/L	19.2	16.7	87	55-150	
PFOSA	ng/L	19.2	19.2	100	70-145	
PFPeA	ng/L	40	37.7	94	65-135	
PFPeS	ng/L	19.2	18.7	97	65-140	
PFTeDA	ng/L	19.2	19.5	102	60-140	
PFTrDA	ng/L	19.2	19.2	100	65-140	
PFUnA	ng/L	19.2	18.3	95	70-145	
13C2-PFDoA (S)	%.			81	10-130	
13C2-PFTA (S)	%.			74	10-130	
13C24:2FTS (S)	%.			94	40-200	
13C26:2FTS (S)	%.			93	40-200	
13C28:2FTS (S)	%.			100	40-300	
13C3-PFBS (S)	%.			91	40-135	
13C3-PFHxS (S)	%.			88	40-130	
13C3-PFPrA (S)	%.			69	5-130	
13C3HFPO-DA (S)	%.			90	40-130	
13C4-PFBA (S)	%.			93	5-130	
13C4-PFHpA (S)	%.			90	40-130	
13C5-PFHxA (S)	%.			88	40-130	
13C5-PFPeA (S)	%.			92	40-130	
13C6-PFDA (S)	%.			93	40-130	
13C7-PFUdA (S)	%.			96	30-130	
13C8-PFOA (S)	%.			89	40-130	
13C8-PFOS (S)	%.			88	40-130	
13C8-PFOSA (S)	%.			77	40-130	
13C9-PFNA (S)	%.			91	40-130	
d3-MeFOSAA (S)	%.			81	40-170	
d3-NMeFOSA (S)	%.			61	10-130	
d5-EtFOSAA (S)	%.			75	25-135	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

LABORATORY CONTROL SAMPLE: 5298859

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
d5-NEtFOSA (S)	%.			59	10-130	
d7-NMeFOSE (S)	%.			73	10-130	
d9-NEtFOSE (S)	%.			67	10-130	

LABORATORY CONTROL SAMPLE: 5298860

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ng/L	12	10.1	84	55-160	
3:3 FTCA	ng/L	15.9	11.8	74	65-130	
4:2 FTS	ng/L	12	11.0	92	70-145	
5:3 FTCA	ng/L	79.4	73.7	93	70-135	
6:2 FTS	ng/L	12.3	11.3	92	65-155	
7:3 FTCA	ng/L	79.4	72.1	91	50-145	
8:2 FTS	ng/L	12.3	11.9	97	60-150	
9Cl-PF3ONS	ng/L	12	10.9	90	70-155	
ADONA	ng/L	12	11.3	94	65-145	
HFPO-DA	ng/L	12.8	12.0	94	70-140	
NEtFOSA	ng/L	3.1	3.1	101	65-145	
NEtFOSAA	ng/L	3.1	2.9	94	70-145	
NEtFOSE	ng/L	30.7	28.7	94	70-135	
NFDHA	ng/L	6.4	5.7	89	50-150	
NMeFOSA	ng/L	3.1	3.0	96	60-150	
NMeFOSAA	ng/L	3.1	3.0	96	50-140	
NMeFOSE	ng/L	30.7	29.4	96	70-145	
PFBA	ng/L	12.8	12.0	94	70-140	
PFBS	ng/L	2.8	2.6	91	60-145	
PFDA	ng/L	3.1	2.8	92	70-140	
PFDoA	ng/L	3.1	3.0	98	70-140	
PFDoS	ng/L	3.1	2.6	85	50-145	
PFDS	ng/L	3.1	2.7	87	60-145	
PFEESA	ng/L	5.6	5.3	94	70-140	
PFHpA	ng/L	3.1	3.0	96	70-150	
PFHpS	ng/L	3.1	2.6	84	70-150	
PFHxA	ng/L	3.1	2.8	90	70-145	
PFHxS	ng/L	2.8	2.6	93	65-145	
PFMBA	ng/L	6.4	6.0	94	60-150	
PFMPA	ng/L	6.4	6.0	94	55-140	
PFNA	ng/L	3.1	2.8	90	70-150	
PFNS	ng/L	3.1	2.9	95	65-145	
PFOA	ng/L	3.1	3.0	98	70-150	
PFOS	ng/L	3.1	2.7	89	55-150	
PFOSA	ng/L	3.1	3.0	97	70-145	
PFPeA	ng/L	6.4	5.7	89	65-135	
PFPeS	ng/L	3.1	2.8	91	65-140	
PFTeDA	ng/L	3.1	3.0	96	60-140	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

LABORATORY CONTROL SAMPLE: 5298860

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
PFTrDA	ng/L	3.1	2.9	95	65-140	
PFUnA	ng/L	3.1	2.9	95	70-145	
13C2-PFDoA (S)	%.			81	10-130	
13C2-PFTA (S)	%.			71	10-130	
13C24:2FTS (S)	%.			88	40-200	
13C26:2FTS (S)	%.			92	40-200	
13C28:2FTS (S)	%.			95	40-300	
13C3-PFBS (S)	%.			87	40-135	
13C3-PFHxS (S)	%.			83	40-130	
13C3-PFPrA (S)	%.			65	5-130	
13C3HFPO-DA (S)	%.			85	40-130	
13C4-PFBA (S)	%.			87	5-130	
13C4-PFHpA (S)	%.			83	40-130	
13C5-PFHxA (S)	%.			84	40-130	
13C5-PFPeA (S)	%.			85	40-130	
13C6-PFDA (S)	%.			87	40-130	
13C7-PFUdA (S)	%.			89	30-130	
13C8-PFOA (S)	%.			89	40-130	
13C8-PFOS (S)	%.			85	40-130	
13C8-PFOSA (S)	%.			75	40-130	
13C9-PFNA (S)	%.			85	40-130	
d3-MeFOSAA (S)	%.			81	40-170	
d3-NMeFOSA (S)	%.			61	10-130	
d5-EtFOSAA (S)	%.			75	25-135	
d5-NEtFOSA (S)	%.			57	10-130	
d7-NMeFOSE (S)	%.			71	10-130	
d9-NEtFOSE (S)	%.			65	10-130	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 5298861 5298862

Parameter	Units	50404676016 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
11Cl-PF3OUdS	ng/L	<7.4	287	284	224	231	78	81	55-160	3	30	
3:3 FTCA	ng/L	<8.4	379	375	341	340	90	90	65-130	0	30	
4:2 FTS	ng/L	<6.1	287	284	281	284	98	100	70-145	1	30	
5:3 FTCA	ng/L	<36.5	1900	1880	2010	2010	106	107	70-135	0	30	
6:2 FTS	ng/L	<7.0	294	290	267	281	91	97	65-155	5	30	
7:3 FTCA	ng/L	<43.3	1900	1880	2020	1960	106	105	50-145	3	30	
8:2 FTS	ng/L	<6.3	294	290	293	300	100	103	60-150	3	30	
9Cl-PF3ONS	ng/L	<6.4	287	284	269	272	94	96	70-155	1	30	
ADONA	ng/L	<7.1	287	284	299	305	104	107	65-145	2	30	
HFPO-DA	ng/L	<6.8	306	303	302	303	99	100	70-140	0	30	
NEtFOSA	ng/L	<1.9	73.4	72.6	75.7	74.6	103	103	65-145	1	30	
NEtFOSAA	ng/L	<2.5	73.4	72.6	73.8	72.6	100	100	70-145	2	30	
NEtFOSE	ng/L	<15.7	734	726	741	736	101	101	70-135	1	30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 5298861 5298862

Parameter	Units	50404676016 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
NFDHA	ng/L	<5.0	153	151	134	129	88	86	50-150	4	30	
NMeFOSA	ng/L	<1.9	73.4	72.6	77.5	78.1	106	107	60-150	1	30	
NMeFOSAA	ng/L	<1.9	73.4	72.6	72.0	73.0	98	100	50-140	1	30	
NMeFOSE	ng/L	<15.6	734	726	745	745	101	103	70-145	0	30	
PFBA	ng/L	27.5	306	303	326	326	97	99	70-140	0	30	
PFBS	ng/L	1.8J	67.3	66.6	64.2	64.8	93	95	60-145	1	30	
PFDA	ng/L	<1.9	73.4	72.6	73.7	77.7	100	107	70-140	5	30	
PFDoA	ng/L	<1.9	73.4	72.6	77.7	78.7	106	108	70-140	1	30	
PFDoS	ng/L	<1.3	73.4	72.6	57.5	61.6	78	85	50-145	7	30	
PFDS	ng/L	<2.6	73.4	72.6	55.3	57.9	75	80	60-145	5	30	
PFEESA	ng/L	<2.6	135	133	146	144	108	108	70-140	1	30	
PFHpA	ng/L	<2.3	73.4	72.6	70.6	76.9	96	106	70-150	9	30	
PFHpS	ng/L	<1.8	73.4	72.6	70.8	67.8	96	93	70-150	4	30	
PFHxA	ng/L	16.8	73.4	72.6	93.1	91.3	104	103	70-145	2	30	
PFHxS	ng/L	<1.6	67.3	66.6	63.0	64.6	94	97	65-145	2	30	
PFMBA	ng/L	<2.9	153	151	152	152	99	101	60-150	0	30	
PFMPA	ng/L	<2.4	153	151	148	150	97	99	55-140	1	30	
PFNA	ng/L	<2.0	73.4	72.6	75.1	76.9	102	106	70-150	2	30	
PFNS	ng/L	<1.8	73.4	72.6	63.7	65.9	87	91	65-145	3	30	
PFOA	ng/L	<1.8	73.4	72.6	71.5	73.4	96	99	70-150	3	30	
PFOS	ng/L	<1.5	73.4	72.6	65.5	63.9	89	88	55-150	2	30	
PFOSA	ng/L	<1.9	73.4	72.6	76.9	78.0	105	107	70-145	1	30	
PFPeA	ng/L	68.0	153	151	212	218	94	99	65-135	3	30	
PFPeS	ng/L	<1.4	73.4	72.6	68.1	69.8	93	96	65-140	2	30	
PFTeDA	ng/L	<1.6	73.4	72.6	77.7	80.4	106	111	60-140	3	30	
PFTrDA	ng/L	<1.7	73.4	72.6	82.5	83.5	112	115	65-140	1	30	
PFUnA	ng/L	<1.3	73.4	72.6	76.7	73.1	104	101	70-145	5	30	
13C2-PFDoA (S)	%.						55	53	10-130			
13C2-PFTA (S)	%.						58	54	10-130			
13C24:2FTS (S)	%.						25	26	40-200			S0
13C26:2FTS (S)	%.						50	46	40-200			
13C28:2FTS (S)	%.						59	55	40-300			
13C3-PFBS (S)	%.						69	62	40-135			
13C3-PFHxS (S)	%.						71	63	40-130			
13C3-PFPrA (S)	%.						19	33	5-130			
13C3HFPO-DA (S)	%.						75	68	40-130			
13C4-PFBA (S)	%.						75	67	5-130			
13C4-PFHpA (S)	%.						73	64	40-130			
13C5-PFHxA (S)	%.						72	65	40-130			
13C5-PFPeA (S)	%.						83	74	40-130			
13C6-PFDA (S)	%.						71	64	40-130			
13C7-PFUdA (S)	%.						65	63	30-130			
13C8-PFOA (S)	%.						74	67	40-130			
13C8-PFOS (S)	%.						72	65	40-130			
13C8-PFOSA (S)	%.						65	58	40-130			
13C9-PFNA (S)	%.						68	63	40-130			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92801849

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 5298861 5298862

Parameter	Units	50404676016 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
d3-MeFOSAA (S)	%.						39	38	40-170			S0
d3-NMeFOSA (S)	%.						49	43	10-130			
d5-EtFOSAA (S)	%.						36	35	25-135			
d5-NEtFOSA (S)	%.						47	41	10-130			
d7-NMeFOSE (S)	%.						57	54	10-130			
d9-NEtFOSE (S)	%.						53	50	10-130			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALIFIERS

Project: Fortress Wood Products
Pace Project No.: 92801849

DEFINITIONS

DF - Dilution Factor, if reported, represents the factor applied to the reported data due to dilution of the sample aliquot.

ND - Not Detected at or above adjusted reporting limit.

TNTC - Too Numerous To Count

J - Estimated concentration above the adjusted method detection limit and below the adjusted reporting limit.

MDL - Adjusted Method Detection Limit.

PQL - Practical Quantitation Limit.

RL - Reporting Limit - The lowest concentration value that meets project requirements for quantitative data with known precision and bias for a specific analyte in a specific matrix.

S - Surrogate

1,2-Diphenylhydrazine decomposes to and cannot be separated from Azobenzene using Method 8270. The result for each analyte is a combined concentration.

Consistent with EPA guidelines, unrounded data are displayed and have been used to calculate % recovery and RPD values.

LCS(D) - Laboratory Control Sample (Duplicate)

MS(D) - Matrix Spike (Duplicate)

DUP - Sample Duplicate

RPD - Relative Percent Difference

NC - Not Calculable.

SG - Silica Gel - Clean-Up

U - Indicates the compound was analyzed for, but not detected.

Acid preservation may not be appropriate for 2 Chloroethylvinyl ether.

A separate vial preserved to a pH of 4-5 is recommended in SW846 Chapter 4 for the analysis of Acrolein and Acrylonitrile by EPA Method 8260.

N-Nitrosodiphenylamine decomposes and cannot be separated from Diphenylamine using Method 8270. The result reported for each analyte is a combined concentration.

Reported results are not rounded until the final step prior to reporting. Therefore, calculated parameters that are typically reported as "Total" may vary slightly from the sum of the reported component parameters.

Pace Analytical is TNI accredited. Contact your Pace PM for the current list of accredited analytes.

TNI - The NELAC Institute.

ANALYTE QUALIFIERS

S0	Surrogate recovery outside laboratory control limits.

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA CROSS REFERENCE TABLE

Project: Fortress Wood Products
Pace Project No.: 92801849

Lab ID	Sample ID	QC Batch Method	QC Batch	Analytical Method	Analytical Batch
92801849001	**GW-7-P**	EPA 1633	1016199	EPA 1633	1016876
92801849002	**EB-1-P**	EPA 1633	1016199	EPA 1633	1016876
92801849003	**FB-4-P**	EPA 1633	1016199	EPA 1633	1016876
92801849004	**GW-1-P**	EPA 1633	1016049	EPA 1633	1016923
92801849005	**GW-2-P**	EPA 1633	1016457	EPA 1633	1017218
92801849006	**DUP-1-P**	EPA 1633	1016457	EPA 1633	1017218

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Laboratory receiving samples:
Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☑ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☐

Sample Condition Upon Receipt

Client Name: ECS Southeast

Project #: **WO# : 92801849**

92801849

Courier: ☐ Commercial ☐ Fed Ex ☑ Pace ☐ UPS ☐ USPS ☐ Other:____ ☐ Client

Custody Seal Present? ☐ Yes ☑ No Seals Intact? ☐ Yes ☐ No ☑ N/A

Date/Initials Person Examining Contents: TH 6/11/25

Packing Material: ☑ Bubble Wrap ☐ Bubble Bags ☐ None ☐ Other

Biological Tissue Frozen? ☐ Yes ☐ No ☑ N/A

Thermometer:
☑ IR Gun ID: 92683 Type of Ice: ☑ Wet ☐ Blue ☐ None

Cooler Temp: 4.8 Correction Factor: Add/Subtract (°C) 0

Temp should be above freezing to 6°C
☐ Samples out of temp criteria. Samples on ice, cooling process has begun

Cooler Temp Corrected (°C): 4.8

USDA Regulated Soil (☑ N/A, water sample)
Did samples originate in a quarantine zone within the United States: CA, NY, or SC (check maps)? ☐ Yes ☐ No

Did samples originate from a foreign source (internationally, including Hawaii and Puerto Rico)? ☐ Yes ☐ No

				Comments/Discrepancy:
Chain of Custody Present?	☑ Yes	☐ No	☐ N/A	1.
Samples Arrived within Hold Time?	☑ Yes	☐ No	☐ N/A	2.
Short Hold Time Analysis (<72 hr.)?	☐ Yes	☑ No	☐ N/A	3.
Rush Turn Around Time Requested?	☐ Yes	☑ No	☐ N/A	4.
Sufficient Volume?	☑ Yes	☐ No	☐ N/A	5.
Correct Containers Used?	☑ Yes	☐ No	☐ N/A	6.
-Pace Containers Used?	☑ Yes	☐ No	☐ N/A	
Containers Intact?	☑ Yes	☐ No	☐ N/A	7.
Dissolved analysis: Samples Field Filtered?	☐ Yes	☑ No	☐ N/A	8.
Sample Labels Match COC?	☑ Yes	☐ No	☐ N/A	9.
-Includes Date/Time/ID/Analysis Matrix: WT				
Headspace in VOA Vials (>5-6mm)?	☐ Yes	☐ No	☑ N/A	10.
Trip Blank Present?	☐ Yes	☐ No	☑ N/A	11.
Trip Blank Custody Seals Present?	☐ Yes	☐ No	☑ N/A	

COMMENTS/SAMPLE DISCREPANCY

Field Data Required? ☐ Yes ☐ No

Lot ID of split containers:

CLIENT NOTIFICATION/RESOLUTION

Person contacted: Date/Time:

Project Manager SCURF Review: Date:

Project Manager SRF Review: Date:

*Check mark top half of box if pH and/or dechlorination is verified and within the acceptance range for preservation samples.
Exceptions: VOA, Coliform, TOC, Oil and Grease, DRO/8015 (water) DOC, LLHg
**Bottom half of box is to list number of bottles
***Check all unpreserved Nitrates for chlorine

Project # **WO#: 92801849**
PM: AMB Due Date: 06/18/25
CLIENT: 92-ECS

Laboratory Receiving location: Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☒ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☐

Client ECS Southeast Profile (EZ) (Circle one) 3268171 Notes

Item#	BP4U-125 mL Plastic Unpreserved (N/A) (Cl-)	BP3U-250 mL Plastic Unpreserved (N/A)	BP2U-500 mL Plastic Unpreserved (N/A)	BP1U-1 liter Plastic Unpreserved (N/A)	GN	BP4S-125 mL Plastic H2SO4 (pH < 2) (Cl-)	BP3N-250 mL plastic HNO3 (pH < 2)	BP4Z-125 mL Plastic Zn Acetate & NaOH (>9)	BP4B-125 mL Plastic NaOH (pH > 12) (Cl-)	WGFU-Wide-mouthed Glass jar Unpreserved	AG1U-1 liter Amber Unpreserved (N/A) (Cl-)	AG1H-1 liter Amber HCl (pH < 2)	AG3U-250 mL Amber Unpreserved (N/A) (Cl-)	AG1S-1 liter Amber H2SO4 (pH < 2)	AG3S-250 mL Amber H2SO4 (pH < 2)	DG9A-40 mL Amber NH4Cl (N/A)(Cl-)	DG9H-40 mL VOA HCl (N/A)	VG9T-40 mL VOA Na2S2O3 (N/A)	VG9U-40 mL VOA Unpreserved (N/A)	DG9V-40 mL VOA H3PO4 (N/A)	KP3U-50 mL Plastic Unpreserved (N/A)	V/GK (3 vials per kit)-VPH/Gas kit (N/A)	SP5T-125 mL Sterile Plastic (N/A - lab)	SP2T-250 mL Sterile Plastic (N/A - lab)		BP3R-250 mL Plastic (NH4)2SO4 (9.3-9.7)	AGDU-100 mL Amber Unpreserved (N/A) (Cl-)	VSGU-20 mL Scintillation vials (N/A)	DG9U-40 mL Amber Unpreserved vials (N/A)
CC					ST																									
1					2																									
2					2																									
3					2																									
4					2																									
5					2																									
6					2																									
7																														
8																														
9																														
10																														
11																														
12																														

pH Adjustment Log for Preserved Samples

Sample ID	Type of Preservative	pH upon receipt	Date preservation adjusted	Time preservation adjusted	Amount of Preservative added	Lot #

Note: Whenever there is a discrepancy affecting North Carolina compliance samples, a copy of this form will be sent to the North Carolina DENR Certification Office (i.e. Out of hold, incorrect preservative, out of temp, incorrect containers.

Pace® Location Requested (City/State):
Pace Analytical Charlotte
9800 Kincey Ave. Suite 100, Huntersville, NC 28078

CHAIN-OF-CUSTODY Analytical Request Document

Chain-of-Custody is a LEGAL DOCUMENT - Complete all relevant fields

LAB USE ONLY- Affix Workorder/Login Label Here

Scan QR Code for instructions

Company Name:	ECS Southeast, LLC-Charlotte	Contact/Report To:	Emery Lovekamp
Street Address:	1812 Center Park Drive Suite D Charlotte, NC 28217	Phone #:	704-525-5152
		E-Mail:	elovekamp@ecslimited.com
		Cc E-Mail:	
Customer Project #:	24413-C	Invoice To:	AP-ECS Charlotte
Project Name:	Fortress Wood Products	Invoice E-Mail:	ecs-49@ecslimited.com
Site Collection Info/Facility ID (as applicable):		Purchase Order # (if applicable):	24413-C
		Quote #:	

Time Zone Collected: [ ] AK [ ] PT [ ] MT [ ] CT [X] ET

County / State origin of sample(s): North Carolina

Data Deliverables:
[ ] Level II [ ] Level III [ ] Level IV
[ ] EQUIS
[ ] Other

Regulatory Program (DW, RCRA, etc.) as applicable: BROWNFIELDS — Reportable [ ] Yes [ ] No

Rush (Pre-approval required): [ ] Same Day [ ] 1 Day [ ] 2 Day [ ] 3 Day [ ] Other _____

DW PWSID # or WW Permit # as applicable:

Date Results Requested: STANDARD

Field Filtered (if applicable): [ ] Yes [X] No

Analysis:

* Matrix Codes (Insert in Matrix box below): Drinking Water (DW), Ground Water (GW), Waste Water (WW), Product (P), Soil/Solid (SS), Oil (OL), Wipe (WP), Tissue (TS), Bioassay (B), Vapor (V), Surface Water (SW),Sediment (SED), Sludge (SL), Caulk (CK), Leachate (LL), Biosolid (BS), Other (OT)

Specify Container Size **: 2

Identify Container Preservative Type***: i

Analysis Requested

Customer Sample ID	Matrix *	Comp / Grab	Composite Start Date	Composite Start Time	Collected or Composite End Date	Collected or Composite End Time	# Cont.	Res. Chlorine Results	Res. Chlorine Units	1633 PFAS	~~7199 hex chrome~~	~~8260 VOC~~	~~8260 VOC trip blank~~	~~8270 SVOC~~	~~PPL Metals 6020/7470~~	Sample Comment
GW-7_P	GW	G	~~6/10/25~~ EL		6/10/25	1100	2			X						
EB-1_P	GW					1125	2			X						
FB-4_P	W					1135	2			X						
GW-1_P	GW					1325	2			X						
GW-2_P	GW					1420	2			X						
DUP-1_P	GW	↓			↓	—	2			X						

**Container Size: (1) 1L, (2) 500mL, (3) 250mL, (4) 125mL, (5) 100mL, (6) 40mL vial, (7) EnCore, (8) TerraCore, (9) 90mL, (10) Other

*** Preservative Types: (1) None, (2) HNO3, (3) H2SO4, (4) HCl, (5) NaOH, (6) Zn Acetate, (7) NaHSO4, (8) Sod. Thiosulfate, (9) Ascorbic Acid, (10) MeOH, (11) Other

Lab Use Only
Proj. Mgr: Angela Baioni
AcctNum / Client ID:
Table #:
Profile / Template: 18978
Prelog / Bottle Ord. ID: EZ 3268171

Preservation non-conformance identified for sample.

Additional Instructions from Pace®:

Collected By: (Printed Name) EMERY LOVEKAMP
Signature:

Customer Remarks / Special Conditions / Possible Hazards:

# Coolers:	Thermometer ID:	Correction Factor (°C):	Obs. Temp. (°C)	Corrected Temp. (°C)	On Ice:

Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Tracking Number:
EL	6/10/25 1540	Erick Hadney/Pace	6/11/25 735	
Erick Hadney/Pace	6/11/25 1332	PGH HVL	6/11/25 1332	Delivered by: [ ] In-Person [X] Courier
				[ ] FedEX [ ] UPS [ ] Other
				Page: 1 of 3

Page 00 of 00

Submitting a sample via this chain of custody constitutes acknowledgment and acceptance of the Pace® Terms and Conditions found at https://www.pacelabs.com/resource-library/resource/pace-terms-and-conditions/

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

July 09, 2025

Emery Lovekamp
ECS Southeast, LLC-Charlotte
1812 Center Park Drive
Suite D
Charlotte, NC 28217

RE: Project: Fortress Wood Products
Pace Project No.: 92802156

Dear Emery Lovekamp:

Enclosed are the analytical results for sample(s) received by the laboratory on June 12, 2025. The results relate only to the samples included in this report. Results reported herein conform to the applicable TNI/NELAC Standards and the laboratory's Quality Manual, where applicable, unless otherwise noted in the body of the report.

The test results provided in this final report were generated by each of the following laboratories within the Pace Network:

- Pace Analytical Services - Minneapolis

If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Angela M. Baioni

Angela Baioni
angela.baioni@pacelabs.com
612-473-6801
Project Manager

Enclosures

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

CERTIFICATIONS

Project: Fortress Wood Products
Pace Project No.: 92802156

Pace Analytical Services, LLC - Minneapolis MN
1700 Elm Street SE, Minneapolis, MN 55414
Alabama Certification #: 40770
Alaska Contaminated Sites Certification #: 17-009
Alaska DW Certification #: MN00064
Arizona Certification #: AZ0014
Arkansas DW Certification #: MN00064
Arkansas WW Certification #: 88-0680
California Certification #: 2929
Colorado Certification #: MN00064
Connecticut Certification #: PH-0256
DoD Certification via A2LA #: 2926.01
EPA Region 8 Tribal Water Systems+Wyoming DW Certification #: via MN 027-053-137
Florida Certification #: E87605
Georgia Certification #: 959
Idaho Certification #: MN00064
Illinois Certification #: 200011
Indiana Certification #: C-MN-01
Iowa Certification #: 368
ISO/IEC 17025 Certification via A2LA #: 2926.01
Kansas Certification #: E-10167
Kentucky DW Certification #: 90062
Kentucky WW Certification #: 90062
Louisiana DEQ Certification #: AI-03086
Louisiana DW Certification #: MN00064
Maine Certification #: MN00064
Maryland Certification #: 322
Michigan Certification #: 9909
Minnesota Certification #: 027-053-137
Minnesota Dept of Ag Approval: via MN 027-053-137
Minnesota Petrofund Registration #: 1240
Mississippi Certification #: MN00064
Missouri Certification #: 10100
Montana Certification #: CERT0092
Nebraska Certification #: NE-OS-18-06
Nevada Certification #: MN00064
New Hampshire Certification #: 2081
New Jersey Certification #: MN002
New York Certification #: 11647
North Carolina DW Certification #: 27700
North Carolina WW Certification #: 530
North Dakota Certification via A2LA #: R-036
North Dakota Certification via MN #: R-036
Ohio DW Certification #: 41244
Ohio VAP Certification (1700) #: CL101
Oklahoma Certification #: 9507
Oregon Primary Certification #: MN300001
Oregon Secondary Certification #: MN200001
Pennsylvania Certification #: 68-00563
Puerto Rico Certification #: MN00064
South Carolina Certification #:74003001
Tennessee Certification #: TN02818
Texas Certification #: T104704192
Utah Certification #: MN00064
Vermont Certification #: VT-027053137
Virginia Certification #: 460163
Washington Certification #: C486
West Virginia DEP Certification #: 382
West Virginia DW Certification #: 9952 C
Wisconsin Certification #: 999407970
Wyoming UST Certification via A2LA #: 2926.01
USDA Permit #: P330-19-00208

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE SUMMARY

Project: Fortress Wood Products
Pace Project No.: 92802156

Lab ID	Sample ID	Matrix	Date Collected	Date Received
92802156001	**GW-5-P**	Water	06/11/25 09:45	06/12/25 13:10
92802156002	**FB-5-P**	Water	06/11/25 10:00	06/12/25 13:10
92802156003	**GW-4-P**	Water	06/11/25 11:10	06/12/25 13:10
92802156004	**GW-3-P**	Water	06/11/25 12:45	06/12/25 13:10
92802156005	**EB-2-P**	Water	06/11/25 14:30	06/12/25 13:10
92802156006	**GW-10-P**	Water	06/11/25 14:55	06/12/25 13:10
92802156007	**DUP-2-P**	Water	06/11/25 00:00	06/12/25 13:10

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE ANALYTE COUNT

Project: Fortress Wood Products
Pace Project No.: 92802156

Lab ID	Sample ID	Method	Analysts	Analytes Reported	Laboratory
92802156001	**GW-5-P**	EPA 1633	AJG	65	PASI-M
92802156002	**FB-5-P**	EPA 1633	AJG	65	PASI-M
92802156003	**GW-4-P**	EPA 1633	AJG	65	PASI-M
92802156004	**GW-3-P**	EPA 1633	AJG	65	PASI-M
92802156005	**EB-2-P**	EPA 1633	MJL	65	PASI-M
92802156006	**GW-10-P**	EPA 1633	AJG	65	PASI-M
92802156007	**DUP-2-P**	EPA 1633	AJG	65	PASI-M

PASI-M = Pace Analytical Services - Minneapolis

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802156

Sample: GW-5-P **Lab ID: 92802156001** Collected: 06/11/25 09:45 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ng/L	6.1	1.9	1	07/02/25 13:30	07/03/25 13:02	763051-92-9	
3:3 FTCA	ND	ng/L	7.7	2.1	1	07/02/25 13:30	07/03/25 13:02	356-02-5	
4:2 FTS	ND	ng/L	6.1	1.5	1	07/02/25 13:30	07/03/25 13:02	757124-72-4	
5:3 FTCA	ND	ng/L	38.4	9.2	1	07/02/25 13:30	07/03/25 13:02	914637-49-3	
6:2 FTS	ND	ng/L	6.1	1.8	1	07/02/25 13:30	07/03/25 13:02	27619-97-2	
7:3 FTCA	ND	ng/L	38.4	10.9	1	07/02/25 13:30	07/03/25 13:02	812-70-4	
8:2 FTS	ND	ng/L	6.1	1.6	1	07/02/25 13:30	07/03/25 13:02	39108-34-4	
9Cl-PF3ONS	ND	ng/L	6.1	1.6	1	07/02/25 13:30	07/03/25 13:02	756426-58-1	
ADONA	ND	ng/L	6.1	1.8	1	07/02/25 13:30	07/03/25 13:02	919005-14-4	
HFPO-DA	ND	ng/L	6.1	1.7	1	07/02/25 13:30	07/03/25 13:02	13252-13-6	
NEtFOSAA	ND	ng/L	1.5	0.64	1	07/02/25 13:30	07/03/25 13:02	2991-50-6	
NEtFOSA	ND	ng/L	1.5	0.49	1	07/02/25 13:30	07/03/25 13:02	4151-50-2	
NEtFOSE	ND	ng/L	15.3	4.0	1	07/02/25 13:30	07/03/25 13:02	1691-99-2	
NFDHA	ND	ng/L	3.1	1.3	1	07/02/25 13:30	07/03/25 13:02	151772-58-6	
NMeFOSAA	ND	ng/L	1.5	0.48	1	07/02/25 13:30	07/03/25 13:02	2355-31-9	
NMeFOSA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 13:02	31506-32-8	
NMeFOSE	ND	ng/L	15.3	3.9	1	07/02/25 13:30	07/03/25 13:02	24448-09-7	
PFBS	**5.0**	ng/L	1.5	0.40	1	07/02/25 13:30	07/03/25 13:02	375-73-5	
PFDA	ND	ng/L	1.5	0.48	1	07/02/25 13:30	07/03/25 13:02	335-76-2	
PFHxA	**28.7**	ng/L	1.5	0.37	1	07/02/25 13:30	07/03/25 13:02	307-24-4	
PFBA	**23.3**	ng/L	6.1	1.5	1	07/02/25 13:30	07/03/25 13:02	375-22-4	
PFDS	ND	ng/L	1.5	0.66	1	07/02/25 13:30	07/03/25 13:02	335-77-3	
PFDoS	ND	ng/L	1.5	0.33	1	07/02/25 13:30	07/03/25 13:02	79780-39-5	
PFEESA	ND	ng/L	3.1	0.66	1	07/02/25 13:30	07/03/25 13:02	113507-82-7	
PFHpS	ND	ng/L	1.5	0.45	1	07/02/25 13:30	07/03/25 13:02	375-92-8	
PFMBA	ND	ng/L	3.1	0.74	1	07/02/25 13:30	07/03/25 13:02	863090-89-5	
PFMPA	ND	ng/L	3.1	0.60	1	07/02/25 13:30	07/03/25 13:02	377-73-1	
PFNS	ND	ng/L	1.5	0.45	1	07/02/25 13:30	07/03/25 13:02	68259-12-1	
PFOSA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 13:02	754-91-6	
PFPeA	**22.1**	ng/L	3.1	0.91	1	07/02/25 13:30	07/03/25 13:02	2706-90-3	
PFPeS	**5.7**	ng/L	1.5	0.36	1	07/02/25 13:30	07/03/25 13:02	2706-91-4	
PFDoA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 13:02	307-55-1	
PFHpA	**27.4**	ng/L	1.5	0.59	1	07/02/25 13:30	07/03/25 13:02	375-85-9	
PFHxS	**10.9**	ng/L	1.5	0.39	1	07/02/25 13:30	07/03/25 13:02	355-46-4	
PFNA	ND	ng/L	1.5	0.50	1	07/02/25 13:30	07/03/25 13:02	375-95-1	
PFOS	**3.3**	ng/L	1.5	0.38	1	07/02/25 13:30	07/03/25 13:02	1763-23-1	
PFOA	**41.6**	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 13:02	335-67-1	
PFTeDA	ND	ng/L	1.5	0.40	1	07/02/25 13:30	07/03/25 13:02	376-06-7	
PFTrDA	ND	ng/L	1.5	0.43	1	07/02/25 13:30	07/03/25 13:02	72629-94-8	
PFUnA	ND	ng/L	1.5	0.34	1	07/02/25 13:30	07/03/25 13:02	2058-94-8	
Surrogates									
13C2-PFDoA (S)	42	%.	10-130		1	07/02/25 13:30	07/03/25 13:02		
13C3HFPO-DA (S)	46	%.	40-130		1	07/02/25 13:30	07/03/25 13:02		
13C3-PFBS (S)	44	%.	40-135		1	07/02/25 13:30	07/03/25 13:02		
13C3-PFHxS (S)	38	%.	40-130		1	07/02/25 13:30	07/03/25 13:02		S0

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802156

Sample: GW-5-P **Lab ID: 92802156001** Collected: 06/11/25 09:45 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C4-PFBA (S)	54	%.	5-130		1	07/02/25 13:30	07/03/25 13:02		
13C4-PFHpA (S)	43	%.	40-130		1	07/02/25 13:30	07/03/25 13:02		
13C5-PFHxA (S)	46	%.	40-130		1	07/02/25 13:30	07/03/25 13:02		
13C5-PFPeA (S)	47	%.	40-130		1	07/02/25 13:30	07/03/25 13:02		
13C6-PFDA (S)	40	%.	40-130		1	07/02/25 13:30	07/03/25 13:02		
13C8-PFOA (S)	40	%.	40-130		1	07/02/25 13:30	07/03/25 13:02		
13C8-PFOS (S)	42	%.	40-130		1	07/02/25 13:30	07/03/25 13:02		
13C8-PFOSA (S)	39	%.	40-130		1	07/02/25 13:30	07/03/25 13:02		S0
13C9-PFNA (S)	39	%.	40-130		1	07/02/25 13:30	07/03/25 13:02		S0
d3-MeFOSAA (S)	38	%.	40-170		1	07/02/25 13:30	07/03/25 13:02		S0
d3-NMeFOSA (S)	31	%.	10-130		1	07/02/25 13:30	07/03/25 13:02		
d5-EtFOSAA (S)	40	%.	25-135		1	07/02/25 13:30	07/03/25 13:02		
d5-NEtFOSA (S)	31	%.	10-130		1	07/02/25 13:30	07/03/25 13:02		
d7-NMeFOSE (S)	40	%.	10-130		1	07/02/25 13:30	07/03/25 13:02		
d9-NEtFOSE (S)	39	%.	10-130		1	07/02/25 13:30	07/03/25 13:02		
13C2-PFTA (S)	47	%.	10-130		1	07/02/25 13:30	07/03/25 13:02		
13C7-PFUdA (S)	42	%.	30-130		1	07/02/25 13:30	07/03/25 13:02		
13C24:2FTS (S)	74	%.	40-200		1	07/02/25 13:30	07/03/25 13:02		
13C26:2FTS (S)	66	%.	40-200		1	07/02/25 13:30	07/03/25 13:02		
13C28:2FTS (S)	51	%.	40-300		1	07/02/25 13:30	07/03/25 13:02		
13C3-PFPrA (S)	16	%.	5-130		1	07/02/25 13:30	07/03/25 13:02		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802156

Sample: FB-5-P **Lab ID: 92802156002** Collected: 06/11/25 10:00 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ng/L	6.1	1.9	1	07/02/25 13:30	07/03/25 13:12	763051-92-9	
3:3 FTCA	ND	ng/L	7.7	2.1	1	07/02/25 13:30	07/03/25 13:12	356-02-5	
4:2 FTS	ND	ng/L	6.1	1.5	1	07/02/25 13:30	07/03/25 13:12	757124-72-4	
5:3 FTCA	ND	ng/L	38.4	9.2	1	07/02/25 13:30	07/03/25 13:12	914637-49-3	
6:2 FTS	ND	ng/L	6.1	1.8	1	07/02/25 13:30	07/03/25 13:12	27619-97-2	
7:3 FTCA	ND	ng/L	38.4	11.0	1	07/02/25 13:30	07/03/25 13:12	812-70-4	
8:2 FTS	ND	ng/L	6.1	1.6	1	07/02/25 13:30	07/03/25 13:12	39108-34-4	
9Cl-PF3ONS	ND	ng/L	6.1	1.6	1	07/02/25 13:30	07/03/25 13:12	756426-58-1	
ADONA	ND	ng/L	6.1	1.8	1	07/02/25 13:30	07/03/25 13:12	919005-14-4	
HFPO-DA	ND	ng/L	6.1	1.7	1	07/02/25 13:30	07/03/25 13:12	13252-13-6	
NEtFOSAA	ND	ng/L	1.5	0.64	1	07/02/25 13:30	07/03/25 13:12	2991-50-6	
NEtFOSA	ND	ng/L	1.5	0.49	1	07/02/25 13:30	07/03/25 13:12	4151-50-2	
NEtFOSE	ND	ng/L	15.4	4.0	1	07/02/25 13:30	07/03/25 13:12	1691-99-2	
NFDHA	ND	ng/L	3.1	1.3	1	07/02/25 13:30	07/03/25 13:12	151772-58-6	
NMeFOSAA	ND	ng/L	1.5	0.48	1	07/02/25 13:30	07/03/25 13:12	2355-31-9	
NMeFOSA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 13:12	31506-32-8	
NMeFOSE	ND	ng/L	15.4	3.9	1	07/02/25 13:30	07/03/25 13:12	24448-09-7	
PFBS	ND	ng/L	1.5	0.40	1	07/02/25 13:30	07/03/25 13:12	375-73-5	
PFDA	ND	ng/L	1.5	0.48	1	07/02/25 13:30	07/03/25 13:12	335-76-2	
PFHxA	ND	ng/L	1.5	0.37	1	07/02/25 13:30	07/03/25 13:12	307-24-4	
PFBA	ND	ng/L	6.1	1.5	1	07/02/25 13:30	07/03/25 13:12	375-22-4	
PFDS	ND	ng/L	1.5	0.66	1	07/02/25 13:30	07/03/25 13:12	335-77-3	
PFDoS	ND	ng/L	1.5	0.33	1	07/02/25 13:30	07/03/25 13:12	79780-39-5	
PFEESA	ND	ng/L	3.1	0.66	1	07/02/25 13:30	07/03/25 13:12	113507-82-7	
PFHpS	ND	ng/L	1.5	0.45	1	07/02/25 13:30	07/03/25 13:12	375-92-8	
PFMBA	ND	ng/L	3.1	0.74	1	07/02/25 13:30	07/03/25 13:12	863090-89-5	
PFMPA	ND	ng/L	3.1	0.60	1	07/02/25 13:30	07/03/25 13:12	377-73-1	
PFNS	ND	ng/L	1.5	0.45	1	07/02/25 13:30	07/03/25 13:12	68259-12-1	
PFOSA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 13:12	754-91-6	
PFPeA	ND	ng/L	3.1	0.92	1	07/02/25 13:30	07/03/25 13:12	2706-90-3	
PFPeS	ND	ng/L	1.5	0.36	1	07/02/25 13:30	07/03/25 13:12	2706-91-4	
PFDoA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 13:12	307-55-1	
PFHpA	ND	ng/L	1.5	0.59	1	07/02/25 13:30	07/03/25 13:12	375-85-9	
PFHxS	ND	ng/L	1.5	0.39	1	07/02/25 13:30	07/03/25 13:12	355-46-4	
PFNA	ND	ng/L	1.5	0.50	1	07/02/25 13:30	07/03/25 13:12	375-95-1	
PFOS	ND	ng/L	1.5	0.38	1	07/02/25 13:30	07/03/25 13:12	1763-23-1	
PFOA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 13:12	335-67-1	
PFTeDA	ND	ng/L	1.5	0.40	1	07/02/25 13:30	07/03/25 13:12	376-06-7	
PFTrDA	ND	ng/L	1.5	0.44	1	07/02/25 13:30	07/03/25 13:12	72629-94-8	
PFUnA	ND	ng/L	1.5	0.34	1	07/02/25 13:30	07/03/25 13:12	2058-94-8	
Surrogates									
13C2-PFDoA (S)	46	%.	10-130		1	07/02/25 13:30	07/03/25 13:12		
13C3HFPO-DA (S)	43	%.	40-130		1	07/02/25 13:30	07/03/25 13:12		
13C3-PFBS (S)	44	%.	40-135		1	07/02/25 13:30	07/03/25 13:12		
13C3-PFHxS (S)	42	%.	40-130		1	07/02/25 13:30	07/03/25 13:12		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802156

Sample: FB-5-P **Lab ID: 92802156002** Collected: 06/11/25 10:00 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C4-PFBA (S)	45	%.	5-130		1	07/02/25 13:30	07/03/25 13:12		
13C4-PFHpA (S)	41	%.	40-130		1	07/02/25 13:30	07/03/25 13:12		
13C5-PFHxA (S)	42	%.	40-130		1	07/02/25 13:30	07/03/25 13:12		
13C5-PFPeA (S)	44	%.	40-130		1	07/02/25 13:30	07/03/25 13:12		
13C6-PFDA (S)	42	%.	40-130		1	07/02/25 13:30	07/03/25 13:12		
13C8-PFOA (S)	43	%.	40-130		1	07/02/25 13:30	07/03/25 13:12		
13C8-PFOS (S)	40	%.	40-130		1	07/02/25 13:30	07/03/25 13:12		
13C8-PFOSA (S)	36	%.	40-130		1	07/02/25 13:30	07/03/25 13:12		S0
13C9-PFNA (S)	40	%.	40-130		1	07/02/25 13:30	07/03/25 13:12		
d3-MeFOSAA (S)	40	%.	40-170		1	07/02/25 13:30	07/03/25 13:12		
d3-NMeFOSA (S)	30	%.	10-130		1	07/02/25 13:30	07/03/25 13:12		
d5-EtFOSAA (S)	41	%.	25-135		1	07/02/25 13:30	07/03/25 13:12		
d5-NEtFOSA (S)	31	%.	10-130		1	07/02/25 13:30	07/03/25 13:12		
d7-NMeFOSE (S)	37	%.	10-130		1	07/02/25 13:30	07/03/25 13:12		
d9-NEtFOSE (S)	38	%.	10-130		1	07/02/25 13:30	07/03/25 13:12		
13C2-PFTA (S)	49	%.	10-130		1	07/02/25 13:30	07/03/25 13:12		
13C7-PFUdA (S)	45	%.	30-130		1	07/02/25 13:30	07/03/25 13:12		
13C24:2FTS (S)	52	%.	40-200		1	07/02/25 13:30	07/03/25 13:12		
13C26:2FTS (S)	44	%.	40-200		1	07/02/25 13:30	07/03/25 13:12		
13C28:2FTS (S)	45	%.	40-300		1	07/02/25 13:30	07/03/25 13:12		
13C3-PFPrA (S)	68	%.	5-130		1	07/02/25 13:30	07/03/25 13:12		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802156

Sample: GW-4-P **Lab ID: 92802156003** Collected: 06/11/25 11:10 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ng/L	6.1	1.9	1	07/02/25 13:30	07/03/25 13:23	763051-92-9	
3:3 FTCA	ND	ng/L	7.7	2.1	1	07/02/25 13:30	07/03/25 13:23	356-02-5	
4:2 FTS	ND	ng/L	6.1	1.5	1	07/02/25 13:30	07/03/25 13:23	757124-72-4	
5:3 FTCA	ND	ng/L	38.3	9.2	1	07/02/25 13:30	07/03/25 13:23	914637-49-3	
6:2 FTS	ND	ng/L	6.1	1.8	1	07/02/25 13:30	07/03/25 13:23	27619-97-2	
7:3 FTCA	ND	ng/L	38.3	10.9	1	07/02/25 13:30	07/03/25 13:23	812-70-4	
8:2 FTS	ND	ng/L	6.1	1.6	1	07/02/25 13:30	07/03/25 13:23	39108-34-4	
9Cl-PF3ONS	ND	ng/L	6.1	1.6	1	07/02/25 13:30	07/03/25 13:23	756426-58-1	
ADONA	ND	ng/L	6.1	1.8	1	07/02/25 13:30	07/03/25 13:23	919005-14-4	
HFPO-DA	ND	ng/L	6.1	1.7	1	07/02/25 13:30	07/03/25 13:23	13252-13-6	
NEtFOSAA	ND	ng/L	1.5	0.64	1	07/02/25 13:30	07/03/25 13:23	2991-50-6	
NEtFOSA	ND	ng/L	1.5	0.48	1	07/02/25 13:30	07/03/25 13:23	4151-50-2	
NEtFOSE	ND	ng/L	15.3	4.0	1	07/02/25 13:30	07/03/25 13:23	1691-99-2	
NFDHA	ND	ng/L	3.1	1.3	1	07/02/25 13:30	07/03/25 13:23	151772-58-6	
NMeFOSAA	ND	ng/L	1.5	0.48	1	07/02/25 13:30	07/03/25 13:23	2355-31-9	
NMeFOSA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 13:23	31506-32-8	
NMeFOSE	ND	ng/L	15.3	3.9	1	07/02/25 13:30	07/03/25 13:23	24448-09-7	
PFBS	**1.7**	ng/L	1.5	0.40	1	07/02/25 13:30	07/03/25 13:23	375-73-5	
PFDA	ND	ng/L	1.5	0.48	1	07/02/25 13:30	07/03/25 13:23	335-76-2	
PFHxA	ND	ng/L	1.5	0.37	1	07/02/25 13:30	07/03/25 13:23	307-24-4	
PFBA	ND	ng/L	6.1	1.5	1	07/02/25 13:30	07/03/25 13:23	375-22-4	
PFDS	ND	ng/L	1.5	0.66	1	07/02/25 13:30	07/03/25 13:23	335-77-3	
PFDoS	ND	ng/L	1.5	0.33	1	07/02/25 13:30	07/03/25 13:23	79780-39-5	
PFEESA	ND	ng/L	3.1	0.66	1	07/02/25 13:30	07/03/25 13:23	113507-82-7	
PFHpS	ND	ng/L	1.5	0.45	1	07/02/25 13:30	07/03/25 13:23	375-92-8	
PFMBA	ND	ng/L	3.1	0.74	1	07/02/25 13:30	07/03/25 13:23	863090-89-5	
PFMPA	ND	ng/L	3.1	0.60	1	07/02/25 13:30	07/03/25 13:23	377-73-1	
PFNS	ND	ng/L	1.5	0.45	1	07/02/25 13:30	07/03/25 13:23	68259-12-1	
PFOSA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 13:23	754-91-6	
PFPeA	ND	ng/L	3.1	0.91	1	07/02/25 13:30	07/03/25 13:23	2706-90-3	
PFPeS	**0.59J**	ng/L	1.5	0.36	1	07/02/25 13:30	07/03/25 13:23	2706-91-4	
PFDoA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 13:23	307-55-1	
PFHpA	ND	ng/L	1.5	0.59	1	07/02/25 13:30	07/03/25 13:23	375-85-9	
PFHxS	**0.48J**	ng/L	1.5	0.39	1	07/02/25 13:30	07/03/25 13:23	355-46-4	
PFNA	ND	ng/L	1.5	0.50	1	07/02/25 13:30	07/03/25 13:23	375-95-1	
PFOS	**0.44J**	ng/L	1.5	0.38	1	07/02/25 13:30	07/03/25 13:23	1763-23-1	
PFOA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 13:23	335-67-1	
PFTeDA	ND	ng/L	1.5	0.40	1	07/02/25 13:30	07/03/25 13:23	376-06-7	
PFTrDA	ND	ng/L	1.5	0.43	1	07/02/25 13:30	07/03/25 13:23	72629-94-8	
PFUnA	ND	ng/L	1.5	0.34	1	07/02/25 13:30	07/03/25 13:23	2058-94-8	
Surrogates									
13C2-PFDoA (S)	74	%.	10-130		1	07/02/25 13:30	07/03/25 13:23		
13C3HFPO-DA (S)	79	%.	40-130		1	07/02/25 13:30	07/03/25 13:23		
13C3-PFBS (S)	77	%.	40-135		1	07/02/25 13:30	07/03/25 13:23		
13C3-PFHxS (S)	76	%.	40-130		1	07/02/25 13:30	07/03/25 13:23		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802156

Sample: GW-4-P **Lab ID: 92802156003** Collected: 06/11/25 11:10 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C4-PFBA (S)	81	%.	5-130		1	07/02/25 13:30	07/03/25 13:23		
13C4-PFHpA (S)	78	%.	40-130		1	07/02/25 13:30	07/03/25 13:23		
13C5-PFHxA (S)	79	%.	40-130		1	07/02/25 13:30	07/03/25 13:23		
13C5-PFPeA (S)	77	%.	40-130		1	07/02/25 13:30	07/03/25 13:23		
13C6-PFDA (S)	78	%.	40-130		1	07/02/25 13:30	07/03/25 13:23		
13C8-PFOA (S)	82	%.	40-130		1	07/02/25 13:30	07/03/25 13:23		
13C8-PFOS (S)	81	%.	40-130		1	07/02/25 13:30	07/03/25 13:23		
13C8-PFOSA (S)	67	%.	40-130		1	07/02/25 13:30	07/03/25 13:23		
13C9-PFNA (S)	75	%.	40-130		1	07/02/25 13:30	07/03/25 13:23		
d3-MeFOSAA (S)	70	%.	40-170		1	07/02/25 13:30	07/03/25 13:23		
d3-NMeFOSA (S)	55	%.	10-130		1	07/02/25 13:30	07/03/25 13:23		
d5-EtFOSAA (S)	69	%.	25-135		1	07/02/25 13:30	07/03/25 13:23		
d5-NEtFOSA (S)	54	%.	10-130		1	07/02/25 13:30	07/03/25 13:23		
d7-NMeFOSE (S)	65	%.	10-130		1	07/02/25 13:30	07/03/25 13:23		
d9-NEtFOSE (S)	63	%.	10-130		1	07/02/25 13:30	07/03/25 13:23		
13C2-PFTA (S)	61	%.	10-130		1	07/02/25 13:30	07/03/25 13:23		
13C7-PFUdA (S)	80	%.	30-130		1	07/02/25 13:30	07/03/25 13:23		
13C24:2FTS (S)	111	%.	40-200		1	07/02/25 13:30	07/03/25 13:23		
13C26:2FTS (S)	113	%.	40-200		1	07/02/25 13:30	07/03/25 13:23		
13C28:2FTS (S)	103	%.	40-300		1	07/02/25 13:30	07/03/25 13:23		
13C3-PFPrA (S)	28	%.	5-130		1	07/02/25 13:30	07/03/25 13:23		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802156

Sample: GW-3-P **Lab ID: 92802156004** Collected: 06/11/25 12:45 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ng/L	6.3	1.9	1	07/02/25 13:30	07/03/25 13:33	763051-92-9	
3:3 FTCA	ND	ng/L	7.9	2.2	1	07/02/25 13:30	07/03/25 13:33	356-02-5	
4:2 FTS	ND	ng/L	6.3	1.6	1	07/02/25 13:30	07/03/25 13:33	757124-72-4	
5:3 FTCA	ND	ng/L	39.6	9.5	1	07/02/25 13:30	07/03/25 13:33	914637-49-3	
6:2 FTS	ND	ng/L	6.3	1.8	1	07/02/25 13:30	07/03/25 13:33	27619-97-2	
7:3 FTCA	ND	ng/L	39.6	11.3	1	07/02/25 13:30	07/03/25 13:33	812-70-4	
8:2 FTS	ND	ng/L	6.3	1.6	1	07/02/25 13:30	07/03/25 13:33	39108-34-4	
9Cl-PF3ONS	ND	ng/L	6.3	1.7	1	07/02/25 13:30	07/03/25 13:33	756426-58-1	
ADONA	ND	ng/L	6.3	1.9	1	07/02/25 13:30	07/03/25 13:33	919005-14-4	
HFPO-DA	ND	ng/L	6.3	1.8	1	07/02/25 13:30	07/03/25 13:33	13252-13-6	
NEtFOSAA	ND	ng/L	1.6	0.66	1	07/02/25 13:30	07/03/25 13:33	2991-50-6	
NEtFOSA	ND	ng/L	1.6	0.50	1	07/02/25 13:30	07/03/25 13:33	4151-50-2	
NEtFOSE	ND	ng/L	15.8	4.1	1	07/02/25 13:30	07/03/25 13:33	1691-99-2	
NFDHA	ND	ng/L	3.2	1.3	1	07/02/25 13:30	07/03/25 13:33	151772-58-6	
NMeFOSAA	ND	ng/L	1.6	0.49	1	07/02/25 13:30	07/03/25 13:33	2355-31-9	
NMeFOSA	ND	ng/L	1.6	0.49	1	07/02/25 13:30	07/03/25 13:33	31506-32-8	
NMeFOSE	ND	ng/L	15.8	4.1	1	07/02/25 13:30	07/03/25 13:33	24448-09-7	
PFBS	**2.2**	ng/L	1.6	0.42	1	07/02/25 13:30	07/03/25 13:33	375-73-5	
PFDA	ND	ng/L	1.6	0.49	1	07/02/25 13:30	07/03/25 13:33	335-76-2	
PFHxA	**2.0**	ng/L	1.6	0.38	1	07/02/25 13:30	07/03/25 13:33	307-24-4	
PFBA	**4.5J**	ng/L	6.3	1.5	1	07/02/25 13:30	07/03/25 13:33	375-22-4	
PFDS	ND	ng/L	1.6	0.68	1	07/02/25 13:30	07/03/25 13:33	335-77-3	
PFDoS	ND	ng/L	1.6	0.34	1	07/02/25 13:30	07/03/25 13:33	79780-39-5	
PFEESA	ND	ng/L	3.2	0.68	1	07/02/25 13:30	07/03/25 13:33	113507-82-7	
PFHpS	ND	ng/L	1.6	0.46	1	07/02/25 13:30	07/03/25 13:33	375-92-8	
PFMBA	ND	ng/L	3.2	0.77	1	07/02/25 13:30	07/03/25 13:33	863090-89-5	
PFMPA	ND	ng/L	3.2	0.62	1	07/02/25 13:30	07/03/25 13:33	377-73-1	
PFNS	ND	ng/L	1.6	0.47	1	07/02/25 13:30	07/03/25 13:33	68259-12-1	
PFOSA	ND	ng/L	1.6	0.48	1	07/02/25 13:30	07/03/25 13:33	754-91-6	
PFPeA	**1.7J**	ng/L	3.2	0.94	1	07/02/25 13:30	07/03/25 13:33	2706-90-3	
PFPeS	**0.71J**	ng/L	1.6	0.37	1	07/02/25 13:30	07/03/25 13:33	2706-91-4	
PFDoA	ND	ng/L	1.6	0.48	1	07/02/25 13:30	07/03/25 13:33	307-55-1	
PFHpA	**2.4**	ng/L	1.6	0.61	1	07/02/25 13:30	07/03/25 13:33	375-85-9	
PFHxS	**6.3**	ng/L	1.6	0.41	1	07/02/25 13:30	07/03/25 13:33	355-46-4	
PFNA	ND	ng/L	1.6	0.52	1	07/02/25 13:30	07/03/25 13:33	375-95-1	
PFOS	**32.4**	ng/L	1.6	0.39	1	07/02/25 13:30	07/03/25 13:33	1763-23-1	
PFOA	**27.6**	ng/L	1.6	0.48	1	07/02/25 13:30	07/03/25 13:33	335-67-1	
PFTeDA	ND	ng/L	1.6	0.41	1	07/02/25 13:30	07/03/25 13:33	376-06-7	
PFTrDA	ND	ng/L	1.6	0.45	1	07/02/25 13:30	07/03/25 13:33	72629-94-8	
PFUnA	ND	ng/L	1.6	0.35	1	07/02/25 13:30	07/03/25 13:33	2058-94-8	
Surrogates									
13C2-PFDoA (S)	69	%.	10-130		1	07/02/25 13:30	07/03/25 13:33		
13C3HFPO-DA (S)	63	%.	40-130		1	07/02/25 13:30	07/03/25 13:33		
13C3-PFBS (S)	65	%.	40-135		1	07/02/25 13:30	07/03/25 13:33		
13C3-PFHxS (S)	62	%.	40-130		1	07/02/25 13:30	07/03/25 13:33		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802156

Sample: GW-3-P **Lab ID: 92802156004** Collected: 06/11/25 12:45 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C4-PFBA (S)	70	%.	5-130		1	07/02/25 13:30	07/03/25 13:33		
13C4-PFHpA (S)	66	%.	40-130		1	07/02/25 13:30	07/03/25 13:33		
13C5-PFHxA (S)	66	%.	40-130		1	07/02/25 13:30	07/03/25 13:33		
13C5-PFPeA (S)	62	%.	40-130		1	07/02/25 13:30	07/03/25 13:33		
13C6-PFDA (S)	68	%.	40-130		1	07/02/25 13:30	07/03/25 13:33		
13C8-PFOA (S)	67	%.	40-130		1	07/02/25 13:30	07/03/25 13:33		
13C8-PFOS (S)	69	%.	40-130		1	07/02/25 13:30	07/03/25 13:33		
13C8-PFOSA (S)	58	%.	40-130		1	07/02/25 13:30	07/03/25 13:33		
13C9-PFNA (S)	68	%.	40-130		1	07/02/25 13:30	07/03/25 13:33		
d3-MeFOSAA (S)	64	%.	40-170		1	07/02/25 13:30	07/03/25 13:33		
d3-NMeFOSA (S)	43	%.	10-130		1	07/02/25 13:30	07/03/25 13:33		
d5-EtFOSAA (S)	65	%.	25-135		1	07/02/25 13:30	07/03/25 13:33		
d5-NEtFOSA (S)	42	%.	10-130		1	07/02/25 13:30	07/03/25 13:33		
d7-NMeFOSE (S)	54	%.	10-130		1	07/02/25 13:30	07/03/25 13:33		
d9-NEtFOSE (S)	52	%.	10-130		1	07/02/25 13:30	07/03/25 13:33		
13C2-PFTA (S)	53	%.	10-130		1	07/02/25 13:30	07/03/25 13:33		
13C7-PFUdA (S)	75	%.	30-130		1	07/02/25 13:30	07/03/25 13:33		
13C24:2FTS (S)	93	%.	40-200		1	07/02/25 13:30	07/03/25 13:33		
13C26:2FTS (S)	122	%.	40-200		1	07/02/25 13:30	07/03/25 13:33		
13C28:2FTS (S)	116	%.	40-300		1	07/02/25 13:30	07/03/25 13:33		
13C3-PFPrA (S)	19	%.	5-130		1	07/02/25 13:30	07/03/25 13:33		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802156

Sample: EB-2-P **Lab ID: 92802156005** Collected: 06/11/25 14:30 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ng/L	6.1	1.9	1	07/02/25 13:30	07/07/25 15:20	763051-92-9	
3:3 FTCA	ND	ng/L	7.7	2.1	1	07/02/25 13:30	07/07/25 15:20	356-02-5	
4:2 FTS	ND	ng/L	6.1	1.5	1	07/02/25 13:30	07/07/25 15:20	757124-72-4	
5:3 FTCA	ND	ng/L	38.4	9.2	1	07/02/25 13:30	07/07/25 15:20	914637-49-3	
6:2 FTS	ND	ng/L	6.1	1.8	1	07/02/25 13:30	07/07/25 15:20	27619-97-2	
7:3 FTCA	ND	ng/L	38.4	10.9	1	07/02/25 13:30	07/07/25 15:20	812-70-4	
8:2 FTS	ND	ng/L	6.1	1.6	1	07/02/25 13:30	07/07/25 15:20	39108-34-4	
9Cl-PF3ONS	ND	ng/L	6.1	1.6	1	07/02/25 13:30	07/07/25 15:20	756426-58-1	
ADONA	ND	ng/L	6.1	1.8	1	07/02/25 13:30	07/07/25 15:20	919005-14-4	
HFPO-DA	ND	ng/L	6.1	1.7	1	07/02/25 13:30	07/07/25 15:20	13252-13-6	
NEtFOSAA	ND	ng/L	1.5	0.64	1	07/02/25 13:30	07/07/25 15:20	2991-50-6	
NEtFOSA	ND	ng/L	1.5	0.49	1	07/02/25 13:30	07/07/25 15:20	4151-50-2	
NEtFOSE	ND	ng/L	15.4	4.0	1	07/02/25 13:30	07/07/25 15:20	1691-99-2	
NFDHA	ND	ng/L	3.1	1.3	1	07/02/25 13:30	07/07/25 15:20	151772-58-6	
NMeFOSAA	ND	ng/L	1.5	0.48	1	07/02/25 13:30	07/07/25 15:20	2355-31-9	
NMeFOSA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/07/25 15:20	31506-32-8	
NMeFOSE	ND	ng/L	15.4	3.9	1	07/02/25 13:30	07/07/25 15:20	24448-09-7	
PFBS	ND	ng/L	1.5	0.40	1	07/02/25 13:30	07/07/25 15:20	375-73-5	
PFDA	ND	ng/L	1.5	0.48	1	07/02/25 13:30	07/07/25 15:20	335-76-2	
PFHxA	ND	ng/L	1.5	0.37	1	07/02/25 13:30	07/07/25 15:20	307-24-4	
PFBA	ND	ng/L	6.1	1.5	1	07/02/25 13:30	07/07/25 15:20	375-22-4	
PFDS	ND	ng/L	1.5	0.66	1	07/02/25 13:30	07/07/25 15:20	335-77-3	
PFDoS	ND	ng/L	1.5	0.33	1	07/02/25 13:30	07/07/25 15:20	79780-39-5	
PFEESA	ND	ng/L	3.1	0.66	1	07/02/25 13:30	07/07/25 15:20	113507-82-7	
PFHpS	ND	ng/L	1.5	0.45	1	07/02/25 13:30	07/07/25 15:20	375-92-8	
PFMBA	ND	ng/L	3.1	0.74	1	07/02/25 13:30	07/07/25 15:20	863090-89-5	
PFMPA	ND	ng/L	3.1	0.60	1	07/02/25 13:30	07/07/25 15:20	377-73-1	
PFNS	ND	ng/L	1.5	0.45	1	07/02/25 13:30	07/07/25 15:20	68259-12-1	
PFOSA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/07/25 15:20	754-91-6	
PFPeA	ND	ng/L	3.1	0.91	1	07/02/25 13:30	07/07/25 15:20	2706-90-3	
PFPeS	ND	ng/L	1.5	0.36	1	07/02/25 13:30	07/07/25 15:20	2706-91-4	
PFDoA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/07/25 15:20	307-55-1	
PFHpA	ND	ng/L	1.5	0.59	1	07/02/25 13:30	07/07/25 15:20	375-85-9	
PFHxS	ND	ng/L	1.5	0.39	1	07/02/25 13:30	07/07/25 15:20	355-46-4	
PFNA	ND	ng/L	1.5	0.50	1	07/02/25 13:30	07/07/25 15:20	375-95-1	
PFOS	**0.54J**	ng/L	1.5	0.38	1	07/02/25 13:30	07/07/25 15:20	1763-23-1	
PFOA	**0.54J**	ng/L	1.5	0.47	1	07/02/25 13:30	07/07/25 15:20	335-67-1	
PFTeDA	ND	ng/L	1.5	0.40	1	07/02/25 13:30	07/07/25 15:20	376-06-7	
PFTrDA	ND	ng/L	1.5	0.43	1	07/02/25 13:30	07/07/25 15:20	72629-94-8	
PFUnA	ND	ng/L	1.5	0.34	1	07/02/25 13:30	07/07/25 15:20	2058-94-8	
Surrogates									
13C2-PFDoA (S)	41	%.	10-130		1	07/02/25 13:30	07/07/25 15:20		
13C3HFPO-DA (S)	41	%.	40-130		1	07/02/25 13:30	07/07/25 15:20		
13C3-PFBS (S)	41	%.	40-135		1	07/02/25 13:30	07/07/25 15:20		
13C3-PFHxS (S)	40	%.	40-130		1	07/02/25 13:30	07/07/25 15:20		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802156

Sample: EB-2-P **Lab ID: 92802156005** Collected: 06/11/25 14:30 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C4-PFBA (S)	46	%.	5-130		1	07/02/25 13:30	07/07/25 15:20		
13C4-PFHpA (S)	40	%.	40-130		1	07/02/25 13:30	07/07/25 15:20		
13C5-PFHxA (S)	39	%.	40-130		1	07/02/25 13:30	07/07/25 15:20		S0
13C5-PFPeA (S)	42	%.	40-130		1	07/02/25 13:30	07/07/25 15:20		
13C6-PFDA (S)	39	%.	40-130		1	07/02/25 13:30	07/07/25 15:20		S0
13C8-PFOA (S)	39	%.	40-130		1	07/02/25 13:30	07/07/25 15:20		S0
13C8-PFOS (S)	38	%.	40-130		1	07/02/25 13:30	07/07/25 15:20		S0
13C8-PFOSA (S)	38	%.	40-130		1	07/02/25 13:30	07/07/25 15:20		S0
13C9-PFNA (S)	38	%.	40-130		1	07/02/25 13:30	07/07/25 15:20		S0
d3-MeFOSAA (S)	32	%.	40-170		1	07/02/25 13:30	07/07/25 15:20		S0
d3-NMeFOSA (S)	32	%.	10-130		1	07/02/25 13:30	07/07/25 15:20		
d5-EtFOSAA (S)	33	%.	25-135		1	07/02/25 13:30	07/07/25 15:20		
d5-NEtFOSA (S)	32	%.	10-130		1	07/02/25 13:30	07/07/25 15:20		
d7-NMeFOSE (S)	38	%.	10-130		1	07/02/25 13:30	07/07/25 15:20		
d9-NEtFOSE (S)	37	%.	10-130		1	07/02/25 13:30	07/07/25 15:20		
13C2-PFTA (S)	53	%.	10-130		1	07/02/25 13:30	07/07/25 15:20		
13C7-PFUdA (S)	43	%.	30-130		1	07/02/25 13:30	07/07/25 15:20		
13C24:2FTS (S)	38	%.	40-200		1	07/02/25 13:30	07/07/25 15:20		S0
13C26:2FTS (S)	43	%.	40-200		1	07/02/25 13:30	07/07/25 15:20		
13C28:2FTS (S)	48	%.	40-300		1	07/02/25 13:30	07/07/25 15:20		
13C3-PFPrA (S)	63	%.	5-130		1	07/02/25 13:30	07/07/25 15:20		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802156

Sample: GW-10-P **Lab ID: 92802156006** Collected: 06/11/25 14:55 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ng/L	6.2	1.9	1	07/02/25 13:30	07/03/25 13:53	763051-92-9	
3:3 FTCA	ND	ng/L	7.7	2.1	1	07/02/25 13:30	07/03/25 13:53	356-02-5	
4:2 FTS	ND	ng/L	6.2	1.5	1	07/02/25 13:30	07/03/25 13:53	757124-72-4	
5:3 FTCA	ND	ng/L	38.7	9.3	1	07/02/25 13:30	07/03/25 13:53	914637-49-3	
6:2 FTS	ND	ng/L	6.2	1.8	1	07/02/25 13:30	07/03/25 13:53	27619-97-2	
7:3 FTCA	ND	ng/L	38.7	11.0	1	07/02/25 13:30	07/03/25 13:53	812-70-4	
8:2 FTS	ND	ng/L	6.2	1.6	1	07/02/25 13:30	07/03/25 13:53	39108-34-4	
9Cl-PF3ONS	ND	ng/L	6.2	1.6	1	07/02/25 13:30	07/03/25 13:53	756426-58-1	
ADONA	ND	ng/L	6.2	1.8	1	07/02/25 13:30	07/03/25 13:53	919005-14-4	
HFPO-DA	ND	ng/L	6.2	1.7	1	07/02/25 13:30	07/03/25 13:53	13252-13-6	
NEtFOSAA	ND	ng/L	1.5	0.64	1	07/02/25 13:30	07/03/25 13:53	2991-50-6	
NEtFOSA	ND	ng/L	1.5	0.49	1	07/02/25 13:30	07/03/25 13:53	4151-50-2	
NEtFOSE	ND	ng/L	15.5	4.0	1	07/02/25 13:30	07/03/25 13:53	1691-99-2	
NFDHA	ND	ng/L	3.1	1.3	1	07/02/25 13:30	07/03/25 13:53	151772-58-6	
NMeFOSAA	ND	ng/L	1.5	0.48	1	07/02/25 13:30	07/03/25 13:53	2355-31-9	
NMeFOSA	ND	ng/L	1.5	0.48	1	07/02/25 13:30	07/03/25 13:53	31506-32-8	
NMeFOSE	ND	ng/L	15.5	4.0	1	07/02/25 13:30	07/03/25 13:53	24448-09-7	
PFBS	**1.2J**	ng/L	1.5	0.41	1	07/02/25 13:30	07/03/25 13:53	375-73-5	
PFDA	ND	ng/L	1.5	0.48	1	07/02/25 13:30	07/03/25 13:53	335-76-2	
PFHxA	**0.86J**	ng/L	1.5	0.37	1	07/02/25 13:30	07/03/25 13:53	307-24-4	
PFBA	**1.9J**	ng/L	6.2	1.5	1	07/02/25 13:30	07/03/25 13:53	375-22-4	
PFDS	ND	ng/L	1.5	0.67	1	07/02/25 13:30	07/03/25 13:53	335-77-3	
PFDoS	ND	ng/L	1.5	0.33	1	07/02/25 13:30	07/03/25 13:53	79780-39-5	
PFEESA	ND	ng/L	3.1	0.67	1	07/02/25 13:30	07/03/25 13:53	113507-82-7	
PFHpS	ND	ng/L	1.5	0.45	1	07/02/25 13:30	07/03/25 13:53	375-92-8	
PFMBA	ND	ng/L	3.1	0.75	1	07/02/25 13:30	07/03/25 13:53	863090-89-5	
PFMPA	ND	ng/L	3.1	0.60	1	07/02/25 13:30	07/03/25 13:53	377-73-1	
PFNS	ND	ng/L	1.5	0.46	1	07/02/25 13:30	07/03/25 13:53	68259-12-1	
PFOSA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 13:53	754-91-6	
PFPeA	ND	ng/L	3.1	0.92	1	07/02/25 13:30	07/03/25 13:53	2706-90-3	
PFPeS	**0.41J**	ng/L	1.5	0.37	1	07/02/25 13:30	07/03/25 13:53	2706-91-4	
PFDoA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 13:53	307-55-1	
PFHpA	ND	ng/L	1.5	0.60	1	07/02/25 13:30	07/03/25 13:53	375-85-9	
PFHxS	**0.84J**	ng/L	1.5	0.40	1	07/02/25 13:30	07/03/25 13:53	355-46-4	
PFNA	ND	ng/L	1.5	0.51	1	07/02/25 13:30	07/03/25 13:53	375-95-1	
PFOS	**1.9**	ng/L	1.5	0.38	1	07/02/25 13:30	07/03/25 13:53	1763-23-1	
PFOA	**2.6**	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 13:53	335-67-1	
PFTeDA	ND	ng/L	1.5	0.40	1	07/02/25 13:30	07/03/25 13:53	376-06-7	
PFTrDA	ND	ng/L	1.5	0.44	1	07/02/25 13:30	07/03/25 13:53	72629-94-8	
PFUnA	ND	ng/L	1.5	0.34	1	07/02/25 13:30	07/03/25 13:53	2058-94-8	
Surrogates									
13C2-PFDoA (S)	54	%.	10-130		1	07/02/25 13:30	07/03/25 13:53		
13C3HFPO-DA (S)	60	%.	40-130		1	07/02/25 13:30	07/03/25 13:53		
13C3-PFBS (S)	61	%.	40-135		1	07/02/25 13:30	07/03/25 13:53		
13C3-PFHxS (S)	58	%.	40-130		1	07/02/25 13:30	07/03/25 13:53		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802156

Sample: GW-10-P **Lab ID: 92802156006** Collected: 06/11/25 14:55 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C4-PFBA (S)	60	%.	5-130		1	07/02/25 13:30	07/03/25 13:53		
13C4-PFHpA (S)	58	%.	40-130		1	07/02/25 13:30	07/03/25 13:53		
13C5-PFHxA (S)	58	%.	40-130		1	07/02/25 13:30	07/03/25 13:53		
13C5-PFPeA (S)	60	%.	40-130		1	07/02/25 13:30	07/03/25 13:53		
13C6-PFDA (S)	59	%.	40-130		1	07/02/25 13:30	07/03/25 13:53		
13C8-PFOA (S)	59	%.	40-130		1	07/02/25 13:30	07/03/25 13:53		
13C8-PFOS (S)	58	%.	40-130		1	07/02/25 13:30	07/03/25 13:53		
13C8-PFOSA (S)	51	%.	40-130		1	07/02/25 13:30	07/03/25 13:53		
13C9-PFNA (S)	58	%.	40-130		1	07/02/25 13:30	07/03/25 13:53		
d3-MeFOSAA (S)	50	%.	40-170		1	07/02/25 13:30	07/03/25 13:53		
d3-NMeFOSA (S)	39	%.	10-130		1	07/02/25 13:30	07/03/25 13:53		
d5-EtFOSAA (S)	52	%.	25-135		1	07/02/25 13:30	07/03/25 13:53		
d5-NEtFOSA (S)	39	%.	10-130		1	07/02/25 13:30	07/03/25 13:53		
d7-NMeFOSE (S)	47	%.	10-130		1	07/02/25 13:30	07/03/25 13:53		
d9-NEtFOSE (S)	46	%.	10-130		1	07/02/25 13:30	07/03/25 13:53		
13C2-PFTA (S)	48	%.	10-130		1	07/02/25 13:30	07/03/25 13:53		
13C7-PFUdA (S)	64	%.	30-130		1	07/02/25 13:30	07/03/25 13:53		
13C24:2FTS (S)	57	%.	40-200		1	07/02/25 13:30	07/03/25 13:53		
13C26:2FTS (S)	63	%.	40-200		1	07/02/25 13:30	07/03/25 13:53		
13C28:2FTS (S)	66	%.	40-300		1	07/02/25 13:30	07/03/25 13:53		
13C3-PFPrA (S)	55	%.	5-130		1	07/02/25 13:30	07/03/25 13:53		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802156

Sample: DUP-2-P **Lab ID: 92802156007** Collected: 06/11/25 00:00 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
11Cl-PF3OUdS	ND	ng/L	6.1	1.9	1	07/02/25 13:30	07/03/25 14:03	763051-92-9	
3:3 FTCA	ND	ng/L	7.7	2.1	1	07/02/25 13:30	07/03/25 14:03	356-02-5	
4:2 FTS	ND	ng/L	6.1	1.5	1	07/02/25 13:30	07/03/25 14:03	757124-72-4	
5:3 FTCA	ND	ng/L	38.3	9.2	1	07/02/25 13:30	07/03/25 14:03	914637-49-3	
6:2 FTS	ND	ng/L	6.1	1.8	1	07/02/25 13:30	07/03/25 14:03	27619-97-2	
7:3 FTCA	ND	ng/L	38.3	10.9	1	07/02/25 13:30	07/03/25 14:03	812-70-4	
8:2 FTS	ND	ng/L	6.1	1.6	1	07/02/25 13:30	07/03/25 14:03	39108-34-4	
9Cl-PF3ONS	ND	ng/L	6.1	1.6	1	07/02/25 13:30	07/03/25 14:03	756426-58-1	
ADONA	ND	ng/L	6.1	1.8	1	07/02/25 13:30	07/03/25 14:03	919005-14-4	
HFPO-DA	ND	ng/L	6.1	1.7	1	07/02/25 13:30	07/03/25 14:03	13252-13-6	
NEtFOSAA	ND	ng/L	1.5	0.64	1	07/02/25 13:30	07/03/25 14:03	2991-50-6	
NEtFOSA	ND	ng/L	1.5	0.48	1	07/02/25 13:30	07/03/25 14:03	4151-50-2	
NEtFOSE	ND	ng/L	15.3	4.0	1	07/02/25 13:30	07/03/25 14:03	1691-99-2	
NFDHA	ND	ng/L	3.1	1.3	1	07/02/25 13:30	07/03/25 14:03	151772-58-6	
NMeFOSAA	ND	ng/L	1.5	0.48	1	07/02/25 13:30	07/03/25 14:03	2355-31-9	
NMeFOSA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 14:03	31506-32-8	
NMeFOSE	ND	ng/L	15.3	3.9	1	07/02/25 13:30	07/03/25 14:03	24448-09-7	
PFBS	**1.7**	ng/L	1.5	0.40	1	07/02/25 13:30	07/03/25 14:03	375-73-5	
PFDA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 14:03	335-76-2	
PFHxA	ND	ng/L	1.5	0.37	1	07/02/25 13:30	07/03/25 14:03	307-24-4	
PFBA	ND	ng/L	6.1	1.5	1	07/02/25 13:30	07/03/25 14:03	375-22-4	
PFDS	ND	ng/L	1.5	0.66	1	07/02/25 13:30	07/03/25 14:03	335-77-3	
PFDoS	ND	ng/L	1.5	0.33	1	07/02/25 13:30	07/03/25 14:03	79780-39-5	
PFEESA	ND	ng/L	3.1	0.66	1	07/02/25 13:30	07/03/25 14:03	113507-82-7	
PFHpS	ND	ng/L	1.5	0.45	1	07/02/25 13:30	07/03/25 14:03	375-92-8	
PFMBA	ND	ng/L	3.1	0.74	1	07/02/25 13:30	07/03/25 14:03	863090-89-5	
PFMPA	ND	ng/L	3.1	0.59	1	07/02/25 13:30	07/03/25 14:03	377-73-1	
PFNS	ND	ng/L	1.5	0.45	1	07/02/25 13:30	07/03/25 14:03	68259-12-1	
PFOSA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 14:03	754-91-6	
PFPeA	ND	ng/L	3.1	0.91	1	07/02/25 13:30	07/03/25 14:03	2706-90-3	
PFPeS	**0.38J**	ng/L	1.5	0.36	1	07/02/25 13:30	07/03/25 14:03	2706-91-4	
PFDoA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 14:03	307-55-1	
PFHpA	ND	ng/L	1.5	0.59	1	07/02/25 13:30	07/03/25 14:03	375-85-9	
PFHxS	**0.55J**	ng/L	1.5	0.39	1	07/02/25 13:30	07/03/25 14:03	355-46-4	
PFNA	ND	ng/L	1.5	0.50	1	07/02/25 13:30	07/03/25 14:03	375-95-1	
PFOS	ND	ng/L	1.5	0.38	1	07/02/25 13:30	07/03/25 14:03	1763-23-1	
PFOA	ND	ng/L	1.5	0.47	1	07/02/25 13:30	07/03/25 14:03	335-67-1	
PFTeDA	ND	ng/L	1.5	0.40	1	07/02/25 13:30	07/03/25 14:03	376-06-7	
PFTrDA	ND	ng/L	1.5	0.43	1	07/02/25 13:30	07/03/25 14:03	72629-94-8	
PFUnA	ND	ng/L	1.5	0.34	1	07/02/25 13:30	07/03/25 14:03	2058-94-8	
Surrogates									
13C2-PFDoA (S)	66	%.	10-130		1	07/02/25 13:30	07/03/25 14:03		
13C3HFPO-DA (S)	70	%.	40-130		1	07/02/25 13:30	07/03/25 14:03		
13C3-PFBS (S)	70	%.	40-135		1	07/02/25 13:30	07/03/25 14:03		
13C3-PFHxS (S)	70	%.	40-130		1	07/02/25 13:30	07/03/25 14:03		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products
Pace Project No.: 92802156

Sample: DUP-2-P **Lab ID: 92802156007** Collected: 06/11/25 00:00 Received: 06/12/25 13:10 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
EPA 1633F Water	Analytical Method: EPA 1633 Preparation Method: EPA 1633 Pace Analytical Services - Minneapolis								
Surrogates									
13C4-PFBA (S)	74	%.	5-130		1	07/02/25 13:30	07/03/25 14:03		
13C4-PFHpA (S)	70	%.	40-130		1	07/02/25 13:30	07/03/25 14:03		
13C5-PFHxA (S)	71	%.	40-130		1	07/02/25 13:30	07/03/25 14:03		
13C5-PFPeA (S)	71	%.	40-130		1	07/02/25 13:30	07/03/25 14:03		
13C6-PFDA (S)	70	%.	40-130		1	07/02/25 13:30	07/03/25 14:03		
13C8-PFOA (S)	72	%.	40-130		1	07/02/25 13:30	07/03/25 14:03		
13C8-PFOS (S)	73	%.	40-130		1	07/02/25 13:30	07/03/25 14:03		
13C8-PFOSA (S)	61	%.	40-130		1	07/02/25 13:30	07/03/25 14:03		
13C9-PFNA (S)	70	%.	40-130		1	07/02/25 13:30	07/03/25 14:03		
d3-MeFOSAA (S)	63	%.	40-170		1	07/02/25 13:30	07/03/25 14:03		
d3-NMeFOSA (S)	46	%.	10-130		1	07/02/25 13:30	07/03/25 14:03		
d5-EtFOSAA (S)	64	%.	25-135		1	07/02/25 13:30	07/03/25 14:03		
d5-NEtFOSA (S)	43	%.	10-130		1	07/02/25 13:30	07/03/25 14:03		
d7-NMeFOSE (S)	57	%.	10-130		1	07/02/25 13:30	07/03/25 14:03		
d9-NEtFOSE (S)	56	%.	10-130		1	07/02/25 13:30	07/03/25 14:03		
13C2-PFTA (S)	56	%.	10-130		1	07/02/25 13:30	07/03/25 14:03		
13C7-PFUdA (S)	74	%.	30-130		1	07/02/25 13:30	07/03/25 14:03		
13C24:2FTS (S)	93	%.	40-200		1	07/02/25 13:30	07/03/25 14:03		
13C26:2FTS (S)	98	%.	40-200		1	07/02/25 13:30	07/03/25 14:03		
13C28:2FTS (S)	87	%.	40-300		1	07/02/25 13:30	07/03/25 14:03		
13C3-PFPrA (S)	26	%.	5-130		1	07/02/25 13:30	07/03/25 14:03		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802156

QC Batch: 1016049
QC Batch Method: EPA 1633
Analysis Method: EPA 1633
Analysis Description: EPA 1633F Water
Laboratory: Pace Analytical Services - Minneapolis
Associated Lab Samples: 92802156001, 92802156002, 92802156003, 92802156004, 92802156005, 92802156006, 92802156007

METHOD BLANK: 5296855 Matrix: Water
Associated Lab Samples: 92802156001, 92802156002, 92802156003, 92802156004, 92802156005, 92802156006, 92802156007

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
11Cl-PF3OUdS	ng/L	ND	6.4	1.9	07/03/25 10:10	
3:3 FTCA	ng/L	ND	8.0	2.2	07/03/25 10:10	
4:2 FTS	ng/L	ND	6.4	1.6	07/03/25 10:10	
5:3 FTCA	ng/L	ND	40.0	9.6	07/03/25 10:10	
6:2 FTS	ng/L	ND	6.4	1.8	07/03/25 10:10	
7:3 FTCA	ng/L	ND	40.0	11.4	07/03/25 10:10	
8:2 FTS	ng/L	ND	6.4	1.7	07/03/25 10:10	
9Cl-PF3ONS	ng/L	ND	6.4	1.7	07/03/25 10:10	
ADONA	ng/L	ND	6.4	1.9	07/03/25 10:10	
HFPO-DA	ng/L	ND	6.4	1.8	07/03/25 10:10	
NEtFOSA	ng/L	ND	1.6	0.51	07/03/25 10:10	
NEtFOSAA	ng/L	ND	1.6	0.66	07/03/25 10:10	
NEtFOSE	ng/L	ND	16.0	4.1	07/03/25 10:10	
NFDHA	ng/L	ND	3.2	1.3	07/03/25 10:10	
NMeFOSA	ng/L	ND	1.6	0.49	07/03/25 10:10	
NMeFOSAA	ng/L	ND	1.6	0.50	07/03/25 10:10	
NMeFOSE	ng/L	ND	16.0	4.1	07/03/25 10:10	
PFBA	ng/L	ND	6.4	1.6	07/03/25 10:10	
PFBS	ng/L	ND	1.6	0.42	07/03/25 10:10	
PFDA	ng/L	ND	1.6	0.50	07/03/25 10:10	
PFDoA	ng/L	ND	1.6	0.49	07/03/25 10:10	
PFDoS	ng/L	ND	1.6	0.34	07/03/25 10:10	
PFDS	ng/L	ND	1.6	0.69	07/03/25 10:10	
PFEESA	ng/L	ND	3.2	0.69	07/03/25 10:10	
PFHpA	ng/L	ND	1.6	0.62	07/03/25 10:10	
PFHpS	ng/L	ND	1.6	0.47	07/03/25 10:10	
PFHxA	ng/L	ND	1.6	0.38	07/03/25 10:10	
PFHxS	ng/L	ND	1.6	0.41	07/03/25 10:10	
PFMBA	ng/L	ND	3.2	0.78	07/03/25 10:10	
PFMPA	ng/L	ND	3.2	0.62	07/03/25 10:10	
PFNA	ng/L	ND	1.6	0.52	07/03/25 10:10	
PFNS	ng/L	ND	1.6	0.47	07/03/25 10:10	
PFOA	ng/L	ND	1.6	0.49	07/03/25 10:10	
PFOS	ng/L	ND	1.6	0.39	07/03/25 10:10	
PFOSA	ng/L	ND	1.6	0.49	07/03/25 10:10	
PFPeA	ng/L	ND	3.2	0.95	07/03/25 10:10	
PFPeS	ng/L	ND	1.6	0.38	07/03/25 10:10	
PFTeDA	ng/L	ND	1.6	0.41	07/03/25 10:10	
PFTrDA	ng/L	ND	1.6	0.45	07/03/25 10:10	
PFUnA	ng/L	ND	1.6	0.36	07/03/25 10:10	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802156

METHOD BLANK: 5296855 Matrix: Water
Associated Lab Samples: 92802156001, 92802156002, 92802156003, 92802156004, 92802156005, 92802156006, 92802156007

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
13C2-PFDoA (S)	%.	65	10-130		07/03/25 10:10	
13C2-PFTA (S)	%.	63	10-130		07/03/25 10:10	
13C24:2FTS (S)	%.	67	40-200		07/03/25 10:10	
13C26:2FTS (S)	%.	54	40-200		07/03/25 10:10	
13C28:2FTS (S)	%.	54	40-300		07/03/25 10:10	
13C3-PFBS (S)	%.	68	40-135		07/03/25 10:10	
13C3-PFHxS (S)	%.	65	40-130		07/03/25 10:10	
13C3-PFPrA (S)	%.	88	5-130		07/03/25 10:10	
13C3HFPO-DA (S)	%.	70	40-130		07/03/25 10:10	
13C4-PFBA (S)	%.	71	5-130		07/03/25 10:10	
13C4-PFHpA (S)	%.	68	40-130		07/03/25 10:10	
13C5-PFHxA (S)	%.	67	40-130		07/03/25 10:10	
13C5-PFPeA (S)	%.	70	40-130		07/03/25 10:10	
13C6-PFDA (S)	%.	69	40-130		07/03/25 10:10	
13C7-PFUdA (S)	%.	69	30-130		07/03/25 10:10	
13C8-PFOA (S)	%.	67	40-130		07/03/25 10:10	
13C8-PFOS (S)	%.	67	40-130		07/03/25 10:10	
13C8-PFOSA (S)	%.	60	40-130		07/03/25 10:10	
13C9-PFNA (S)	%.	66	40-130		07/03/25 10:10	
d3-MeFOSAA (S)	%.	58	40-170		07/03/25 10:10	
d3-NMeFOSA (S)	%.	53	10-130		07/03/25 10:10	
d5-EtFOSAA (S)	%.	56	25-135		07/03/25 10:10	
d5-NEtFOSA (S)	%.	55	10-130		07/03/25 10:10	
d7-NMeFOSE (S)	%.	59	10-130		07/03/25 10:10	
d9-NEtFOSE (S)	%.	59	10-130		07/03/25 10:10	

LABORATORY CONTROL SAMPLE: 5296856

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ng/L	75.2	80.2	107	55-160	
3:3 FTCA	ng/L	99.2	77.4	78	65-130	
4:2 FTS	ng/L	75.2	58.1	77	70-145	
5:3 FTCA	ng/L	496	395	80	70-135	
6:2 FTS	ng/L	76.8	61.0	79	65-155	
7:3 FTCA	ng/L	496	373	75	50-145	
8:2 FTS	ng/L	76.8	58.8	77	60-150	
9Cl-PF3ONS	ng/L	75.2	67.4	90	70-155	
ADONA	ng/L	75.2	61.4	82	65-145	
HFPO-DA	ng/L	80	64.3	80	70-140	
NEtFOSA	ng/L	19.2	16.3	85	65-145	
NEtFOSAA	ng/L	19.2	15.7	82	70-145	
NEtFOSE	ng/L	192	151	79	70-135	
NFDHA	ng/L	40	32.9	82	50-150	
NMeFOSA	ng/L	19.2	16.4	85	60-150	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802156

LABORATORY CONTROL SAMPLE: 5296856

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
NMeFOSAA	ng/L	19.2	14.9	78	50-140	
NMeFOSE	ng/L	192	157	82	70-145	
PFBA	ng/L	80	63.2	79	70-140	
PFBS	ng/L	17.6	13.9	79	60-145	
PFDA	ng/L	19.2	15.3	80	70-140	
PFDoA	ng/L	19.2	16.1	84	70-140	
PFDoS	ng/L	19.2	24.4	127	50-145	
PFDS	ng/L	19.2	19.0	99	60-145	
PFEESA	ng/L	35.2	29.0	82	70-140	
PFHpA	ng/L	19.2	16.1	84	70-150	
PFHpS	ng/L	19.2	15.0	78	70-150	
PFHxA	ng/L	19.2	15.9	83	70-145	
PFHxS	ng/L	17.6	13.9	79	65-145	
PFMBA	ng/L	40	31.1	78	60-150	
PFMPA	ng/L	40	31.7	79	55-140	
PFNA	ng/L	19.2	15.5	81	70-150	
PFNS	ng/L	19.2	16.7	87	65-145	
PFOA	ng/L	19.2	15.0	78	70-150	
PFOS	ng/L	19.2	15.0	78	55-150	
PFOSA	ng/L	19.2	15.4	80	70-145	
PFPeA	ng/L	40	31.7	79	65-135	
PFPeS	ng/L	19.2	14.7	77	65-140	
PFTeDA	ng/L	19.2	16.4	86	60-140	
PFTrDA	ng/L	19.2	20.2	105	65-140	
PFUnA	ng/L	19.2	15.3	80	70-145	
13C2-PFDoA (S)	%.			36	10-130	
13C2-PFTA (S)	%.			47	10-130	
13C24:2FTS (S)	%.			37	40-200	S0
13C26:2FTS (S)	%.			37	40-200	S0
13C28:2FTS (S)	%.			39	40-300	S0
13C3-PFBS (S)	%.			32	40-135	S0
13C3-PFHxS (S)	%.			30	40-130	S0
13C3-PFPrA (S)	%.			64	5-130	
13C3HFPO-DA (S)	%.			31	40-130	S0
13C4-PFBA (S)	%.			35	5-130	
13C4-PFHpA (S)	%.			29	40-130	S0
13C5-PFHxA (S)	%.			30	40-130	S0
13C5-PFPeA (S)	%.			32	40-130	S0
13C6-PFDA (S)	%.			31	40-130	S0
13C7-PFUdA (S)	%.			35	30-130	
13C8-PFOA (S)	%.			31	40-130	S0
13C8-PFOS (S)	%.			29	40-130	S0
13C8-PFOSA (S)	%.			30	40-130	S0
13C9-PFNA (S)	%.			29	40-130	S0
d3-MeFOSAA (S)	%.			30	40-170	S0
d3-NMeFOSA (S)	%.			24	10-130	
d5-EtFOSAA (S)	%.			30	25-135	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802156

LABORATORY CONTROL SAMPLE: 5296856

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
d5-NEtFOSA (S)	%.			23	10-130	
d7-NMeFOSE (S)	%.			28	10-130	
d9-NEtFOSE (S)	%.			27	10-130	

LABORATORY CONTROL SAMPLE: 5296857

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
11Cl-PF3OUdS	ng/L	12	9.5	79	55-160	
3:3 FTCA	ng/L	15.9	10.6	66	65-130	
4:2 FTS	ng/L	12	8.8	73	70-145	
5:3 FTCA	ng/L	79.4	65.3	82	70-135	
6:2 FTS	ng/L	12.3	9.1	74	65-155	
7:3 FTCA	ng/L	79.4	72.0	91	50-145	
8:2 FTS	ng/L	12.3	10.0	81	60-150	
9Cl-PF3ONS	ng/L	12	9.7	81	70-155	
ADONA	ng/L	12	9.6	80	65-145	
HFPO-DA	ng/L	12.8	9.5	74	70-140	
NEtFOSA	ng/L	3.1	2.2	73	65-145	
NEtFOSAA	ng/L	3.1	2.3	76	70-145	
NEtFOSE	ng/L	30.7	23.9	78	70-135	
NFDHA	ng/L	6.4	4.9	77	50-150	
NMeFOSA	ng/L	3.1	2.5	82	60-150	
NMeFOSAA	ng/L	3.1	2.3	76	50-140	
NMeFOSE	ng/L	30.7	24.4	79	70-145	
PFBA	ng/L	12.8	9.3	73	70-140	
PFBS	ng/L	2.8	2.0	70	60-145	
PFDA	ng/L	3.1	2.6	84	70-140	
PFDoA	ng/L	3.1	2.3	76	70-140	
PFDoS	ng/L	3.1	2.7	89	50-145	
PFDS	ng/L	3.1	2.4	79	60-145	
PFEESA	ng/L	5.6	4.1	73	70-140	
PFHpA	ng/L	3.1	2.4	77	70-150	
PFHpS	ng/L	3.1	2.4	77	70-150	
PFHxA	ng/L	3.1	2.5	81	70-145	
PFHxS	ng/L	2.8	2.2	77	65-145	
PFMBA	ng/L	6.4	4.5	71	60-150	
PFMPA	ng/L	6.4	4.6	71	55-140	
PFNA	ng/L	3.1	2.4	77	70-150	
PFNS	ng/L	3.1	2.7	88	65-145	
PFOA	ng/L	3.1	2.5	82	70-150	
PFOS	ng/L	3.1	2.2	73	55-150	
PFOSA	ng/L	3.1	2.4	78	70-145	
PFPeA	ng/L	6.4	4.8	75	65-135	
PFPeS	ng/L	3.1	2.3	75	65-140	
PFTeDA	ng/L	3.1	2.4	77	60-140	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products
Pace Project No.: 92802156

LABORATORY CONTROL SAMPLE: 5296857

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
PFTrDA	ng/L	3.1	2.4	79	65-140	
PFUnA	ng/L	3.1	2.3	76	70-145	
13C2-PFDoA (S)	%.			46	10-130	
13C2-PFTA (S)	%.			46	10-130	
13C24:2FTS (S)	%.			59	40-200	
13C26:2FTS (S)	%.			49	40-200	
13C28:2FTS (S)	%.			48	40-300	
13C3-PFBS (S)	%.			50	40-135	
13C3-PFHxS (S)	%.			42	40-130	
13C3-PFPrA (S)	%.			75	5-130	
13C3HFPO-DA (S)	%.			47	40-130	
13C4-PFBA (S)	%.			54	5-130	
13C4-PFHpA (S)	%.			43	40-130	
13C5-PFHxA (S)	%.			47	40-130	
13C5-PFPeA (S)	%.			52	40-130	
13C6-PFDA (S)	%.			44	40-130	
13C7-PFUdA (S)	%.			47	30-130	
13C8-PFOA (S)	%.			41	40-130	
13C8-PFOS (S)	%.			44	40-130	
13C8-PFOSA (S)	%.			44	40-130	
13C9-PFNA (S)	%.			44	40-130	
d3-MeFOSAA (S)	%.			49	40-170	
d3-NMeFOSA (S)	%.			34	10-130	
d5-EtFOSAA (S)	%.			49	25-135	
d5-NEtFOSA (S)	%.			33	10-130	
d7-NMeFOSE (S)	%.			36	10-130	
d9-NEtFOSE (S)	%.			33	10-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALIFIERS

Project: Fortress Wood Products
Pace Project No.: 92802156

DEFINITIONS

DF - Dilution Factor, if reported, represents the factor applied to the reported data due to dilution of the sample aliquot.

ND - Not Detected at or above adjusted reporting limit.

TNTC - Too Numerous To Count

J - Estimated concentration above the adjusted method detection limit and below the adjusted reporting limit.

MDL - Adjusted Method Detection Limit.

PQL - Practical Quantitation Limit.

RL - Reporting Limit - The lowest concentration value that meets project requirements for quantitative data with known precision and bias for a specific analyte in a specific matrix.

S - Surrogate

1,2-Diphenylhydrazine decomposes to and cannot be separated from Azobenzene using Method 8270. The result for each analyte is a combined concentration.

Consistent with EPA guidelines, unrounded data are displayed and have been used to calculate % recovery and RPD values.

LCS(D) - Laboratory Control Sample (Duplicate)

MS(D) - Matrix Spike (Duplicate)

DUP - Sample Duplicate

RPD - Relative Percent Difference

NC - Not Calculable.

SG - Silica Gel - Clean-Up

U - Indicates the compound was analyzed for, but not detected.

Acid preservation may not be appropriate for 2 Chloroethylvinyl ether.

A separate vial preserved to a pH of 4-5 is recommended in SW846 Chapter 4 for the analysis of Acrolein and Acrylonitrile by EPA Method 8260.

N-Nitrosodiphenylamine decomposes and cannot be separated from Diphenylamine using Method 8270. The result reported for each analyte is a combined concentration.

Reported results are not rounded until the final step prior to reporting. Therefore, calculated parameters that are typically reported as "Total" may vary slightly from the sum of the reported component parameters.

Pace Analytical is TNI accredited. Contact your Pace PM for the current list of accredited analytes.

TNI - The NELAC Institute.

ANALYTE QUALIFIERS

S0	Surrogate recovery outside laboratory control limits.

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA CROSS REFERENCE TABLE

Project: Fortress Wood Products
Pace Project No.: 92802156

Lab ID	Sample ID	QC Batch Method	QC Batch	Analytical Method	Analytical Batch
92802156001	**GW-5-P**	EPA 1633	1016049	EPA 1633	1016923
92802156002	**FB-5-P**	EPA 1633	1016049	EPA 1633	1016923
92802156003	**GW-4-P**	EPA 1633	1016049	EPA 1633	1016923
92802156004	**GW-3-P**	EPA 1633	1016049	EPA 1633	1016923
92802156005	**EB-2-P**	EPA 1633	1016049	EPA 1633	1016923
92802156006	**GW-10-P**	EPA 1633	1016049	EPA 1633	1016923
92802156007	**DUP-2-P**	EPA 1633	1016049	EPA 1633	1016923

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace

Effective Date: 05/24/2024

Laboratory receiving samples:
Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☑ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☐

Sample Condition Upon Receipt

Client Name: ECS Southeast

Project #: **WO# : 92802156**

92802156

Courier: ☐ Commercial ☐ Fed Ex ☑ Pace ☐ UPS ☐ USPS ☐ Other:____ ☐ Client

Custody Seal Present? ☐ Yes ☑ No Seals Intact? ☐ Yes ☑ No ☐ N/A

Date/Initials Person Examining Contents: LJ 6/12/25

Packing Material: ☑ Bubble Wrap ☐ Bubble Bags ☐ None ☑ Other

Biological Tissue Frozen? ☐ Yes ☐ No ☑ N/A

Thermometer: ☐ IR Gun ID: 92T078

Type of Ice: ☑ Wet ☐ Blue ☐ None

Cooler Temp: 3.6 Correction Factor: Add/Subtract (°C) 0

Temp should be above freezing to 6°C
☐ Samples out of temp criteria. Samples on ice, cooling process has begun

Cooler Temp Corrected (°C): 3.6

USDA Regulated Soil (☑ N/A, water sample)
Did samples originate in a quarantine zone within the United States CA, NY, or SC (check maps)? ☐ Yes ☑ No

Did samples originate from a foreign source (internationally, including Hawaii and Puerto Rico)? ☐ Yes ☑ No

				Comments/Discrepancy:
Chain of Custody Present?	☑ Yes	☐ No	☐ N/A	1.
Samples Arrived within Hold Time?	☑ Yes	☐ No	☐ N/A	2.
Short Hold Time Analysis (<72 hr.)?	☐ Yes	☑ No	☐ N/A	3.
Rush Turn Around Time Requested?	☐ Yes	☑ No	☐ N/A	4.
Sufficient Volume?	☑ Yes	☐ No	☐ N/A	5.
Correct Containers Used?	☑ Yes	☐ No	☐ N/A	6.
-Pace Containers Used?	☑ Yes	☐ No	☐ N/A	
Containers Intact?	☑ Yes	☐ No	☐ N/A	7
Dissolved analysis: Samples Field Filtered?	☐ Yes	☑ No	☐ N/A	8.
Sample Labels Match COC?	☑ Yes	☐ No	☐ N/A	9.
-Includes Date/Time/ID/Analysis Matrix: WT				
Headspace in VOA Vials (>5-6mm)?	☐ Yes	☑ No	☐ N/A	10.
Trip Blank Present?	☐ Yes	☑ No	☐ N/A	11.
Trip Blank Custody Seals Present?	☐ Yes	☐ No	☐ N/A	

COMMENTS/SAMPLE DISCREPANCY

Field Data Required? ☐ Yes ☐ No

Lot ID of split containers:

CLIENT NOTIFICATION/RESOLUTION

Person contacted: Date/Time:

Project Manager SCURF Review: Date:

Project Manager SRF Review: Date:

Effective Date: 05/24/2024

*Check mark top half of box if pH and/or dechlorination is verified and within the acceptance range for preservation samples.
Exceptions: VOA, Coliform, TOC, Oil and Grease, DRO/8015 (water) DOC, LLHg
**Bottom half of box is to list number of bottles
***Check all unpreserved Nitrates for chlorine

Project # **WO#: 92802156**
PM: AMB Due Date: 06/19/25
CLIENT: 92-ECS

Laboratory Receiving location: Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☑ Raleigh ☐ Mu

Client ECS Southeast Profile # 2 (Circle one) 3265815 Notes

Item#	BP4U-125 mL Plastic Unpreserved (N/A) (CL)	BP3U-250 mL Plastic Unpreserved (N/A)	BP2U-500 mL Plastic Unpreserved (N/A)	BP1U-1 liter Plastic Unpreserved (N/A)	BP4S-125 mL Plastic H2SO4 (pH < 2) (CL)	BP3N-250 mL plastic HNO3 (pH < 2)	BP4Z-125 mL Plastic Zn Acetate & NaOH (>9)	BP4B-125 mL Plastic NaOH (pH > 12) (CL)	VAGFU-Wide-mouthed Glass, jar Unpreserved	AG1U-1 liter Amber Unpreserved (N/A) (CL)	AG1H-1 liter Amber HCl (pH < 2)	AG3U-250 mL Amber Unpreserved (N/A) (CL)	AG1S-1 liter Amber H2SO4 (pH < 2)	AG3S-250 mL Amber H2SO4 (pH < 2)	DG9H-40 mL Amber HCl (N/A)(CL)	DG9H-40 mL VOA HCl (N/A)	VG9T-40 mL VOA Na2S2O3 (N/A)	VG9U-40 mL VOA Unpreserved (N/A)	DG9V-40 mL VOA H3PO4 (N/A)	KP7U-50 mL Plastic Unpreserved (N/A)	VGK (3 vials per kit)-VPH/Gas kit (N/A)	SP5T-125 mL Sterile Plastic (N/A - lab)	SP2T-250 mL Sterile Plastic (N/A - lab)		BP3R-250 mL Plastic (NH4)2SO4 (9 3 9 7)	AG0U-100 mL Amber Unpreserved (N/A) (CL)	VSGU-20 mL Scintillation vials (N/A)	UG9U-40 mL Amber Unpreserved vials (N/A)
CC					SI																							
1					2																							
2					2																							
3					2																							
4					2																							
5					2																							
6					2																							
7					2																							
8																												
9																												
10																												
11																												
12																												

pH Adjustment Log for Preserved Samples

Sample ID	Type of Preservative	pH upon receipt	Date preservation adjusted	Time preservation adjusted	Amount of Preservative added	Lot #

Note: Whenever there is a discrepancy affecting North Carolina compliance samples, a copy of this form will be sent to the North Carolina DENR Certification Office (i.e. Out of hold, incorrect preservative, out of temp, incorrect containers.

Pace® Location Requested (City/State):
Pace Analytical Charlotte
9800 Kincey Ave. Suite 100, Huntersville, NC 28078

CHAIN-OF-CUSTODY Analytical Request Document

Chain-of-Custody is a LEGAL DOCUMENT - Complete all relevant fields

LAB USE ONLY- Affix Workorder/Login Label Here

Scan QR Code for instructions

Company Name:	ECS Southeast, LLC-Charlotte	Contact/Report To:	Emery Lovekamp
Street Address:	1812 Center Park Drive Suite D Charlotte, NC 28217	Phone #:	704-525-5152
		E-Mail:	elovekamp@ecslimited.com
		Cc E-Mail:	
Customer Project #:	24413-C	Invoice To:	AP-ECS Charlotte
Project Name:	FORTRESS WOOD PRODUCTS	Invoice E-Mail:	ecs-49@ecslimited.com
Site Collection Info/Facility ID (as applicable):		Purchase Order # (if applicable):	NEED
		Quote #:	

Time Zone Collected: [ ] AK [ ] PT [ ] MT [ ] CT [X] ET

County / State origin of sample(s): North Carolina GUILFORD COUNTY

Data Deliverables: [ ] Level II [ ] Level III [ ] Level IV [ ] EQUIS [ ] Other

Regulatory Program (DW, RCRA, etc.) as applicable: BROWNFIELDS — Reportable [ ] Yes [ ] No

Rush (Pre-approval required): [ ] Same Day [ ] 1 Day [ ] 2 Day [ ] 3 Day [ ] Other _____

DW PWSID # or WW Permit # as applicable:

Date Results Requested: STANDARD

Field Filtered (if applicable): [ ] Yes [X] No

Analysis:

Specify Container Size **: 2

Identify Container Preservative Type***: 1

**Container Size: (1) 1L, (2) 500mL, (3) 250mL, (4) 125mL, (5) 100mL, (6) 40mL vial, (7) EnCore, (8) TerraCore, (9) 90mL, (10) Other

*** Preservative Types: (1) None, (2) HNO3, (3) H2SO4, (4) HCl, (5) NaOH, (6) Zn Acetate, (7) NaHSO4, (8) Sod. Thiosulfate, (9) Ascorbic Acid, (10) MeOH, (11) Other

Lab Use Only

Proj. Mgr: Angela Baioni

AcctNum / Client ID:

Table #:

Profile / Template: 18978

Prelog / Bottle Ord. ID: EZ 3265815

* Matrix Codes (insert in Matrix box below): Drinking Water (DW), Ground Water (GW), Waste Water (WW), Product (P), Soil/Solid (SS), Oil (OL), Wipe (WP), Tissue (TS), Bioassay (B), Vapor (V), Surface Water (SW), Sediment (SED), Sludge (SL), Caulk (CK), Leachate (LL), Biosolid (BS), Other (OT)

Customer Sample ID	Matrix *	Comp / Grab	Composite Start Date	Composite Start Time	Collected or Composite End Date	Collected or Composite End Time	# Cont.	Res. Chlorine Results	Res. Chlorine Units	~~8260B~~	~~8260 VOC+dry weight~~	~~8270 SVOC, 7196 hex chrome~~	~~PCB congeners (HRGC)~~	~~PFL Metals 6020/7471~~	~~RCRA Metals~~	PFAS 1633				Sample Comment	Preservation non conformance identified for sample.
GW-5_P	GW	G			6/11/25	0945	2									X					
FB-5_P	GW					1000	2									X					
GW-4_P	GW					1110	2									X					
GW-3_P	GW					1245	2									X					
EB-2_P	W					1430	2									X					
GW-10_P	GW					1455	2									X					
DUP-2_P	GW					—	2									X					

Additional Instructions from Pace®:

Collected By: (Printed Name) EMERY LOVEKAMP

Signature:

Customer Remarks / Special Conditions / Possible Hazards:

# Coolers:	Thermometer ID:	Correction Factor (°C):	Obs. Temp. (°C)	Corrected Temp. (°C)	On Ice:
1	92705		3.6	3.6	

	Date/Time:	Received by/Company: (Signature)	Date/Time:	Tracking Number:
Relinquished by/Company: (Signature) ECS	6/11/25 1510		6-12-25 09:55	
Relinquished by/Company: (Signature)	6-12-25 1310	Pace	6/12/25 13:10	Delivered by: [ ] In-Person [ ] Courier [ ] FedEX [ ] UPS [ ] Other
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Page: 5 of 5

Submitting a sample via this chain of custody constitutes acknowledgment and acceptance of the Pace® Terms and Conditions found at https://www.pacelabs.com/resource-library/resource/pace-terms-and-conditions/

ENV-FRM-CORQ-0019_v02_110123 ©

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

December 29, 2025

Emery Lovekamp
ECS Southeast, LLC-Charlotte
1812 Center Park Drive
Suite D
Charlotte, NC 28217

RE: Project: Fortress Wood Products II
Pace Project No.: 92833633

Dear Emery Lovekamp:

Enclosed are the analytical results for sample(s) received by the laboratory on December 09, 2025. The results relate only to the samples included in this report. Results reported herein conform to the applicable TNI/NELAC Standards and the laboratory's Quality Manual, where applicable, unless otherwise noted in the body of the report.

The test results provided in this final report were generated by each of the following laboratories within the Pace Network:

- Pace National - Mt. Juliet
- Pace Analytical Services - Charlotte

Revised 12/29/25 to include MDLs and applicable J values, per client request.

If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Travis Mullis
travis.mullis@pacelabs.com
(704)875-9092
Project Manager

Enclosures

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

CERTIFICATIONS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Pace Analytical Services National

12065 Lebanon Road, Mt. Juliet, TN 37122
Alabama Certification #: 40660
Alaska Certification 17-026
Arizona Certification #: AZ0612
Arkansas Certification #: 88-0469
California Certification #: 2932
Canada Certification #: 1461.01
Colorado Certification #: TN00003
Connecticut Certification #: PH-0197
DOD Certification: #1461.01
EPA# TN00003
Florida Certification #: E87487
Georgia DW Certification #: 923
Georgia Certification: NELAP
Idaho Certification #: TN00003
Illinois Certification #: 200008
Indiana Certification #: C-TN-01
Iowa Certification #: 364
Kansas Certification #: E-10277
Kentucky UST Certification #: 16
Kentucky Certification #: 90010
Louisiana Certification #: AI30792
Louisiana DW Certification #: LA180010
Maine Certification #: TN0002
Maryland Certification #: 324
Massachusetts Certification #: M-TN003
Michigan Certification #: 9958
Minnesota Certification #: 047-999-395
Mississippi Certification #: TN00003
Missouri Certification #: 340
Montana Certification #: CERT0086
Nebraska Certification #: NE-OS-15-05
Nevada Certification #: TN-03-2002-34
New Hampshire Certification #: 2975
New Jersey Certification #: TN002
New Mexico DW Certification
New York Certification #: 11742
North Carolina Aquatic Toxicity Certification #: 41
North Carolina Drinking Water Certification #: 21704
North Carolina Environmental Certificate #: 375
North Dakota Certification #: R-140
Ohio VAP Certification #: CL0069
Oklahoma Certification #: 9915
Oregon Certification #: TN200002
Pennsylvania Certification #: 68-02979
Rhode Island Certification #: LAO00356
South Carolina Certification #: 84004
South Dakota Certification
Tennessee DW/Chem/Micro Certification #: 2006
Texas Certification #: T 104704245-17-14
Texas Mold Certification #: LAB0152
USDA Soil Permit #: P330-15-00234
Utah Certification #: TN00003
Vermont Dept. of Health: ID# VT-2006
Virginia Certification #: VT2006
Virginia Certification #: 460132
Washington Certification #: C847
West Virginia Certification #: 233
Wisconsin Certification #: 998093910
Wyoming UST Certification #: via A2LA 2926.01
A2LA-ISO 17025 Certification #: 1461.01
A2LA-ISO 17025 Certification #: 1461.02
AIHA-LAP/LLC EMLAP Certification #:100789

Pace Analytical Services Charlotte

South Carolina Laboratory ID: 99006
9800 Kincey Ave. Ste 100, Huntersville, NC 28078
North Carolina Drinking Water Certification #: 37706
North Carolina Field Services Certification #: 5342
North Carolina Wastewater Certification #: 12
South Carolina Laboratory ID: 99006
South Carolina Certification #: 99006001
South Carolina Drinking Water Cert. #: 99006003
Florida/NELAP Certification #: E87627
Kentucky UST Certification #: 84
Louisiana DoH Drinking Water #: LA029
Virginia/VELAP Certification #: 460221

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE SUMMARY

Project: Fortress Wood Products II
Pace Project No.: 92833633

Lab ID	Sample ID	Matrix	Date Collected	Date Received
92833633001	**SW-3**	Water	12/05/25 12:15	12/09/25 12:00
92833633002	**SW-2**	Water	12/05/25 13:50	12/09/25 12:00
92833633003	**SW-1**	Water	12/05/25 14:25	12/09/25 12:00
92833633004	**SW-DUP**	Water	12/05/25 00:00	12/09/25 12:00
92833633005	**TB-4**	Water	11/25/25 00:00	12/09/25 12:00
92833633006	**SS-3**	Solid	12/05/25 13:00	12/09/25 12:00
92833633007	**SS-2**	Solid	12/05/25 13:55	12/09/25 12:00
92833633008	**SS-1**	Solid	12/05/25 14:35	12/09/25 12:00
92833633009	**SS-DUP**	Solid	12/05/25 00:00	12/09/25 12:00

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE ANALYTE COUNT

Project: Fortress Wood Products II
Pace Project No.: 92833633

Lab ID	Sample ID	Method	Analysts	Analytes Reported	Laboratory
92833633001	**SW-3**	EPA 6020B	TMT	14	PAN
		EPA 7470A	NDL	1	PAN
		EPA 8270E	PKS	74	PASI-C
		EPA 8260D	LMB	63	PASI-C
		SM2340-97	TMT	1	PAN
92833633002	**SW-2**	EPA 6020B	TMT	14	PAN
		EPA 7470A	NDL	1	PAN
		EPA 8270E	PKS	74	PASI-C
		EPA 8260D	LMB	63	PASI-C
		SM2340-97	TMT	1	PAN
92833633003	**SW-1**	EPA 6020B	TMT	14	PAN
		EPA 7470A	NDL	1	PAN
		EPA 8270E	PKS	74	PASI-C
		EPA 8260D	LMB	63	PASI-C
		SM2340-97	TMT	1	PAN
92833633004	**SW-DUP**	EPA 6020B	TMT	14	PAN
		EPA 7470A	NDL	1	PAN
		EPA 8270E	PKS	74	PASI-C
		EPA 8260D	LMB	63	PASI-C
		SM2340-97	TMT	1	PAN
92833633005	**TB-4**	EPA 8260D	TMH	63	PASI-C
92833633006	**SS-3**	EPA 7199	ARC	1	PASI-C
		EPA 6020B	TMT, UNP	12	PAN
		EPA 7471B	MDE	1	PAN
		EPA 8270E	PKS	75	PASI-C
		EPA 8260D	LMB	70	PASI-C
		SW-846	KDF	1	PASI-C
		SM 2540G	MT	1	PAN
92833633007	**SS-2**	EPA 7199	ARC	1	PASI-C
		EPA 6020B	TMT, UNP	12	PAN
		EPA 7471B	MDE	1	PAN
		EPA 8270E	PKS	75	PASI-C
		EPA 8260D	LMB	70	PASI-C
		SW-846	KDF	1	PASI-C
		SM 2540G	MT	1	PAN
92833633008	**SS-1**	EPA 7199	ARC	1	PASI-C
		EPA 6020B	TMT, UNP	12	PAN

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE ANALYTE COUNT

Project: Fortress Wood Products II
Pace Project No.: 92833633

Lab ID	Sample ID	Method	Analysts	Analytes Reported	Laboratory
		EPA 7471B	MDE	1	PAN
		EPA 8270E	PKS	75	PASI-C
		EPA 8260D	LMB	70	PASI-C
		SW-846	KDF	1	PASI-C
		SM 2540G	MT	1	PAN
92833633009	**SS-DUP**	EPA 7199	ARC	1	PASI-C
		EPA 6020B	TMT, UNP	12	PAN
		EPA 7471B	MDE	1	PAN
		EPA 8270E	PKS	75	PASI-C
		EPA 8260D	LMB	70	PASI-C
		SW-846	KDF	1	PASI-C
		SM 2540G	MT	1	PAN

PAN = Pace National - Mt. Juliet
PASI-C = Pace Analytical Services - Charlotte

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SW-3 **Lab ID: 92833633001** Collected: 12/05/25 12:15 Received: 12/09/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Metals (ICPMS) 6020B	Analytical Method: EPA 6020B Preparation Method: 3015 Pace National - Mt. Juliet								
Antimony	**0.364J**	ug/L	4.00	0.310	1	12/16/25 09:23	12/25/25 14:58	7440-36-0	J
Arsenic	**0.292J**	ug/L	2.00	0.120	1	12/16/25 09:23	12/25/25 14:58	7440-38-2	J
Beryllium	ND	ug/L	2.00	0.200	1	12/16/25 09:23	12/25/25 14:58	7440-41-7	
Cadmium	ND	ug/L	1.00	0.120	1	12/16/25 09:23	12/25/25 14:58	7440-43-9	
Calcium	**7490**	ug/L	1000	92.5	1	12/16/25 09:23	12/25/25 14:58	7440-70-2	
Chromium	**1.05J**	ug/L	2.00	0.900	1	12/16/25 09:23	12/25/25 14:58	7440-47-3	J
Copper	**5.89**	ug/L	5.00	0.700	1	12/16/25 09:23	12/25/25 14:58	7440-50-8	
Lead	**0.764J**	ug/L	2.00	0.500	1	12/16/25 09:23	12/25/25 14:58	7439-92-1	J
Magnesium	**1380**	ug/L	1000	82.7	1	12/16/25 09:23	12/25/25 14:58	7439-95-4	
Nickel	**1.08J**	ug/L	2.00	0.500	1	12/16/25 09:23	12/25/25 14:58	7440-02-0	J
Selenium	ND	ug/L	2.00	0.250	1	12/16/25 09:23	12/25/25 14:58	7782-49-2	
Silver	ND	ug/L	2.00	0.110	1	12/16/25 09:23	12/25/25 14:58	7440-22-4	
Thallium	ND	ug/L	2.00	0.130	1	12/16/25 09:23	12/25/25 14:58	7440-28-0	
Zinc	**29.1**	ug/L	25.0	4.00	1	12/16/25 09:23	12/25/25 14:58	7440-66-6	
Mercury 7470A	Analytical Method: EPA 7470A Preparation Method: 7470A Pace National - Mt. Juliet								
Mercury	ND	ug/L	0.200	0.0700	1	12/16/25 17:12	12/17/25 21:34	7439-97-6	
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Acenaphthene	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 13:44	83-32-9	
Acenaphthylene	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 13:44	208-96-8	
Aniline	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 13:44	62-53-3	
Anthracene	ND	ug/L	10.0	2.3	1	12/10/25 15:49	12/11/25 13:44	120-12-7	
Benzo(a)anthracene	ND	ug/L	10.0	2.7	1	12/10/25 15:49	12/11/25 13:44	56-55-3	1g
Benzo(a)pyrene	ND	ug/L	10.0	2.8	1	12/10/25 15:49	12/11/25 13:44	50-32-8	
Benzo(b)fluoranthene	ND	ug/L	10.0	2.6	1	12/10/25 15:49	12/11/25 13:44	205-99-2	
Benzo(g,h,i)perylene	ND	ug/L	10.0	2.8	1	12/10/25 15:49	12/11/25 13:44	191-24-2	1g
Benzo(k)fluoranthene	ND	ug/L	10.0	2.7	1	12/10/25 15:49	12/11/25 13:44	207-08-9	
Benzoic Acid	ND	ug/L	50.0	22.0	1	12/10/25 15:49	12/11/25 13:44	65-85-0	
Benzyl alcohol	ND	ug/L	20.0	2.9	1	12/10/25 15:49	12/11/25 13:44	100-51-6	
4-Bromophenylphenyl ether	ND	ug/L	10.0	1.8	1	12/10/25 15:49	12/11/25 13:44	101-55-3	
Butylbenzylphthalate	ND	ug/L	10.0	3.1	1	12/10/25 15:49	12/11/25 13:44	85-68-7	
4-Chloro-3-methylphenol	ND	ug/L	10.0	3.3	1	12/10/25 15:49	12/11/25 13:44	59-50-7	
4-Chloroaniline	ND	ug/L	20.0	3.6	1	12/10/25 15:49	12/11/25 13:44	106-47-8	
bis(2-Chloroethoxy)methane	ND	ug/L	10.0	1.8	1	12/10/25 15:49	12/11/25 13:44	111-91-1	
bis(2-Chloroethyl) ether	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 13:44	111-44-4	
2-Chloronaphthalene	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 13:44	91-58-7	
2-Chlorophenol	ND	ug/L	10.0	1.2	1	12/10/25 15:49	12/11/25 13:44	95-57-8	
4-Chlorophenylphenyl ether	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 13:44	7005-72-3	
Chrysene	ND	ug/L	10.0	2.8	1	12/10/25 15:49	12/11/25 13:44	218-01-9	
Dibenz(a,h)anthracene	ND	ug/L	10.0	3.0	1	12/10/25 15:49	12/11/25 13:44	53-70-3	
Dibenzofuran	ND	ug/L	10.0	2.1	1	12/10/25 15:49	12/11/25 13:44	132-64-9	
1,2-Dichlorobenzene	ND	ug/L	10.0	1.8	1	12/10/25 15:49	12/11/25 13:44	95-50-1	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SW-3 **Lab ID: 92833633001** Collected: 12/05/25 12:15 Received: 12/09/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
1,3-Dichlorobenzene	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 13:44	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 13:44	106-46-7	
3,3'-Dichlorobenzidine	ND	ug/L	20.0	8.1	1	12/10/25 15:49	12/11/25 13:44	91-94-1	
2,4-Dichlorophenol	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 13:44	120-83-2	
Diethylphthalate	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 13:44	84-66-2	
2,4-Dimethylphenol	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 13:44	105-67-9	
Dimethylphthalate	ND	ug/L	10.0	2.1	1	12/10/25 15:49	12/11/25 13:44	131-11-3	
Di-n-butylphthalate	ND	ug/L	10.0	2.2	1	12/10/25 15:49	12/11/25 13:44	84-74-2	
4,6-Dinitro-2-methylphenol	ND	ug/L	20.0	7.8	1	12/10/25 15:49	12/11/25 13:44	534-52-1	
2,4-Dinitrophenol	ND	ug/L	50.0	26.0	1	12/10/25 15:49	12/11/25 13:44	51-28-5	
2,4-Dinitrotoluene	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 13:44	121-14-2	
2,6-Dinitrotoluene	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 13:44	606-20-2	
Di-n-octylphthalate	ND	ug/L	10.0	3.9	1	12/10/25 15:49	12/11/25 13:44	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	ug/L	6.0	3.7	1	12/10/25 15:49	12/11/25 13:44	117-81-7	
Fluoranthene	ND	ug/L	10.0	2.2	1	12/10/25 15:49	12/11/25 13:44	206-44-0	
Fluorene	ND	ug/L	10.0	2.1	1	12/10/25 15:49	12/11/25 13:44	86-73-7	
Hexachloro-1,3-butadiene	ND	ug/L	10.0	1.8	1	12/10/25 15:49	12/11/25 13:44	87-68-3	
Hexachlorobenzene	ND	ug/L	10.0	2.2	1	12/10/25 15:49	12/11/25 13:44	118-74-1	
Hexachlorocyclopentadiene	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 13:44	77-47-4	
Hexachloroethane	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 13:44	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	ug/L	10.0	2.9	1	12/10/25 15:49	12/11/25 13:44	193-39-5	
Isophorone	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 13:44	78-59-1	
1-Methylnaphthalene	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 13:44	90-12-0	
2-Methylnaphthalene	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 13:44	91-57-6	
2-Methylphenol(o-Cresol)	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 13:44	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	ug/L	10.0	1.2	1	12/10/25 15:49	12/11/25 13:44	15831-10-4	
Naphthalene	ND	ug/L	10.0	2.1	1	12/10/25 15:49	12/11/25 13:44	91-20-3	
2-Nitroaniline	ND	ug/L	20.0	3.0	1	12/10/25 15:49	12/11/25 13:44	88-74-4	
3-Nitroaniline	ND	ug/L	20.0	3.8	1	12/10/25 15:49	12/11/25 13:44	99-09-2	
4-Nitroaniline	ND	ug/L	20.0	5.1	1	12/10/25 15:49	12/11/25 13:44	100-01-6	
Nitrobenzene	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 13:44	98-95-3	
2-Nitrophenol	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 13:44	88-75-5	
4-Nitrophenol	ND	ug/L	50.0	6.6	1	12/10/25 15:49	12/11/25 13:44	100-02-7	
N-Nitrosodimethylamine	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 13:44	62-75-9	
N-Nitroso-di-n-propylamine	ND	ug/L	10.0	1.3	1	12/10/25 15:49	12/11/25 13:44	621-64-7	
N-Nitrosodiphenylamine	ND	ug/L	10.0	3.0	1	12/10/25 15:49	12/11/25 13:44	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	ug/L	10.0	1.2	1	12/10/25 15:49	12/11/25 13:44	108-60-1	v1
Pentachlorophenol	ND	ug/L	20.0	3.8	1	12/10/25 15:49	12/11/25 13:44	87-86-5	
Phenanthrene	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 13:44	85-01-8	
Phenol	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 13:44	108-95-2	
Pyrene	ND	ug/L	10.0	2.2	1	12/10/25 15:49	12/11/25 13:44	129-00-0	
1,2,4-Trichlorobenzene	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 13:44	120-82-1	
2,4,5-Trichlorophenol	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 13:44	95-95-4	
2,4,6-Trichlorophenol	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 13:44	88-06-2	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SW-3 **Lab ID: 92833633001** Collected: 12/05/25 12:15 Received: 12/09/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Surrogates									
Nitrobenzene-d5 (S)	45	%	10-133		1	12/10/25 15:49	12/11/25 13:44	4165-60-0	
2-Fluorobiphenyl (S)	38	%	10-130		1	12/10/25 15:49	12/11/25 13:44	321-60-8	
Terphenyl-d14 (S)	96	%	10-193		1	12/10/25 15:49	12/11/25 13:44	1718-51-0	
Phenol-d6 (S)	23	%	10-130		1	12/10/25 15:49	12/11/25 13:44	13127-88-3	
2-Fluorophenol (S)	35	%	10-130		1	12/10/25 15:49	12/11/25 13:44	367-12-4	
2,4,6-Tribromophenol (S)	47	%	10-166		1	12/10/25 15:49	12/11/25 13:44	118-79-6	
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		12/11/25 19:55	67-64-1	
Benzene	ND	ug/L	1.0	0.34	1		12/11/25 19:55	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		12/11/25 19:55	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		12/11/25 19:55	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		12/11/25 19:55	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		12/11/25 19:55	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		12/11/25 19:55	74-83-9	IK
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		12/11/25 19:55	78-93-3	v2
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		12/11/25 19:55	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		12/11/25 19:55	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		12/11/25 19:55	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		12/11/25 19:55	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		12/11/25 19:55	74-87-3	
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		12/11/25 19:55	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		12/11/25 19:55	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		12/11/25 19:55	96-12-8	v2
Dibromochloromethane	ND	ug/L	1.0	0.36	1		12/11/25 19:55	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		12/11/25 19:55	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		12/11/25 19:55	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		12/11/25 19:55	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		12/11/25 19:55	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		12/11/25 19:55	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		12/11/25 19:55	75-71-8	v2
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		12/11/25 19:55	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		12/11/25 19:55	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		12/11/25 19:55	75-35-4	
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		12/11/25 19:55	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		12/11/25 19:55	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		12/11/25 19:55	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		12/11/25 19:55	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		12/11/25 19:55	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		12/11/25 19:55	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		12/11/25 19:55	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		12/11/25 19:55	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		12/11/25 19:55	108-20-3	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SW-3 **Lab ID: 92833633001** Collected: 12/05/25 12:15 Received: 12/09/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Ethylbenzene	ND	ug/L	1.0	0.30	1		12/11/25 19:55	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		12/11/25 19:55	87-68-3	
2-Hexanone	ND	ug/L	5.0	0.48	1		12/11/25 19:55	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		12/11/25 19:55	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		12/11/25 19:55	75-09-2	
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		12/11/25 19:55	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		12/11/25 19:55	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		12/11/25 19:55	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		12/11/25 19:55	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		12/11/25 19:55	630-20-6	
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		12/11/25 19:55	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		12/11/25 19:55	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		12/11/25 19:55	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		12/11/25 19:55	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		12/11/25 19:55	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		12/11/25 19:55	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		12/11/25 19:55	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		12/11/25 19:55	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		12/11/25 19:55	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		12/11/25 19:55	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		12/11/25 19:55	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		12/11/25 19:55	75-01-4	
Xylene (Total)	ND	ug/L	1.0	0.34	1		12/11/25 19:55	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		12/11/25 19:55	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		12/11/25 19:55	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	97	%	70-130		1		12/11/25 19:55	460-00-4	
1,2-Dichloroethane-d4 (S)	98	%	70-130		1		12/11/25 19:55	17060-07-0	
Toluene-d8 (S)	96	%	70-130		1		12/11/25 19:55	2037-26-5	
Calculated Results	Analytical Method: SM2340-97 Preparation Method: SM2340B Pace National - Mt. Juliet								
Hardness, Total(SM 2340B)	**24400**	ug/L	2500	231	1	12/25/25 14:58	12/25/25 14:58		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SW-2 **Lab ID: 92833633002** Collected: 12/05/25 13:50 Received: 12/09/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Metals (ICPMS) 6020B	Analytical Method: EPA 6020B Preparation Method: 3015 Pace National - Mt. Juliet								
Antimony	ND	ug/L	4.00	0.310	1	12/16/25 09:23	12/25/25 15:01	7440-36-0	
Arsenic	**0.557J**	ug/L	2.00	0.120	1	12/16/25 09:23	12/25/25 15:01	7440-38-2	J
Beryllium	ND	ug/L	2.00	0.200	1	12/16/25 09:23	12/25/25 15:01	7440-41-7	
Cadmium	ND	ug/L	1.00	0.120	1	12/16/25 09:23	12/25/25 15:01	7440-43-9	
Calcium	**12100**	ug/L	1000	92.5	1	12/16/25 09:23	12/25/25 15:01	7440-70-2	
Chromium	**1.33J**	ug/L	2.00	0.900	1	12/16/25 09:23	12/25/25 15:01	7440-47-3	J
Copper	**8.30**	ug/L	5.00	0.700	1	12/16/25 09:23	12/25/25 15:01	7440-50-8	
Lead	**0.843J**	ug/L	2.00	0.500	1	12/16/25 09:23	12/25/25 15:01	7439-92-1	J
Magnesium	**5600**	ug/L	1000	82.7	1	12/16/25 09:23	12/25/25 15:01	7439-95-4	
Nickel	**1.94J**	ug/L	2.00	0.500	1	12/16/25 09:23	12/25/25 15:01	7440-02-0	J
Selenium	ND	ug/L	2.00	0.250	1	12/16/25 09:23	12/25/25 15:01	7782-49-2	
Silver	ND	ug/L	2.00	0.110	1	12/16/25 09:23	12/25/25 15:01	7440-22-4	
Thallium	ND	ug/L	2.00	0.130	1	12/16/25 09:23	12/25/25 15:01	7440-28-0	
Zinc	**19.4J**	ug/L	25.0	4.00	1	12/16/25 09:23	12/25/25 15:01	7440-66-6	J
Mercury 7470A	Analytical Method: EPA 7470A Preparation Method: 7470A Pace National - Mt. Juliet								
Mercury	ND	ug/L	0.200	0.0700	1	12/16/25 17:12	12/17/25 21:37	7439-97-6	
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Acenaphthene	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 14:09	83-32-9	
Acenaphthylene	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 14:09	208-96-8	
Aniline	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 14:09	62-53-3	
Anthracene	ND	ug/L	10.0	2.3	1	12/10/25 15:49	12/11/25 14:09	120-12-7	
Benzo(a)anthracene	ND	ug/L	10.0	2.7	1	12/10/25 15:49	12/11/25 14:09	56-55-3	1g
Benzo(a)pyrene	ND	ug/L	10.0	2.8	1	12/10/25 15:49	12/11/25 14:09	50-32-8	
Benzo(b)fluoranthene	ND	ug/L	10.0	2.6	1	12/10/25 15:49	12/11/25 14:09	205-99-2	
Benzo(g,h,i)perylene	ND	ug/L	10.0	2.8	1	12/10/25 15:49	12/11/25 14:09	191-24-2	1g
Benzo(k)fluoranthene	ND	ug/L	10.0	2.7	1	12/10/25 15:49	12/11/25 14:09	207-08-9	
Benzoic Acid	ND	ug/L	50.0	22.0	1	12/10/25 15:49	12/11/25 14:09	65-85-0	
Benzyl alcohol	ND	ug/L	20.0	2.9	1	12/10/25 15:49	12/11/25 14:09	100-51-6	
4-Bromophenylphenyl ether	ND	ug/L	10.0	1.8	1	12/10/25 15:49	12/11/25 14:09	101-55-3	
Butylbenzylphthalate	ND	ug/L	10.0	3.1	1	12/10/25 15:49	12/11/25 14:09	85-68-7	
4-Chloro-3-methylphenol	ND	ug/L	10.0	3.3	1	12/10/25 15:49	12/11/25 14:09	59-50-7	
4-Chloroaniline	ND	ug/L	20.0	3.6	1	12/10/25 15:49	12/11/25 14:09	106-47-8	
bis(2-Chloroethoxy)methane	ND	ug/L	10.0	1.8	1	12/10/25 15:49	12/11/25 14:09	111-91-1	
bis(2-Chloroethyl) ether	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 14:09	111-44-4	
2-Chloronaphthalene	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 14:09	91-58-7	
2-Chlorophenol	ND	ug/L	10.0	1.2	1	12/10/25 15:49	12/11/25 14:09	95-57-8	
4-Chlorophenylphenyl ether	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 14:09	7005-72-3	
Chrysene	ND	ug/L	10.0	2.8	1	12/10/25 15:49	12/11/25 14:09	218-01-9	
Dibenz(a,h)anthracene	ND	ug/L	10.0	3.0	1	12/10/25 15:49	12/11/25 14:09	53-70-3	
Dibenzofuran	ND	ug/L	10.0	2.1	1	12/10/25 15:49	12/11/25 14:09	132-64-9	
1,2-Dichlorobenzene	ND	ug/L	10.0	1.8	1	12/10/25 15:49	12/11/25 14:09	95-50-1	

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SW-2 **Lab ID: 92833633002** Collected: 12/05/25 13:50 Received: 12/09/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
1,3-Dichlorobenzene	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 14:09	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 14:09	106-46-7	
3,3'-Dichlorobenzidine	ND	ug/L	20.0	8.1	1	12/10/25 15:49	12/11/25 14:09	91-94-1	
2,4-Dichlorophenol	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 14:09	120-83-2	
Diethylphthalate	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 14:09	84-66-2	
2,4-Dimethylphenol	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 14:09	105-67-9	
Dimethylphthalate	ND	ug/L	10.0	2.1	1	12/10/25 15:49	12/11/25 14:09	131-11-3	
Di-n-butylphthalate	ND	ug/L	10.0	2.2	1	12/10/25 15:49	12/11/25 14:09	84-74-2	
4,6-Dinitro-2-methylphenol	ND	ug/L	20.0	7.8	1	12/10/25 15:49	12/11/25 14:09	534-52-1	
2,4-Dinitrophenol	ND	ug/L	50.0	26.0	1	12/10/25 15:49	12/11/25 14:09	51-28-5	
2,4-Dinitrotoluene	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 14:09	121-14-2	
2,6-Dinitrotoluene	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 14:09	606-20-2	
Di-n-octylphthalate	ND	ug/L	10.0	3.9	1	12/10/25 15:49	12/11/25 14:09	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	ug/L	6.0	3.7	1	12/10/25 15:49	12/11/25 14:09	117-81-7	
Fluoranthene	ND	ug/L	10.0	2.2	1	12/10/25 15:49	12/11/25 14:09	206-44-0	
Fluorene	ND	ug/L	10.0	2.1	1	12/10/25 15:49	12/11/25 14:09	86-73-7	
Hexachloro-1,3-butadiene	ND	ug/L	10.0	1.8	1	12/10/25 15:49	12/11/25 14:09	87-68-3	
Hexachlorobenzene	ND	ug/L	10.0	2.2	1	12/10/25 15:49	12/11/25 14:09	118-74-1	
Hexachlorocyclopentadiene	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 14:09	77-47-4	
Hexachloroethane	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 14:09	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	ug/L	10.0	2.9	1	12/10/25 15:49	12/11/25 14:09	193-39-5	
Isophorone	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 14:09	78-59-1	
1-Methylnaphthalene	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 14:09	90-12-0	
2-Methylnaphthalene	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 14:09	91-57-6	
2-Methylphenol(o-Cresol)	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 14:09	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	ug/L	10.0	1.2	1	12/10/25 15:49	12/11/25 14:09	15831-10-4	
Naphthalene	ND	ug/L	10.0	2.1	1	12/10/25 15:49	12/11/25 14:09	91-20-3	
2-Nitroaniline	ND	ug/L	20.0	3.0	1	12/10/25 15:49	12/11/25 14:09	88-74-4	
3-Nitroaniline	ND	ug/L	20.0	3.8	1	12/10/25 15:49	12/11/25 14:09	99-09-2	
4-Nitroaniline	ND	ug/L	20.0	5.1	1	12/10/25 15:49	12/11/25 14:09	100-01-6	
Nitrobenzene	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 14:09	98-95-3	
2-Nitrophenol	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 14:09	88-75-5	
4-Nitrophenol	ND	ug/L	50.0	6.6	1	12/10/25 15:49	12/11/25 14:09	100-02-7	
N-Nitrosodimethylamine	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 14:09	62-75-9	
N-Nitroso-di-n-propylamine	ND	ug/L	10.0	1.3	1	12/10/25 15:49	12/11/25 14:09	621-64-7	
N-Nitrosodiphenylamine	ND	ug/L	10.0	3.0	1	12/10/25 15:49	12/11/25 14:09	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	ug/L	10.0	1.2	1	12/10/25 15:49	12/11/25 14:09	108-60-1	v1
Pentachlorophenol	ND	ug/L	20.0	3.8	1	12/10/25 15:49	12/11/25 14:09	87-86-5	
Phenanthrene	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 14:09	85-01-8	
Phenol	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 14:09	108-95-2	
Pyrene	ND	ug/L	10.0	2.2	1	12/10/25 15:49	12/11/25 14:09	129-00-0	
1,2,4-Trichlorobenzene	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 14:09	120-82-1	
2,4,5-Trichlorophenol	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 14:09	95-95-4	
2,4,6-Trichlorophenol	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 14:09	88-06-2	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SW-2 **Lab ID: 92833633002** Collected: 12/05/25 13:50 Received: 12/09/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Surrogates									
Nitrobenzene-d5 (S)	57	%	10-133		1	12/10/25 15:49	12/11/25 14:09	4165-60-0	
2-Fluorobiphenyl (S)	49	%	10-130		1	12/10/25 15:49	12/11/25 14:09	321-60-8	
Terphenyl-d14 (S)	86	%	10-193		1	12/10/25 15:49	12/11/25 14:09	1718-51-0	
Phenol-d6 (S)	31	%	10-130		1	12/10/25 15:49	12/11/25 14:09	13127-88-3	
2-Fluorophenol (S)	43	%	10-130		1	12/10/25 15:49	12/11/25 14:09	367-12-4	
2,4,6-Tribromophenol (S)	61	%	10-166		1	12/10/25 15:49	12/11/25 14:09	118-79-6	
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		12/11/25 20:13	67-64-1	
Benzene	ND	ug/L	1.0	0.34	1		12/11/25 20:13	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		12/11/25 20:13	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		12/11/25 20:13	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		12/11/25 20:13	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		12/11/25 20:13	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		12/11/25 20:13	74-83-9	IK
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		12/11/25 20:13	78-93-3	v2
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		12/11/25 20:13	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		12/11/25 20:13	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		12/11/25 20:13	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		12/11/25 20:13	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		12/11/25 20:13	74-87-3	
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		12/11/25 20:13	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		12/11/25 20:13	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		12/11/25 20:13	96-12-8	v2
Dibromochloromethane	ND	ug/L	1.0	0.36	1		12/11/25 20:13	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		12/11/25 20:13	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		12/11/25 20:13	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		12/11/25 20:13	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		12/11/25 20:13	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		12/11/25 20:13	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		12/11/25 20:13	75-71-8	v2
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		12/11/25 20:13	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		12/11/25 20:13	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		12/11/25 20:13	75-35-4	
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		12/11/25 20:13	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		12/11/25 20:13	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		12/11/25 20:13	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		12/11/25 20:13	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		12/11/25 20:13	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		12/11/25 20:13	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		12/11/25 20:13	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		12/11/25 20:13	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		12/11/25 20:13	108-20-3	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SW-2 **Lab ID: 92833633002** Collected: 12/05/25 13:50 Received: 12/09/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Ethylbenzene	ND	ug/L	1.0	0.30	1		12/11/25 20:13	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		12/11/25 20:13	87-68-3	
2-Hexanone	ND	ug/L	5.0	0.48	1		12/11/25 20:13	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		12/11/25 20:13	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		12/11/25 20:13	75-09-2	
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		12/11/25 20:13	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		12/11/25 20:13	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		12/11/25 20:13	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		12/11/25 20:13	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		12/11/25 20:13	630-20-6	
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		12/11/25 20:13	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		12/11/25 20:13	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		12/11/25 20:13	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		12/11/25 20:13	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		12/11/25 20:13	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		12/11/25 20:13	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		12/11/25 20:13	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		12/11/25 20:13	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		12/11/25 20:13	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		12/11/25 20:13	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		12/11/25 20:13	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		12/11/25 20:13	75-01-4	
Xylene (Total)	ND	ug/L	1.0	0.34	1		12/11/25 20:13	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		12/11/25 20:13	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		12/11/25 20:13	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	100	%	70-130		1		12/11/25 20:13	460-00-4	
1,2-Dichloroethane-d4 (S)	100	%	70-130		1		12/11/25 20:13	17060-07-0	
Toluene-d8 (S)	99	%	70-130		1		12/11/25 20:13	2037-26-5	
Calculated Results	Analytical Method: SM2340-97 Preparation Method: SM2340B Pace National - Mt. Juliet								
Hardness, Total(SM 2340B)	**53300**	ug/L	2500	231	1	12/25/25 15:01	12/25/25 15:01		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SW-1 **Lab ID: 92833633003** Collected: 12/05/25 14:25 Received: 12/09/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Metals (ICPMS) 6020B	Analytical Method: EPA 6020B Preparation Method: 3015 Pace National - Mt. Juliet								
Antimony	**0.318J**	ug/L	4.00	0.310	1	12/16/25 09:23	12/25/25 15:04	7440-36-0	J
Arsenic	**0.456J**	ug/L	2.00	0.120	1	12/16/25 09:23	12/25/25 15:04	7440-38-2	J
Beryllium	ND	ug/L	2.00	0.200	1	12/16/25 09:23	12/25/25 15:04	7440-41-7	
Cadmium	ND	ug/L	1.00	0.120	1	12/16/25 09:23	12/25/25 15:04	7440-43-9	
Calcium	**20600**	ug/L	1000	92.5	1	12/16/25 09:23	12/25/25 15:04	7440-70-2	
Chromium	**0.980J**	ug/L	2.00	0.900	1	12/16/25 09:23	12/25/25 15:04	7440-47-3	J
Copper	**3.50J**	ug/L	5.00	0.700	1	12/16/25 09:23	12/25/25 15:04	7440-50-8	J
Lead	ND	ug/L	2.00	0.500	1	12/16/25 09:23	12/25/25 15:04	7439-92-1	
Magnesium	**10900**	ug/L	1000	82.7	1	12/16/25 09:23	12/25/25 15:04	7439-95-4	
Nickel	**1.05J**	ug/L	2.00	0.500	1	12/16/25 09:23	12/25/25 15:04	7440-02-0	J
Selenium	ND	ug/L	2.00	0.250	1	12/16/25 09:23	12/25/25 15:04	7782-49-2	
Silver	ND	ug/L	2.00	0.110	1	12/16/25 09:23	12/25/25 15:04	7440-22-4	
Thallium	ND	ug/L	2.00	0.130	1	12/16/25 09:23	12/25/25 15:04	7440-28-0	
Zinc	**9.98J**	ug/L	25.0	4.00	1	12/16/25 09:23	12/25/25 15:04	7440-66-6	J
Mercury 7470A	Analytical Method: EPA 7470A Preparation Method: 7470A Pace National - Mt. Juliet								
Mercury	ND	ug/L	0.200	0.0700	1	12/16/25 17:12	12/17/25 21:39	7439-97-6	
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Acenaphthene	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 14:33	83-32-9	
Acenaphthylene	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 14:33	208-96-8	
Aniline	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 14:33	62-53-3	
Anthracene	ND	ug/L	10.0	2.3	1	12/10/25 15:49	12/11/25 14:33	120-12-7	
Benzo(a)anthracene	ND	ug/L	10.0	2.7	1	12/10/25 15:49	12/11/25 14:33	56-55-3	1g
Benzo(a)pyrene	ND	ug/L	10.0	2.8	1	12/10/25 15:49	12/11/25 14:33	50-32-8	
Benzo(b)fluoranthene	ND	ug/L	10.0	2.6	1	12/10/25 15:49	12/11/25 14:33	205-99-2	
Benzo(g,h,i)perylene	ND	ug/L	10.0	2.8	1	12/10/25 15:49	12/11/25 14:33	191-24-2	1g
Benzo(k)fluoranthene	ND	ug/L	10.0	2.7	1	12/10/25 15:49	12/11/25 14:33	207-08-9	
Benzoic Acid	ND	ug/L	50.0	22.0	1	12/10/25 15:49	12/11/25 14:33	65-85-0	
Benzyl alcohol	ND	ug/L	20.0	2.9	1	12/10/25 15:49	12/11/25 14:33	100-51-6	
4-Bromophenylphenyl ether	ND	ug/L	10.0	1.8	1	12/10/25 15:49	12/11/25 14:33	101-55-3	
Butylbenzylphthalate	ND	ug/L	10.0	3.1	1	12/10/25 15:49	12/11/25 14:33	85-68-7	
4-Chloro-3-methylphenol	ND	ug/L	10.0	3.3	1	12/10/25 15:49	12/11/25 14:33	59-50-7	
4-Chloroaniline	ND	ug/L	20.0	3.6	1	12/10/25 15:49	12/11/25 14:33	106-47-8	
bis(2-Chloroethoxy)methane	ND	ug/L	10.0	1.8	1	12/10/25 15:49	12/11/25 14:33	111-91-1	
bis(2-Chloroethyl) ether	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 14:33	111-44-4	
2-Chloronaphthalene	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 14:33	91-58-7	
2-Chlorophenol	ND	ug/L	10.0	1.2	1	12/10/25 15:49	12/11/25 14:33	95-57-8	
4-Chlorophenylphenyl ether	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 14:33	7005-72-3	
Chrysene	ND	ug/L	10.0	2.8	1	12/10/25 15:49	12/11/25 14:33	218-01-9	
Dibenz(a,h)anthracene	ND	ug/L	10.0	3.0	1	12/10/25 15:49	12/11/25 14:33	53-70-3	
Dibenzofuran	ND	ug/L	10.0	2.1	1	12/10/25 15:49	12/11/25 14:33	132-64-9	
1,2-Dichlorobenzene	ND	ug/L	10.0	1.8	1	12/10/25 15:49	12/11/25 14:33	95-50-1	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SW-1 **Lab ID: 92833633003** Collected: 12/05/25 14:25 Received: 12/09/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
1,3-Dichlorobenzene	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 14:33	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 14:33	106-46-7	
3,3'-Dichlorobenzidine	ND	ug/L	20.0	8.1	1	12/10/25 15:49	12/11/25 14:33	91-94-1	
2,4-Dichlorophenol	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 14:33	120-83-2	
Diethylphthalate	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 14:33	84-66-2	
2,4-Dimethylphenol	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 14:33	105-67-9	
Dimethylphthalate	ND	ug/L	10.0	2.1	1	12/10/25 15:49	12/11/25 14:33	131-11-3	
Di-n-butylphthalate	ND	ug/L	10.0	2.2	1	12/10/25 15:49	12/11/25 14:33	84-74-2	
4,6-Dinitro-2-methylphenol	ND	ug/L	20.0	7.8	1	12/10/25 15:49	12/11/25 14:33	534-52-1	
2,4-Dinitrophenol	ND	ug/L	50.0	26.0	1	12/10/25 15:49	12/11/25 14:33	51-28-5	
2,4-Dinitrotoluene	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 14:33	121-14-2	
2,6-Dinitrotoluene	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 14:33	606-20-2	
Di-n-octylphthalate	ND	ug/L	10.0	3.9	1	12/10/25 15:49	12/11/25 14:33	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	ug/L	6.0	3.7	1	12/10/25 15:49	12/11/25 14:33	117-81-7	
Fluoranthene	ND	ug/L	10.0	2.2	1	12/10/25 15:49	12/11/25 14:33	206-44-0	
Fluorene	ND	ug/L	10.0	2.1	1	12/10/25 15:49	12/11/25 14:33	86-73-7	
Hexachloro-1,3-butadiene	ND	ug/L	10.0	1.8	1	12/10/25 15:49	12/11/25 14:33	87-68-3	
Hexachlorobenzene	ND	ug/L	10.0	2.2	1	12/10/25 15:49	12/11/25 14:33	118-74-1	
Hexachlorocyclopentadiene	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 14:33	77-47-4	
Hexachloroethane	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 14:33	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	ug/L	10.0	2.9	1	12/10/25 15:49	12/11/25 14:33	193-39-5	
Isophorone	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 14:33	78-59-1	
1-Methylnaphthalene	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 14:33	90-12-0	
2-Methylnaphthalene	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 14:33	91-57-6	
2-Methylphenol(o-Cresol)	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 14:33	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	ug/L	10.0	1.2	1	12/10/25 15:49	12/11/25 14:33	15831-10-4	
Naphthalene	ND	ug/L	10.0	2.1	1	12/10/25 15:49	12/11/25 14:33	91-20-3	
2-Nitroaniline	ND	ug/L	20.0	3.0	1	12/10/25 15:49	12/11/25 14:33	88-74-4	
3-Nitroaniline	ND	ug/L	20.0	3.8	1	12/10/25 15:49	12/11/25 14:33	99-09-2	
4-Nitroaniline	ND	ug/L	20.0	5.1	1	12/10/25 15:49	12/11/25 14:33	100-01-6	
Nitrobenzene	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 14:33	98-95-3	
2-Nitrophenol	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 14:33	88-75-5	
4-Nitrophenol	ND	ug/L	50.0	6.6	1	12/10/25 15:49	12/11/25 14:33	100-02-7	
N-Nitrosodimethylamine	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 14:33	62-75-9	
N-Nitroso-di-n-propylamine	ND	ug/L	10.0	1.3	1	12/10/25 15:49	12/11/25 14:33	621-64-7	
N-Nitrosodiphenylamine	ND	ug/L	10.0	3.0	1	12/10/25 15:49	12/11/25 14:33	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	ug/L	10.0	1.2	1	12/10/25 15:49	12/11/25 14:33	108-60-1	v1
Pentachlorophenol	ND	ug/L	20.0	3.8	1	12/10/25 15:49	12/11/25 14:33	87-86-5	
Phenanthrene	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 14:33	85-01-8	
Phenol	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 14:33	108-95-2	
Pyrene	ND	ug/L	10.0	2.2	1	12/10/25 15:49	12/11/25 14:33	129-00-0	
1,2,4-Trichlorobenzene	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 14:33	120-82-1	
2,4,5-Trichlorophenol	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 14:33	95-95-4	
2,4,6-Trichlorophenol	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 14:33	88-06-2	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SW-1 **Lab ID: 92833633003** Collected: 12/05/25 14:25 Received: 12/09/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Surrogates									
Nitrobenzene-d5 (S)	63	%	10-133		1	12/10/25 15:49	12/11/25 14:33	4165-60-0	
2-Fluorobiphenyl (S)	54	%	10-130		1	12/10/25 15:49	12/11/25 14:33	321-60-8	
Terphenyl-d14 (S)	102	%	10-193		1	12/10/25 15:49	12/11/25 14:33	1718-51-0	
Phenol-d6 (S)	40	%	10-130		1	12/10/25 15:49	12/11/25 14:33	13127-88-3	
2-Fluorophenol (S)	50	%	10-130		1	12/10/25 15:49	12/11/25 14:33	367-12-4	
2,4,6-Tribromophenol (S)	71	%	10-166		1	12/10/25 15:49	12/11/25 14:33	118-79-6	
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		12/11/25 20:32	67-64-1	
Benzene	ND	ug/L	1.0	0.34	1		12/11/25 20:32	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		12/11/25 20:32	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		12/11/25 20:32	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		12/11/25 20:32	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		12/11/25 20:32	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		12/11/25 20:32	74-83-9	IK
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		12/11/25 20:32	78-93-3	v2
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		12/11/25 20:32	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		12/11/25 20:32	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		12/11/25 20:32	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		12/11/25 20:32	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		12/11/25 20:32	74-87-3	
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		12/11/25 20:32	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		12/11/25 20:32	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		12/11/25 20:32	96-12-8	v2
Dibromochloromethane	ND	ug/L	1.0	0.36	1		12/11/25 20:32	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		12/11/25 20:32	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		12/11/25 20:32	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		12/11/25 20:32	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		12/11/25 20:32	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		12/11/25 20:32	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		12/11/25 20:32	75-71-8	v2
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		12/11/25 20:32	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		12/11/25 20:32	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		12/11/25 20:32	75-35-4	
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		12/11/25 20:32	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		12/11/25 20:32	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		12/11/25 20:32	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		12/11/25 20:32	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		12/11/25 20:32	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		12/11/25 20:32	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		12/11/25 20:32	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		12/11/25 20:32	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		12/11/25 20:32	108-20-3	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SW-1 **Lab ID: 92833633003** Collected: 12/05/25 14:25 Received: 12/09/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Ethylbenzene	ND	ug/L	1.0	0.30	1		12/11/25 20:32	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		12/11/25 20:32	87-68-3	
2-Hexanone	ND	ug/L	5.0	0.48	1		12/11/25 20:32	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		12/11/25 20:32	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		12/11/25 20:32	75-09-2	
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		12/11/25 20:32	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		12/11/25 20:32	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		12/11/25 20:32	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		12/11/25 20:32	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		12/11/25 20:32	630-20-6	
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		12/11/25 20:32	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		12/11/25 20:32	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		12/11/25 20:32	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		12/11/25 20:32	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		12/11/25 20:32	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		12/11/25 20:32	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		12/11/25 20:32	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		12/11/25 20:32	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		12/11/25 20:32	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		12/11/25 20:32	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		12/11/25 20:32	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		12/11/25 20:32	75-01-4	
Xylene (Total)	ND	ug/L	1.0	0.34	1		12/11/25 20:32	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		12/11/25 20:32	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		12/11/25 20:32	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	98	%	70-130		1		12/11/25 20:32	460-00-4	
1,2-Dichloroethane-d4 (S)	101	%	70-130		1		12/11/25 20:32	17060-07-0	
Toluene-d8 (S)	97	%	70-130		1		12/11/25 20:32	2037-26-5	
Calculated Results	Analytical Method: SM2340-97 Preparation Method: SM2340B Pace National - Mt. Juliet								
Hardness, Total(SM 2340B)	**96200**	ug/L	2500	231	1	12/25/25 15:04	12/25/25 15:04		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SW-DUP **Lab ID: 92833633004** Collected: 12/05/25 00:00 Received: 12/09/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Metals (ICPMS) 6020B	Analytical Method: EPA 6020B Preparation Method: 3015 Pace National - Mt. Juliet								
Antimony	**0.346J**	ug/L	4.00	0.310	1	12/16/25 09:23	12/25/25 15:07	7440-36-0	J
Arsenic	**0.290J**	ug/L	2.00	0.120	1	12/16/25 09:23	12/25/25 15:07	7440-38-2	J
Beryllium	ND	ug/L	2.00	0.200	1	12/16/25 09:23	12/25/25 15:07	7440-41-7	
Cadmium	ND	ug/L	1.00	0.120	1	12/16/25 09:23	12/25/25 15:07	7440-43-9	
Calcium	**7900**	ug/L	1000	92.5	1	12/16/25 09:23	12/25/25 15:07	7440-70-2	
Chromium	**1.42J**	ug/L	2.00	0.900	1	12/16/25 09:23	12/25/25 15:07	7440-47-3	J
Copper	**6.21**	ug/L	5.00	0.700	1	12/16/25 09:23	12/25/25 15:07	7440-50-8	
Lead	**1.13J**	ug/L	2.00	0.500	1	12/16/25 09:23	12/25/25 15:07	7439-92-1	J
Magnesium	**1470**	ug/L	1000	82.7	1	12/16/25 09:23	12/25/25 15:07	7439-95-4	
Nickel	**1.36J**	ug/L	2.00	0.500	1	12/16/25 09:23	12/25/25 15:07	7440-02-0	J
Selenium	ND	ug/L	2.00	0.250	1	12/16/25 09:23	12/25/25 15:07	7782-49-2	
Silver	ND	ug/L	2.00	0.110	1	12/16/25 09:23	12/25/25 15:07	7440-22-4	
Thallium	ND	ug/L	2.00	0.130	1	12/16/25 09:23	12/25/25 15:07	7440-28-0	
Zinc	**29.4**	ug/L	25.0	4.00	1	12/16/25 09:23	12/25/25 15:07	7440-66-6	
Mercury 7470A	Analytical Method: EPA 7470A Preparation Method: 7470A Pace National - Mt. Juliet								
Mercury	ND	ug/L	0.200	0.0700	1	12/16/25 17:12	12/17/25 21:42	7439-97-6	
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Acenaphthene	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 14:58	83-32-9	
Acenaphthylene	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 14:58	208-96-8	
Aniline	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 14:58	62-53-3	
Anthracene	ND	ug/L	10.0	2.3	1	12/10/25 15:49	12/11/25 14:58	120-12-7	
Benzo(a)anthracene	ND	ug/L	10.0	2.7	1	12/10/25 15:49	12/11/25 14:58	56-55-3	1g
Benzo(a)pyrene	ND	ug/L	10.0	2.8	1	12/10/25 15:49	12/11/25 14:58	50-32-8	
Benzo(b)fluoranthene	ND	ug/L	10.0	2.6	1	12/10/25 15:49	12/11/25 14:58	205-99-2	
Benzo(g,h,i)perylene	ND	ug/L	10.0	2.8	1	12/10/25 15:49	12/11/25 14:58	191-24-2	1g
Benzo(k)fluoranthene	ND	ug/L	10.0	2.7	1	12/10/25 15:49	12/11/25 14:58	207-08-9	
Benzoic Acid	ND	ug/L	50.0	22.0	1	12/10/25 15:49	12/11/25 14:58	65-85-0	
Benzyl alcohol	ND	ug/L	20.0	2.9	1	12/10/25 15:49	12/11/25 14:58	100-51-6	
4-Bromophenylphenyl ether	ND	ug/L	10.0	1.8	1	12/10/25 15:49	12/11/25 14:58	101-55-3	
Butylbenzylphthalate	ND	ug/L	10.0	3.1	1	12/10/25 15:49	12/11/25 14:58	85-68-7	
4-Chloro-3-methylphenol	ND	ug/L	10.0	3.3	1	12/10/25 15:49	12/11/25 14:58	59-50-7	
4-Chloroaniline	ND	ug/L	20.0	3.6	1	12/10/25 15:49	12/11/25 14:58	106-47-8	
bis(2-Chloroethoxy)methane	ND	ug/L	10.0	1.8	1	12/10/25 15:49	12/11/25 14:58	111-91-1	
bis(2-Chloroethyl) ether	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 14:58	111-44-4	
2-Chloronaphthalene	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 14:58	91-58-7	
2-Chlorophenol	ND	ug/L	10.0	1.2	1	12/10/25 15:49	12/11/25 14:58	95-57-8	
4-Chlorophenylphenyl ether	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 14:58	7005-72-3	
Chrysene	ND	ug/L	10.0	2.8	1	12/10/25 15:49	12/11/25 14:58	218-01-9	
Dibenz(a,h)anthracene	ND	ug/L	10.0	3.0	1	12/10/25 15:49	12/11/25 14:58	53-70-3	
Dibenzofuran	ND	ug/L	10.0	2.1	1	12/10/25 15:49	12/11/25 14:58	132-64-9	
1,2-Dichlorobenzene	ND	ug/L	10.0	1.8	1	12/10/25 15:49	12/11/25 14:58	95-50-1	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SW-DUP **Lab ID: 92833633004** Collected: 12/05/25 00:00 Received: 12/09/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
1,3-Dichlorobenzene	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 14:58	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 14:58	106-46-7	
3,3'-Dichlorobenzidine	ND	ug/L	20.0	8.1	1	12/10/25 15:49	12/11/25 14:58	91-94-1	
2,4-Dichlorophenol	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 14:58	120-83-2	
Diethylphthalate	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 14:58	84-66-2	
2,4-Dimethylphenol	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 14:58	105-67-9	
Dimethylphthalate	ND	ug/L	10.0	2.1	1	12/10/25 15:49	12/11/25 14:58	131-11-3	
Di-n-butylphthalate	ND	ug/L	10.0	2.2	1	12/10/25 15:49	12/11/25 14:58	84-74-2	
4,6-Dinitro-2-methylphenol	ND	ug/L	20.0	7.8	1	12/10/25 15:49	12/11/25 14:58	534-52-1	
2,4-Dinitrophenol	ND	ug/L	50.0	26.0	1	12/10/25 15:49	12/11/25 14:58	51-28-5	
2,4-Dinitrotoluene	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 14:58	121-14-2	
2,6-Dinitrotoluene	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 14:58	606-20-2	
Di-n-octylphthalate	ND	ug/L	10.0	3.9	1	12/10/25 15:49	12/11/25 14:58	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	ug/L	6.0	3.7	1	12/10/25 15:49	12/11/25 14:58	117-81-7	
Fluoranthene	ND	ug/L	10.0	2.2	1	12/10/25 15:49	12/11/25 14:58	206-44-0	
Fluorene	ND	ug/L	10.0	2.1	1	12/10/25 15:49	12/11/25 14:58	86-73-7	
Hexachloro-1,3-butadiene	ND	ug/L	10.0	1.8	1	12/10/25 15:49	12/11/25 14:58	87-68-3	
Hexachlorobenzene	ND	ug/L	10.0	2.2	1	12/10/25 15:49	12/11/25 14:58	118-74-1	
Hexachlorocyclopentadiene	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 14:58	77-47-4	
Hexachloroethane	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 14:58	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	ug/L	10.0	2.9	1	12/10/25 15:49	12/11/25 14:58	193-39-5	
Isophorone	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 14:58	78-59-1	
1-Methylnaphthalene	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 14:58	90-12-0	
2-Methylnaphthalene	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 14:58	91-57-6	
2-Methylphenol(o-Cresol)	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 14:58	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	ug/L	10.0	1.2	1	12/10/25 15:49	12/11/25 14:58	15831-10-4	
Naphthalene	ND	ug/L	10.0	2.1	1	12/10/25 15:49	12/11/25 14:58	91-20-3	
2-Nitroaniline	ND	ug/L	20.0	3.0	1	12/10/25 15:49	12/11/25 14:58	88-74-4	
3-Nitroaniline	ND	ug/L	20.0	3.8	1	12/10/25 15:49	12/11/25 14:58	99-09-2	
4-Nitroaniline	ND	ug/L	20.0	5.1	1	12/10/25 15:49	12/11/25 14:58	100-01-6	
Nitrobenzene	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 14:58	98-95-3	
2-Nitrophenol	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 14:58	88-75-5	
4-Nitrophenol	ND	ug/L	50.0	6.6	1	12/10/25 15:49	12/11/25 14:58	100-02-7	
N-Nitrosodimethylamine	ND	ug/L	10.0	1.9	1	12/10/25 15:49	12/11/25 14:58	62-75-9	
N-Nitroso-di-n-propylamine	ND	ug/L	10.0	1.3	1	12/10/25 15:49	12/11/25 14:58	621-64-7	
N-Nitrosodiphenylamine	ND	ug/L	10.0	3.0	1	12/10/25 15:49	12/11/25 14:58	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	ug/L	10.0	1.2	1	12/10/25 15:49	12/11/25 14:58	108-60-1	v1
Pentachlorophenol	ND	ug/L	20.0	3.8	1	12/10/25 15:49	12/11/25 14:58	87-86-5	
Phenanthrene	ND	ug/L	10.0	2.0	1	12/10/25 15:49	12/11/25 14:58	85-01-8	
Phenol	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 14:58	108-95-2	
Pyrene	ND	ug/L	10.0	2.2	1	12/10/25 15:49	12/11/25 14:58	129-00-0	
1,2,4-Trichlorobenzene	ND	ug/L	10.0	1.7	1	12/10/25 15:49	12/11/25 14:58	120-82-1	
2,4,5-Trichlorophenol	ND	ug/L	10.0	1.4	1	12/10/25 15:49	12/11/25 14:58	95-95-4	
2,4,6-Trichlorophenol	ND	ug/L	10.0	1.6	1	12/10/25 15:49	12/11/25 14:58	88-06-2	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SW-DUP **Lab ID: 92833633004** Collected: 12/05/25 00:00 Received: 12/09/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E RVE	Analytical Method: EPA 8270E Preparation Method: EPA 3510C Pace Analytical Services - Charlotte								
Surrogates									
Nitrobenzene-d5 (S)	59	%	10-133		1	12/10/25 15:49	12/11/25 14:58	4165-60-0	
2-Fluorobiphenyl (S)	53	%	10-130		1	12/10/25 15:49	12/11/25 14:58	321-60-8	
Terphenyl-d14 (S)	103	%	10-193		1	12/10/25 15:49	12/11/25 14:58	1718-51-0	
Phenol-d6 (S)	35	%	10-130		1	12/10/25 15:49	12/11/25 14:58	13127-88-3	
2-Fluorophenol (S)	47	%	10-130		1	12/10/25 15:49	12/11/25 14:58	367-12-4	
2,4,6-Tribromophenol (S)	70	%	10-166		1	12/10/25 15:49	12/11/25 14:58	118-79-6	
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		12/11/25 20:50	67-64-1	
Benzene	ND	ug/L	1.0	0.34	1		12/11/25 20:50	71-43-2	
Bromobenzene	ND	ug/L	1.0	0.29	1		12/11/25 20:50	108-86-1	
Bromochloromethane	ND	ug/L	1.0	0.47	1		12/11/25 20:50	74-97-5	
Bromodichloromethane	ND	ug/L	1.0	0.31	1		12/11/25 20:50	75-27-4	
Bromoform	ND	ug/L	1.0	0.34	1		12/11/25 20:50	75-25-2	
Bromomethane	ND	ug/L	2.0	1.7	1		12/11/25 20:50	74-83-9	IK
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		12/11/25 20:50	78-93-3	v2
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		12/11/25 20:50	56-23-5	
Chlorobenzene	ND	ug/L	1.0	0.28	1		12/11/25 20:50	108-90-7	
Chloroethane	ND	ug/L	1.0	0.65	1		12/11/25 20:50	75-00-3	
Chloroform	ND	ug/L	1.0	0.43	1		12/11/25 20:50	67-66-3	
Chloromethane	ND	ug/L	1.0	0.54	1		12/11/25 20:50	74-87-3	
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		12/11/25 20:50	95-49-8	
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		12/11/25 20:50	106-43-4	
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		12/11/25 20:50	96-12-8	v2
Dibromochloromethane	ND	ug/L	1.0	0.36	1		12/11/25 20:50	124-48-1	
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		12/11/25 20:50	106-93-4	
Dibromomethane	ND	ug/L	1.0	0.39	1		12/11/25 20:50	74-95-3	
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		12/11/25 20:50	95-50-1	
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		12/11/25 20:50	541-73-1	
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		12/11/25 20:50	106-46-7	
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		12/11/25 20:50	75-71-8	v2
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		12/11/25 20:50	75-34-3	
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		12/11/25 20:50	107-06-2	
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		12/11/25 20:50	75-35-4	
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		12/11/25 20:50	156-59-2	
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		12/11/25 20:50	156-60-5	
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		12/11/25 20:50	78-87-5	
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		12/11/25 20:50	142-28-9	
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		12/11/25 20:50	594-20-7	
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		12/11/25 20:50	563-58-6	
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		12/11/25 20:50	10061-01-5	
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		12/11/25 20:50	10061-02-6	
Diisopropyl ether	ND	ug/L	1.0	0.31	1		12/11/25 20:50	108-20-3	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SW-DUP **Lab ID: 92833633004** Collected: 12/05/25 00:00 Received: 12/09/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Ethylbenzene	ND	ug/L	1.0	0.30	1		12/11/25 20:50	100-41-4	
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		12/11/25 20:50	87-68-3	
2-Hexanone	ND	ug/L	5.0	0.48	1		12/11/25 20:50	591-78-6	
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		12/11/25 20:50	99-87-6	
Methylene Chloride	ND	ug/L	5.0	2.0	1		12/11/25 20:50	75-09-2	
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		12/11/25 20:50	108-10-1	
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		12/11/25 20:50	1634-04-4	
Naphthalene	ND	ug/L	1.0	0.64	1		12/11/25 20:50	91-20-3	
Styrene	ND	ug/L	1.0	0.29	1		12/11/25 20:50	100-42-5	
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		12/11/25 20:50	630-20-6	
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		12/11/25 20:50	79-34-5	
Tetrachloroethene	ND	ug/L	1.0	0.29	1		12/11/25 20:50	127-18-4	
Toluene	ND	ug/L	1.0	0.24	1		12/11/25 20:50	108-88-3	
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		12/11/25 20:50	87-61-6	
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		12/11/25 20:50	120-82-1	
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		12/11/25 20:50	71-55-6	
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		12/11/25 20:50	79-00-5	
Trichloroethene	ND	ug/L	1.0	0.38	1		12/11/25 20:50	79-01-6	
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		12/11/25 20:50	75-69-4	
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		12/11/25 20:50	96-18-4	
Vinyl acetate	ND	ug/L	2.0	1.3	1		12/11/25 20:50	108-05-4	
Vinyl chloride	ND	ug/L	1.0	0.39	1		12/11/25 20:50	75-01-4	
Xylene (Total)	ND	ug/L	1.0	0.34	1		12/11/25 20:50	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		12/11/25 20:50	179601-23-1	
o-Xylene	ND	ug/L	1.0	0.34	1		12/11/25 20:50	95-47-6	
Surrogates									
4-Bromofluorobenzene (S)	101	%	70-130		1		12/11/25 20:50	460-00-4	
1,2-Dichloroethane-d4 (S)	100	%	70-130		1		12/11/25 20:50	17060-07-0	
Toluene-d8 (S)	97	%	70-130		1		12/11/25 20:50	2037-26-5	
Calculated Results	Analytical Method: SM2340-97 Preparation Method: SM2340B Pace National - Mt. Juliet								
Hardness, Total(SM 2340B)	**25800**	ug/L	2500	231	1	12/25/25 15:07	12/25/25 15:07		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: TB-4 **Lab ID: 92833633005** Collected: 11/25/25 00:00 Received: 12/09/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
Acetone	ND	ug/L	25.0	5.1	1		12/10/25 16:03	67-64-1	H1
Benzene	ND	ug/L	1.0	0.34	1		12/10/25 16:03	71-43-2	H1
Bromobenzene	ND	ug/L	1.0	0.29	1		12/10/25 16:03	108-86-1	H1
Bromochloromethane	ND	ug/L	1.0	0.47	1		12/10/25 16:03	74-97-5	H1
Bromodichloromethane	ND	ug/L	1.0	0.31	1		12/10/25 16:03	75-27-4	H1
Bromoform	ND	ug/L	1.0	0.34	1		12/10/25 16:03	75-25-2	H1
Bromomethane	ND	ug/L	2.0	1.7	1		12/10/25 16:03	74-83-9	H1,IK, v2
2-Butanone (MEK)	ND	ug/L	5.0	4.0	1		12/10/25 16:03	78-93-3	H1
Carbon tetrachloride	ND	ug/L	1.0	0.33	1		12/10/25 16:03	56-23-5	H1
Chlorobenzene	ND	ug/L	1.0	0.28	1		12/10/25 16:03	108-90-7	H1
Chloroethane	ND	ug/L	1.0	0.65	1		12/10/25 16:03	75-00-3	H1
Chloroform	ND	ug/L	1.0	0.43	1		12/10/25 16:03	67-66-3	H1
Chloromethane	ND	ug/L	1.0	0.54	1		12/10/25 16:03	74-87-3	H1
2-Chlorotoluene	ND	ug/L	1.0	0.32	1		12/10/25 16:03	95-49-8	H1
4-Chlorotoluene	ND	ug/L	1.0	0.32	1		12/10/25 16:03	106-43-4	H1
1,2-Dibromo-3-chloropropane	ND	ug/L	2.0	0.34	1		12/10/25 16:03	96-12-8	H1
Dibromochloromethane	ND	ug/L	1.0	0.36	1		12/10/25 16:03	124-48-1	H1
1,2-Dibromoethane (EDB)	ND	ug/L	1.0	0.27	1		12/10/25 16:03	106-93-4	H1
Dibromomethane	ND	ug/L	1.0	0.39	1		12/10/25 16:03	74-95-3	H1
1,2-Dichlorobenzene	ND	ug/L	1.0	0.34	1		12/10/25 16:03	95-50-1	H1
1,3-Dichlorobenzene	ND	ug/L	1.0	0.34	1		12/10/25 16:03	541-73-1	H1
1,4-Dichlorobenzene	ND	ug/L	1.0	0.33	1		12/10/25 16:03	106-46-7	H1
Dichlorodifluoromethane	ND	ug/L	1.0	0.35	1		12/10/25 16:03	75-71-8	H1
1,1-Dichloroethane	ND	ug/L	1.0	0.37	1		12/10/25 16:03	75-34-3	H1
1,2-Dichloroethane	ND	ug/L	1.0	0.32	1		12/10/25 16:03	107-06-2	H1
1,1-Dichloroethene	ND	ug/L	1.0	0.35	1		12/10/25 16:03	75-35-4	H1
cis-1,2-Dichloroethene	ND	ug/L	1.0	0.38	1		12/10/25 16:03	156-59-2	H1
trans-1,2-Dichloroethene	ND	ug/L	1.0	0.40	1		12/10/25 16:03	156-60-5	H1
1,2-Dichloropropane	ND	ug/L	1.0	0.36	1		12/10/25 16:03	78-87-5	H1
1,3-Dichloropropane	ND	ug/L	1.0	0.28	1		12/10/25 16:03	142-28-9	H1
2,2-Dichloropropane	ND	ug/L	1.0	0.39	1		12/10/25 16:03	594-20-7	H1
1,1-Dichloropropene	ND	ug/L	1.0	0.43	1		12/10/25 16:03	563-58-6	H1
cis-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		12/10/25 16:03	10061-01-5	H1
trans-1,3-Dichloropropene	ND	ug/L	1.0	0.36	1		12/10/25 16:03	10061-02-6	H1
Diisopropyl ether	ND	ug/L	1.0	0.31	1		12/10/25 16:03	108-20-3	H1
Ethylbenzene	ND	ug/L	1.0	0.30	1		12/10/25 16:03	100-41-4	H1
Hexachloro-1,3-butadiene	ND	ug/L	2.0	1.5	1		12/10/25 16:03	87-68-3	H1
2-Hexanone	ND	ug/L	5.0	0.48	1		12/10/25 16:03	591-78-6	H1
p-Isopropyltoluene	ND	ug/L	1.0	0.41	1		12/10/25 16:03	99-87-6	H1
Methylene Chloride	ND	ug/L	5.0	2.0	1		12/10/25 16:03	75-09-2	H1
4-Methyl-2-pentanone (MIBK)	ND	ug/L	5.0	2.7	1		12/10/25 16:03	108-10-1	H1
Methyl-tert-butyl ether	ND	ug/L	1.0	0.42	1		12/10/25 16:03	1634-04-4	H1
Naphthalene	ND	ug/L	1.0	0.64	1		12/10/25 16:03	91-20-3	H1
Styrene	ND	ug/L	1.0	0.29	1		12/10/25 16:03	100-42-5	H1

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: TB-4 **Lab ID: 92833633005** Collected: 11/25/25 00:00 Received: 12/09/25 12:00 Matrix: Water

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D MSV Low Level	Analytical Method: EPA 8260D Pace Analytical Services - Charlotte								
1,1,1,2-Tetrachloroethane	ND	ug/L	1.0	0.31	1		12/10/25 16:03	630-20-6	H1
1,1,2,2-Tetrachloroethane	ND	ug/L	1.0	0.22	1		12/10/25 16:03	79-34-5	H1
Tetrachloroethene	ND	ug/L	1.0	0.29	1		12/10/25 16:03	127-18-4	H1
Toluene	ND	ug/L	1.0	0.24	1		12/10/25 16:03	108-88-3	H1
1,2,3-Trichlorobenzene	ND	ug/L	1.0	0.81	1		12/10/25 16:03	87-61-6	H1
1,2,4-Trichlorobenzene	ND	ug/L	1.0	0.64	1		12/10/25 16:03	120-82-1	H1
1,1,1-Trichloroethane	ND	ug/L	1.0	0.33	1		12/10/25 16:03	71-55-6	H1
1,1,2-Trichloroethane	ND	ug/L	1.0	0.32	1		12/10/25 16:03	79-00-5	H1
Trichloroethene	ND	ug/L	1.0	0.38	1		12/10/25 16:03	79-01-6	H1
Trichlorofluoromethane	ND	ug/L	1.0	0.30	1		12/10/25 16:03	75-69-4	H1
1,2,3-Trichloropropane	ND	ug/L	1.0	0.26	1		12/10/25 16:03	96-18-4	H1
Vinyl acetate	ND	ug/L	2.0	1.3	1		12/10/25 16:03	108-05-4	H1
Vinyl chloride	ND	ug/L	1.0	0.39	1		12/10/25 16:03	75-01-4	H1
Xylene (Total)	ND	ug/L	1.0	0.34	1		12/10/25 16:03	1330-20-7	
m&p-Xylene	ND	ug/L	2.0	0.71	1		12/10/25 16:03	179601-23-1	H1
o-Xylene	ND	ug/L	1.0	0.34	1		12/10/25 16:03	95-47-6	H1
Surrogates									
4-Bromofluorobenzene (S)	98	%	70-130		1		12/10/25 16:03	460-00-4	
1,2-Dichloroethane-d4 (S)	100	%	70-130		1		12/10/25 16:03	17060-07-0	
Toluene-d8 (S)	102	%	70-130		1		12/10/25 16:03	2037-26-5	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-3 **Lab ID: 92833633006** Collected: 12/05/25 13:00 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199 Pace Analytical Services - Charlotte								
Chromium, Hexavalent	**1.7**	mg/kg	1.2	0.21	1	12/10/25 09:50	12/10/25 23:49	18540-29-9	
Metals (ICPMS) 6020B	Analytical Method: EPA 6020B Preparation Method: 3050B Pace National - Mt. Juliet								
Antimony	ND	mg/kg	0.701	0.230	1.06	12/15/25 07:02	12/23/25 21:04	7440-36-0	
Arsenic	**1.44**	mg/kg	0.280	0.153	1.06	12/15/25 07:02	12/23/25 21:04	7440-38-2	
Beryllium	**0.571J**	mg/kg	0.701	0.210	1.06	12/15/25 07:02	12/24/25 15:15	7440-41-7	J
Cadmium	ND	mg/kg	0.280	0.127	1.06	12/15/25 07:02	12/23/25 21:04	7440-43-9	
Chromium	**64.2**	mg/kg	1.40	0.230	1.06	12/15/25 07:02	12/23/25 21:04	7440-47-3	
Copper	**21.4**	mg/kg	1.40	0.194	1.06	12/15/25 07:02	12/23/25 21:04	7440-50-8	
Lead	**9.04**	mg/kg	0.561	0.201	1.06	12/15/25 07:02	12/23/25 21:04	7439-92-1	
Nickel	**15.6**	mg/kg	0.701	0.237	1.06	12/15/25 07:02	12/23/25 21:04	7440-02-0	
Selenium	**0.962**	mg/kg	0.701	0.250	1.06	12/15/25 07:02	12/23/25 21:04	7782-49-2	
Silver	ND	mg/kg	0.140	0.107	1.06	12/15/25 07:02	12/23/25 21:04	7440-22-4	
Thallium	ND	mg/kg	0.561	0.155	1.06	12/15/25 07:02	12/23/25 21:04	7440-28-0	
Zinc	**18.3**	mg/kg	7.01	1.69	1.06	12/15/25 07:02	12/23/25 21:04	7440-66-6	
Mercury 7471B	Analytical Method: EPA 7471B Preparation Method: 7471A Pace National - Mt. Juliet								
Mercury	ND	mg/kg	0.0529	0.0273	1	12/12/25 14:50	12/13/25 13:18	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 17:15	83-32-9	
Acenaphthylene	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 17:15	208-96-8	
Aniline	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 17:15	62-53-3	
Anthracene	ND	mg/kg	0.41	0.13	1	12/10/25 05:19	12/10/25 17:15	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 17:15	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 17:15	50-32-8	
Benzo(b)fluoranthene	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 17:15	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 17:15	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 17:15	207-08-9	
Benzoic Acid	ND	mg/kg	2.1	0.88	1	12/10/25 05:19	12/10/25 17:15	65-85-0	
Benzyl alcohol	ND	mg/kg	0.82	0.31	1	12/10/25 05:19	12/10/25 17:15	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 17:15	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.41	0.17	1	12/10/25 05:19	12/10/25 17:15	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	0.82	0.29	1	12/10/25 05:19	12/10/25 17:15	59-50-7	
4-Chloroaniline	ND	mg/kg	0.82	0.32	1	12/10/25 05:19	12/10/25 17:15	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.41	0.17	1	12/10/25 05:19	12/10/25 17:15	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 17:15	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 17:15	91-58-7	
2-Chlorophenol	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 17:15	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 17:15	7005-72-3	
Chrysene	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 17:15	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-3 **Lab ID: 92833633006** Collected: 12/05/25 13:00 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 17:15	53-70-3	
Dibenzofuran	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 17:15	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 17:15	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 17:15	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 17:15	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	0.82	0.28	1	12/10/25 05:19	12/10/25 17:15	91-94-1	
2,4-Dichlorophenol	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 17:15	120-83-2	
Diethylphthalate	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 17:15	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.41	0.17	1	12/10/25 05:19	12/10/25 17:15	105-67-9	
Dimethylphthalate	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 17:15	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 17:15	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	0.82	0.38	1	12/10/25 05:19	12/10/25 17:15	534-52-1	
2,4-Dinitrophenol	ND	mg/kg	2.1	1.3	1	12/10/25 05:19	12/10/25 17:15	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 17:15	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 17:15	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 17:15	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 17:15	117-81-7	
Fluoranthene	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 17:15	206-44-0	
Fluorene	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 17:15	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.41	0.18	1	12/10/25 05:19	12/10/25 17:15	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 17:15	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.41	0.24	1	12/10/25 05:19	12/10/25 17:15	77-47-4	
Hexachloroethane	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 17:15	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 17:15	193-39-5	
Isophorone	ND	mg/kg	0.41	0.18	1	12/10/25 05:19	12/10/25 17:15	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 17:15	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 17:15	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.41	0.17	1	12/10/25 05:19	12/10/25 17:15	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.41	0.17	1	12/10/25 05:19	12/10/25 17:15	15831-10-4	
Naphthalene	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 17:15	91-20-3	
2-Nitroaniline	ND	mg/kg	2.1	0.34	1	12/10/25 05:19	12/10/25 17:15	88-74-4	
3-Nitroaniline	ND	mg/kg	2.1	0.32	1	12/10/25 05:19	12/10/25 17:15	99-09-2	
4-Nitroaniline	ND	mg/kg	0.82	0.31	1	12/10/25 05:19	12/10/25 17:15	100-01-6	
Nitrobenzene	ND	mg/kg	0.41	0.19	1	12/10/25 05:19	12/10/25 17:15	98-95-3	
2-Nitrophenol	ND	mg/kg	0.41	0.18	1	12/10/25 05:19	12/10/25 17:15	88-75-5	
4-Nitrophenol	ND	mg/kg	2.1	0.80	1	12/10/25 05:19	12/10/25 17:15	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 17:15	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 17:15	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 17:15	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.41	0.20	1	12/10/25 05:19	12/10/25 17:15	108-60-1	
Pentachlorophenol	ND	mg/kg	0.82	0.40	1	12/10/25 05:19	12/10/25 17:15	87-86-5	
Phenanthrene	ND	mg/kg	0.41	0.13	1	12/10/25 05:19	12/10/25 17:15	85-01-8	
Phenol	ND	mg/kg	0.41	0.18	1	12/10/25 05:19	12/10/25 17:15	108-95-2	
Pyrene	ND	mg/kg	0.41	0.17	1	12/10/25 05:19	12/10/25 17:15	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-3 **Lab ID: 92833633006** Collected: 12/05/25 13:00 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.41	0.13	1	12/10/25 05:19	12/10/25 17:15	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 17:15	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.41	0.19	1	12/10/25 05:19	12/10/25 17:15	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.41	0.17	1	12/10/25 05:19	12/10/25 17:15	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	72	%	10-130		1	12/10/25 05:19	12/10/25 17:15	4165-60-0	
2-Fluorobiphenyl (S)	59	%	10-130		1	12/10/25 05:19	12/10/25 17:15	321-60-8	
Terphenyl-d14 (S)	66	%	10-130		1	12/10/25 05:19	12/10/25 17:15	1718-51-0	
Phenol-d6 (S)	72	%	10-130		1	12/10/25 05:19	12/10/25 17:15	13127-88-3	
2-Fluorophenol (S)	67	%	10-130		1	12/10/25 05:19	12/10/25 17:15	367-12-4	
2,4,6-Tribromophenol (S)	73	%	10-130		1	12/10/25 05:19	12/10/25 17:15	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.14	0.044	1	12/09/25 14:58	12/10/25 14:41	67-64-1	
Benzene	ND	mg/kg	0.0069	0.0027	1	12/09/25 14:58	12/10/25 14:41	71-43-2	
Bromobenzene	ND	mg/kg	0.0069	0.0022	1	12/09/25 14:58	12/10/25 14:41	108-86-1	
Bromochloromethane	ND	mg/kg	0.0069	0.0020	1	12/09/25 14:58	12/10/25 14:41	74-97-5	
Bromodichloromethane	ND	mg/kg	0.0069	0.0027	1	12/09/25 14:58	12/10/25 14:41	75-27-4	
Bromoform	ND	mg/kg	0.0069	0.0024	1	12/09/25 14:58	12/10/25 14:41	75-25-2	
Bromomethane	ND	mg/kg	0.028	0.021	1	12/09/25 14:58	12/10/25 14:41	74-83-9	IH,IK,v1
2-Butanone (MEK)	ND	mg/kg	0.14	0.033	1	12/09/25 14:58	12/10/25 14:41	78-93-3	
n-Butylbenzene	ND	mg/kg	0.0069	0.0043	1	12/09/25 14:58	12/10/25 14:41	104-51-8	
sec-Butylbenzene	ND	mg/kg	0.0069	0.0030	1	12/09/25 14:58	12/10/25 14:41	135-98-8	
tert-Butylbenzene	ND	mg/kg	0.0069	0.0025	1	12/09/25 14:58	12/10/25 14:41	98-06-6	
Carbon tetrachloride	ND	mg/kg	0.0069	0.0026	1	12/09/25 14:58	12/10/25 14:41	56-23-5	
Chlorobenzene	ND	mg/kg	0.0069	0.0040	1	12/09/25 14:58	12/10/25 14:41	108-90-7	
Chloroethane	ND	mg/kg	0.014	0.0053	1	12/09/25 14:58	12/10/25 14:41	75-00-3	
Chloroform	ND	mg/kg	0.0069	0.0058	1	12/09/25 14:58	12/10/25 14:41	67-66-3	
Chloromethane	ND	mg/kg	0.014	0.0058	1	12/09/25 14:58	12/10/25 14:41	74-87-3	
2-Chlorotoluene	ND	mg/kg	0.0069	0.0024	1	12/09/25 14:58	12/10/25 14:41	95-49-8	
4-Chlorotoluene	ND	mg/kg	0.0069	0.0038	1	12/09/25 14:58	12/10/25 14:41	106-43-4	
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0069	0.0027	1	12/09/25 14:58	12/10/25 14:41	96-12-8	
Dibromochloromethane	ND	mg/kg	0.0069	0.0039	1	12/09/25 14:58	12/10/25 14:41	124-48-1	
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0069	0.0030	1	12/09/25 14:58	12/10/25 14:41	106-93-4	
Dibromomethane	ND	mg/kg	0.0069	0.0015	1	12/09/25 14:58	12/10/25 14:41	74-95-3	
1,2-Dichlorobenzene	ND	mg/kg	0.0069	0.0025	1	12/09/25 14:58	12/10/25 14:41	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.0069	0.0021	1	12/09/25 14:58	12/10/25 14:41	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.0069	0.0018	1	12/09/25 14:58	12/10/25 14:41	106-46-7	
Dichlorodifluoromethane	ND	mg/kg	0.014	0.0070	1	12/09/25 14:58	12/10/25 14:41	75-71-8	
1,1-Dichloroethane	ND	mg/kg	0.0069	0.0028	1	12/09/25 14:58	12/10/25 14:41	75-34-3	
1,2-Dichloroethane	ND	mg/kg	0.0069	0.0046	1	12/09/25 14:58	12/10/25 14:41	107-06-2	
1,1-Dichloroethene	ND	mg/kg	0.0069	0.0028	1	12/09/25 14:58	12/10/25 14:41	75-35-4	
cis-1,2-Dichloroethene	ND	mg/kg	0.0069	0.0024	1	12/09/25 14:58	12/10/25 14:41	156-59-2	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-3 **Lab ID: 92833633006** Collected: 12/05/25 13:00 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0069	0.0059	1	12/09/25 14:58	12/10/25 14:41	156-60-5	
1,2-Dichloropropane	ND	mg/kg	0.0069	0.0021	1	12/09/25 14:58	12/10/25 14:41	78-87-5	
1,3-Dichloropropane	ND	mg/kg	0.0069	0.0022	1	12/09/25 14:58	12/10/25 14:41	142-28-9	
2,2-Dichloropropane	ND	mg/kg	0.0069	0.0052	1	12/09/25 14:58	12/10/25 14:41	594-20-7	
1,1-Dichloropropene	ND	mg/kg	0.0069	0.0033	1	12/09/25 14:58	12/10/25 14:41	563-58-6	
cis-1,3-Dichloropropene	ND	mg/kg	0.0069	0.0019	1	12/09/25 14:58	12/10/25 14:41	10061-01-5	
trans-1,3-Dichloropropene	ND	mg/kg	0.0069	0.0024	1	12/09/25 14:58	12/10/25 14:41	10061-02-6	
Diisopropyl ether	ND	mg/kg	0.0069	0.0019	1	12/09/25 14:58	12/10/25 14:41	108-20-3	
Ethylbenzene	ND	mg/kg	0.0069	0.0032	1	12/09/25 14:58	12/10/25 14:41	100-41-4	
Hexachloro-1,3-butadiene	ND	mg/kg	0.014	0.011	1	12/09/25 14:58	12/10/25 14:41	87-68-3	
2-Hexanone	ND	mg/kg	0.069	0.0066	1	12/09/25 14:58	12/10/25 14:41	591-78-6	
Isopropylbenzene (Cumene)	ND	mg/kg	0.0069	0.0023	1	12/09/25 14:58	12/10/25 14:41	98-82-8	
p-Isopropyltoluene	ND	mg/kg	0.0069	0.0034	1	12/09/25 14:58	12/10/25 14:41	99-87-6	
Methylene Chloride	ND	mg/kg	0.028	0.019	1	12/09/25 14:58	12/10/25 14:41	75-09-2	
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.069	0.0066	1	12/09/25 14:58	12/10/25 14:41	108-10-1	
Methyl-tert-butyl ether	ND	mg/kg	0.0069	0.0026	1	12/09/25 14:58	12/10/25 14:41	1634-04-4	
Naphthalene	ND	mg/kg	0.0069	0.0036	1	12/09/25 14:58	12/10/25 14:41	91-20-3	
n-Propylbenzene	ND	mg/kg	0.0069	0.0025	1	12/09/25 14:58	12/10/25 14:41	103-65-1	
Styrene	ND	mg/kg	0.0069	0.0018	1	12/09/25 14:58	12/10/25 14:41	100-42-5	
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0069	0.0026	1	12/09/25 14:58	12/10/25 14:41	630-20-6	
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0069	0.0018	1	12/09/25 14:58	12/10/25 14:41	79-34-5	
Tetrachloroethene	ND	mg/kg	0.0069	0.0022	1	12/09/25 14:58	12/10/25 14:41	127-18-4	
Toluene	ND	mg/kg	0.0069	0.0048	1	12/09/25 14:58	12/10/25 14:41	108-88-3	
1,2,3-Trichlorobenzene	ND	mg/kg	0.0069	0.0056	1	12/09/25 14:58	12/10/25 14:41	87-61-6	
1,2,4-Trichlorobenzene	ND	mg/kg	0.0069	0.0058	1	12/09/25 14:58	12/10/25 14:41	120-82-1	
1,1,1-Trichloroethane	ND	mg/kg	0.0069	0.0036	1	12/09/25 14:58	12/10/25 14:41	71-55-6	
1,1,2-Trichloroethane	ND	mg/kg	0.0069	0.0023	1	12/09/25 14:58	12/10/25 14:41	79-00-5	
Trichloroethene	ND	mg/kg	0.0069	0.0056	1	12/09/25 14:58	12/10/25 14:41	79-01-6	
Trichlorofluoromethane	ND	mg/kg	0.0069	0.0038	1	12/09/25 14:58	12/10/25 14:41	75-69-4	
1,2,3-Trichloropropane	ND	mg/kg	0.0069	0.0035	1	12/09/25 14:58	12/10/25 14:41	96-18-4	
1,2,4-Trimethylbenzene	ND	mg/kg	0.0069	0.0041	1	12/09/25 14:58	12/10/25 14:41	95-63-6	
1,3,5-Trimethylbenzene	ND	mg/kg	0.0069	0.0023	1	12/09/25 14:58	12/10/25 14:41	108-67-8	
Vinyl acetate	ND	mg/kg	0.069	0.014	1	12/09/25 14:58	12/10/25 14:41	108-05-4	
Vinyl chloride	ND	mg/kg	0.014	0.0035	1	12/09/25 14:58	12/10/25 14:41	75-01-4	
Xylene (Total)	ND	mg/kg	0.014	0.0039	1	12/09/25 14:58	12/10/25 14:41	1330-20-7	
m&p-Xylene	ND	mg/kg	0.014	0.0047	1	12/09/25 14:58	12/10/25 14:41	179601-23-1	
o-Xylene	ND	mg/kg	0.0069	0.0030	1	12/09/25 14:58	12/10/25 14:41	95-47-6	
Surrogates									
Toluene-d8 (S)	100	%	70-130		1	12/09/25 14:58	12/10/25 14:41	2037-26-5	
4-Bromofluorobenzene (S)	101	%	70-130		1	12/09/25 14:58	12/10/25 14:41	460-00-4	
1,2-Dichloroethane-d4 (S)	87	%	70-135		1	12/09/25 14:58	12/10/25 14:41	17060-07-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-3 **Lab ID: 92833633006** Collected: 12/05/25 13:00 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**19.3**	%	0.10	0.10	1		12/09/25 17:58		N2
Total Solids 2540 G-2011	Analytical Method: SM 2540G Preparation Method: SM 2540 G Pace National - Mt. Juliet								
Total Solids	**75.6**	%			1	12/12/25 06:36	12/12/25 06:42		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-2 **Lab ID: 92833633007** Collected: 12/05/25 13:55 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199 Pace Analytical Services - Charlotte								
Chromium, Hexavalent	**2.6**	mg/kg	1.3	0.21	1	12/10/25 09:50	12/11/25 00:42	18540-29-9	
Metals (ICPMS) 6020B	Analytical Method: EPA 6020B Preparation Method: 3050B Pace National - Mt. Juliet								
Antimony	**0.232J**	mg/kg	0.687	0.226	1.06	12/15/25 07:02	12/23/25 21:08	7440-36-0	J
Arsenic	**2.90**	mg/kg	0.275	0.150	1.06	12/15/25 07:02	12/23/25 21:08	7440-38-2	
Beryllium	**0.313J**	mg/kg	0.687	0.206	1.06	12/15/25 07:02	12/24/25 15:19	7440-41-7	J
Cadmium	ND	mg/kg	0.275	0.125	1.06	12/15/25 07:02	12/23/25 21:08	7440-43-9	
Chromium	**54.7**	mg/kg	1.37	0.226	1.06	12/15/25 07:02	12/23/25 21:08	7440-47-3	
Copper	**32.5**	mg/kg	1.37	0.191	1.06	12/15/25 07:02	12/23/25 21:08	7440-50-8	
Lead	**8.27**	mg/kg	0.550	0.197	1.06	12/15/25 07:02	12/23/25 21:08	7439-92-1	
Nickel	**5.85**	mg/kg	0.687	0.232	1.06	12/15/25 07:02	12/23/25 21:08	7440-02-0	
Selenium	**0.268J**	mg/kg	0.687	0.245	1.06	12/15/25 07:02	12/23/25 21:08	7782-49-2	J
Silver	ND	mg/kg	0.137	0.105	1.06	12/15/25 07:02	12/23/25 21:08	7440-22-4	
Thallium	ND	mg/kg	0.550	0.152	1.06	12/15/25 07:02	12/23/25 21:08	7440-28-0	
Zinc	**31.6**	mg/kg	6.87	1.66	1.06	12/15/25 07:02	12/23/25 21:08	7440-66-6	
Mercury 7471B	Analytical Method: EPA 7471B Preparation Method: 7471A Pace National - Mt. Juliet								
Mercury	ND	mg/kg	0.0519	0.0267	1	12/12/25 14:50	12/13/25 13:20	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.40	0.14	1	12/10/25 05:19	12/10/25 17:41	83-32-9	
Acenaphthylene	ND	mg/kg	0.40	0.14	1	12/10/25 05:19	12/10/25 17:41	208-96-8	
Aniline	ND	mg/kg	0.40	0.16	1	12/10/25 05:19	12/10/25 17:41	62-53-3	
Anthracene	ND	mg/kg	0.40	0.13	1	12/10/25 05:19	12/10/25 17:41	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.40	0.13	1	12/10/25 05:19	12/10/25 17:41	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.40	0.14	1	12/10/25 05:19	12/10/25 17:41	50-32-8	
Benzo(b)fluoranthene	ND	mg/kg	0.40	0.13	1	12/10/25 05:19	12/10/25 17:41	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.40	0.15	1	12/10/25 05:19	12/10/25 17:41	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.40	0.14	1	12/10/25 05:19	12/10/25 17:41	207-08-9	
Benzoic Acid	ND	mg/kg	2.0	0.85	1	12/10/25 05:19	12/10/25 17:41	65-85-0	
Benzyl alcohol	ND	mg/kg	0.79	0.30	1	12/10/25 05:19	12/10/25 17:41	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.40	0.15	1	12/10/25 05:19	12/10/25 17:41	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.40	0.17	1	12/10/25 05:19	12/10/25 17:41	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	0.79	0.28	1	12/10/25 05:19	12/10/25 17:41	59-50-7	
4-Chloroaniline	ND	mg/kg	0.79	0.31	1	12/10/25 05:19	12/10/25 17:41	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.40	0.17	1	12/10/25 05:19	12/10/25 17:41	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.40	0.15	1	12/10/25 05:19	12/10/25 17:41	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.40	0.16	1	12/10/25 05:19	12/10/25 17:41	91-58-7	
2-Chlorophenol	ND	mg/kg	0.40	0.15	1	12/10/25 05:19	12/10/25 17:41	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.40	0.15	1	12/10/25 05:19	12/10/25 17:41	7005-72-3	
Chrysene	ND	mg/kg	0.40	0.14	1	12/10/25 05:19	12/10/25 17:41	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-2 **Lab ID: 92833633007** Collected: 12/05/25 13:55 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.40	0.15	1	12/10/25 05:19	12/10/25 17:41	53-70-3	
Dibenzofuran	ND	mg/kg	0.40	0.14	1	12/10/25 05:19	12/10/25 17:41	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.40	0.14	1	12/10/25 05:19	12/10/25 17:41	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.40	0.14	1	12/10/25 05:19	12/10/25 17:41	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.40	0.15	1	12/10/25 05:19	12/10/25 17:41	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	0.79	0.27	1	12/10/25 05:19	12/10/25 17:41	91-94-1	
2,4-Dichlorophenol	ND	mg/kg	0.40	0.16	1	12/10/25 05:19	12/10/25 17:41	120-83-2	
Diethylphthalate	ND	mg/kg	0.40	0.15	1	12/10/25 05:19	12/10/25 17:41	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.40	0.17	1	12/10/25 05:19	12/10/25 17:41	105-67-9	
Dimethylphthalate	ND	mg/kg	0.40	0.14	1	12/10/25 05:19	12/10/25 17:41	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.40	0.13	1	12/10/25 05:19	12/10/25 17:41	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	0.79	0.37	1	12/10/25 05:19	12/10/25 17:41	534-52-1	
2,4-Dinitrophenol	ND	mg/kg	2.0	1.2	1	12/10/25 05:19	12/10/25 17:41	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.40	0.15	1	12/10/25 05:19	12/10/25 17:41	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.40	0.15	1	12/10/25 05:19	12/10/25 17:41	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.40	0.16	1	12/10/25 05:19	12/10/25 17:41	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.40	0.15	1	12/10/25 05:19	12/10/25 17:41	117-81-7	
Fluoranthene	ND	mg/kg	0.40	0.14	1	12/10/25 05:19	12/10/25 17:41	206-44-0	
Fluorene	ND	mg/kg	0.40	0.14	1	12/10/25 05:19	12/10/25 17:41	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.40	0.17	1	12/10/25 05:19	12/10/25 17:41	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.40	0.16	1	12/10/25 05:19	12/10/25 17:41	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.40	0.23	1	12/10/25 05:19	12/10/25 17:41	77-47-4	
Hexachloroethane	ND	mg/kg	0.40	0.15	1	12/10/25 05:19	12/10/25 17:41	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.40	0.16	1	12/10/25 05:19	12/10/25 17:41	193-39-5	
Isophorone	ND	mg/kg	0.40	0.18	1	12/10/25 05:19	12/10/25 17:41	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.40	0.14	1	12/10/25 05:19	12/10/25 17:41	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.40	0.16	1	12/10/25 05:19	12/10/25 17:41	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.40	0.16	1	12/10/25 05:19	12/10/25 17:41	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.40	0.16	1	12/10/25 05:19	12/10/25 17:41	15831-10-4	
Naphthalene	ND	mg/kg	0.40	0.13	1	12/10/25 05:19	12/10/25 17:41	91-20-3	
2-Nitroaniline	ND	mg/kg	2.0	0.33	1	12/10/25 05:19	12/10/25 17:41	88-74-4	
3-Nitroaniline	ND	mg/kg	2.0	0.31	1	12/10/25 05:19	12/10/25 17:41	99-09-2	
4-Nitroaniline	ND	mg/kg	0.79	0.30	1	12/10/25 05:19	12/10/25 17:41	100-01-6	
Nitrobenzene	ND	mg/kg	0.40	0.18	1	12/10/25 05:19	12/10/25 17:41	98-95-3	
2-Nitrophenol	ND	mg/kg	0.40	0.17	1	12/10/25 05:19	12/10/25 17:41	88-75-5	
4-Nitrophenol	ND	mg/kg	2.0	0.77	1	12/10/25 05:19	12/10/25 17:41	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.40	0.13	1	12/10/25 05:19	12/10/25 17:41	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.40	0.15	1	12/10/25 05:19	12/10/25 17:41	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.40	0.14	1	12/10/25 05:19	12/10/25 17:41	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.40	0.19	1	12/10/25 05:19	12/10/25 17:41	108-60-1	
Pentachlorophenol	ND	mg/kg	0.79	0.39	1	12/10/25 05:19	12/10/25 17:41	87-86-5	
Phenanthrene	ND	mg/kg	0.40	0.13	1	12/10/25 05:19	12/10/25 17:41	85-01-8	
Phenol	ND	mg/kg	0.40	0.18	1	12/10/25 05:19	12/10/25 17:41	108-95-2	
Pyrene	ND	mg/kg	0.40	0.16	1	12/10/25 05:19	12/10/25 17:41	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-2 **Lab ID: 92833633007** Collected: 12/05/25 13:55 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.40	0.13	1	12/10/25 05:19	12/10/25 17:41	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.40	0.16	1	12/10/25 05:19	12/10/25 17:41	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.40	0.18	1	12/10/25 05:19	12/10/25 17:41	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.40	0.16	1	12/10/25 05:19	12/10/25 17:41	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	73	%	10-130		1	12/10/25 05:19	12/10/25 17:41	4165-60-0	
2-Fluorobiphenyl (S)	57	%	10-130		1	12/10/25 05:19	12/10/25 17:41	321-60-8	
Terphenyl-d14 (S)	41	%	10-130		1	12/10/25 05:19	12/10/25 17:41	1718-51-0	
Phenol-d6 (S)	75	%	10-130		1	12/10/25 05:19	12/10/25 17:41	13127-88-3	
2-Fluorophenol (S)	71	%	10-130		1	12/10/25 05:19	12/10/25 17:41	367-12-4	
2,4,6-Tribromophenol (S)	80	%	10-130		1	12/10/25 05:19	12/10/25 17:41	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.15	0.048	1	12/09/25 14:58	12/10/25 14:59	67-64-1	
Benzene	ND	mg/kg	0.0074	0.0030	1	12/09/25 14:58	12/10/25 14:59	71-43-2	
Bromobenzene	ND	mg/kg	0.0074	0.0024	1	12/09/25 14:58	12/10/25 14:59	108-86-1	
Bromochloromethane	ND	mg/kg	0.0074	0.0022	1	12/09/25 14:58	12/10/25 14:59	74-97-5	
Bromodichloromethane	ND	mg/kg	0.0074	0.0029	1	12/09/25 14:58	12/10/25 14:59	75-27-4	
Bromoform	ND	mg/kg	0.0074	0.0026	1	12/09/25 14:58	12/10/25 14:59	75-25-2	
Bromomethane	ND	mg/kg	0.030	0.023	1	12/09/25 14:58	12/10/25 14:59	74-83-9	IH,IK,v1
2-Butanone (MEK)	ND	mg/kg	0.15	0.036	1	12/09/25 14:58	12/10/25 14:59	78-93-3	
n-Butylbenzene	ND	mg/kg	0.0074	0.0047	1	12/09/25 14:58	12/10/25 14:59	104-51-8	
sec-Butylbenzene	ND	mg/kg	0.0074	0.0033	1	12/09/25 14:58	12/10/25 14:59	135-98-8	
tert-Butylbenzene	ND	mg/kg	0.0074	0.0026	1	12/09/25 14:58	12/10/25 14:59	98-06-6	
Carbon tetrachloride	ND	mg/kg	0.0074	0.0028	1	12/09/25 14:58	12/10/25 14:59	56-23-5	
Chlorobenzene	ND	mg/kg	0.0074	0.0043	1	12/09/25 14:58	12/10/25 14:59	108-90-7	
Chloroethane	ND	mg/kg	0.015	0.0057	1	12/09/25 14:58	12/10/25 14:59	75-00-3	
Chloroform	ND	mg/kg	0.0074	0.0062	1	12/09/25 14:58	12/10/25 14:59	67-66-3	
Chloromethane	ND	mg/kg	0.015	0.0062	1	12/09/25 14:58	12/10/25 14:59	74-87-3	
2-Chlorotoluene	ND	mg/kg	0.0074	0.0026	1	12/09/25 14:58	12/10/25 14:59	95-49-8	
4-Chlorotoluene	ND	mg/kg	0.0074	0.0041	1	12/09/25 14:58	12/10/25 14:59	106-43-4	
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0074	0.0029	1	12/09/25 14:58	12/10/25 14:59	96-12-8	
Dibromochloromethane	ND	mg/kg	0.0074	0.0042	1	12/09/25 14:58	12/10/25 14:59	124-48-1	
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0074	0.0033	1	12/09/25 14:58	12/10/25 14:59	106-93-4	
Dibromomethane	ND	mg/kg	0.0074	0.0016	1	12/09/25 14:58	12/10/25 14:59	74-95-3	
1,2-Dichlorobenzene	ND	mg/kg	0.0074	0.0027	1	12/09/25 14:58	12/10/25 14:59	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.0074	0.0023	1	12/09/25 14:58	12/10/25 14:59	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.0074	0.0019	1	12/09/25 14:58	12/10/25 14:59	106-46-7	
Dichlorodifluoromethane	ND	mg/kg	0.015	0.0076	1	12/09/25 14:58	12/10/25 14:59	75-71-8	
1,1-Dichloroethane	ND	mg/kg	0.0074	0.0031	1	12/09/25 14:58	12/10/25 14:59	75-34-3	
1,2-Dichloroethane	ND	mg/kg	0.0074	0.0049	1	12/09/25 14:58	12/10/25 14:59	107-06-2	
1,1-Dichloroethene	ND	mg/kg	0.0074	0.0031	1	12/09/25 14:58	12/10/25 14:59	75-35-4	
cis-1,2-Dichloroethene	ND	mg/kg	0.0074	0.0025	1	12/09/25 14:58	12/10/25 14:59	156-59-2	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-2 **Lab ID: 92833633007** Collected: 12/05/25 13:55 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0074	0.0063	1	12/09/25 14:58	12/10/25 14:59	156-60-5	
1,2-Dichloropropane	ND	mg/kg	0.0074	0.0022	1	12/09/25 14:58	12/10/25 14:59	78-87-5	
1,3-Dichloropropane	ND	mg/kg	0.0074	0.0023	1	12/09/25 14:58	12/10/25 14:59	142-28-9	
2,2-Dichloropropane	ND	mg/kg	0.0074	0.0056	1	12/09/25 14:58	12/10/25 14:59	594-20-7	
1,1-Dichloropropene	ND	mg/kg	0.0074	0.0036	1	12/09/25 14:58	12/10/25 14:59	563-58-6	
cis-1,3-Dichloropropene	ND	mg/kg	0.0074	0.0020	1	12/09/25 14:58	12/10/25 14:59	10061-01-5	
trans-1,3-Dichloropropene	ND	mg/kg	0.0074	0.0026	1	12/09/25 14:58	12/10/25 14:59	10061-02-6	
Diisopropyl ether	ND	mg/kg	0.0074	0.0020	1	12/09/25 14:58	12/10/25 14:59	108-20-3	
Ethylbenzene	ND	mg/kg	0.0074	0.0035	1	12/09/25 14:58	12/10/25 14:59	100-41-4	
Hexachloro-1,3-butadiene	ND	mg/kg	0.015	0.012	1	12/09/25 14:58	12/10/25 14:59	87-68-3	
2-Hexanone	ND	mg/kg	0.074	0.0072	1	12/09/25 14:58	12/10/25 14:59	591-78-6	
Isopropylbenzene (Cumene)	ND	mg/kg	0.0074	0.0025	1	12/09/25 14:58	12/10/25 14:59	98-82-8	
p-Isopropyltoluene	**0.0094**	mg/kg	0.0074	0.0037	1	12/09/25 14:58	12/10/25 14:59	99-87-6	
Methylene Chloride	ND	mg/kg	0.030	0.020	1	12/09/25 14:58	12/10/25 14:59	75-09-2	
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.074	0.0072	1	12/09/25 14:58	12/10/25 14:59	108-10-1	
Methyl-tert-butyl ether	ND	mg/kg	0.0074	0.0028	1	12/09/25 14:58	12/10/25 14:59	1634-04-4	
Naphthalene	ND	mg/kg	0.0074	0.0039	1	12/09/25 14:58	12/10/25 14:59	91-20-3	
n-Propylbenzene	ND	mg/kg	0.0074	0.0026	1	12/09/25 14:58	12/10/25 14:59	103-65-1	
Styrene	ND	mg/kg	0.0074	0.0020	1	12/09/25 14:58	12/10/25 14:59	100-42-5	
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0074	0.0029	1	12/09/25 14:58	12/10/25 14:59	630-20-6	
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0074	0.0020	1	12/09/25 14:58	12/10/25 14:59	79-34-5	
Tetrachloroethene	ND	mg/kg	0.0074	0.0023	1	12/09/25 14:58	12/10/25 14:59	127-18-4	
Toluene	ND	mg/kg	0.0074	0.0051	1	12/09/25 14:58	12/10/25 14:59	108-88-3	
1,2,3-Trichlorobenzene	ND	mg/kg	0.0074	0.0060	1	12/09/25 14:58	12/10/25 14:59	87-61-6	
1,2,4-Trichlorobenzene	ND	mg/kg	0.0074	0.0062	1	12/09/25 14:58	12/10/25 14:59	120-82-1	
1,1,1-Trichloroethane	ND	mg/kg	0.0074	0.0039	1	12/09/25 14:58	12/10/25 14:59	71-55-6	
1,1,2-Trichloroethane	ND	mg/kg	0.0074	0.0025	1	12/09/25 14:58	12/10/25 14:59	79-00-5	
Trichloroethene	ND	mg/kg	0.0074	0.0060	1	12/09/25 14:58	12/10/25 14:59	79-01-6	
Trichlorofluoromethane	ND	mg/kg	0.0074	0.0041	1	12/09/25 14:58	12/10/25 14:59	75-69-4	
1,2,3-Trichloropropane	ND	mg/kg	0.0074	0.0038	1	12/09/25 14:58	12/10/25 14:59	96-18-4	
1,2,4-Trimethylbenzene	ND	mg/kg	0.0074	0.0044	1	12/09/25 14:58	12/10/25 14:59	95-63-6	
1,3,5-Trimethylbenzene	ND	mg/kg	0.0074	0.0025	1	12/09/25 14:58	12/10/25 14:59	108-67-8	
Vinyl acetate	ND	mg/kg	0.074	0.015	1	12/09/25 14:58	12/10/25 14:59	108-05-4	
Vinyl chloride	ND	mg/kg	0.015	0.0038	1	12/09/25 14:58	12/10/25 14:59	75-01-4	
Xylene (Total)	ND	mg/kg	0.015	0.0042	1	12/09/25 14:58	12/10/25 14:59	1330-20-7	
m&p-Xylene	ND	mg/kg	0.015	0.0051	1	12/09/25 14:58	12/10/25 14:59	179601-23-1	
o-Xylene	ND	mg/kg	0.0074	0.0033	1	12/09/25 14:58	12/10/25 14:59	95-47-6	
Surrogates									
Toluene-d8 (S)	101	%	70-130		1	12/09/25 14:58	12/10/25 14:59	2037-26-5	
4-Bromofluorobenzene (S)	103	%	70-130		1	12/09/25 14:58	12/10/25 14:59	460-00-4	
1,2-Dichloroethane-d4 (S)	101	%	70-135		1	12/09/25 14:58	12/10/25 14:59	17060-07-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-2 **Lab ID: 92833633007** Collected: 12/05/25 13:55 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**18.1**	%	0.10	0.10	1		12/09/25 17:58		N2
Total Solids 2540 G-2011	Analytical Method: SM 2540G Preparation Method: SM 2540 G Pace National - Mt. Juliet								
Total Solids	**77.1**	%			1	12/12/25 06:36	12/12/25 06:42		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-1 **Lab ID: 92833633008** Collected: 12/05/25 14:35 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199 Pace Analytical Services - Charlotte								
Chromium, Hexavalent	**1.9**	mg/kg	1.4	0.24	1	12/10/25 09:50	12/11/25 01:35	18540-29-9	
Metals (ICPMS) 6020B	Analytical Method: EPA 6020B Preparation Method: 3050B Pace National - Mt. Juliet								
Antimony	ND	mg/kg	0.706	0.232	1.11	12/15/25 07:02	12/23/25 21:11	7440-36-0	
Arsenic	**3.25**	mg/kg	0.282	0.154	1.11	12/15/25 07:02	12/23/25 21:11	7440-38-2	
Beryllium	**0.304J**	mg/kg	0.706	0.211	1.11	12/15/25 07:02	12/24/25 15:22	7440-41-7	J
Cadmium	ND	mg/kg	0.282	0.128	1.11	12/15/25 07:02	12/23/25 21:11	7440-43-9	
Chromium	**47.2**	mg/kg	1.41	0.232	1.11	12/15/25 07:02	12/23/25 21:11	7440-47-3	
Copper	**15.8**	mg/kg	1.41	0.196	1.11	12/15/25 07:02	12/23/25 21:11	7440-50-8	
Lead	**5.27**	mg/kg	0.565	0.202	1.11	12/15/25 07:02	12/23/25 21:11	7439-92-1	
Nickel	**4.30**	mg/kg	0.706	0.239	1.11	12/15/25 07:02	12/23/25 21:11	7440-02-0	
Selenium	**0.344J**	mg/kg	0.706	0.252	1.11	12/15/25 07:02	12/23/25 21:11	7782-49-2	J
Silver	ND	mg/kg	0.141	0.108	1.11	12/15/25 07:02	12/23/25 21:11	7440-22-4	
Thallium	ND	mg/kg	0.565	0.155	1.11	12/15/25 07:02	12/23/25 21:11	7440-28-0	
Zinc	**29.4**	mg/kg	7.06	1.70	1.11	12/15/25 07:02	12/23/25 21:11	7440-66-6	
Mercury 7471B	Analytical Method: EPA 7471B Preparation Method: 7471A Pace National - Mt. Juliet								
Mercury	ND	mg/kg	0.0509	0.0262	1	12/12/25 14:50	12/13/25 13:23	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.44	0.15	1	12/10/25 05:19	12/10/25 18:07	83-32-9	
Acenaphthylene	ND	mg/kg	0.44	0.15	1	12/10/25 05:19	12/10/25 18:07	208-96-8	
Aniline	ND	mg/kg	0.44	0.17	1	12/10/25 05:19	12/10/25 18:07	62-53-3	
Anthracene	ND	mg/kg	0.44	0.14	1	12/10/25 05:19	12/10/25 18:07	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.44	0.15	1	12/10/25 05:19	12/10/25 18:07	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.44	0.15	1	12/10/25 05:19	12/10/25 18:07	50-32-8	
Benzo(b)fluoranthene	ND	mg/kg	0.44	0.15	1	12/10/25 05:19	12/10/25 18:07	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.44	0.17	1	12/10/25 05:19	12/10/25 18:07	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.44	0.15	1	12/10/25 05:19	12/10/25 18:07	207-08-9	
Benzoic Acid	ND	mg/kg	2.2	0.95	1	12/10/25 05:19	12/10/25 18:07	65-85-0	
Benzyl alcohol	ND	mg/kg	0.88	0.33	1	12/10/25 05:19	12/10/25 18:07	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.44	0.17	1	12/10/25 05:19	12/10/25 18:07	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.44	0.19	1	12/10/25 05:19	12/10/25 18:07	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	0.88	0.31	1	12/10/25 05:19	12/10/25 18:07	59-50-7	
4-Chloroaniline	ND	mg/kg	0.88	0.35	1	12/10/25 05:19	12/10/25 18:07	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.44	0.18	1	12/10/25 05:19	12/10/25 18:07	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.44	0.17	1	12/10/25 05:19	12/10/25 18:07	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.44	0.17	1	12/10/25 05:19	12/10/25 18:07	91-58-7	
2-Chlorophenol	ND	mg/kg	0.44	0.17	1	12/10/25 05:19	12/10/25 18:07	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.44	0.16	1	12/10/25 05:19	12/10/25 18:07	7005-72-3	
Chrysene	ND	mg/kg	0.44	0.16	1	12/10/25 05:19	12/10/25 18:07	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-1 **Lab ID: 92833633008** Collected: 12/05/25 14:35 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.44	0.17	1	12/10/25 05:19	12/10/25 18:07	53-70-3	
Dibenzofuran	ND	mg/kg	0.44	0.16	1	12/10/25 05:19	12/10/25 18:07	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.44	0.16	1	12/10/25 05:19	12/10/25 18:07	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.44	0.16	1	12/10/25 05:19	12/10/25 18:07	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.44	0.17	1	12/10/25 05:19	12/10/25 18:07	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	0.88	0.30	1	12/10/25 05:19	12/10/25 18:07	91-94-1	
2,4-Dichlorophenol	ND	mg/kg	0.44	0.17	1	12/10/25 05:19	12/10/25 18:07	120-83-2	
Diethylphthalate	ND	mg/kg	0.44	0.16	1	12/10/25 05:19	12/10/25 18:07	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.44	0.18	1	12/10/25 05:19	12/10/25 18:07	105-67-9	
Dimethylphthalate	ND	mg/kg	0.44	0.16	1	12/10/25 05:19	12/10/25 18:07	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.44	0.15	1	12/10/25 05:19	12/10/25 18:07	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	0.88	0.41	1	12/10/25 05:19	12/10/25 18:07	534-52-1	
2,4-Dinitrophenol	ND	mg/kg	2.2	1.4	1	12/10/25 05:19	12/10/25 18:07	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.44	0.17	1	12/10/25 05:19	12/10/25 18:07	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.44	0.16	1	12/10/25 05:19	12/10/25 18:07	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.44	0.17	1	12/10/25 05:19	12/10/25 18:07	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.44	0.17	1	12/10/25 05:19	12/10/25 18:07	117-81-7	
Fluoranthene	ND	mg/kg	0.44	0.15	1	12/10/25 05:19	12/10/25 18:07	206-44-0	
Fluorene	ND	mg/kg	0.44	0.15	1	12/10/25 05:19	12/10/25 18:07	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.44	0.19	1	12/10/25 05:19	12/10/25 18:07	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.44	0.17	1	12/10/25 05:19	12/10/25 18:07	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.44	0.25	1	12/10/25 05:19	12/10/25 18:07	77-47-4	
Hexachloroethane	ND	mg/kg	0.44	0.17	1	12/10/25 05:19	12/10/25 18:07	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.44	0.17	1	12/10/25 05:19	12/10/25 18:07	193-39-5	
Isophorone	ND	mg/kg	0.44	0.20	1	12/10/25 05:19	12/10/25 18:07	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.44	0.15	1	12/10/25 05:19	12/10/25 18:07	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.44	0.18	1	12/10/25 05:19	12/10/25 18:07	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.44	0.18	1	12/10/25 05:19	12/10/25 18:07	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.44	0.18	1	12/10/25 05:19	12/10/25 18:07	15831-10-4	
Naphthalene	ND	mg/kg	0.44	0.15	1	12/10/25 05:19	12/10/25 18:07	91-20-3	
2-Nitroaniline	ND	mg/kg	2.2	0.36	1	12/10/25 05:19	12/10/25 18:07	88-74-4	
3-Nitroaniline	ND	mg/kg	2.2	0.35	1	12/10/25 05:19	12/10/25 18:07	99-09-2	
4-Nitroaniline	ND	mg/kg	0.88	0.34	1	12/10/25 05:19	12/10/25 18:07	100-01-6	
Nitrobenzene	ND	mg/kg	0.44	0.20	1	12/10/25 05:19	12/10/25 18:07	98-95-3	
2-Nitrophenol	ND	mg/kg	0.44	0.19	1	12/10/25 05:19	12/10/25 18:07	88-75-5	
4-Nitrophenol	ND	mg/kg	2.2	0.85	1	12/10/25 05:19	12/10/25 18:07	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.44	0.15	1	12/10/25 05:19	12/10/25 18:07	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.44	0.17	1	12/10/25 05:19	12/10/25 18:07	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.44	0.16	1	12/10/25 05:19	12/10/25 18:07	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.44	0.21	1	12/10/25 05:19	12/10/25 18:07	108-60-1	
Pentachlorophenol	ND	mg/kg	0.88	0.43	1	12/10/25 05:19	12/10/25 18:07	87-86-5	
Phenanthrene	ND	mg/kg	0.44	0.14	1	12/10/25 05:19	12/10/25 18:07	85-01-8	
Phenol	ND	mg/kg	0.44	0.20	1	12/10/25 05:19	12/10/25 18:07	108-95-2	
Pyrene	ND	mg/kg	0.44	0.18	1	12/10/25 05:19	12/10/25 18:07	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-1 **Lab ID: 92833633008** Collected: 12/05/25 14:35 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.44	0.14	1	12/10/25 05:19	12/10/25 18:07	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.44	0.17	1	12/10/25 05:19	12/10/25 18:07	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.44	0.20	1	12/10/25 05:19	12/10/25 18:07	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.44	0.18	1	12/10/25 05:19	12/10/25 18:07	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	71	%	10-130		1	12/10/25 05:19	12/10/25 18:07	4165-60-0	
2-Fluorobiphenyl (S)	32	%	10-130		1	12/10/25 05:19	12/10/25 18:07	321-60-8	
Terphenyl-d14 (S)	28	%	10-130		1	12/10/25 05:19	12/10/25 18:07	1718-51-0	
Phenol-d6 (S)	71	%	10-130		1	12/10/25 05:19	12/10/25 18:07	13127-88-3	
2-Fluorophenol (S)	66	%	10-130		1	12/10/25 05:19	12/10/25 18:07	367-12-4	
2,4,6-Tribromophenol (S)	71	%	10-130		1	12/10/25 05:19	12/10/25 18:07	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.15	0.048	1	12/09/25 14:58	12/10/25 15:17	67-64-1	
Benzene	ND	mg/kg	0.0074	0.0030	1	12/09/25 14:58	12/10/25 15:17	71-43-2	
Bromobenzene	ND	mg/kg	0.0074	0.0024	1	12/09/25 14:58	12/10/25 15:17	108-86-1	
Bromochloromethane	ND	mg/kg	0.0074	0.0022	1	12/09/25 14:58	12/10/25 15:17	74-97-5	
Bromodichloromethane	ND	mg/kg	0.0074	0.0029	1	12/09/25 14:58	12/10/25 15:17	75-27-4	
Bromoform	ND	mg/kg	0.0074	0.0026	1	12/09/25 14:58	12/10/25 15:17	75-25-2	
Bromomethane	ND	mg/kg	0.030	0.023	1	12/09/25 14:58	12/10/25 15:17	74-83-9	IH,IK,v1
2-Butanone (MEK)	ND	mg/kg	0.15	0.036	1	12/09/25 14:58	12/10/25 15:17	78-93-3	
n-Butylbenzene	ND	mg/kg	0.0074	0.0047	1	12/09/25 14:58	12/10/25 15:17	104-51-8	
sec-Butylbenzene	ND	mg/kg	0.0074	0.0033	1	12/09/25 14:58	12/10/25 15:17	135-98-8	
tert-Butylbenzene	ND	mg/kg	0.0074	0.0026	1	12/09/25 14:58	12/10/25 15:17	98-06-6	
Carbon tetrachloride	ND	mg/kg	0.0074	0.0028	1	12/09/25 14:58	12/10/25 15:17	56-23-5	
Chlorobenzene	ND	mg/kg	0.0074	0.0043	1	12/09/25 14:58	12/10/25 15:17	108-90-7	
Chloroethane	ND	mg/kg	0.015	0.0057	1	12/09/25 14:58	12/10/25 15:17	75-00-3	
Chloroform	ND	mg/kg	0.0074	0.0062	1	12/09/25 14:58	12/10/25 15:17	67-66-3	
Chloromethane	ND	mg/kg	0.015	0.0062	1	12/09/25 14:58	12/10/25 15:17	74-87-3	
2-Chlorotoluene	ND	mg/kg	0.0074	0.0026	1	12/09/25 14:58	12/10/25 15:17	95-49-8	
4-Chlorotoluene	ND	mg/kg	0.0074	0.0041	1	12/09/25 14:58	12/10/25 15:17	106-43-4	
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0074	0.0029	1	12/09/25 14:58	12/10/25 15:17	96-12-8	
Dibromochloromethane	ND	mg/kg	0.0074	0.0042	1	12/09/25 14:58	12/10/25 15:17	124-48-1	
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0074	0.0033	1	12/09/25 14:58	12/10/25 15:17	106-93-4	
Dibromomethane	ND	mg/kg	0.0074	0.0016	1	12/09/25 14:58	12/10/25 15:17	74-95-3	
1,2-Dichlorobenzene	ND	mg/kg	0.0074	0.0027	1	12/09/25 14:58	12/10/25 15:17	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.0074	0.0023	1	12/09/25 14:58	12/10/25 15:17	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.0074	0.0019	1	12/09/25 14:58	12/10/25 15:17	106-46-7	
Dichlorodifluoromethane	ND	mg/kg	0.015	0.0076	1	12/09/25 14:58	12/10/25 15:17	75-71-8	
1,1-Dichloroethane	ND	mg/kg	0.0074	0.0031	1	12/09/25 14:58	12/10/25 15:17	75-34-3	
1,2-Dichloroethane	ND	mg/kg	0.0074	0.0049	1	12/09/25 14:58	12/10/25 15:17	107-06-2	
1,1-Dichloroethene	ND	mg/kg	0.0074	0.0031	1	12/09/25 14:58	12/10/25 15:17	75-35-4	
cis-1,2-Dichloroethene	ND	mg/kg	0.0074	0.0025	1	12/09/25 14:58	12/10/25 15:17	156-59-2	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-1 **Lab ID: 92833633008** Collected: 12/05/25 14:35 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0074	0.0063	1	12/09/25 14:58	12/10/25 15:17	156-60-5	
1,2-Dichloropropane	ND	mg/kg	0.0074	0.0022	1	12/09/25 14:58	12/10/25 15:17	78-87-5	
1,3-Dichloropropane	ND	mg/kg	0.0074	0.0023	1	12/09/25 14:58	12/10/25 15:17	142-28-9	
2,2-Dichloropropane	ND	mg/kg	0.0074	0.0056	1	12/09/25 14:58	12/10/25 15:17	594-20-7	
1,1-Dichloropropene	ND	mg/kg	0.0074	0.0036	1	12/09/25 14:58	12/10/25 15:17	563-58-6	
cis-1,3-Dichloropropene	ND	mg/kg	0.0074	0.0020	1	12/09/25 14:58	12/10/25 15:17	10061-01-5	
trans-1,3-Dichloropropene	ND	mg/kg	0.0074	0.0026	1	12/09/25 14:58	12/10/25 15:17	10061-02-6	
Diisopropyl ether	ND	mg/kg	0.0074	0.0020	1	12/09/25 14:58	12/10/25 15:17	108-20-3	
Ethylbenzene	ND	mg/kg	0.0074	0.0035	1	12/09/25 14:58	12/10/25 15:17	100-41-4	
Hexachloro-1,3-butadiene	ND	mg/kg	0.015	0.012	1	12/09/25 14:58	12/10/25 15:17	87-68-3	
2-Hexanone	ND	mg/kg	0.074	0.0072	1	12/09/25 14:58	12/10/25 15:17	591-78-6	
Isopropylbenzene (Cumene)	ND	mg/kg	0.0074	0.0025	1	12/09/25 14:58	12/10/25 15:17	98-82-8	
p-Isopropyltoluene	ND	mg/kg	0.0074	0.0037	1	12/09/25 14:58	12/10/25 15:17	99-87-6	
Methylene Chloride	ND	mg/kg	0.030	0.020	1	12/09/25 14:58	12/10/25 15:17	75-09-2	
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.074	0.0072	1	12/09/25 14:58	12/10/25 15:17	108-10-1	
Methyl-tert-butyl ether	ND	mg/kg	0.0074	0.0028	1	12/09/25 14:58	12/10/25 15:17	1634-04-4	
Naphthalene	ND	mg/kg	0.0074	0.0039	1	12/09/25 14:58	12/10/25 15:17	91-20-3	
n-Propylbenzene	ND	mg/kg	0.0074	0.0026	1	12/09/25 14:58	12/10/25 15:17	103-65-1	
Styrene	ND	mg/kg	0.0074	0.0020	1	12/09/25 14:58	12/10/25 15:17	100-42-5	
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0074	0.0029	1	12/09/25 14:58	12/10/25 15:17	630-20-6	
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0074	0.0020	1	12/09/25 14:58	12/10/25 15:17	79-34-5	
Tetrachloroethene	ND	mg/kg	0.0074	0.0023	1	12/09/25 14:58	12/10/25 15:17	127-18-4	
Toluene	ND	mg/kg	0.0074	0.0051	1	12/09/25 14:58	12/10/25 15:17	108-88-3	
1,2,3-Trichlorobenzene	ND	mg/kg	0.0074	0.0060	1	12/09/25 14:58	12/10/25 15:17	87-61-6	
1,2,4-Trichlorobenzene	ND	mg/kg	0.0074	0.0062	1	12/09/25 14:58	12/10/25 15:17	120-82-1	
1,1,1-Trichloroethane	ND	mg/kg	0.0074	0.0039	1	12/09/25 14:58	12/10/25 15:17	71-55-6	
1,1,2-Trichloroethane	ND	mg/kg	0.0074	0.0025	1	12/09/25 14:58	12/10/25 15:17	79-00-5	
Trichloroethene	ND	mg/kg	0.0074	0.0060	1	12/09/25 14:58	12/10/25 15:17	79-01-6	
Trichlorofluoromethane	ND	mg/kg	0.0074	0.0041	1	12/09/25 14:58	12/10/25 15:17	75-69-4	
1,2,3-Trichloropropane	ND	mg/kg	0.0074	0.0038	1	12/09/25 14:58	12/10/25 15:17	96-18-4	
1,2,4-Trimethylbenzene	ND	mg/kg	0.0074	0.0044	1	12/09/25 14:58	12/10/25 15:17	95-63-6	
1,3,5-Trimethylbenzene	ND	mg/kg	0.0074	0.0025	1	12/09/25 14:58	12/10/25 15:17	108-67-8	
Vinyl acetate	ND	mg/kg	0.074	0.015	1	12/09/25 14:58	12/10/25 15:17	108-05-4	
Vinyl chloride	ND	mg/kg	0.015	0.0038	1	12/09/25 14:58	12/10/25 15:17	75-01-4	
Xylene (Total)	ND	mg/kg	0.015	0.0042	1	12/09/25 14:58	12/10/25 15:17	1330-20-7	
m&p-Xylene	ND	mg/kg	0.015	0.0051	1	12/09/25 14:58	12/10/25 15:17	179601-23-1	
o-Xylene	ND	mg/kg	0.0074	0.0033	1	12/09/25 14:58	12/10/25 15:17	95-47-6	
Surrogates									
Toluene-d8 (S)	102	%	70-130		1	12/09/25 14:58	12/10/25 15:17	2037-26-5	
4-Bromofluorobenzene (S)	100	%	70-130		1	12/09/25 14:58	12/10/25 15:17	460-00-4	
1,2-Dichloroethane-d4 (S)	101	%	70-135		1	12/09/25 14:58	12/10/25 15:17	17060-07-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-1 **Lab ID: 92833633008** Collected: 12/05/25 14:35 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**26.1**	%	0.10	0.10	1		12/09/25 17:58		N2
Total Solids 2540 G-2011	Analytical Method: SM 2540G Preparation Method: SM 2540 G Pace National - Mt. Juliet								
Total Solids	**78.6**	%			1	12/12/25 06:36	12/12/25 06:42		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-DUP **Lab ID: 92833633009** Collected: 12/05/25 00:00 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
7199 Chromium, Hexavalent	Analytical Method: EPA 7199 Preparation Method: EPA 7199 Pace Analytical Services - Charlotte								
Chromium, Hexavalent	**1.0J**	mg/kg	1.3	0.22	1	12/10/25 09:50	12/11/25 03:56	18540-29-9	
Metals (ICPMS) 6020B	Analytical Method: EPA 6020B Preparation Method: 3050B Pace National - Mt. Juliet								
Antimony	ND	mg/kg	0.631	0.207	1	12/15/25 07:02	12/23/25 21:14	7440-36-0	
Arsenic	**0.855**	mg/kg	0.253	0.138	1	12/15/25 07:02	12/23/25 21:14	7440-38-2	
Beryllium	**0.329J**	mg/kg	0.631	0.189	1	12/15/25 07:02	12/24/25 15:44	7440-41-7	J
Cadmium	ND	mg/kg	0.253	0.115	1	12/15/25 07:02	12/23/25 21:14	7440-43-9	
Chromium	**56.6**	mg/kg	1.26	0.207	1	12/15/25 07:02	12/23/25 21:14	7440-47-3	
Copper	**19.3**	mg/kg	1.26	0.176	1	12/15/25 07:02	12/23/25 21:14	7440-50-8	
Lead	**7.71**	mg/kg	0.505	0.181	1	12/15/25 07:02	12/23/25 21:14	7439-92-1	
Nickel	**14.7**	mg/kg	0.631	0.213	1	12/15/25 07:02	12/23/25 21:14	7440-02-0	
Selenium	**0.806**	mg/kg	0.631	0.225	1	12/15/25 07:02	12/23/25 21:14	7782-49-2	
Silver	ND	mg/kg	0.126	0.0961	1	12/15/25 07:02	12/23/25 21:14	7440-22-4	
Thallium	ND	mg/kg	0.505	0.139	1	12/15/25 07:02	12/23/25 21:14	7440-28-0	
Zinc	**15.1**	mg/kg	6.31	1.53	1	12/15/25 07:02	12/23/25 21:14	7440-66-6	
Mercury 7471B	Analytical Method: EPA 7471B Preparation Method: 7471A Pace National - Mt. Juliet								
Mercury	ND	mg/kg	0.0505	0.0260	1	12/12/25 14:50	12/13/25 13:26	7439-97-6	
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Acenaphthene	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 18:33	83-32-9	
Acenaphthylene	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 18:33	208-96-8	
Aniline	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 18:33	62-53-3	
Anthracene	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 18:33	120-12-7	
Benzo(a)anthracene	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 18:33	56-55-3	
Benzo(a)pyrene	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 18:33	50-32-8	
Benzo(b)fluoranthene	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 18:33	205-99-2	
Benzo(g,h,i)perylene	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 18:33	191-24-2	
Benzo(k)fluoranthene	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 18:33	207-08-9	
Benzoic Acid	ND	mg/kg	2.1	0.89	1	12/10/25 05:19	12/10/25 18:33	65-85-0	
Benzyl alcohol	ND	mg/kg	0.83	0.31	1	12/10/25 05:19	12/10/25 18:33	100-51-6	
4-Bromophenylphenyl ether	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 18:33	101-55-3	
Butylbenzylphthalate	ND	mg/kg	0.41	0.17	1	12/10/25 05:19	12/10/25 18:33	85-68-7	
4-Chloro-3-methylphenol	ND	mg/kg	0.83	0.29	1	12/10/25 05:19	12/10/25 18:33	59-50-7	
4-Chloroaniline	ND	mg/kg	0.83	0.32	1	12/10/25 05:19	12/10/25 18:33	106-47-8	
bis(2-Chloroethoxy)methane	ND	mg/kg	0.41	0.17	1	12/10/25 05:19	12/10/25 18:33	111-91-1	
bis(2-Chloroethyl) ether	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 18:33	111-44-4	
2-Chloronaphthalene	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 18:33	91-58-7	
2-Chlorophenol	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 18:33	95-57-8	
4-Chlorophenylphenyl ether	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 18:33	7005-72-3	
Chrysene	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 18:33	218-01-9	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-DUP **Lab ID: 92833633009** Collected: 12/05/25 00:00 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Dibenz(a,h)anthracene	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 18:33	53-70-3	
Dibenzofuran	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 18:33	132-64-9	
1,2-Dichlorobenzene	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 18:33	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 18:33	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 18:33	106-46-7	
3,3'-Dichlorobenzidine	ND	mg/kg	0.83	0.28	1	12/10/25 05:19	12/10/25 18:33	91-94-1	
2,4-Dichlorophenol	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 18:33	120-83-2	
Diethylphthalate	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 18:33	84-66-2	
2,4-Dimethylphenol	ND	mg/kg	0.41	0.17	1	12/10/25 05:19	12/10/25 18:33	105-67-9	
Dimethylphthalate	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 18:33	131-11-3	
Di-n-butylphthalate	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 18:33	84-74-2	
4,6-Dinitro-2-methylphenol	ND	mg/kg	0.83	0.39	1	12/10/25 05:19	12/10/25 18:33	534-52-1	
2,4-Dinitrophenol	ND	mg/kg	2.1	1.3	1	12/10/25 05:19	12/10/25 18:33	51-28-5	
2,4-Dinitrotoluene	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 18:33	121-14-2	
2,6-Dinitrotoluene	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 18:33	606-20-2	
Di-n-octylphthalate	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 18:33	117-84-0	
bis(2-Ethylhexyl)phthalate	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 18:33	117-81-7	
Fluoranthene	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 18:33	206-44-0	
Fluorene	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 18:33	86-73-7	
Hexachloro-1,3-butadiene	ND	mg/kg	0.41	0.18	1	12/10/25 05:19	12/10/25 18:33	87-68-3	
Hexachlorobenzene	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 18:33	118-74-1	
Hexachlorocyclopentadiene	ND	mg/kg	0.41	0.24	1	12/10/25 05:19	12/10/25 18:33	77-47-4	
Hexachloroethane	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 18:33	67-72-1	
Indeno(1,2,3-cd)pyrene	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 18:33	193-39-5	
Isophorone	ND	mg/kg	0.41	0.18	1	12/10/25 05:19	12/10/25 18:33	78-59-1	
1-Methylnaphthalene	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 18:33	90-12-0	
2-Methylnaphthalene	ND	mg/kg	0.41	0.17	1	12/10/25 05:19	12/10/25 18:33	91-57-6	
2-Methylphenol(o-Cresol)	ND	mg/kg	0.41	0.17	1	12/10/25 05:19	12/10/25 18:33	95-48-7	
3&4-Methylphenol(m&p Cresol)	ND	mg/kg	0.41	0.17	1	12/10/25 05:19	12/10/25 18:33	15831-10-4	
Naphthalene	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 18:33	91-20-3	
2-Nitroaniline	ND	mg/kg	2.1	0.34	1	12/10/25 05:19	12/10/25 18:33	88-74-4	
3-Nitroaniline	ND	mg/kg	2.1	0.32	1	12/10/25 05:19	12/10/25 18:33	99-09-2	
4-Nitroaniline	ND	mg/kg	0.83	0.31	1	12/10/25 05:19	12/10/25 18:33	100-01-6	
Nitrobenzene	ND	mg/kg	0.41	0.19	1	12/10/25 05:19	12/10/25 18:33	98-95-3	
2-Nitrophenol	ND	mg/kg	0.41	0.18	1	12/10/25 05:19	12/10/25 18:33	88-75-5	
4-Nitrophenol	ND	mg/kg	2.1	0.80	1	12/10/25 05:19	12/10/25 18:33	100-02-7	
N-Nitrosodimethylamine	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 18:33	62-75-9	
N-Nitroso-di-n-propylamine	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 18:33	621-64-7	
N-Nitrosodiphenylamine	ND	mg/kg	0.41	0.15	1	12/10/25 05:19	12/10/25 18:33	86-30-6	
2,2'-Oxybis(1-chloropropane)	ND	mg/kg	0.41	0.20	1	12/10/25 05:19	12/10/25 18:33	108-60-1	
Pentachlorophenol	ND	mg/kg	0.83	0.40	1	12/10/25 05:19	12/10/25 18:33	87-86-5	
Phenanthrene	ND	mg/kg	0.41	0.14	1	12/10/25 05:19	12/10/25 18:33	85-01-8	
Phenol	ND	mg/kg	0.41	0.18	1	12/10/25 05:19	12/10/25 18:33	108-95-2	
Pyrene	ND	mg/kg	0.41	0.17	1	12/10/25 05:19	12/10/25 18:33	129-00-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-DUP **Lab ID: 92833633009** Collected: 12/05/25 00:00 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8270E MSSV Microwave	Analytical Method: EPA 8270E Preparation Method: EPA 3546 Pace Analytical Services - Charlotte								
Pyridine	ND	mg/kg	0.41	0.13	1	12/10/25 05:19	12/10/25 18:33	110-86-1	
1,2,4-Trichlorobenzene	ND	mg/kg	0.41	0.16	1	12/10/25 05:19	12/10/25 18:33	120-82-1	
2,4,5-Trichlorophenol	ND	mg/kg	0.41	0.19	1	12/10/25 05:19	12/10/25 18:33	95-95-4	
2,4,6-Trichlorophenol	ND	mg/kg	0.41	0.17	1	12/10/25 05:19	12/10/25 18:33	88-06-2	
Surrogates									
Nitrobenzene-d5 (S)	69	%	10-130		1	12/10/25 05:19	12/10/25 18:33	4165-60-0	
2-Fluorobiphenyl (S)	50	%	10-130		1	12/10/25 05:19	12/10/25 18:33	321-60-8	
Terphenyl-d14 (S)	69	%	10-130		1	12/10/25 05:19	12/10/25 18:33	1718-51-0	
Phenol-d6 (S)	69	%	10-130		1	12/10/25 05:19	12/10/25 18:33	13127-88-3	
2-Fluorophenol (S)	62	%	10-130		1	12/10/25 05:19	12/10/25 18:33	367-12-4	
2,4,6-Tribromophenol (S)	72	%	10-130		1	12/10/25 05:19	12/10/25 18:33	118-79-6	
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
Acetone	ND	mg/kg	0.14	0.045	1	12/09/25 14:58	12/10/25 15:34	67-64-1	
Benzene	ND	mg/kg	0.0069	0.0028	1	12/09/25 14:58	12/10/25 15:34	71-43-2	
Bromobenzene	ND	mg/kg	0.0069	0.0023	1	12/09/25 14:58	12/10/25 15:34	108-86-1	
Bromochloromethane	ND	mg/kg	0.0069	0.0021	1	12/09/25 14:58	12/10/25 15:34	74-97-5	
Bromodichloromethane	ND	mg/kg	0.0069	0.0027	1	12/09/25 14:58	12/10/25 15:34	75-27-4	
Bromoform	ND	mg/kg	0.0069	0.0024	1	12/09/25 14:58	12/10/25 15:34	75-25-2	
Bromomethane	ND	mg/kg	0.028	0.021	1	12/09/25 14:58	12/10/25 15:34	74-83-9	IH,IK,v1
2-Butanone (MEK)	ND	mg/kg	0.14	0.033	1	12/09/25 14:58	12/10/25 15:34	78-93-3	
n-Butylbenzene	ND	mg/kg	0.0069	0.0044	1	12/09/25 14:58	12/10/25 15:34	104-51-8	
sec-Butylbenzene	ND	mg/kg	0.0069	0.0031	1	12/09/25 14:58	12/10/25 15:34	135-98-8	
tert-Butylbenzene	ND	mg/kg	0.0069	0.0025	1	12/09/25 14:58	12/10/25 15:34	98-06-6	
Carbon tetrachloride	ND	mg/kg	0.0069	0.0026	1	12/09/25 14:58	12/10/25 15:34	56-23-5	
Chlorobenzene	ND	mg/kg	0.0069	0.0040	1	12/09/25 14:58	12/10/25 15:34	108-90-7	
Chloroethane	ND	mg/kg	0.014	0.0054	1	12/09/25 14:58	12/10/25 15:34	75-00-3	
Chloroform	ND	mg/kg	0.0069	0.0058	1	12/09/25 14:58	12/10/25 15:34	67-66-3	
Chloromethane	ND	mg/kg	0.014	0.0058	1	12/09/25 14:58	12/10/25 15:34	74-87-3	
2-Chlorotoluene	ND	mg/kg	0.0069	0.0025	1	12/09/25 14:58	12/10/25 15:34	95-49-8	
4-Chlorotoluene	ND	mg/kg	0.0069	0.0039	1	12/09/25 14:58	12/10/25 15:34	106-43-4	
1,2-Dibromo-3-chloropropane	ND	mg/kg	0.0069	0.0027	1	12/09/25 14:58	12/10/25 15:34	96-12-8	
Dibromochloromethane	ND	mg/kg	0.0069	0.0039	1	12/09/25 14:58	12/10/25 15:34	124-48-1	
1,2-Dibromoethane (EDB)	ND	mg/kg	0.0069	0.0031	1	12/09/25 14:58	12/10/25 15:34	106-93-4	
Dibromomethane	ND	mg/kg	0.0069	0.0015	1	12/09/25 14:58	12/10/25 15:34	74-95-3	
1,2-Dichlorobenzene	ND	mg/kg	0.0069	0.0025	1	12/09/25 14:58	12/10/25 15:34	95-50-1	
1,3-Dichlorobenzene	ND	mg/kg	0.0069	0.0021	1	12/09/25 14:58	12/10/25 15:34	541-73-1	
1,4-Dichlorobenzene	ND	mg/kg	0.0069	0.0018	1	12/09/25 14:58	12/10/25 15:34	106-46-7	
Dichlorodifluoromethane	ND	mg/kg	0.014	0.0071	1	12/09/25 14:58	12/10/25 15:34	75-71-8	
1,1-Dichloroethane	ND	mg/kg	0.0069	0.0029	1	12/09/25 14:58	12/10/25 15:34	75-34-3	
1,2-Dichloroethane	ND	mg/kg	0.0069	0.0046	1	12/09/25 14:58	12/10/25 15:34	107-06-2	
1,1-Dichloroethene	ND	mg/kg	0.0069	0.0029	1	12/09/25 14:58	12/10/25 15:34	75-35-4	
cis-1,2-Dichloroethene	ND	mg/kg	0.0069	0.0024	1	12/09/25 14:58	12/10/25 15:34	156-59-2	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-DUP **Lab ID: 92833633009** Collected: 12/05/25 00:00 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
8260D/5035A/5030B Volatiles	Analytical Method: EPA 8260D Preparation Method: EPA 5035A/5030B Pace Analytical Services - Charlotte								
trans-1,2-Dichloroethene	ND	mg/kg	0.0069	0.0059	1	12/09/25 14:58	12/10/25 15:34	156-60-5	
1,2-Dichloropropane	ND	mg/kg	0.0069	0.0021	1	12/09/25 14:58	12/10/25 15:34	78-87-5	
1,3-Dichloropropane	ND	mg/kg	0.0069	0.0022	1	12/09/25 14:58	12/10/25 15:34	142-28-9	
2,2-Dichloropropane	ND	mg/kg	0.0069	0.0053	1	12/09/25 14:58	12/10/25 15:34	594-20-7	
1,1-Dichloropropene	ND	mg/kg	0.0069	0.0033	1	12/09/25 14:58	12/10/25 15:34	563-58-6	
cis-1,3-Dichloropropene	ND	mg/kg	0.0069	0.0019	1	12/09/25 14:58	12/10/25 15:34	10061-01-5	
trans-1,3-Dichloropropene	ND	mg/kg	0.0069	0.0024	1	12/09/25 14:58	12/10/25 15:34	10061-02-6	
Diisopropyl ether	ND	mg/kg	0.0069	0.0019	1	12/09/25 14:58	12/10/25 15:34	108-20-3	
Ethylbenzene	ND	mg/kg	0.0069	0.0032	1	12/09/25 14:58	12/10/25 15:34	100-41-4	
Hexachloro-1,3-butadiene	ND	mg/kg	0.014	0.011	1	12/09/25 14:58	12/10/25 15:34	87-68-3	
2-Hexanone	ND	mg/kg	0.069	0.0067	1	12/09/25 14:58	12/10/25 15:34	591-78-6	
Isopropylbenzene (Cumene)	ND	mg/kg	0.0069	0.0024	1	12/09/25 14:58	12/10/25 15:34	98-82-8	
p-Isopropyltoluene	ND	mg/kg	0.0069	0.0034	1	12/09/25 14:58	12/10/25 15:34	99-87-6	
Methylene Chloride	ND	mg/kg	0.028	0.019	1	12/09/25 14:58	12/10/25 15:34	75-09-2	
4-Methyl-2-pentanone (MIBK)	ND	mg/kg	0.069	0.0067	1	12/09/25 14:58	12/10/25 15:34	108-10-1	
Methyl-tert-butyl ether	ND	mg/kg	0.0069	0.0026	1	12/09/25 14:58	12/10/25 15:34	1634-04-4	
Naphthalene	ND	mg/kg	0.0069	0.0036	1	12/09/25 14:58	12/10/25 15:34	91-20-3	
n-Propylbenzene	ND	mg/kg	0.0069	0.0025	1	12/09/25 14:58	12/10/25 15:34	103-65-1	
Styrene	ND	mg/kg	0.0069	0.0018	1	12/09/25 14:58	12/10/25 15:34	100-42-5	
1,1,1,2-Tetrachloroethane	ND	mg/kg	0.0069	0.0027	1	12/09/25 14:58	12/10/25 15:34	630-20-6	
1,1,2,2-Tetrachloroethane	ND	mg/kg	0.0069	0.0018	1	12/09/25 14:58	12/10/25 15:34	79-34-5	
Tetrachloroethene	ND	mg/kg	0.0069	0.0022	1	12/09/25 14:58	12/10/25 15:34	127-18-4	
Toluene	ND	mg/kg	0.0069	0.0048	1	12/09/25 14:58	12/10/25 15:34	108-88-3	
1,2,3-Trichlorobenzene	ND	mg/kg	0.0069	0.0056	1	12/09/25 14:58	12/10/25 15:34	87-61-6	
1,2,4-Trichlorobenzene	ND	mg/kg	0.0069	0.0058	1	12/09/25 14:58	12/10/25 15:34	120-82-1	
1,1,1-Trichloroethane	ND	mg/kg	0.0069	0.0036	1	12/09/25 14:58	12/10/25 15:34	71-55-6	
1,1,2-Trichloroethane	ND	mg/kg	0.0069	0.0023	1	12/09/25 14:58	12/10/25 15:34	79-00-5	
Trichloroethene	ND	mg/kg	0.0069	0.0056	1	12/09/25 14:58	12/10/25 15:34	79-01-6	
Trichlorofluoromethane	ND	mg/kg	0.0069	0.0038	1	12/09/25 14:58	12/10/25 15:34	75-69-4	
1,2,3-Trichloropropane	ND	mg/kg	0.0069	0.0035	1	12/09/25 14:58	12/10/25 15:34	96-18-4	
1,2,4-Trimethylbenzene	ND	mg/kg	0.0069	0.0041	1	12/09/25 14:58	12/10/25 15:34	95-63-6	
1,3,5-Trimethylbenzene	ND	mg/kg	0.0069	0.0023	1	12/09/25 14:58	12/10/25 15:34	108-67-8	
Vinyl acetate	ND	mg/kg	0.069	0.014	1	12/09/25 14:58	12/10/25 15:34	108-05-4	
Vinyl chloride	ND	mg/kg	0.014	0.0035	1	12/09/25 14:58	12/10/25 15:34	75-01-4	
Xylene (Total)	ND	mg/kg	0.014	0.0040	1	12/09/25 14:58	12/10/25 15:34	1330-20-7	
m&p-Xylene	ND	mg/kg	0.014	0.0047	1	12/09/25 14:58	12/10/25 15:34	179601-23-1	
o-Xylene	ND	mg/kg	0.0069	0.0031	1	12/09/25 14:58	12/10/25 15:34	95-47-6	
Surrogates									
Toluene-d8 (S)	101	%	70-130		1	12/09/25 14:58	12/10/25 15:34	2037-26-5	
4-Bromofluorobenzene (S)	103	%	70-130		1	12/09/25 14:58	12/10/25 15:34	460-00-4	
1,2-Dichloroethane-d4 (S)	103	%	70-135		1	12/09/25 14:58	12/10/25 15:34	17060-07-0	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products II
Pace Project No.: 92833633

Sample: SS-DUP **Lab ID: 92833633009** Collected: 12/05/25 00:00 Received: 12/09/25 12:00 Matrix: Solid

Results reported on a "dry weight" basis and are adjusted for percent moisture, sample size and any dilutions.

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
Percent Moisture	Analytical Method: SW-846 Pace Analytical Services - Charlotte								
Percent Moisture	**19.1**	%	0.10	0.10	1		12/09/25 17:58		N2
Total Solids 2540 G-2011	Analytical Method: SM 2540G Preparation Method: SM 2540 G Pace National - Mt. Juliet								
Total Solids	**79.2**	%			1	12/12/25 06:36	12/12/25 06:42		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

QC Batch: 2656935
QC Batch Method: 3015
Analysis Method: EPA 6020B
Analysis Description: Metals (ICPMS) 6020B
Laboratory: Pace National - Mt. Juliet
Associated Lab Samples: 92833633001, 92833633002, 92833633003, 92833633004

METHOD BLANK: R4318947-1 Matrix: Water
Associated Lab Samples: 92833633001, 92833633002, 92833633003, 92833633004

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Antimony	ug/L	ND	4.00	0.310	12/25/25 14:10	
Arsenic	ug/L	ND	2.00	0.120	12/25/25 14:10	
Beryllium	ug/L	ND	2.00	0.200	12/25/25 14:10	
Cadmium	ug/L	ND	1.00	0.120	12/25/25 14:10	
Calcium	ug/L	ND	1000	92.5	12/25/25 14:10	
Chromium	ug/L	ND	2.00	0.900	12/25/25 14:10	
Copper	ug/L	ND	5.00	0.700	12/25/25 14:10	
Lead	ug/L	ND	2.00	0.500	12/25/25 14:10	
Magnesium	ug/L	ND	1000	82.7	12/25/25 14:10	
Nickel	ug/L	ND	2.00	0.500	12/25/25 14:10	
Selenium	ug/L	ND	2.00	0.250	12/25/25 14:10	
Silver	ug/L	ND	2.00	0.110	12/25/25 14:10	
Thallium	ug/L	ND	2.00	0.130	12/25/25 14:10	
Zinc	ug/L	ND	25.0	4.00	12/25/25 14:10	

LABORATORY CONTROL SAMPLE: R4318947-2

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Antimony	ug/L	50.0	50.5	101	80.0-120	
Arsenic	ug/L	50.0	50.6	101	80.0-120	
Beryllium	ug/L	50.0	47.3	94.5	80.0-120	
Cadmium	ug/L	50.0	52.1	104	80.0-120	
Calcium	ug/L	5000	5130	103	80.0-120	
Chromium	ug/L	50.0	52.4	105	80.0-120	
Copper	ug/L	50.0	53.4	107	80.0-120	
Lead	ug/L	50.0	50.2	100	80.0-120	
Magnesium	ug/L	5000	5140	103	80.0-120	
Nickel	ug/L	50.0	53.0	106	80.0-120	
Selenium	ug/L	50.0	50.7	101	80.0-120	
Silver	ug/L	50.0	48.6	97.2	80.0-120	
Thallium	ug/L	50.0	50.5	101	80.0-120	
Zinc	ug/L	50.0	51.4	103	80.0-120	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: R4318947-4 R4318947-5

Parameter	Units	L1926758-01 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Antimony	ug/L	0.397	50.0	50.0	51.2	51.5	102	102	75.0-125	0.557	20	
Arsenic	ug/L	0.377	50.0	50.0	50.7	50.4	101	100	75.0-125	0.558	20	
Beryllium	ug/L	ND	50.0	50.0	45.5	45.1	91.0	90.2	75.0-125	0.886	20	
Cadmium	ug/L	ND	50.0	50.0	52.3	50.8	105	102	75.0-125	2.94	20	
Calcium	ug/L	181000	5000	5000	183000	182000	50.0	26.4	75.0-125	0.647	20	P6
Chromium	ug/L	0.965	50.0	50.0	51.9	51.7	102	102	75.0-125	0.375	20	
Copper	ug/L	1.74	50.0	50.0	50.8	51.1	98.1	98.8	75.0-125	0.680	20	
Lead	ug/L	ND	50.0	50.0	49.0	48.9	98.0	97.8	75.0-125	0.119	20	
Magnesium	ug/L	35000	5000	5000	39300	40700	87.1	114	75.0-125	3.32	20	
Nickel	ug/L	2.28	50.0	50.0	52.6	52.5	101	100	75.0-125	0.175	20	
Selenium	ug/L	1.35	50.0	50.0	51.8	52.0	101	101	75.0-125	0.390	20	
Silver	ug/L	ND	50.0	50.0	47.9	48.0	95.8	96.0	75.0-125	0.173	20	
Thallium	ug/L	0.375	50.0	50.0	49.8	49.2	98.8	97.6	75.0-125	1.29	20	
Zinc	ug/L	5.64	50.0	50.0	52.1	53.9	92.9	96.5	75.0-125	3.32	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

QC Batch: 2657288
QC Batch Method: 3050B
Analysis Method: EPA 6020B
Analysis Description: Metals (ICPMS) 6020B
Laboratory: Pace National - Mt. Juliet
Associated Lab Samples: 92833633006, 92833633007, 92833633008, 92833633009

METHOD BLANK: R4318333-1 Matrix: Solid
Associated Lab Samples: 92833633006, 92833633007, 92833633008, 92833633009

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Antimony	mg/kg	ND	0.520	0.171	12/23/25 19:35	
Arsenic	mg/kg	ND	0.208	0.113	12/23/25 19:35	
Cadmium	mg/kg	ND	0.208	0.0944	12/23/25 19:35	
Chromium	mg/kg	ND	1.04	0.171	12/23/25 19:35	
Copper	mg/kg	ND	1.04	0.145	12/23/25 19:35	
Lead	mg/kg	ND	0.416	0.149	12/23/25 19:35	
Nickel	mg/kg	ND	0.520	0.176	12/23/25 19:35	
Selenium	mg/kg	ND	0.520	0.185	12/23/25 19:35	
Silver	mg/kg	ND	0.104	0.0791	12/23/25 19:35	
Thallium	mg/kg	ND	0.416	0.114	12/23/25 19:35	
Zinc	mg/kg	ND	5.20	1.26	12/23/25 19:35	

METHOD BLANK: R4318780-1 Matrix: Solid
Associated Lab Samples: 92833633006, 92833633007, 92833633008, 92833633009

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Beryllium	mg/kg	ND	0.520	0.156	12/24/25 14:53	

LABORATORY CONTROL SAMPLE: R4318333-2

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Antimony	mg/kg	100	102	102	80.0-120	
Arsenic	mg/kg	100	98.3	98.3	80.0-120	
Cadmium	mg/kg	100	98.1	98.1	80.0-120	
Chromium	mg/kg	100	97.3	97.3	80.0-120	
Copper	mg/kg	100	100	100	80.0-120	
Lead	mg/kg	100	96.3	96.3	80.0-120	
Nickel	mg/kg	100	101	101	80.0-120	
Selenium	mg/kg	100	98.3	98.3	80.0-120	
Silver	mg/kg	20.0	21.9	109	80.0-120	
Thallium	mg/kg	100	99.6	99.6	80.0-120	
Zinc	mg/kg	100	97.6	97.6	80.0-120	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

LABORATORY CONTROL SAMPLE: R4318780-2

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Beryllium	mg/kg	100	94.0	94.0	80.0-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: R4318333-5 R4318333-6

Parameter	Units	L1926358-21 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Antimony	mg/kg	ND	103	103	92.3	93.5	89.6	90.8	75.0-125	1.28	20	
Arsenic	mg/kg	1.74	103	103	93.5	94.5	89.1	90.1	75.0-125	1.08	20	
Cadmium	mg/kg	ND	103	103	91.5	92.6	88.8	89.9	75.0-125	1.25	20	
Chromium	mg/kg	2.60	103	103	94.1	94.9	88.8	89.7	75.0-125	0.887	20	
Copper	mg/kg	2.04	103	103	95.6	98.1	90.9	93.3	75.0-125	2.59	20	
Lead	mg/kg	2.29	103	103	90.3	93.0	85.5	88.1	75.0-125	2.91	20	
Nickel	mg/kg	1.84	103	103	96.1	96.9	91.5	92.3	75.0-125	0.798	20	
Selenium	mg/kg	0.471	103	103	91.2	93.7	88.1	90.6	75.0-125	2.78	20	
Silver	mg/kg	ND	20.6	20.6	20.4	20.7	99.1	100	75.0-125	1.24	20	
Thallium	mg/kg	ND	103	103	92.4	92.7	89.7	90.0	75.0-125	0.393	20	
Zinc	mg/kg	9.87	103	103	101	103	88.0	90.3	75.0-125	2.28	20	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: R4318780-5 R4318780-6

Parameter	Units	L1926358-21 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Beryllium	mg/kg	0.234	103	103	89.5	88.9	86.7	86.1	75.0-125	0.748	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

QC Batch: 2656855
QC Batch Method: 7470A
Analysis Method: EPA 7470A
Analysis Description: Mercury 7470A
Laboratory: Pace National - Mt. Juliet
Associated Lab Samples: 92833633001, 92833633002, 92833633003, 92833633004

METHOD BLANK: R4315993-1 Matrix: Water
Associated Lab Samples: 92833633001, 92833633002, 92833633003, 92833633004

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Mercury	ug/L	ND	0.200	0.0700	12/17/25 20:28	

LABORATORY CONTROL SAMPLE: R4315993-2

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Mercury	ug/L	3.00	3.11	104	80.0-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: R4315993-4 R4315993-5

Parameter	Units	L1926734-01 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Mercury	ug/L	ND	3.00	3.00	2.23	2.08	74.4	69.4	75.0-125	7.04	20	ML

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

QC Batch: 2657743
QC Batch Method: 7471A
Analysis Method: EPA 7471B
Analysis Description: Mercury 7471B
Laboratory: Pace National - Mt. Juliet
Associated Lab Samples: 92833633006, 92833633007, 92833633008, 92833633009

METHOD BLANK: R4313778-1 Matrix: Solid
Associated Lab Samples: 92833633006, 92833633007, 92833633008, 92833633009

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Mercury	mg/kg	ND	0.0400	0.0206	12/13/25 12:16	

LABORATORY CONTROL SAMPLE: R4313778-2

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Mercury	mg/kg	0.500	0.490	98.1	80.0-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: R4313778-4 R4313778-5

Parameter	Units	L1925738-01 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Mercury	mg/kg	ND	0.516	0.516	0.461	0.474	89.2	91.8	75.0-125	2.81	20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

QC Batch: 978004
QC Batch Method: EPA 5035A/5030B
Analysis Method: EPA 8260D
Analysis Description: 8260D 5035A 5030B
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92833633006, 92833633007, 92833633008, 92833633009

METHOD BLANK: 5028925 Matrix: Solid
Associated Lab Samples: 92833633006, 92833633007, 92833633008, 92833633009

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	ND	0.0050	0.0019	12/10/25 07:16	
1,1,1-Trichloroethane	mg/kg	ND	0.0050	0.0026	12/10/25 07:16	
1,1,2,2-Tetrachloroethane	mg/kg	ND	0.0050	0.0013	12/10/25 07:16	
1,1,2-Trichloroethane	mg/kg	ND	0.0050	0.0017	12/10/25 07:16	
1,1-Dichloroethane	mg/kg	ND	0.0050	0.0021	12/10/25 07:16	
1,1-Dichloroethene	mg/kg	ND	0.0050	0.0021	12/10/25 07:16	
1,1-Dichloropropene	mg/kg	ND	0.0050	0.0024	12/10/25 07:16	
1,2,3-Trichlorobenzene	mg/kg	ND	0.0050	0.0040	12/10/25 07:16	
1,2,3-Trichloropropane	mg/kg	ND	0.0050	0.0025	12/10/25 07:16	
1,2,4-Trichlorobenzene	mg/kg	ND	0.0050	0.0042	12/10/25 07:16	
1,2,4-Trimethylbenzene	mg/kg	ND	0.0050	0.0030	12/10/25 07:16	
1,2-Dibromo-3-chloropropane	mg/kg	ND	0.0050	0.0019	12/10/25 07:16	
1,2-Dibromoethane (EDB)	mg/kg	ND	0.0050	0.0022	12/10/25 07:16	
1,2-Dichlorobenzene	mg/kg	ND	0.0050	0.0018	12/10/25 07:16	
1,2-Dichloroethane	mg/kg	ND	0.0050	0.0033	12/10/25 07:16	
1,2-Dichloropropane	mg/kg	ND	0.0050	0.0015	12/10/25 07:16	
1,3,5-Trimethylbenzene	mg/kg	ND	0.0050	0.0017	12/10/25 07:16	
1,3-Dichlorobenzene	mg/kg	ND	0.0050	0.0016	12/10/25 07:16	
1,3-Dichloropropane	mg/kg	ND	0.0050	0.0016	12/10/25 07:16	
1,4-Dichlorobenzene	mg/kg	ND	0.0050	0.0013	12/10/25 07:16	
2,2-Dichloropropane	mg/kg	ND	0.0050	0.0038	12/10/25 07:16	
2-Butanone (MEK)	mg/kg	ND	0.10	0.024	12/10/25 07:16	
2-Chlorotoluene	mg/kg	ND	0.0050	0.0018	12/10/25 07:16	
2-Hexanone	mg/kg	ND	0.050	0.0048	12/10/25 07:16	
4-Chlorotoluene	mg/kg	ND	0.0050	0.0028	12/10/25 07:16	
4-Methyl-2-pentanone (MIBK)	mg/kg	ND	0.050	0.0048	12/10/25 07:16	
Acetone	mg/kg	ND	0.10	0.032	12/10/25 07:16	
Benzene	mg/kg	ND	0.0050	0.0020	12/10/25 07:16	
Bromobenzene	mg/kg	ND	0.0050	0.0016	12/10/25 07:16	
Bromochloromethane	mg/kg	ND	0.0050	0.0015	12/10/25 07:16	
Bromodichloromethane	mg/kg	ND	0.0050	0.0019	12/10/25 07:16	
Bromoform	mg/kg	ND	0.0050	0.0018	12/10/25 07:16	
Bromomethane	mg/kg	ND	0.020	0.016	12/10/25 07:16	IH,IK,v1
Carbon tetrachloride	mg/kg	ND	0.0050	0.0019	12/10/25 07:16	
Chlorobenzene	mg/kg	ND	0.0050	0.0029	12/10/25 07:16	
Chloroethane	mg/kg	ND	0.010	0.0039	12/10/25 07:16	
Chloroform	mg/kg	ND	0.0050	0.0042	12/10/25 07:16	
Chloromethane	mg/kg	ND	0.010	0.0042	12/10/25 07:16	
cis-1,2-Dichloroethene	mg/kg	ND	0.0050	0.0017	12/10/25 07:16	
cis-1,3-Dichloropropene	mg/kg	ND	0.0050	0.0014	12/10/25 07:16	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

METHOD BLANK: 5028925 Matrix: Solid
Associated Lab Samples: 92833633006, 92833633007, 92833633008, 92833633009

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Dibromochloromethane	mg/kg	ND	0.0050	0.0028	12/10/25 07:16	
Dibromomethane	mg/kg	ND	0.0050	0.0011	12/10/25 07:16	
Dichlorodifluoromethane	mg/kg	ND	0.010	0.0051	12/10/25 07:16	
Diisopropyl ether	mg/kg	ND	0.0050	0.0014	12/10/25 07:16	
Ethylbenzene	mg/kg	ND	0.0050	0.0023	12/10/25 07:16	
Hexachloro-1,3-butadiene	mg/kg	ND	0.010	0.0082	12/10/25 07:16	
Isopropylbenzene (Cumene)	mg/kg	ND	0.0050	0.0017	12/10/25 07:16	
m&p-Xylene	mg/kg	ND	0.010	0.0034	12/10/25 07:16	
Methyl-tert-butyl ether	mg/kg	ND	0.0050	0.0019	12/10/25 07:16	
Methylene Chloride	mg/kg	ND	0.020	0.014	12/10/25 07:16	
n-Butylbenzene	mg/kg	ND	0.0050	0.0032	12/10/25 07:16	
n-Propylbenzene	mg/kg	ND	0.0050	0.0018	12/10/25 07:16	
Naphthalene	mg/kg	ND	0.0050	0.0026	12/10/25 07:16	
o-Xylene	mg/kg	ND	0.0050	0.0022	12/10/25 07:16	
p-Isopropyltoluene	mg/kg	ND	0.0050	0.0025	12/10/25 07:16	
sec-Butylbenzene	mg/kg	ND	0.0050	0.0022	12/10/25 07:16	
Styrene	mg/kg	ND	0.0050	0.0013	12/10/25 07:16	
tert-Butylbenzene	mg/kg	ND	0.0050	0.0018	12/10/25 07:16	
Tetrachloroethene	mg/kg	ND	0.0050	0.0016	12/10/25 07:16	
Toluene	mg/kg	ND	0.0050	0.0034	12/10/25 07:16	
trans-1,2-Dichloroethene	mg/kg	ND	0.0050	0.0042	12/10/25 07:16	
trans-1,3-Dichloropropene	mg/kg	ND	0.0050	0.0017	12/10/25 07:16	
Trichloroethene	mg/kg	ND	0.0050	0.0040	12/10/25 07:16	
Trichlorofluoromethane	mg/kg	ND	0.0050	0.0028	12/10/25 07:16	
Vinyl acetate	mg/kg	ND	0.050	0.010	12/10/25 07:16	
Vinyl chloride	mg/kg	ND	0.010	0.0025	12/10/25 07:16	
Xylene (Total)	mg/kg	ND	0.010	0.0028	12/10/25 07:16	
1,2-Dichloroethane-d4 (S)	%	106	70-135		12/10/25 07:16	
4-Bromofluorobenzene (S)	%	101	70-130		12/10/25 07:16	
Toluene-d8 (S)	%	100	70-130		12/10/25 07:16	

LABORATORY CONTROL SAMPLE: 5028926

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	0.5	0.51	103	70-130	
1,1,1-Trichloroethane	mg/kg	0.5	0.50	99	68-130	
1,1,2,2-Tetrachloroethane	mg/kg	0.5	0.52	104	70-130	
1,1,2-Trichloroethane	mg/kg	0.5	0.53	106	70-130	
1,1-Dichloroethane	mg/kg	0.5	0.52	103	70-130	
1,1-Dichloroethene	mg/kg	0.5	0.54	108	67-139	
1,1-Dichloropropene	mg/kg	0.5	0.51	103	68-132	
1,2,3-Trichlorobenzene	mg/kg	0.5	0.56	112	68-130	
1,2,3-Trichloropropane	mg/kg	0.5	0.52	104	70-130	
1,2,4-Trichlorobenzene	mg/kg	0.5	0.50	101	67-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

LABORATORY CONTROL SAMPLE: 5028926

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,2,4-Trimethylbenzene	mg/kg	0.5	0.53	106	70-130	
1,2-Dibromo-3-chloropropane	mg/kg	0.5	0.53	106	68-130	
1,2-Dibromoethane (EDB)	mg/kg	0.5	0.52	104	70-130	
1,2-Dichlorobenzene	mg/kg	0.5	0.49	99	70-130	
1,2-Dichloroethane	mg/kg	0.5	0.50	100	68-130	
1,2-Dichloropropane	mg/kg	0.5	0.53	106	70-130	
1,3,5-Trimethylbenzene	mg/kg	0.5	0.53	106	70-130	
1,3-Dichlorobenzene	mg/kg	0.5	0.49	97	70-130	
1,3-Dichloropropane	mg/kg	0.5	0.51	102	70-130	
1,4-Dichlorobenzene	mg/kg	0.5	0.51	102	70-130	
2,2-Dichloropropane	mg/kg	0.5	0.50	99	49-137	
2-Butanone (MEK)	mg/kg	1	1.0	105	59-136	
2-Chlorotoluene	mg/kg	0.5	0.52	103	70-130	
2-Hexanone	mg/kg	1	1.1	108	63-143	
4-Chlorotoluene	mg/kg	0.5	0.51	101	70-130	
4-Methyl-2-pentanone (MIBK)	mg/kg	1	1.1	111	67-134	
Acetone	mg/kg	1	1.0	101	59-132	
Benzene	mg/kg	0.5	0.53	105	70-130	
Bromobenzene	mg/kg	0.5	0.51	102	70-130	
Bromochloromethane	mg/kg	0.5	0.52	103	70-130	
Bromodichloromethane	mg/kg	0.5	0.54	107	70-130	
Bromoform	mg/kg	0.5	0.52	105	70-130	
Bromomethane	mg/kg	0.5	0.72	144	36-180	IH,IK,v1
Carbon tetrachloride	mg/kg	0.5	0.53	105	69-133	
Chlorobenzene	mg/kg	0.5	0.50	99	70-130	
Chloroethane	mg/kg	0.5	0.60	121	61-147	
Chloroform	mg/kg	0.5	0.51	103	69-130	
Chloromethane	mg/kg	0.5	0.50	100	66-154	
cis-1,2-Dichloroethene	mg/kg	0.5	0.52	103	69-130	
cis-1,3-Dichloropropene	mg/kg	0.5	0.55	111	70-130	
Dibromochloromethane	mg/kg	0.5	0.53	106	70-130	
Dibromomethane	mg/kg	0.5	0.52	103	70-130	
Dichlorodifluoromethane	mg/kg	0.5	0.39	78	40-194	
Diisopropyl ether	mg/kg	0.5	0.53	105	64-130	
Ethylbenzene	mg/kg	0.5	0.48	96	69-130	
Hexachloro-1,3-butadiene	mg/kg	0.5	0.57	113	59-134	
Isopropylbenzene (Cumene)	mg/kg	0.5	0.57	113	70-130	
m&p-Xylene	mg/kg	1	1.0	103	70-130	
Methyl-tert-butyl ether	mg/kg	0.5	0.50	100	66-130	
Methylene Chloride	mg/kg	0.5	0.51	101	67-130	
n-Butylbenzene	mg/kg	0.5	0.50	100	66-130	
n-Propylbenzene	mg/kg	0.5	0.52	105	70-130	
Naphthalene	mg/kg	0.5	0.53	105	70-130	
o-Xylene	mg/kg	0.5	0.52	104	70-130	
p-Isopropyltoluene	mg/kg	0.5	0.53	105	69-130	
sec-Butylbenzene	mg/kg	0.5	0.52	104	70-130	
Styrene	mg/kg	0.5	0.54	107	70-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

LABORATORY CONTROL SAMPLE: 5028926

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
tert-Butylbenzene	mg/kg	0.5	0.51	102	61-130	
Tetrachloroethene	mg/kg	0.5	0.51	102	70-130	
Toluene	mg/kg	0.5	0.51	102	70-130	
trans-1,2-Dichloroethene	mg/kg	0.5	0.53	105	68-133	
trans-1,3-Dichloropropene	mg/kg	0.5	0.55	110	70-130	
Trichloroethene	mg/kg	0.5	0.51	101	70-130	
Trichlorofluoromethane	mg/kg	0.5	0.51	101	59-147	
Vinyl acetate	mg/kg	1	1.0	104	67-136	
Vinyl chloride	mg/kg	0.5	0.51	103	59-148	
Xylene (Total)	mg/kg	1.5	1.5	103	70-130	
1,2-Dichloroethane-d4 (S)	%			99	70-135	
4-Bromofluorobenzene (S)	%			99	70-130	
Toluene-d8 (S)	%			101	70-130	

MATRIX SPIKE SAMPLE: 5028927

Parameter	Units	92833431004 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	<0.0056	0.56	0.52	92	10-174	
1,1,1-Trichloroethane	mg/kg	<0.0056	0.56	0.52	93	10-178	
1,1,2,2-Tetrachloroethane	mg/kg	<0.0056	0.56	0.51	91	10-164	
1,1,2-Trichloroethane	mg/kg	<0.0056	0.56	0.49	87	10-167	
1,1-Dichloroethane	mg/kg	<0.0056	0.56	0.52	91	10-175	
1,1-Dichloroethene	mg/kg	<0.0056	0.56	0.54	95	10-189	
1,1-Dichloropropene	mg/kg	<0.0056	0.56	0.54	96	10-179	
1,2,3-Trichlorobenzene	mg/kg	<0.0056	0.56	0.28	50	10-154	
1,2,3-Trichloropropane	mg/kg	<0.0056	0.56	0.48	84	10-157	
1,2,4-Trichlorobenzene	mg/kg	<0.0056	0.56	0.39	69	10-156	
1,2,4-Trimethylbenzene	mg/kg	0.12	0.56	0.68	98	10-169	
1,2-Dibromo-3-chloropropane	mg/kg	<5.6 ug/kg	0.56	0.42	74	10-148	
1,2-Dibromoethane (EDB)	mg/kg	<0.0056	0.56	0.51	90	10-166	
1,2-Dichlorobenzene	mg/kg	<0.0056	0.56	0.51	90	10-166	
1,2-Dichloroethane	mg/kg	<0.0056	0.56	0.47	84	10-171	
1,2-Dichloropropane	mg/kg	<0.0056	0.56	0.52	93	10-175	
1,3,5-Trimethylbenzene	mg/kg	0.043	0.56	0.60	99	10-171	
1,3-Dichlorobenzene	mg/kg	<0.0056	0.56	0.52	91	10-166	
1,3-Dichloropropane	mg/kg	<0.0056	0.56	0.50	88	10-167	
1,4-Dichlorobenzene	mg/kg	<0.0056	0.56	0.49	88	10-163	
2,2-Dichloropropane	mg/kg	<0.0056	0.56	0.41	73	10-158	
2-Butanone (MEK)	mg/kg	<0.11	1.1	0.77	69	10-156	
2-Chlorotoluene	mg/kg	<0.0056	0.56	0.52	91	10-167	
2-Hexanone	mg/kg	<0.056	1.1	0.89	79	10-159	
4-Chlorotoluene	mg/kg	<0.0056	0.56	0.52	92	10-167	
4-Methyl-2-pentanone (MIBK)	mg/kg	<0.056	1.1	0.90	80	10-162	
Acetone	mg/kg	<0.11	1.1	0.53	47	10-131	
Benzene	mg/kg	0.0060	0.56	0.55	96	10-175	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

MATRIX SPIKE SAMPLE: 5028927

Parameter	Units	92833431004 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Bromobenzene	mg/kg	<0.0056	0.56	0.50	89	10-166	
Bromochloromethane	mg/kg	<0.0056	0.56	0.48	86	10-173	
Bromodichloromethane	mg/kg	<0.0056	0.56	0.51	91	10-169	
Bromoform	mg/kg	<0.0056	0.56	0.50	89	10-165	
Bromomethane	mg/kg	<0.023	0.56	0.30	53	10-130	IH,IK,v1
Carbon tetrachloride	mg/kg	<0.0056	0.56	0.54	96	10-182	
Chlorobenzene	mg/kg	<0.0056	0.56	0.52	92	10-171	
Chloroethane	mg/kg	<0.011	0.56	0.089	16	10-130	
Chloroform	mg/kg	<0.0056	0.56	0.52	92	10-171	
Chloromethane	mg/kg	<0.011	0.56	0.52	92	10-200	
cis-1,2-Dichloroethene	mg/kg	<0.0056	0.56	0.52	93	10-172	
cis-1,3-Dichloropropene	mg/kg	<0.0056	0.56	0.50	88	10-160	
Dibromochloromethane	mg/kg	<0.0056	0.56	0.50	89	10-168	
Dibromomethane	mg/kg	<5.6 ug/kg	0.56	0.48	85	10-173	
Dichlorodifluoromethane	mg/kg	<0.011	0.56	0.047	8	10-200	M1
Diisopropyl ether	mg/kg	<0.0056	0.56	0.53	95	10-169	
Ethylbenzene	mg/kg	0.036	0.56	0.55	92	10-169	
Hexachloro-1,3-butadiene	mg/kg	<11.3 ug/kg	0.56	0.57	101	10-190	
Isopropylbenzene (Cumene)	mg/kg	0.0076	0.56	0.63	110	10-179	
m&p-Xylene	mg/kg	0.21	1.1	1.3	99	10-174	
Methyl-tert-butyl ether	mg/kg	<0.0056	0.56	0.48	85	10-157	
Methylene Chloride	mg/kg	<0.023	0.56	0.34	61	10-177	
n-Butylbenzene	mg/kg	<0.0056	0.56	0.56	100	10-174	
n-Propylbenzene	mg/kg	0.016	0.56	0.55	95	10-170	
Naphthalene	mg/kg	0.017	0.56	0.30	51	10-155	
o-Xylene	mg/kg	0.093	0.56	0.65	99	10-175	
p-Isopropyltoluene	mg/kg	<0.0056	0.56	0.57	101	10-174	
sec-Butylbenzene	mg/kg	<0.0056	0.56	0.55	98	10-177	
Styrene	mg/kg	<0.0056	0.56	0.56	99	10-174	
tert-Butylbenzene	mg/kg	<0.0056	0.56	0.51	90	10-142	
Tetrachloroethene	mg/kg	<0.0056	0.56	0.54	97	10-166	
Toluene	mg/kg	0.021	0.56	0.54	92	10-173	
trans-1,2-Dichloroethene	mg/kg	<0.0056	0.56	0.54	97	10-173	
trans-1,3-Dichloropropene	mg/kg	<0.0056	0.56	0.48	85	10-159	
Trichloroethene	mg/kg	<0.0056	0.56	0.54	95	10-181	
Trichlorofluoromethane	mg/kg	<0.0056	0.56	0.058	10	10-130	
Vinyl acetate	mg/kg	<0.056	1.1	0.88	78	10-158	
Vinyl chloride	mg/kg	<0.011	0.56	0.49	88	10-189	
Xylene (Total)	mg/kg	0.30	1.6	2.0	99	10-174	
1,2-Dichloroethane-d4 (S)	%				96	70-135	
4-Bromofluorobenzene (S)	%				103	70-130	
Toluene-d8 (S)	%				100	70-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

SAMPLE DUPLICATE: 5028928

Parameter	Units	92833431005 Result	Dup Result	RPD	Max RPD	Qualifiers
1,1,1,2-Tetrachloroethane	mg/kg	<0.0068	ND		30	
1,1,1-Trichloroethane	mg/kg	<0.0068	ND		30	
1,1,2,2-Tetrachloroethane	mg/kg	<0.0068	ND		30	
1,1,2-Trichloroethane	mg/kg	<0.0068	ND		30	
1,1-Dichloroethane	mg/kg	<0.0068	ND		30	
1,1-Dichloroethene	mg/kg	<0.0068	ND		30	
1,1-Dichloropropene	mg/kg	<0.0068	ND		30	
1,2,3-Trichlorobenzene	mg/kg	<0.0068	ND		30	
1,2,3-Trichloropropane	mg/kg	<0.0068	ND		30	
1,2,4-Trichlorobenzene	mg/kg	<0.0068	ND		30	
1,2,4-Trimethylbenzene	mg/kg	0.038	0.035	7	30	
1,2-Dibromo-3-chloropropane	mg/kg	<6.8 ug/kg	ND		30	
1,2-Dibromoethane (EDB)	mg/kg	<0.0068	ND		30	
1,2-Dichlorobenzene	mg/kg	<0.0068	ND		30	
1,2-Dichloroethane	mg/kg	<0.0068	ND		30	
1,2-Dichloropropane	mg/kg	<0.0068	ND		30	
1,3,5-Trimethylbenzene	mg/kg	0.015	0.014	7	30	
1,3-Dichlorobenzene	mg/kg	<0.0068	ND		30	
1,3-Dichloropropane	mg/kg	<0.0068	ND		30	
1,4-Dichlorobenzene	mg/kg	<0.0068	ND		30	
2,2-Dichloropropane	mg/kg	<0.0068	ND		30	
2-Butanone (MEK)	mg/kg	<0.14	ND		30	
2-Chlorotoluene	mg/kg	<0.0068	ND		30	
2-Hexanone	mg/kg	<0.068	ND		30	
4-Chlorotoluene	mg/kg	<0.0068	ND		30	
4-Methyl-2-pentanone (MIBK)	mg/kg	<0.068	ND		30	
Acetone	mg/kg	<0.14	ND		30	
Benzene	mg/kg	<0.0068	ND		30	
Bromobenzene	mg/kg	<0.0068	ND		30	
Bromochloromethane	mg/kg	<0.0068	ND		30	
Bromodichloromethane	mg/kg	<0.0068	ND		30	
Bromoform	mg/kg	<0.0068	ND		30	
Bromomethane	mg/kg	<0.027	ND		30	IH,IK,v1
Carbon tetrachloride	mg/kg	<0.0068	ND		30	
Chlorobenzene	mg/kg	<0.0068	ND		30	
Chloroethane	mg/kg	<0.014	ND		30	
Chloroform	mg/kg	<0.0068	ND		30	
Chloromethane	mg/kg	<0.014	ND		30	
cis-1,2-Dichloroethene	mg/kg	<0.0068	ND		30	
cis-1,3-Dichloropropene	mg/kg	<0.0068	ND		30	
Dibromochloromethane	mg/kg	<0.0068	ND		30	
Dibromomethane	mg/kg	<6.8 ug/kg	ND		30	
Dichlorodifluoromethane	mg/kg	<0.014	ND		30	
Diisopropyl ether	mg/kg	<0.0068	ND		30	
Ethylbenzene	mg/kg	0.0052J	0.0051J		30	
Hexachloro-1,3-butadiene	mg/kg	<13.5 ug/kg	ND		30	
Isopropylbenzene (Cumene)	mg/kg	<0.0068	ND		30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

SAMPLE DUPLICATE: 5028928

Parameter	Units	92833431005 Result	Dup Result	RPD	Max RPD	Qualifiers
m&p-Xylene	mg/kg	0.016	0.015	4	30	
Methyl-tert-butyl ether	mg/kg	<0.0068	ND		30	
Methylene Chloride	mg/kg	<0.027	ND		30	
n-Butylbenzene	mg/kg	<0.0068	ND		30	
n-Propylbenzene	mg/kg	0.0039J	0.0040J		30	
Naphthalene	mg/kg	<0.0068	0.0086		30	
o-Xylene	mg/kg	0.010	0.0087	18	30	
p-Isopropyltoluene	mg/kg	<0.0068	ND		30	
sec-Butylbenzene	mg/kg	<0.0068	ND		30	
Styrene	mg/kg	<0.0068	ND		30	
tert-Butylbenzene	mg/kg	<0.0068	ND		30	
Tetrachloroethene	mg/kg	<0.0068	ND		30	
Toluene	mg/kg	<0.0068	ND		30	
trans-1,2-Dichloroethene	mg/kg	<0.0068	ND		30	
trans-1,3-Dichloropropene	mg/kg	<0.0068	ND		30	
Trichloroethene	mg/kg	<0.0068	ND		30	
Trichlorofluoromethane	mg/kg	<0.0068	ND		30	
Vinyl acetate	mg/kg	<0.068	ND		30	
Vinyl chloride	mg/kg	<0.014	ND		30	
Xylene (Total)	mg/kg	0.027	0.024	9	30	
1,2-Dichloroethane-d4 (S)	%	99	100			
4-Bromofluorobenzene (S)	%	102	103			
Toluene-d8 (S)	%	101	100			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

QC Batch: 978213
QC Batch Method: EPA 8260D
Analysis Method: EPA 8260D
Analysis Description: 8260D MSV Low Level
Laboratory: Pace Analytical Services - Charlotte

Associated Lab Samples: 92833633005

METHOD BLANK: 5029748 Matrix: Water
Associated Lab Samples: 92833633005

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	1.0	0.31	12/10/25 12:41	
1,1,1-Trichloroethane	ug/L	ND	1.0	0.33	12/10/25 12:41	
1,1,2,2-Tetrachloroethane	ug/L	ND	1.0	0.22	12/10/25 12:41	
1,1,2-Trichloroethane	ug/L	ND	1.0	0.32	12/10/25 12:41	
1,1-Dichloroethane	ug/L	ND	1.0	0.37	12/10/25 12:41	
1,1-Dichloroethene	ug/L	ND	1.0	0.35	12/10/25 12:41	
1,1-Dichloropropene	ug/L	ND	1.0	0.43	12/10/25 12:41	
1,2,3-Trichlorobenzene	ug/L	ND	1.0	0.81	12/10/25 12:41	
1,2,3-Trichloropropane	ug/L	ND	1.0	0.26	12/10/25 12:41	
1,2,4-Trichlorobenzene	ug/L	ND	1.0	0.64	12/10/25 12:41	
1,2-Dibromo-3-chloropropane	ug/L	ND	2.0	0.34	12/10/25 12:41	
1,2-Dibromoethane (EDB)	ug/L	ND	1.0	0.27	12/10/25 12:41	
1,2-Dichlorobenzene	ug/L	ND	1.0	0.34	12/10/25 12:41	
1,2-Dichloroethane	ug/L	ND	1.0	0.32	12/10/25 12:41	
1,2-Dichloropropane	ug/L	ND	1.0	0.36	12/10/25 12:41	
1,3-Dichlorobenzene	ug/L	ND	1.0	0.34	12/10/25 12:41	
1,3-Dichloropropane	ug/L	ND	1.0	0.28	12/10/25 12:41	
1,4-Dichlorobenzene	ug/L	ND	1.0	0.33	12/10/25 12:41	
2,2-Dichloropropane	ug/L	ND	1.0	0.39	12/10/25 12:41	
2-Butanone (MEK)	ug/L	ND	5.0	4.0	12/10/25 12:41	
2-Chlorotoluene	ug/L	ND	1.0	0.32	12/10/25 12:41	
2-Hexanone	ug/L	ND	5.0	0.48	12/10/25 12:41	
4-Chlorotoluene	ug/L	ND	1.0	0.32	12/10/25 12:41	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	5.0	2.7	12/10/25 12:41	
Acetone	ug/L	ND	25.0	5.1	12/10/25 12:41	
Benzene	ug/L	ND	1.0	0.34	12/10/25 12:41	
Bromobenzene	ug/L	ND	1.0	0.29	12/10/25 12:41	
Bromochloromethane	ug/L	ND	1.0	0.47	12/10/25 12:41	
Bromodichloromethane	ug/L	ND	1.0	0.31	12/10/25 12:41	
Bromoform	ug/L	ND	1.0	0.34	12/10/25 12:41	
Bromomethane	ug/L	ND	2.0	1.7	12/10/25 12:41	IK,v2
Carbon tetrachloride	ug/L	ND	1.0	0.33	12/10/25 12:41	
Chlorobenzene	ug/L	ND	1.0	0.28	12/10/25 12:41	
Chloroethane	ug/L	ND	1.0	0.65	12/10/25 12:41	
Chloroform	ug/L	ND	1.0	0.43	12/10/25 12:41	
Chloromethane	ug/L	ND	1.0	0.54	12/10/25 12:41	
cis-1,2-Dichloroethene	ug/L	ND	1.0	0.38	12/10/25 12:41	
cis-1,3-Dichloropropene	ug/L	ND	1.0	0.36	12/10/25 12:41	
Dibromochloromethane	ug/L	ND	1.0	0.36	12/10/25 12:41	
Dibromomethane	ug/L	ND	1.0	0.39	12/10/25 12:41	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

METHOD BLANK: 5029748 Matrix: Water
Associated Lab Samples: 92833633005

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Dichlorodifluoromethane	ug/L	ND	1.0	0.35	12/10/25 12:41	
Diisopropyl ether	ug/L	ND	1.0	0.31	12/10/25 12:41	
Ethylbenzene	ug/L	ND	1.0	0.30	12/10/25 12:41	
Hexachloro-1,3-butadiene	ug/L	ND	2.0	1.5	12/10/25 12:41	
m&p-Xylene	ug/L	ND	2.0	0.71	12/10/25 12:41	
Methyl-tert-butyl ether	ug/L	ND	1.0	0.42	12/10/25 12:41	
Methylene Chloride	ug/L	ND	5.0	2.0	12/10/25 12:41	
Naphthalene	ug/L	ND	1.0	0.64	12/10/25 12:41	
o-Xylene	ug/L	ND	1.0	0.34	12/10/25 12:41	
p-Isopropyltoluene	ug/L	ND	1.0	0.41	12/10/25 12:41	
Styrene	ug/L	ND	1.0	0.29	12/10/25 12:41	
Tetrachloroethene	ug/L	ND	1.0	0.29	12/10/25 12:41	
Toluene	ug/L	ND	1.0	0.24	12/10/25 12:41	
trans-1,2-Dichloroethene	ug/L	ND	1.0	0.40	12/10/25 12:41	
trans-1,3-Dichloropropene	ug/L	ND	1.0	0.36	12/10/25 12:41	
Trichloroethene	ug/L	ND	1.0	0.38	12/10/25 12:41	
Trichlorofluoromethane	ug/L	ND	1.0	0.30	12/10/25 12:41	
Vinyl acetate	ug/L	ND	2.0	1.3	12/10/25 12:41	
Vinyl chloride	ug/L	ND	1.0	0.39	12/10/25 12:41	
Xylene (Total)	ug/L	ND	1.0	0.34	12/10/25 12:41	
1,2-Dichloroethane-d4 (S)	%	100	70-130		12/10/25 12:41	
4-Bromofluorobenzene (S)	%	102	70-130		12/10/25 12:41	
Toluene-d8 (S)	%	103	70-130		12/10/25 12:41	

LABORATORY CONTROL SAMPLE: 5029749

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	20	19.5	97	70-130	
1,1,1-Trichloroethane	ug/L	20	21.1	106	70-130	
1,1,2,2-Tetrachloroethane	ug/L	20	17.6	88	70-130	
1,1,2-Trichloroethane	ug/L	20	20.1	101	70-130	
1,1-Dichloroethane	ug/L	20	19.9	100	70-130	
1,1-Dichloroethene	ug/L	20	23.1	116	69-131	
1,1-Dichloropropene	ug/L	20	21.5	108	70-132	
1,2,3-Trichlorobenzene	ug/L	20	21.7	108	70-132	
1,2,3-Trichloropropane	ug/L	20	16.8	84	70-130	
1,2,4-Trichlorobenzene	ug/L	20	21.0	105	70-130	
1,2-Dibromo-3-chloropropane	ug/L	20	18.3	91	70-130	
1,2-Dibromoethane (EDB)	ug/L	20	19.3	97	70-130	
1,2-Dichlorobenzene	ug/L	20	19.1	96	70-130	
1,2-Dichloroethane	ug/L	20	19.2	96	70-130	
1,2-Dichloropropane	ug/L	20	21.3	107	70-130	
1,3-Dichlorobenzene	ug/L	20	20.1	101	70-130	
1,3-Dichloropropane	ug/L	20	18.4	92	70-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

LABORATORY CONTROL SAMPLE: 5029749

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,4-Dichlorobenzene	ug/L	20	19.9	99	70-130	
2,2-Dichloropropane	ug/L	20	20.7	104	69-130	
2-Butanone (MEK)	ug/L	40	36.2	90	67-133	
2-Chlorotoluene	ug/L	20	19.6	98	70-130	
2-Hexanone	ug/L	40	35.6	89	70-133	
4-Chlorotoluene	ug/L	20	19.6	98	70-130	
4-Methyl-2-pentanone (MIBK)	ug/L	40	37.4	93	70-130	
Acetone	ug/L	40	37.4	94	67-130	
Benzene	ug/L	20	20.5	102	70-130	
Bromobenzene	ug/L	20	19.8	99	70-130	
Bromochloromethane	ug/L	20	20.5	102	70-130	
Bromodichloromethane	ug/L	20	21.9	109	70-130	
Bromoform	ug/L	20	20.4	102	70-133	
Bromomethane	ug/L	20	11.8	59	41-148	IK,v3
Carbon tetrachloride	ug/L	20	23.6	118	70-130	
Chlorobenzene	ug/L	20	19.8	99	70-130	
Chloroethane	ug/L	20	20.8	104	41-157	
Chloroform	ug/L	20	20.3	102	70-130	
Chloromethane	ug/L	20	20.1	101	59-141	
cis-1,2-Dichloroethene	ug/L	20	20.2	101	70-130	
cis-1,3-Dichloropropene	ug/L	20	21.0	105	70-130	
Dibromochloromethane	ug/L	20	20.0	100	70-130	
Dibromomethane	ug/L	20	20.1	100	70-130	
Dichlorodifluoromethane	ug/L	20	24.6	123	54-147	
Diisopropyl ether	ug/L	20	19.2	96	70-130	
Ethylbenzene	ug/L	20	19.7	98	70-130	
Hexachloro-1,3-butadiene	ug/L	20	23.7	119	70-134	
m&p-Xylene	ug/L	40	39.9	100	70-130	
Methyl-tert-butyl ether	ug/L	20	18.1	91	70-130	
Methylene Chloride	ug/L	20	20.4	102	62-130	
Naphthalene	ug/L	20	18.7	93	70-135	
o-Xylene	ug/L	20	20.3	101	70-130	
p-Isopropyltoluene	ug/L	20	21.3	107	70-130	
Styrene	ug/L	20	20.7	103	70-130	
Tetrachloroethene	ug/L	20	20.7	103	70-130	
Toluene	ug/L	20	19.9	100	70-130	
trans-1,2-Dichloroethene	ug/L	20	21.2	106	70-130	
trans-1,3-Dichloropropene	ug/L	20	21.0	105	70-130	
Trichloroethene	ug/L	20	21.0	105	70-130	
Trichlorofluoromethane	ug/L	20	23.9	119	57-130	
Vinyl acetate	ug/L	40	41.5	104	70-141	
Vinyl chloride	ug/L	20	19.5	98	66-140	
Xylene (Total)	ug/L	60	60.2	100	70-130	
1,2-Dichloroethane-d4 (S)	%			99	70-130	
4-Bromofluorobenzene (S)	%			101	70-130	
Toluene-d8 (S)	%			99	70-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

MATRIX SPIKE SAMPLE: 5029750

Parameter	Units	92833045019 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	20	21.9	110	70-146	
1,1,1-Trichloroethane	ug/L	ND	20	22.2	111	70-150	
1,1,2,2-Tetrachloroethane	ug/L	ND	20	21.0	105	66-144	
1,1,2-Trichloroethane	ug/L	ND	20	21.7	109	70-142	
1,1-Dichloroethane	ug/L	ND	20	20.9	105	68-150	
1,1-Dichloroethene	ug/L	ND	20	24.5	122	64-162	
1,1-Dichloropropene	ug/L	ND	20	22.4	112	70-160	
1,2,3-Trichlorobenzene	ug/L	ND	20	20.9	105	66-151	
1,2,3-Trichloropropane	ug/L	ND	20	20.8	104	66-144	
1,2,4-Trichlorobenzene	ug/L	ND	20	20.5	102	69-147	
1,2-Dibromo-3-chloropropane	ug/L	ND	20	20.9	104	62-146	
1,2-Dibromoethane (EDB)	ug/L	ND	20	20.8	104	70-143	
1,2-Dichlorobenzene	ug/L	ND	20	20.3	102	70-142	
1,2-Dichloroethane	ug/L	ND	20	21.8	109	68-145	
1,2-Dichloropropane	ug/L	ND	20	22.8	114	70-144	
1,3-Dichlorobenzene	ug/L	ND	20	20.5	102	70-142	
1,3-Dichloropropane	ug/L	ND	20	20.6	103	70-141	
1,4-Dichlorobenzene	ug/L	ND	20	20.4	102	70-140	
2,2-Dichloropropane	ug/L	ND	20	21.6	108	58-160	
2-Butanone (MEK)	ug/L	ND	40	44.7	112	57-156	
2-Chlorotoluene	ug/L	ND	20	20.7	104	70-148	
2-Hexanone	ug/L	ND	40	44.4	111	62-153	
4-Chlorotoluene	ug/L	ND	20	19.9	99	70-144	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	40	44.3	111	65-144	
Acetone	ug/L	ND	40	43.6	109	49-162	
Benzene	ug/L	ND	20	21.9	109	68-144	
Bromobenzene	ug/L	ND	20	20.9	105	70-144	
Bromochloromethane	ug/L	ND	20	22.2	111	70-148	
Bromodichloromethane	ug/L	ND	20	23.8	119	70-141	
Bromoform	ug/L	ND	20	22.5	113	59-144	
Bromomethane	ug/L	ND	20	12.4	62	23-190	IK,v3
Carbon tetrachloride	ug/L	ND	20	25.0	125	70-147	
Chlorobenzene	ug/L	ND	20	20.9	104	70-143	
Chloroethane	ug/L	ND	20	20.9	104	55-190	
Chloroform	ug/L	ND	20	21.5	107	67-148	
Chloromethane	ug/L	ND	20	20.5	103	38-180	
cis-1,2-Dichloroethene	ug/L	ND	20	20.5	103	67-151	
cis-1,3-Dichloropropene	ug/L	ND	20	21.8	109	70-142	
Dibromochloromethane	ug/L	ND	20	22.9	115	68-140	
Dibromomethane	ug/L	ND	20	22.3	112	70-142	
Dichlorodifluoromethane	ug/L	ND	20	24.0	120	15-200	
Diisopropyl ether	ug/L	ND	20	21.5	107	62-149	
Ethylbenzene	ug/L	ND	20	21.2	106	70-145	
Hexachloro-1,3-butadiene	ug/L	ND	20	21.9	109	64-164	
m&p-Xylene	ug/L	ND	40	42.5	106	70-148	
Methyl-tert-butyl ether	ug/L	ND	20	20.1	101	64-146	
Methylene Chloride	ug/L	ND	20	21.2	106	54-149	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

MATRIX SPIKE SAMPLE: 5029750

Parameter	Units	92833045019 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Naphthalene	ug/L	ND	20	19.8	99	62-154	
o-Xylene	ug/L	ND	20	21.6	108	70-145	
p-Isopropyltoluene	ug/L	ND	20	22.1	110	70-153	
Styrene	ug/L	ND	20	21.5	108	70-147	
Tetrachloroethene	ug/L	ND	20	21.5	108	70-145	
Toluene	ug/L	ND	20	21.3	106	65-146	
trans-1,2-Dichloroethene	ug/L	ND	20	21.7	108	69-155	
trans-1,3-Dichloropropene	ug/L	ND	20	22.3	111	70-142	
Trichloroethene	ug/L	ND	20	22.9	115	70-152	
Trichlorofluoromethane	ug/L	ND	20	24.7	124	60-158	
Vinyl acetate	ug/L	ND	40	46.8	117	56-157	
Vinyl chloride	ug/L	ND	20	20.2	101	51-178	
Xylene (Total)	ug/L	ND	60	64.1	107	70-146	
1,2-Dichloroethane-d4 (S)	%				100	70-130	
4-Bromofluorobenzene (S)	%				102	70-130	
Toluene-d8 (S)	%				100	70-130	

SAMPLE DUPLICATE: 5029751

Parameter	Units	92833347002 Result	Dup Result	RPD	Max RPD	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	ND		30	
1,1,1-Trichloroethane	ug/L	ND	ND		30	
1,1,2,2-Tetrachloroethane	ug/L	ND	ND		30	
1,1,2-Trichloroethane	ug/L	ND	ND		30	
1,1-Dichloroethane	ug/L	ND	ND		30	
1,1-Dichloroethene	ug/L	ND	ND		30	
1,1-Dichloropropene	ug/L	ND	ND		30	
1,2,3-Trichlorobenzene	ug/L	ND	ND		30	
1,2,3-Trichloropropane	ug/L	ND	ND		30	
1,2,4-Trichlorobenzene	ug/L	ND	ND		30	
1,2-Dibromo-3-chloropropane	ug/L	ND	ND		30	
1,2-Dibromoethane (EDB)	ug/L	ND	ND		30	
1,2-Dichlorobenzene	ug/L	ND	ND		30	
1,2-Dichloroethane	ug/L	ND	ND		30	
1,2-Dichloropropane	ug/L	ND	ND		30	
1,3-Dichlorobenzene	ug/L	ND	ND		30	
1,3-Dichloropropane	ug/L	ND	ND		30	
1,4-Dichlorobenzene	ug/L	ND	ND		30	
2,2-Dichloropropane	ug/L	ND	ND		30	
2-Butanone (MEK)	ug/L	ND	ND		30	
2-Chlorotoluene	ug/L	ND	ND		30	
2-Hexanone	ug/L	ND	ND		30	
4-Chlorotoluene	ug/L	ND	ND		30	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	ND		30	
Acetone	ug/L	ND	ND		30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

SAMPLE DUPLICATE: 5029751

Parameter	Units	92833347002 Result	Dup Result	RPD	Max RPD	Qualifiers
Benzene	ug/L	ND	ND		30	
Bromobenzene	ug/L	ND	ND		30	
Bromochloromethane	ug/L	ND	ND		30	
Bromodichloromethane	ug/L	ND	ND		30	
Bromoform	ug/L	ND	ND		30	
Bromomethane	ug/L	ND	ND		30	IK,v2
Carbon tetrachloride	ug/L	ND	ND		30	
Chlorobenzene	ug/L	ND	ND		30	
Chloroethane	ug/L	ND	ND		30	
Chloroform	ug/L	ND	ND		30	
Chloromethane	ug/L	5.7	ND		30	
cis-1,2-Dichloroethene	ug/L	ND	ND		30	
cis-1,3-Dichloropropene	ug/L	ND	ND		30	
Dibromochloromethane	ug/L	ND	ND		30	
Dibromomethane	ug/L	ND	ND		30	
Dichlorodifluoromethane	ug/L	ND	ND		30	
Diisopropyl ether	ug/L	ND	ND		30	
Ethylbenzene	ug/L	ND	ND		30	
Hexachloro-1,3-butadiene	ug/L	ND	ND		30	
m&p-Xylene	ug/L	ND	ND		30	
Methyl-tert-butyl ether	ug/L	ND	ND		30	
Methylene Chloride	ug/L	ND	ND		30	
Naphthalene	ug/L	ND	ND		30	
o-Xylene	ug/L	ND	ND		30	
p-Isopropyltoluene	ug/L	ND	ND		30	
Styrene	ug/L	ND	ND		30	
Tetrachloroethene	ug/L	ND	ND		30	
Toluene	ug/L	ND	ND		30	
trans-1,2-Dichloroethene	ug/L	ND	ND		30	
trans-1,3-Dichloropropene	ug/L	ND	ND		30	
Trichloroethene	ug/L	ND	ND		30	
Trichlorofluoromethane	ug/L	ND	ND		30	
Vinyl acetate	ug/L	ND	ND		30	
Vinyl chloride	ug/L	ND	ND		30	
Xylene (Total)	ug/L	ND	ND		30	
1,2-Dichloroethane-d4 (S)	%	99	104			
4-Bromofluorobenzene (S)	%	101	100			
Toluene-d8 (S)	%	101	100			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

QC Batch: 978606
QC Batch Method: EPA 8260D
Analysis Method: EPA 8260D
Analysis Description: 8260D MSV Low Level
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92833633001, 92833633002, 92833633003, 92833633004

METHOD BLANK: 5032037 Matrix: Water
Associated Lab Samples: 92833633001, 92833633002, 92833633003, 92833633004

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	1.0	0.31	12/11/25 12:49	
1,1,1-Trichloroethane	ug/L	ND	1.0	0.33	12/11/25 12:49	
1,1,2,2-Tetrachloroethane	ug/L	ND	1.0	0.22	12/11/25 12:49	
1,1,2-Trichloroethane	ug/L	ND	1.0	0.32	12/11/25 12:49	
1,1-Dichloroethane	ug/L	ND	1.0	0.37	12/11/25 12:49	
1,1-Dichloroethene	ug/L	ND	1.0	0.35	12/11/25 12:49	
1,1-Dichloropropene	ug/L	ND	1.0	0.43	12/11/25 12:49	
1,2,3-Trichlorobenzene	ug/L	ND	1.0	0.81	12/11/25 12:49	
1,2,3-Trichloropropane	ug/L	ND	1.0	0.26	12/11/25 12:49	
1,2,4-Trichlorobenzene	ug/L	ND	1.0	0.64	12/11/25 12:49	
1,2-Dibromo-3-chloropropane	ug/L	ND	2.0	0.34	12/11/25 12:49	v2
1,2-Dibromoethane (EDB)	ug/L	ND	1.0	0.27	12/11/25 12:49	
1,2-Dichlorobenzene	ug/L	ND	1.0	0.34	12/11/25 12:49	
1,2-Dichloroethane	ug/L	ND	1.0	0.32	12/11/25 12:49	
1,2-Dichloropropane	ug/L	ND	1.0	0.36	12/11/25 12:49	
1,3-Dichlorobenzene	ug/L	ND	1.0	0.34	12/11/25 12:49	
1,3-Dichloropropane	ug/L	ND	1.0	0.28	12/11/25 12:49	
1,4-Dichlorobenzene	ug/L	ND	1.0	0.33	12/11/25 12:49	
2,2-Dichloropropane	ug/L	ND	1.0	0.39	12/11/25 12:49	
2-Butanone (MEK)	ug/L	ND	5.0	4.0	12/11/25 12:49	v2
2-Chlorotoluene	ug/L	ND	1.0	0.32	12/11/25 12:49	
2-Hexanone	ug/L	ND	5.0	0.48	12/11/25 12:49	
4-Chlorotoluene	ug/L	ND	1.0	0.32	12/11/25 12:49	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	5.0	2.7	12/11/25 12:49	
Acetone	ug/L	ND	25.0	5.1	12/11/25 12:49	
Benzene	ug/L	ND	1.0	0.34	12/11/25 12:49	
Bromobenzene	ug/L	ND	1.0	0.29	12/11/25 12:49	
Bromochloromethane	ug/L	ND	1.0	0.47	12/11/25 12:49	
Bromodichloromethane	ug/L	ND	1.0	0.31	12/11/25 12:49	
Bromoform	ug/L	ND	1.0	0.34	12/11/25 12:49	
Bromomethane	ug/L	ND	2.0	1.7	12/11/25 12:49	IK
Carbon tetrachloride	ug/L	ND	1.0	0.33	12/11/25 12:49	
Chlorobenzene	ug/L	ND	1.0	0.28	12/11/25 12:49	
Chloroethane	ug/L	ND	1.0	0.65	12/11/25 12:49	
Chloroform	ug/L	ND	1.0	0.43	12/11/25 12:49	
Chloromethane	ug/L	ND	1.0	0.54	12/11/25 12:49	
cis-1,2-Dichloroethene	ug/L	ND	1.0	0.38	12/11/25 12:49	
cis-1,3-Dichloropropene	ug/L	ND	1.0	0.36	12/11/25 12:49	
Dibromochloromethane	ug/L	ND	1.0	0.36	12/11/25 12:49	
Dibromomethane	ug/L	ND	1.0	0.39	12/11/25 12:49	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

METHOD BLANK: 5032037 Matrix: Water
Associated Lab Samples: 92833633001, 92833633002, 92833633003, 92833633004

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Dichlorodifluoromethane	ug/L	ND	1.0	0.35	12/11/25 12:49	v2
Diisopropyl ether	ug/L	ND	1.0	0.31	12/11/25 12:49	
Ethylbenzene	ug/L	ND	1.0	0.30	12/11/25 12:49	
Hexachloro-1,3-butadiene	ug/L	ND	2.0	1.5	12/11/25 12:49	
m&p-Xylene	ug/L	ND	2.0	0.71	12/11/25 12:49	
Methyl-tert-butyl ether	ug/L	ND	1.0	0.42	12/11/25 12:49	
Methylene Chloride	ug/L	ND	5.0	2.0	12/11/25 12:49	
Naphthalene	ug/L	ND	1.0	0.64	12/11/25 12:49	
o-Xylene	ug/L	ND	1.0	0.34	12/11/25 12:49	
p-Isopropyltoluene	ug/L	ND	1.0	0.41	12/11/25 12:49	
Styrene	ug/L	ND	1.0	0.29	12/11/25 12:49	
Tetrachloroethene	ug/L	ND	1.0	0.29	12/11/25 12:49	
Toluene	ug/L	ND	1.0	0.24	12/11/25 12:49	
trans-1,2-Dichloroethene	ug/L	ND	1.0	0.40	12/11/25 12:49	
trans-1,3-Dichloropropene	ug/L	ND	1.0	0.36	12/11/25 12:49	
Trichloroethene	ug/L	ND	1.0	0.38	12/11/25 12:49	
Trichlorofluoromethane	ug/L	ND	1.0	0.30	12/11/25 12:49	
Vinyl acetate	ug/L	ND	2.0	1.3	12/11/25 12:49	
Vinyl chloride	ug/L	ND	1.0	0.39	12/11/25 12:49	
Xylene (Total)	ug/L	ND	1.0	0.34	12/11/25 12:49	
1,2-Dichloroethane-d4 (S)	%	95	70-130		12/11/25 12:49	
4-Bromofluorobenzene (S)	%	99	70-130		12/11/25 12:49	
Toluene-d8 (S)	%	100	70-130		12/11/25 12:49	

LABORATORY CONTROL SAMPLE: 5032038

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	20	19.2	96	70-130	
1,1,1-Trichloroethane	ug/L	20	18.1	91	70-130	
1,1,2,2-Tetrachloroethane	ug/L	20	17.4	87	70-130	
1,1,2-Trichloroethane	ug/L	20	18.1	91	70-130	
1,1-Dichloroethane	ug/L	20	18.9	94	70-130	
1,1-Dichloroethene	ug/L	20	19.9	100	69-131	
1,1-Dichloropropene	ug/L	20	18.0	90	70-132	
1,2,3-Trichlorobenzene	ug/L	20	18.2	91	70-132	
1,2,3-Trichloropropane	ug/L	20	18.0	90	70-130	
1,2,4-Trichlorobenzene	ug/L	20	18.8	94	70-130	
1,2-Dibromo-3-chloropropane	ug/L	20	15.5	78	70-130	v3
1,2-Dibromoethane (EDB)	ug/L	20	18.3	91	70-130	
1,2-Dichlorobenzene	ug/L	20	18.3	92	70-130	
1,2-Dichloroethane	ug/L	20	18.8	94	70-130	
1,2-Dichloropropane	ug/L	20	17.7	89	70-130	
1,3-Dichlorobenzene	ug/L	20	18.5	93	70-130	
1,3-Dichloropropane	ug/L	20	19.0	95	70-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

LABORATORY CONTROL SAMPLE: 5032038

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,4-Dichlorobenzene	ug/L	20	18.4	92	70-130	
2,2-Dichloropropane	ug/L	20	20.6	103	69-130	
2-Butanone (MEK)	ug/L	40	31.4	79	67-133	v3
2-Chlorotoluene	ug/L	20	18.2	91	70-130	
2-Hexanone	ug/L	40	32.4	81	70-133	
4-Chlorotoluene	ug/L	20	18.2	91	70-130	
4-Methyl-2-pentanone (MIBK)	ug/L	40	34.0	85	70-130	
Acetone	ug/L	40	32.6	82	67-130	
Benzene	ug/L	20	18.3	91	70-130	
Bromobenzene	ug/L	20	18.3	91	70-130	
Bromochloromethane	ug/L	20	18.3	92	70-130	
Bromodichloromethane	ug/L	20	18.7	93	70-130	
Bromoform	ug/L	20	18.2	91	70-133	IK
Bromomethane	ug/L	20	19.0	95	41-148	
Carbon tetrachloride	ug/L	20	18.9	94	70-130	
Chlorobenzene	ug/L	20	19.1	95	70-130	
Chloroethane	ug/L	20	19.6	98	41-157	
Chloroform	ug/L	20	18.6	93	70-130	
Chloromethane	ug/L	20	19.3	96	59-141	
cis-1,2-Dichloroethene	ug/L	20	19.2	96	70-130	
cis-1,3-Dichloropropene	ug/L	20	19.6	98	70-130	
Dibromochloromethane	ug/L	20	19.0	95	70-130	
Dibromomethane	ug/L	20	19.1	96	70-130	
Dichlorodifluoromethane	ug/L	20	16.0	80	54-147	v3
Diisopropyl ether	ug/L	20	18.9	94	70-130	
Ethylbenzene	ug/L	20	18.9	94	70-130	
Hexachloro-1,3-butadiene	ug/L	20	19.8	99	70-134	
m&p-Xylene	ug/L	40	38.2	96	70-130	
Methyl-tert-butyl ether	ug/L	20	18.2	91	70-130	
Methylene Chloride	ug/L	20	19.0	95	62-130	
Naphthalene	ug/L	20	16.9	84	70-135	
o-Xylene	ug/L	20	19.7	98	70-130	
p-Isopropyltoluene	ug/L	20	19.4	97	70-130	
Styrene	ug/L	20	19.3	96	70-130	
Tetrachloroethene	ug/L	20	18.0	90	70-130	
Toluene	ug/L	20	18.0	90	70-130	
trans-1,2-Dichloroethene	ug/L	20	19.2	96	70-130	
trans-1,3-Dichloropropene	ug/L	20	19.5	98	70-130	
Trichloroethene	ug/L	20	18.1	90	70-130	
Trichlorofluoromethane	ug/L	20	17.3	87	57-130	
Vinyl acetate	ug/L	40	41.8	104	70-141	
Vinyl chloride	ug/L	20	17.2	86	66-140	
Xylene (Total)	ug/L	60	57.9	96	70-130	
1,2-Dichloroethane-d4 (S)	%			99	70-130	
4-Bromofluorobenzene (S)	%			103	70-130	
Toluene-d8 (S)	%			97	70-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

MATRIX SPIKE SAMPLE: 5032039

Parameter	Units	92833575001 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	20	23.5	118	70-146	
1,1,1-Trichloroethane	ug/L	ND	20	24.2	121	70-150	
1,1,2,2-Tetrachloroethane	ug/L	ND	20	21.8	109	66-144	
1,1,2-Trichloroethane	ug/L	ND	20	22.3	111	70-142	
1,1-Dichloroethane	ug/L	ND	20	24.4	122	68-150	
1,1-Dichloroethene	ug/L	ND	20	26.1	130	64-162	
1,1-Dichloropropene	ug/L	ND	20	23.6	118	70-160	
1,2,3-Trichlorobenzene	ug/L	ND	20	24.1	121	66-151	
1,2,3-Trichloropropane	ug/L	ND	20	20.8	104	66-144	
1,2,4-Trichlorobenzene	ug/L	ND	20	23.6	118	69-147	
1,2-Dibromo-3-chloropropane	ug/L	ND	20	22.6	113	62-146	
1,2-Dibromoethane (EDB)	ug/L	ND	20	21.7	108	70-143	
1,2-Dichlorobenzene	ug/L	ND	20	22.3	111	70-142	
1,2-Dichloroethane	ug/L	ND	20	22.6	113	68-145	
1,2-Dichloropropane	ug/L	ND	20	22.9	115	70-144	
1,3-Dichlorobenzene	ug/L	ND	20	22.8	114	70-142	
1,3-Dichloropropane	ug/L	ND	20	21.8	109	70-141	
1,4-Dichlorobenzene	ug/L	ND	20	22.2	111	70-140	
2,2-Dichloropropane	ug/L	ND	20	24.6	123	58-160	
2-Butanone (MEK)	ug/L	ND	40	42.9	107	57-156	
2-Chlorotoluene	ug/L	ND	20	22.2	111	70-148	
2-Hexanone	ug/L	ND	40	45.3	113	62-153	
4-Chlorotoluene	ug/L	ND	20	22.7	114	70-144	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	40	43.3	108	65-144	
Acetone	ug/L	ND	40	43.8	110	49-162	
Benzene	ug/L	ND	20	23.7	119	68-144	
Bromobenzene	ug/L	ND	20	22.6	113	70-144	
Bromochloromethane	ug/L	ND	20	22.2	111	70-148	
Bromodichloromethane	ug/L	ND	20	24.2	121	70-141	
Bromoform	ug/L	ND	20	21.0	105	59-144	
Bromomethane	ug/L	ND	20	22.7	113	23-190	IK
Carbon tetrachloride	ug/L	ND	20	25.5	127	70-147	
Chlorobenzene	ug/L	ND	20	23.1	116	70-143	
Chloroethane	ug/L	ND	20	24.4	122	55-190	
Chloroform	ug/L	ND	20	22.9	114	67-148	
Chloromethane	ug/L	ND	20	22.1	111	38-180	
cis-1,2-Dichloroethene	ug/L	ND	20	23.6	118	67-151	
cis-1,3-Dichloropropene	ug/L	ND	20	24.1	121	70-142	
Dibromochloromethane	ug/L	ND	20	21.6	108	68-140	
Dibromomethane	ug/L	ND	20	22.2	111	70-142	
Dichlorodifluoromethane	ug/L	ND	20	20.5	103	15-200	
Diisopropyl ether	ug/L	ND	20	22.5	112	62-149	
Ethylbenzene	ug/L	ND	20	22.9	114	70-145	
Hexachloro-1,3-butadiene	ug/L	ND	20	24.7	123	64-164	
m&p-Xylene	ug/L	ND	40	46.0	115	70-148	
Methyl-tert-butyl ether	ug/L	ND	20	21.3	107	64-146	
Methylene Chloride	ug/L	ND	20	22.3	111	54-149	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

MATRIX SPIKE SAMPLE: 5032039

Parameter	Units	92833575001 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Naphthalene	ug/L	ND	20	22.4	112	62-154	
o-Xylene	ug/L	ND	20	23.2	116	70-145	
p-Isopropyltoluene	ug/L	ND	20	24.4	122	70-153	
Styrene	ug/L	ND	20	23.1	115	70-147	
Tetrachloroethene	ug/L	ND	20	21.8	109	70-145	
Toluene	ug/L	ND	20	22.6	113	65-146	
trans-1,2-Dichloroethene	ug/L	ND	20	24.2	121	69-155	
trans-1,3-Dichloropropene	ug/L	ND	20	24.2	121	70-142	
Trichloroethene	ug/L	ND	20	24.5	123	70-152	
Trichlorofluoromethane	ug/L	ND	20	23.9	120	60-158	
Vinyl acetate	ug/L	ND	40	48.3	121	56-157	
Vinyl chloride	ug/L	ND	20	24.0	120	51-178	
Xylene (Total)	ug/L	ND	60	69.2	115	70-146	
1,2-Dichloroethane-d4 (S)	%				105	70-130	
4-Bromofluorobenzene (S)	%				101	70-130	
Toluene-d8 (S)	%				100	70-130	

SAMPLE DUPLICATE: 5032040

Parameter	Units	92833633001 Result	Dup Result	RPD	Max RPD	Qualifiers
1,1,1,2-Tetrachloroethane	ug/L	ND	ND		30	
1,1,1-Trichloroethane	ug/L	ND	ND		30	
1,1,2,2-Tetrachloroethane	ug/L	ND	ND		30	
1,1,2-Trichloroethane	ug/L	ND	ND		30	
1,1-Dichloroethane	ug/L	ND	ND		30	
1,1-Dichloroethene	ug/L	ND	ND		30	
1,1-Dichloropropene	ug/L	ND	ND		30	
1,2,3-Trichlorobenzene	ug/L	ND	ND		30	
1,2,3-Trichloropropane	ug/L	ND	ND		30	
1,2,4-Trichlorobenzene	ug/L	ND	ND		30	
1,2-Dibromo-3-chloropropane	ug/L	ND	ND		30	
1,2-Dibromoethane (EDB)	ug/L	ND	ND		30	
1,2-Dichlorobenzene	ug/L	ND	ND		30	
1,2-Dichloroethane	ug/L	ND	ND		30	
1,2-Dichloropropane	ug/L	ND	ND		30	
1,3-Dichlorobenzene	ug/L	ND	ND		30	
1,3-Dichloropropane	ug/L	ND	ND		30	
1,4-Dichlorobenzene	ug/L	ND	ND		30	
2,2-Dichloropropane	ug/L	ND	ND		30	
2-Butanone (MEK)	ug/L	ND	ND		30	
2-Chlorotoluene	ug/L	ND	ND		30	
2-Hexanone	ug/L	ND	ND		30	
4-Chlorotoluene	ug/L	ND	ND		30	
4-Methyl-2-pentanone (MIBK)	ug/L	ND	ND		30	
Acetone	ug/L	ND	ND		30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

SAMPLE DUPLICATE: 5032040

Parameter	Units	92833633001 Result	Dup Result	RPD	Max RPD	Qualifiers
Benzene	ug/L	ND	ND		30	
Bromobenzene	ug/L	ND	ND		30	
Bromochloromethane	ug/L	ND	ND		30	
Bromodichloromethane	ug/L	ND	ND		30	
Bromoform	ug/L	ND	ND		30	
Bromomethane	ug/L	ND	ND		30	IK
Carbon tetrachloride	ug/L	ND	ND		30	
Chlorobenzene	ug/L	ND	ND		30	
Chloroethane	ug/L	ND	ND		30	
Chloroform	ug/L	ND	ND		30	
Chloromethane	ug/L	ND	ND		30	
cis-1,2-Dichloroethene	ug/L	ND	ND		30	
cis-1,3-Dichloropropene	ug/L	ND	ND		30	
Dibromochloromethane	ug/L	ND	ND		30	
Dibromomethane	ug/L	ND	ND		30	
Dichlorodifluoromethane	ug/L	ND	ND		30	
Diisopropyl ether	ug/L	ND	ND		30	
Ethylbenzene	ug/L	ND	ND		30	
Hexachloro-1,3-butadiene	ug/L	ND	ND		30	
m&p-Xylene	ug/L	ND	ND		30	
Methyl-tert-butyl ether	ug/L	ND	ND		30	
Methylene Chloride	ug/L	ND	ND		30	
Naphthalene	ug/L	ND	ND		30	
o-Xylene	ug/L	ND	ND		30	
p-Isopropyltoluene	ug/L	ND	ND		30	
Styrene	ug/L	ND	ND		30	
Tetrachloroethene	ug/L	ND	ND		30	
Toluene	ug/L	ND	ND		30	
trans-1,2-Dichloroethene	ug/L	ND	ND		30	
trans-1,3-Dichloropropene	ug/L	ND	ND		30	
Trichloroethene	ug/L	ND	ND		30	
Trichlorofluoromethane	ug/L	ND	ND		30	
Vinyl acetate	ug/L	ND	ND		30	
Vinyl chloride	ug/L	ND	ND		30	
Xylene (Total)	ug/L	ND	ND		30	
1,2-Dichloroethane-d4 (S)	%	98	106			
4-Bromofluorobenzene (S)	%	97	97			
Toluene-d8 (S)	%	96	103			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

QC Batch: 978181 | Analysis Method: EPA 7199
QC Batch Method: EPA 7199 | Analysis Description: 7199 Chromium, Hexavalent
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92833633006, 92833633007, 92833633008, 92833633009

METHOD BLANK: 5029620 Matrix: Solid
Associated Lab Samples: 92833633006, 92833633007, 92833633008, 92833633009

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Chromium, Hexavalent	mg/kg	ND	1.0	0.18	12/10/25 22:55	

LABORATORY CONTROL SAMPLE: 5029621

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Chromium, Hexavalent	mg/kg	10	10.1	101	80-120	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 5029622 5029623

Parameter	Units	92833633006 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Chromium, Hexavalent	mg/kg	1.7	12.4	12.9	12.7	13.7	89	92	75-125	7	20	

MATRIX SPIKE SAMPLE: 5029624

Parameter	Units	92833633007 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Chromium, Hexavalent	mg/kg	2.6	1350	1320	97	75-125	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

QC Batch: 978312
QC Batch Method: EPA 3510C
Analysis Method: EPA 8270E
Analysis Description: 8270E Water MSSV RVE
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92833633001, 92833633002, 92833633003, 92833633004

METHOD BLANK: 5030333 Matrix: Water
Associated Lab Samples: 92833633001, 92833633002, 92833633003, 92833633004

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,2,4-Trichlorobenzene	ug/L	ND	10.0	1.7	12/11/25 13:20	
1,2-Dichlorobenzene	ug/L	ND	10.0	1.8	12/11/25 13:20	
1,3-Dichlorobenzene	ug/L	ND	10.0	1.6	12/11/25 13:20	
1,4-Dichlorobenzene	ug/L	ND	10.0	1.7	12/11/25 13:20	
1-Methylnaphthalene	ug/L	ND	10.0	2.0	12/11/25 13:20	
2,2'-Oxybis(1-chloropropane)	ug/L	ND	10.0	1.2	12/11/25 13:20	v1
2,4,5-Trichlorophenol	ug/L	ND	10.0	1.4	12/11/25 13:20	
2,4,6-Trichlorophenol	ug/L	ND	10.0	1.6	12/11/25 13:20	
2,4-Dichlorophenol	ug/L	ND	10.0	1.4	12/11/25 13:20	
2,4-Dimethylphenol	ug/L	ND	10.0	1.7	12/11/25 13:20	
2,4-Dinitrophenol	ug/L	ND	50.0	26.0	12/11/25 13:20	
2,4-Dinitrotoluene	ug/L	ND	10.0	1.6	12/11/25 13:20	
2,6-Dinitrotoluene	ug/L	ND	10.0	1.7	12/11/25 13:20	
2-Chloronaphthalene	ug/L	ND	10.0	1.7	12/11/25 13:20	
2-Chlorophenol	ug/L	ND	10.0	1.2	12/11/25 13:20	
2-Methylnaphthalene	ug/L	ND	10.0	1.9	12/11/25 13:20	
2-Methylphenol(o-Cresol)	ug/L	ND	10.0	1.9	12/11/25 13:20	
2-Nitroaniline	ug/L	ND	20.0	3.0	12/11/25 13:20	
2-Nitrophenol	ug/L	ND	10.0	1.4	12/11/25 13:20	
3&4-Methylphenol(m&p Cresol)	ug/L	ND	10.0	1.2	12/11/25 13:20	
3,3'-Dichlorobenzidine	ug/L	ND	20.0	8.1	12/11/25 13:20	
3-Nitroaniline	ug/L	ND	20.0	3.8	12/11/25 13:20	
4,6-Dinitro-2-methylphenol	ug/L	ND	20.0	7.8	12/11/25 13:20	
4-Bromophenylphenyl ether	ug/L	ND	10.0	1.8	12/11/25 13:20	
4-Chloro-3-methylphenol	ug/L	ND	10.0	3.3	12/11/25 13:20	
4-Chloroaniline	ug/L	ND	20.0	3.6	12/11/25 13:20	
4-Chlorophenylphenyl ether	ug/L	ND	10.0	2.0	12/11/25 13:20	
4-Nitroaniline	ug/L	ND	20.0	5.1	12/11/25 13:20	
4-Nitrophenol	ug/L	ND	50.0	6.6	12/11/25 13:20	
Acenaphthene	ug/L	ND	10.0	2.0	12/11/25 13:20	
Acenaphthylene	ug/L	ND	10.0	2.0	12/11/25 13:20	
Aniline	ug/L	ND	10.0	1.6	12/11/25 13:20	
Anthracene	ug/L	ND	10.0	2.3	12/11/25 13:20	
Benzo(a)anthracene	ug/L	ND	10.0	2.7	12/11/25 13:20	
Benzo(a)pyrene	ug/L	ND	10.0	2.8	12/11/25 13:20	
Benzo(b)fluoranthene	ug/L	ND	10.0	2.6	12/11/25 13:20	
Benzo(g,h,i)perylene	ug/L	ND	10.0	2.8	12/11/25 13:20	
Benzo(k)fluoranthene	ug/L	ND	10.0	2.7	12/11/25 13:20	
Benzoic Acid	ug/L	ND	50.0	22.0	12/11/25 13:20	
Benzyl alcohol	ug/L	ND	20.0	2.9	12/11/25 13:20	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

METHOD BLANK: 5030333 Matrix: Water
Associated Lab Samples: 92833633001, 92833633002, 92833633003, 92833633004

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
bis(2-Chloroethoxy)methane	ug/L	ND	10.0	1.8	12/11/25 13:20	
bis(2-Chloroethyl) ether	ug/L	ND	10.0	1.9	12/11/25 13:20	
bis(2-Ethylhexyl)phthalate	ug/L	ND	6.0	3.7	12/11/25 13:20	
Butylbenzylphthalate	ug/L	ND	10.0	3.1	12/11/25 13:20	
Chrysene	ug/L	ND	10.0	2.8	12/11/25 13:20	
Di-n-butylphthalate	ug/L	ND	10.0	2.2	12/11/25 13:20	
Di-n-octylphthalate	ug/L	ND	10.0	3.9	12/11/25 13:20	
Dibenz(a,h)anthracene	ug/L	ND	10.0	3.0	12/11/25 13:20	
Dibenzofuran	ug/L	ND	10.0	2.1	12/11/25 13:20	
Diethylphthalate	ug/L	ND	10.0	2.0	12/11/25 13:20	
Dimethylphthalate	ug/L	ND	10.0	2.1	12/11/25 13:20	
Fluoranthene	ug/L	ND	10.0	2.2	12/11/25 13:20	
Fluorene	ug/L	ND	10.0	2.1	12/11/25 13:20	
Hexachloro-1,3-butadiene	ug/L	ND	10.0	1.8	12/11/25 13:20	
Hexachlorobenzene	ug/L	ND	10.0	2.2	12/11/25 13:20	
Hexachlorocyclopentadiene	ug/L	ND	10.0	1.6	12/11/25 13:20	
Hexachloroethane	ug/L	ND	10.0	1.4	12/11/25 13:20	
Indeno(1,2,3-cd)pyrene	ug/L	ND	10.0	2.9	12/11/25 13:20	
Isophorone	ug/L	ND	10.0	1.7	12/11/25 13:20	
N-Nitroso-di-n-propylamine	ug/L	ND	10.0	1.3	12/11/25 13:20	
N-Nitrosodimethylamine	ug/L	ND	10.0	1.9	12/11/25 13:20	
N-Nitrosodiphenylamine	ug/L	ND	10.0	3.0	12/11/25 13:20	
Naphthalene	ug/L	ND	10.0	2.1	12/11/25 13:20	
Nitrobenzene	ug/L	ND	10.0	1.9	12/11/25 13:20	
Pentachlorophenol	ug/L	ND	20.0	3.8	12/11/25 13:20	
Phenanthrene	ug/L	ND	10.0	2.0	12/11/25 13:20	
Phenol	ug/L	ND	10.0	1.4	12/11/25 13:20	
Pyrene	ug/L	ND	10.0	2.2	12/11/25 13:20	
2,4,6-Tribromophenol (S)	%	74	10-166		12/11/25 13:20	
2-Fluorobiphenyl (S)	%	56	10-130		12/11/25 13:20	
2-Fluorophenol (S)	%	54	10-130		12/11/25 13:20	
Nitrobenzene-d5 (S)	%	71	10-133		12/11/25 13:20	
Phenol-d6 (S)	%	41	10-130		12/11/25 13:20	
Terphenyl-d14 (S)	%	104	10-193		12/11/25 13:20	

LABORATORY CONTROL SAMPLE: 5030334

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,2,4-Trichlorobenzene	ug/L	50	29.0	58	14-130	
1,2-Dichlorobenzene	ug/L	50	26.7	53	10-130	
1,3-Dichlorobenzene	ug/L	50	24.6	49	10-130	
1,4-Dichlorobenzene	ug/L	50	25.4	51	10-130	
1-Methylnaphthalene	ug/L	50	34.5	69	26-131	
2,2'-Oxybis(1-chloropropane)	ug/L	50	38.8	78	23-130	v1

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

LABORATORY CONTROL SAMPLE: 5030334

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
2,4,5-Trichlorophenol	ug/L	50	27.9	56	36-150	
2,4,6-Trichlorophenol	ug/L	50	27.8	56	30-151	
2,4-Dichlorophenol	ug/L	50	31.2	62	36-140	
2,4-Dimethylphenol	ug/L	50	33.1	66	36-155	
2,4-Dinitrophenol	ug/L	250	187	75	10-169	
2,4-Dinitrotoluene	ug/L	50	39.7	79	46-160	
2,6-Dinitrotoluene	ug/L	50	33.0	66	47-161	
2-Chloronaphthalene	ug/L	50	27.6	55	29-134	
2-Chlorophenol	ug/L	50	28.6	57	29-130	
2-Methylnaphthalene	ug/L	50	34.1	68	26-130	
2-Methylphenol(o-Cresol)	ug/L	50	29.0	58	32-130	
2-Nitroaniline	ug/L	100	52.7	53	41-150	
2-Nitrophenol	ug/L	50	32.4	65	31-145	
3&4-Methylphenol(m&p Cresol)	ug/L	50	27.4	55	29-130	
3,3'-Dichlorobenzidine	ug/L	100	87.4	87	46-153	
3-Nitroaniline	ug/L	100	65.5	66	47-156	
4,6-Dinitro-2-methylphenol	ug/L	100	80.7	81	23-161	
4-Bromophenylphenyl ether	ug/L	50	34.3	69	45-143	
4-Chloro-3-methylphenol	ug/L	100	68.9	69	42-143	
4-Chloroaniline	ug/L	100	58.0	58	37-135	
4-Chlorophenylphenyl ether	ug/L	50	30.9	62	43-140	
4-Nitroaniline	ug/L	100	73.1	73	47-157	
4-Nitrophenol	ug/L	250	109	44	10-130	
Acenaphthene	ug/L	50	26.8	54	38-138	
Acenaphthylene	ug/L	50	30.4	61	39-139	
Aniline	ug/L	50	25.5	51	16-130	
Anthracene	ug/L	50	39.3	79	45-136	
Benzo(a)anthracene	ug/L	50	52.0	104	52-151	
Benzo(a)pyrene	ug/L	50	46.0	92	46-165	
Benzo(b)fluoranthene	ug/L	50	46.1	92	44-170	
Benzo(g,h,i)perylene	ug/L	50	53.2	106	39-171	
Benzo(k)fluoranthene	ug/L	50	45.5	91	43-168	
Benzoic Acid	ug/L	250	105	42	10-130	
Benzyl alcohol	ug/L	100	58.2	58	33-134	
bis(2-Chloroethoxy)methane	ug/L	50	33.2	66	37-140	
bis(2-Chloroethyl) ether	ug/L	50	32.2	64	33-136	
bis(2-Ethylhexyl)phthalate	ug/L	50	50.8	102	50-169	
Butylbenzylphthalate	ug/L	50	53.7	107	50-174	
Chrysene	ug/L	50	53.2	106	52-148	
Di-n-butylphthalate	ug/L	50	47.2	94	51-154	
Di-n-octylphthalate	ug/L	50	54.5	109	44-170	
Dibenz(a,h)anthracene	ug/L	50	49.5	99	41-171	
Dibenzofuran	ug/L	50	29.6	59	42-157	
Diethylphthalate	ug/L	50	38.6	77	50-149	
Dimethylphthalate	ug/L	50	33.0	66	47-146	
Fluoranthene	ug/L	50	49.5	99	51-152	
Fluorene	ug/L	50	30.2	60	46-143	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

LABORATORY CONTROL SAMPLE: 5030334

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Hexachloro-1,3-butadiene	ug/L	50	30.6	61	10-130	
Hexachlorobenzene	ug/L	50	35.6	71	40-139	
Hexachlorocyclopentadiene	ug/L	50	22.7	45	10-130	
Hexachloroethane	ug/L	50	24.4	49	10-130	
Indeno(1,2,3-cd)pyrene	ug/L	50	45.0	90	40-172	
Isophorone	ug/L	50	36.7	73	37-143	
N-Nitroso-di-n-propylamine	ug/L	50	35.3	71	38-145	
N-Nitrosodimethylamine	ug/L	50	28.5	57	30-130	
N-Nitrosodiphenylamine	ug/L	50	35.8	72	46-144	
Naphthalene	ug/L	50	30.6	61	21-130	
Nitrobenzene	ug/L	50	32.6	65	33-136	
Pentachlorophenol	ug/L	100	82.4	82	19-156	
Phenanthrene	ug/L	50	40.3	81	49-143	
Phenol	ug/L	50	19.3	39	18-130	
Pyrene	ug/L	50	46.7	93	48-156	
2,4,6-Tribromophenol (S)	%			70	10-166	
2-Fluorobiphenyl (S)	%			53	10-130	
2-Fluorophenol (S)	%			44	10-130	
Nitrobenzene-d5 (S)	%			65	10-133	
Phenol-d6 (S)	%			36	10-130	
Terphenyl-d14 (S)	%			92	10-193	

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 5030335 5030336

Parameter	Units	92833633001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
1,2,4-Trichlorobenzene	ug/L	ND	100	100	55.6	59.1	56	59	10-130	6	30	
1,2-Dichlorobenzene	ug/L	ND	100	100	41.0	46.3	41	46	10-130	12	30	
1,3-Dichlorobenzene	ug/L	ND	100	100	35.1	40.9	35	41	10-130	15	30	
1,4-Dichlorobenzene	ug/L	ND	100	100	37.6	42.3	38	42	10-130	12	30	
1-Methylnaphthalene	ug/L	ND	100	100	72.9	69.9	73	70	10-130	4	30	
2,2'-Oxybis(1-chloropropane)	ug/L	ND	100	100	78.2	76.9	78	77	10-132	2	30	v1
2,4,5-Trichlorophenol	ug/L	ND	100	100	66.5	59.2	67	59	10-174	12	30	
2,4,6-Trichlorophenol	ug/L	ND	100	100	63.6	57.6	64	58	10-173	10	30	
2,4-Dichlorophenol	ug/L	ND	100	100	68.3	66.3	68	66	10-153	3	30	
2,4-Dimethylphenol	ug/L	ND	100	100	75.3	70.6	75	71	12-157	7	30	
2,4-Dinitrophenol	ug/L	ND	500	500	433	371	87	74	10-165	15	30	
2,4-Dinitrotoluene	ug/L	ND	100	100	88.1	78.4	88	78	29-168	12	30	
2,6-Dinitrotoluene	ug/L	ND	100	100	76.3	72.0	76	72	28-168	6	30	
2-Chloronaphthalene	ug/L	ND	100	100	61.6	56.2	62	56	11-136	9	30	
2-Chlorophenol	ug/L	ND	100	100	61.7	61.3	62	61	10-134	1	30	
2-Methylnaphthalene	ug/L	ND	100	100	72.1	69.1	72	69	10-131	4	30	
2-Methylphenol(o-Cresol)	ug/L	ND	100	100	63.9	62.0	64	62	10-130	3	30	
2-Nitroaniline	ug/L	ND	200	200	119	106	60	53	19-156	12	30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 5030335 5030336

Parameter	Units	92833633001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
2-Nitrophenol	ug/L	ND	100	100	68.1	68.8	68	69	10-160	1	30	
3&4-Methylphenol(m&p Cresol)	ug/L	ND	100	100	59.3	59.7	59	60	10-132	1	30	
3,3'-Dichlorobenzidine	ug/L	ND	200	200	147	162	74	81	10-173	10	30	
3-Nitroaniline	ug/L	ND	200	200	143	128	71	64	19-169	11	30	
4,6-Dinitro-2-methylphenol	ug/L	ND	200	200	183	160	92	80	10-178	13	30	
4-Bromophenylphenyl ether	ug/L	ND	100	100	80.9	75.0	81	75	28-149	8	30	
4-Chloro-3-methylphenol	ug/L	ND	200	200	157	151	79	76	18-148	4	30	
4-Chloroaniline	ug/L	ND	200	200	119	123	59	62	10-141	4	30	
4-Chlorophenylphenyl ether	ug/L	ND	100	100	70.0	64.6	70	65	24-144	8	30	
4-Nitroaniline	ug/L	ND	200	200	165	131	82	65	18-170	23	30	
4-Nitrophenol	ug/L	ND	500	500	249	213	50	43	10-130	16	30	
Acenaphthene	ug/L	ND	100	100	62.7	56.3	63	56	18-142	11	30	
Acenaphthylene	ug/L	ND	100	100	69.4	64.1	69	64	18-143	8	30	
Aniline	ug/L	ND	100	100	33.7	42.9	34	43	10-130	24	30	
Anthracene	ug/L	ND	100	100	90.1	78.5	90	78	32-138	14	30	
Benzo(a)anthracene	ug/L	ND	100	100	116	103	116	103	41-155	12	30	
Benzo(a)pyrene	ug/L	ND	100	100	110	98.8	110	99	10-167	11	30	
Benzo(b)fluoranthene	ug/L	ND	100	100	104	97.0	104	97	31-172	7	30	
Benzo(g,h,i)perylene	ug/L	ND	100	100	128	109	128	109	26-177	16	30	
Benzo(k)fluoranthene	ug/L	ND	100	100	112	97.7	112	98	31-168	14	30	
Benzoic Acid	ug/L	ND	500	500	228	211	46	42	10-130	8	30	
Benzyl alcohol	ug/L	ND	200	200	128	127	64	63	10-136	1	30	
bis(2-Chloroethoxy)methane	ug/L	ND	100	100	75.5	71.9	76	72	12-143	5	30	
bis(2-Chloroethyl) ether	ug/L	ND	100	100	62.6	63.6	63	64	10-139	2	30	
bis(2-Ethylhexyl)phthalate	ug/L	ND	100	100	120	104	120	104	41-173	14	30	
Butylbenzylphthalate	ug/L	ND	100	100	123	109	123	109	38-182	13	30	
Chrysene	ug/L	ND	100	100	118	104	118	104	41-152	13	30	
Di-n-butylphthalate	ug/L	ND	100	100	112	93.9	112	94	37-162	17	30	
Di-n-octylphthalate	ug/L	ND	100	100	131	113	131	113	36-176	14	30	
Dibenz(a,h)anthracene	ug/L	ND	100	100	118	104	118	104	29-175	13	30	
Dibenzofuran	ug/L	ND	100	100	67.8	61.3	68	61	23-144	10	30	
Diethylphthalate	ug/L	ND	100	100	87.0	76.7	87	77	33-154	13	30	
Dimethylphthalate	ug/L	ND	100	100	77.0	70.9	77	71	29-150	8	30	
Fluoranthene	ug/L	ND	100	100	115	94.3	115	94	40-156	20	30	
Fluorene	ug/L	ND	100	100	70.4	63.5	70	63	26-148	10	30	
Hexachloro-1,3-butadiene	ug/L	ND	100	100	51.6	57.9	52	58	10-130	12	30	
Hexachlorobenzene	ug/L	ND	100	100	79.1	69.9	79	70	27-145	12	30	
Hexachlorocyclopentadiene	ug/L	ND	100	100	49.2	49.3	49	49	10-130	0	30	
Hexachloroethane	ug/L	ND	100	100	34.3	39.1	34	39	10-130	13	30	
Indeno(1,2,3-cd)pyrene	ug/L	ND	100	100	106	92.3	106	92	28-176	14	30	
Isophorone	ug/L	ND	100	100	82.9	78.2	83	78	14-145	6	30	
N-Nitroso-di-n-propylamine	ug/L	ND	100	100	80.0	76.7	80	77	12-149	4	30	
N-Nitrosodimethylamine	ug/L	ND	100	100	57.5	54.9	57	55	10-130	4	30	
N-Nitrosodiphenylamine	ug/L	ND	100	100	80.3	74.1	80	74	29-149	8	30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

MATRIX SPIKE & MATRIX SPIKE DUPLICATE: 5030335 5030336

Parameter	Units	92833633001 Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS % Rec	MSD % Rec	% Rec Limits	RPD	Max RPD	Qual
Naphthalene	ug/L	ND	100	100	59.7	61.8	60	62	10-130	4	30	
Nitrobenzene	ug/L	ND	100	100	68.0	64.0	68	64	10-145	6	30	
Pentachlorophenol	ug/L	ND	200	200	197	161	98	81	10-178	20	30	
Phenanthrene	ug/L	ND	100	100	92.2	78.2	92	78	36-146	16	30	
Phenol	ug/L	ND	100	100	43.1	37.0	43	37	10-130	15	30	
Pyrene	ug/L	ND	100	100	107	95.7	107	96	42-156	11	30	
2,4,6-Tribromophenol (S)	%						76	68	10-166			
2-Fluorobiphenyl (S)	%						54	51	10-130			
2-Fluorophenol (S)	%						42	43	10-130			
Nitrobenzene-d5 (S)	%						59	61	10-133			
Phenol-d6 (S)	%						36	38	10-130			
Terphenyl-d14 (S)	%						98	94	10-193			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

QC Batch: 978136
QC Batch Method: EPA 3546
Analysis Method: EPA 8270E
Analysis Description: 8270E Solid MSSV Microwave
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92833633006, 92833633007, 92833633008, 92833633009

METHOD BLANK: 5029504 Matrix: Solid
Associated Lab Samples: 92833633006, 92833633007, 92833633008, 92833633009

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,2,4-Trichlorobenzene	mg/kg	ND	0.33	0.13	12/10/25 11:47	
1,2-Dichlorobenzene	mg/kg	ND	0.33	0.12	12/10/25 11:47	
1,3-Dichlorobenzene	mg/kg	ND	0.33	0.12	12/10/25 11:47	
1,4-Dichlorobenzene	mg/kg	ND	0.33	0.13	12/10/25 11:47	
1-Methylnaphthalene	mg/kg	ND	0.33	0.12	12/10/25 11:47	
2,2'-Oxybis(1-chloropropane)	mg/kg	ND	0.33	0.16	12/10/25 11:47	
2,4,5-Trichlorophenol	mg/kg	ND	0.33	0.15	12/10/25 11:47	
2,4,6-Trichlorophenol	mg/kg	ND	0.33	0.14	12/10/25 11:47	
2,4-Dichlorophenol	mg/kg	ND	0.33	0.13	12/10/25 11:47	
2,4-Dimethylphenol	mg/kg	ND	0.33	0.14	12/10/25 11:47	
2,4-Dinitrophenol	mg/kg	ND	1.6	1.0	12/10/25 11:47	
2,4-Dinitrotoluene	mg/kg	ND	0.33	0.13	12/10/25 11:47	
2,6-Dinitrotoluene	mg/kg	ND	0.33	0.12	12/10/25 11:47	
2-Chloronaphthalene	mg/kg	ND	0.33	0.13	12/10/25 11:47	
2-Chlorophenol	mg/kg	ND	0.33	0.12	12/10/25 11:47	
2-Methylnaphthalene	mg/kg	ND	0.33	0.13	12/10/25 11:47	
2-Methylphenol(o-Cresol)	mg/kg	ND	0.33	0.13	12/10/25 11:47	
2-Nitroaniline	mg/kg	ND	1.6	0.27	12/10/25 11:47	
2-Nitrophenol	mg/kg	ND	0.33	0.14	12/10/25 11:47	
3&4-Methylphenol(m&p Cresol)	mg/kg	ND	0.33	0.13	12/10/25 11:47	
3,3'-Dichlorobenzidine	mg/kg	ND	0.66	0.22	12/10/25 11:47	
3-Nitroaniline	mg/kg	ND	1.6	0.26	12/10/25 11:47	
4,6-Dinitro-2-methylphenol	mg/kg	ND	0.66	0.31	12/10/25 11:47	
4-Bromophenylphenyl ether	mg/kg	ND	0.33	0.13	12/10/25 11:47	
4-Chloro-3-methylphenol	mg/kg	ND	0.66	0.23	12/10/25 11:47	
4-Chloroaniline	mg/kg	ND	0.66	0.26	12/10/25 11:47	
4-Chlorophenylphenyl ether	mg/kg	ND	0.33	0.12	12/10/25 11:47	
4-Nitroaniline	mg/kg	ND	0.66	0.25	12/10/25 11:47	
4-Nitrophenol	mg/kg	ND	1.6	0.63	12/10/25 11:47	
Acenaphthene	mg/kg	ND	0.33	0.12	12/10/25 11:47	
Acenaphthylene	mg/kg	ND	0.33	0.12	12/10/25 11:47	
Aniline	mg/kg	ND	0.33	0.13	12/10/25 11:47	
Anthracene	mg/kg	ND	0.33	0.11	12/10/25 11:47	
Benzo(a)anthracene	mg/kg	ND	0.33	0.11	12/10/25 11:47	
Benzo(a)pyrene	mg/kg	ND	0.33	0.11	12/10/25 11:47	
Benzo(b)fluoranthene	mg/kg	ND	0.33	0.11	12/10/25 11:47	
Benzo(g,h,i)perylene	mg/kg	ND	0.33	0.13	12/10/25 11:47	
Benzo(k)fluoranthene	mg/kg	ND	0.33	0.12	12/10/25 11:47	
Benzoic Acid	mg/kg	ND	1.6	0.70	12/10/25 11:47	
Benzyl alcohol	mg/kg	ND	0.66	0.25	12/10/25 11:47	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

METHOD BLANK: 5029504 Matrix: Solid
Associated Lab Samples: 92833633006, 92833633007, 92833633008, 92833633009

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
bis(2-Chloroethoxy)methane	mg/kg	ND	0.33	0.14	12/10/25 11:47	
bis(2-Chloroethyl) ether	mg/kg	ND	0.33	0.12	12/10/25 11:47	
bis(2-Ethylhexyl)phthalate	mg/kg	ND	0.33	0.13	12/10/25 11:47	
Butylbenzylphthalate	mg/kg	ND	0.33	0.14	12/10/25 11:47	
Chrysene	mg/kg	ND	0.33	0.12	12/10/25 11:47	
Di-n-butylphthalate	mg/kg	ND	0.33	0.11	12/10/25 11:47	
Di-n-octylphthalate	mg/kg	ND	0.33	0.13	12/10/25 11:47	
Dibenz(a,h)anthracene	mg/kg	ND	0.33	0.13	12/10/25 11:47	
Dibenzofuran	mg/kg	ND	0.33	0.12	12/10/25 11:47	
Diethylphthalate	mg/kg	ND	0.33	0.12	12/10/25 11:47	
Dimethylphthalate	mg/kg	ND	0.33	0.12	12/10/25 11:47	
Fluoranthene	mg/kg	ND	0.33	0.11	12/10/25 11:47	
Fluorene	mg/kg	ND	0.33	0.12	12/10/25 11:47	
Hexachloro-1,3-butadiene	mg/kg	ND	0.33	0.14	12/10/25 11:47	
Hexachlorobenzene	mg/kg	ND	0.33	0.13	12/10/25 11:47	
Hexachlorocyclopentadiene	mg/kg	ND	0.33	0.19	12/10/25 11:47	
Hexachloroethane	mg/kg	ND	0.33	0.13	12/10/25 11:47	
Indeno(1,2,3-cd)pyrene	mg/kg	ND	0.33	0.13	12/10/25 11:47	
Isophorone	mg/kg	ND	0.33	0.15	12/10/25 11:47	
N-Nitroso-di-n-propylamine	mg/kg	ND	0.33	0.12	12/10/25 11:47	
N-Nitrosodimethylamine	mg/kg	ND	0.33	0.11	12/10/25 11:47	
N-Nitrosodiphenylamine	mg/kg	ND	0.33	0.12	12/10/25 11:47	
Naphthalene	mg/kg	ND	0.33	0.11	12/10/25 11:47	
Nitrobenzene	mg/kg	ND	0.33	0.15	12/10/25 11:47	
Pentachlorophenol	mg/kg	ND	0.66	0.32	12/10/25 11:47	
Phenanthrene	mg/kg	ND	0.33	0.11	12/10/25 11:47	
Phenol	mg/kg	ND	0.33	0.15	12/10/25 11:47	
Pyrene	mg/kg	ND	0.33	0.13	12/10/25 11:47	
Pyridine	mg/kg	ND	0.33	0.10	12/10/25 11:47	
2,4,6-Tribromophenol (S)	%	72	10-130		12/10/25 11:47	
2-Fluorobiphenyl (S)	%	67	10-130		12/10/25 11:47	
2-Fluorophenol (S)	%	67	10-130		12/10/25 11:47	
Nitrobenzene-d5 (S)	%	66	10-130		12/10/25 11:47	
Phenol-d6 (S)	%	68	10-130		12/10/25 11:47	
Terphenyl-d14 (S)	%	65	10-130		12/10/25 11:47	

LABORATORY CONTROL SAMPLE: 5029505

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
1,2,4-Trichlorobenzene	mg/kg	1.7	0.94	56	40-130	
1,2-Dichlorobenzene	mg/kg	1.7	0.87	52	37-130	
1,3-Dichlorobenzene	mg/kg	1.7	0.86	51	36-130	
1,4-Dichlorobenzene	mg/kg	1.7	0.86	51	36-130	
1-Methylnaphthalene	mg/kg	1.7	1.1	67	46-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

LABORATORY CONTROL SAMPLE: 5029505

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
2,2'-Oxybis(1-chloropropane)	mg/kg	1.7	0.90	54	12-130	
2,4,5-Trichlorophenol	mg/kg	1.7	1.3	77	49-130	
2,4,6-Trichlorophenol	mg/kg	1.7	1.3	75	48-130	
2,4-Dichlorophenol	mg/kg	1.7	1.1	63	45-130	
2,4-Dimethylphenol	mg/kg	1.7	1.1	64	45-130	
2,4-Dinitrophenol	mg/kg	8.4	7.7	92	23-130	
2,4-Dinitrotoluene	mg/kg	1.7	1.6	99	50-130	
2,6-Dinitrotoluene	mg/kg	1.7	1.5	89	53-130	
2-Chloronaphthalene	mg/kg	1.7	1.2	69	46-130	
2-Chlorophenol	mg/kg	1.7	0.90	54	39-130	
2-Methylnaphthalene	mg/kg	1.7	1.1	67	45-130	
2-Methylphenol(o-Cresol)	mg/kg	1.7	1.0	62	38-130	
2-Nitroaniline	mg/kg	3.3	2.9	88	43-130	
2-Nitrophenol	mg/kg	1.7	0.98	59	43-130	
3&4-Methylphenol(m&p Cresol)	mg/kg	1.7	1.1	66	34-130	
3,3'-Dichlorobenzidine	mg/kg	3.3	2.8	83	68-130	
3-Nitroaniline	mg/kg	3.3	2.9	87	36-130	
4,6-Dinitro-2-methylphenol	mg/kg	3.3	3.0	89	38-130	
4-Bromophenylphenyl ether	mg/kg	1.7	1.4	81	52-130	
4-Chloro-3-methylphenol	mg/kg	3.3	2.7	80	45-130	
4-Chloroaniline	mg/kg	3.3	2.4	72	41-130	
4-Chlorophenylphenyl ether	mg/kg	1.7	1.3	81	46-130	
4-Nitroaniline	mg/kg	3.3	3.4	102	40-130	
4-Nitrophenol	mg/kg	8.4	8.4	101	34-130	
Acenaphthene	mg/kg	1.7	1.2	73	47-130	
Acenaphthylene	mg/kg	1.7	1.3	79	50-130	
Aniline	mg/kg	1.7	0.89	53	33-130	
Anthracene	mg/kg	1.7	1.5	89	46-130	
Benzo(a)anthracene	mg/kg	1.7	1.6	96	49-130	
Benzo(a)pyrene	mg/kg	1.7	1.7	101	45-130	
Benzo(b)fluoranthene	mg/kg	1.7	1.7	100	45-130	
Benzo(g,h,i)perylene	mg/kg	1.7	1.6	98	44-130	
Benzo(k)fluoranthene	mg/kg	1.7	1.6	98	46-130	
Benzoic Acid	mg/kg	8.4	4.0	48	14-130	
Benzyl alcohol	mg/kg	3.3	2.2	65	39-130	
bis(2-Chloroethoxy)methane	mg/kg	1.7	1.0	62	41-130	
bis(2-Chloroethyl) ether	mg/kg	1.7	0.92	55	34-130	
bis(2-Ethylhexyl)phthalate	mg/kg	1.7	1.5	92	39-130	
Butylbenzylphthalate	mg/kg	1.7	1.6	94	48-130	
Chrysene	mg/kg	1.7	1.6	94	50-130	
Di-n-butylphthalate	mg/kg	1.7	1.6	97	46-130	
Di-n-octylphthalate	mg/kg	1.7	1.7	100	49-130	
Dibenz(a,h)anthracene	mg/kg	1.7	1.7	103	46-130	
Dibenzofuran	mg/kg	1.7	1.3	79	49-130	
Diethylphthalate	mg/kg	1.7	1.6	95	49-130	
Dimethylphthalate	mg/kg	1.7	1.5	91	50-130	
Fluoranthene	mg/kg	1.7	1.7	99	49-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

LABORATORY CONTROL SAMPLE: 5029505

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Fluorene	mg/kg	1.7	1.4	83	47-130	
Hexachloro-1,3-butadiene	mg/kg	1.7	0.88	53	36-130	
Hexachlorobenzene	mg/kg	1.7	1.4	85	52-130	
Hexachlorocyclopentadiene	mg/kg	1.7	0.93	56	10-130	
Hexachloroethane	mg/kg	1.7	0.82	49	36-130	
Indeno(1,2,3-cd)pyrene	mg/kg	1.7	1.5	90	44-130	
Isophorone	mg/kg	1.7	1.3	75	40-130	
N-Nitroso-di-n-propylamine	mg/kg	1.7	1.2	72	34-130	
N-Nitrosodimethylamine	mg/kg	1.7	0.76	46	29-130	
N-Nitrosodiphenylamine	mg/kg	1.7	1.4	82	47-130	
Naphthalene	mg/kg	1.7	0.98	58	43-130	
Nitrobenzene	mg/kg	1.7	0.97	58	41-130	
Pentachlorophenol	mg/kg	3.3	3.2	94	35-130	
Phenanthrene	mg/kg	1.7	1.5	89	50-130	
Phenol	mg/kg	1.7	0.99	59	39-130	
Pyrene	mg/kg	1.7	1.5	89	51-130	
Pyridine	mg/kg	1.7	0.74	44	21-130	
2,4,6-Tribromophenol (S)	%			83	10-130	
2-Fluorobiphenyl (S)	%			64	10-130	
2-Fluorophenol (S)	%			49	10-130	
Nitrobenzene-d5 (S)	%			54	10-130	
Phenol-d6 (S)	%			56	10-130	
Terphenyl-d14 (S)	%			70	10-130	

MATRIX SPIKE SAMPLE: 5029506

Parameter	Units	92833145001 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
1,2,4-Trichlorobenzene	mg/kg	ND	2	1.3	68	22-130	
1,2-Dichlorobenzene	mg/kg	ND	2	1.1	59	22-130	
1,3-Dichlorobenzene	mg/kg	ND	2	1.1	56	22-130	
1,4-Dichlorobenzene	mg/kg	ND	2	1.1	57	21-130	
1-Methylnaphthalene	mg/kg	ND	2	1.5	78	27-130	
2,2'-Oxybis(1-chloropropane)	mg/kg	ND	2	1.2	62	10-130	
2,4,5-Trichlorophenol	mg/kg	ND	2	1.8	90	18-130	
2,4,6-Trichlorophenol	mg/kg	ND	2	1.7	86	17-130	
2,4-Dichlorophenol	mg/kg	ND	2	1.6	83	19-130	
2,4-Dimethylphenol	mg/kg	ND	2	1.5	78	17-130	
2,4-Dinitrophenol	mg/kg	ND	9.8	7.9	81	10-130	
2,4-Dinitrotoluene	mg/kg	ND	2	2.0	100	31-130	
2,6-Dinitrotoluene	mg/kg	ND	2	1.9	97	33-130	
2-Chloronaphthalene	mg/kg	ND	2	1.5	79	26-130	
2-Chlorophenol	mg/kg	ND	2	1.3	67	19-130	
2-Methylnaphthalene	mg/kg	ND	2	1.5	79	26-130	
2-Methylphenol(o-Cresol)	mg/kg	ND	2	1.5	77	19-130	
2-Nitroaniline	mg/kg	ND	3.9	3.6	92	29-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

MATRIX SPIKE SAMPLE: 5029506

Parameter	Units	92833145001 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
2-Nitrophenol	mg/kg	ND	2	1.4	71	16-130	
3&4-Methylphenol(m&p Cresol)	mg/kg	ND	2	1.6	81	14-130	
3,3'-Dichlorobenzidine	mg/kg	ND	3.9	3.4	88	16-130	
3-Nitroaniline	mg/kg	ND	3.9	3.6	92	28-130	
4,6-Dinitro-2-methylphenol	mg/kg	ND	3.9	3.5	89	10-131	
4-Bromophenylphenyl ether	mg/kg	ND	2	1.7	84	32-130	
4-Chloro-3-methylphenol	mg/kg	ND	3.9	3.7	93	26-130	
4-Chloroaniline	mg/kg	ND	3.9	3.2	83	19-130	
4-Chlorophenylphenyl ether	mg/kg	ND	2	1.7	86	29-130	
4-Nitroaniline	mg/kg	ND	3.9	4.0	101	22-130	
4-Nitrophenol	mg/kg	ND	9.8	10.3	105	10-130	
Acenaphthene	mg/kg	ND	2	1.6	81	29-130	
Acenaphthylene	mg/kg	ND	2	1.7	88	27-130	
Aniline	mg/kg	ND	2	1.2	60	10-130	
Anthracene	mg/kg	ND	2	1.8	91	26-130	
Benzo(a)anthracene	mg/kg	ND	2	1.9	93	31-130	
Benzo(a)pyrene	mg/kg	ND	2	1.9	96	24-130	
Benzo(b)fluoranthene	mg/kg	ND	2	2.0	97	12-137	
Benzo(g,h,i)perylene	mg/kg	ND	2	1.8	91	16-130	
Benzo(k)fluoranthene	mg/kg	ND	2	1.8	92	27-130	
Benzoic Acid	mg/kg	ND	9.8	1.9J	19	10-130	
Benzyl alcohol	mg/kg	ND	3.9	3.1	79	25-130	
bis(2-Chloroethoxy)methane	mg/kg	ND	2	1.4	74	26-130	
bis(2-Chloroethyl) ether	mg/kg	ND	2	1.2	63	23-130	
bis(2-Ethylhexyl)phthalate	mg/kg	ND	2	1.7	89	20-130	
Butylbenzylphthalate	mg/kg	ND	2	1.8	90	28-130	
Chrysene	mg/kg	ND	2	1.9	93	29-130	
Di-n-butylphthalate	mg/kg	ND	2	1.8	94	29-130	
Di-n-octylphthalate	mg/kg	ND	2	1.9	96	30-130	
Dibenz(a,h)anthracene	mg/kg	ND	2	1.7	87	27-130	
Dibenzofuran	mg/kg	ND	2	1.7	85	33-130	
Diethylphthalate	mg/kg	ND	2	1.9	96	34-130	
Dimethylphthalate	mg/kg	ND	2	1.9	95	35-130	
Fluoranthene	mg/kg	ND	2	2.0	98	26-130	
Fluorene	mg/kg	ND	2	1.7	88	27-130	
Hexachloro-1,3-butadiene	mg/kg	ND	2	1.2	60	19-130	
Hexachlorobenzene	mg/kg	ND	2	1.7	87	31-130	
Hexachlorocyclopentadiene	mg/kg	ND	2	1.1	58	10-130	
Hexachloroethane	mg/kg	ND	2	1.1	55	21-130	
Indeno(1,2,3-cd)pyrene	mg/kg	ND	2	1.6	82	16-130	
Isophorone	mg/kg	ND	2	1.6	84	29-130	
N-Nitroso-di-n-propylamine	mg/kg	ND	2	1.6	83	22-130	
N-Nitrosodimethylamine	mg/kg	ND	2	1.0	51	15-130	
N-Nitrosodiphenylamine	mg/kg	ND	2	1.8	90	30-130	
Naphthalene	mg/kg	ND	2	1.4	71	24-130	
Nitrobenzene	mg/kg	ND	2	1.3	68	25-130	
Pentachlorophenol	mg/kg	ND	3.9	4.0	102	10-130	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

MATRIX SPIKE SAMPLE: 5029506

Parameter	Units	92833145001 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Phenanthrene	mg/kg	ND	2	1.8	92	28-130	
Phenol	mg/kg	ND	2	1.4	72	18-130	
Pyrene	mg/kg	ND	2	1.8	87	27-130	
Pyridine	mg/kg	ND	2	0.74	38	10-130	
2,4,6-Tribromophenol (S)	%				89	10-130	
2-Fluorobiphenyl (S)	%				68	10-130	
2-Fluorophenol (S)	%				58	10-130	
Nitrobenzene-d5 (S)	%				64	10-130	
Phenol-d6 (S)	%				69	10-130	
Terphenyl-d14 (S)	%				66	10-130	

SAMPLE DUPLICATE: 5029507

Parameter	Units	92833145004 Result	Dup Result	RPD	Max RPD	Qualifiers
1,2,4-Trichlorobenzene	mg/kg	ND	ND		30	
1,2-Dichlorobenzene	mg/kg	ND	ND		30	
1,3-Dichlorobenzene	mg/kg	ND	ND		30	
1,4-Dichlorobenzene	mg/kg	ND	ND		30	
1-Methylnaphthalene	mg/kg	ND	ND		30	
2,2'-Oxybis(1-chloropropane)	mg/kg	ND	ND		30	
2,4,5-Trichlorophenol	mg/kg	ND	ND		30	
2,4,6-Trichlorophenol	mg/kg	ND	ND		30	
2,4-Dichlorophenol	mg/kg	ND	ND		30	
2,4-Dimethylphenol	mg/kg	ND	ND		30	
2,4-Dinitrophenol	mg/kg	ND	ND		30	
2,4-Dinitrotoluene	mg/kg	ND	ND		30	
2,6-Dinitrotoluene	mg/kg	ND	ND		30	
2-Chloronaphthalene	mg/kg	ND	ND		30	
2-Chlorophenol	mg/kg	ND	ND		30	
2-Methylnaphthalene	mg/kg	ND	ND		30	
2-Methylphenol(o-Cresol)	mg/kg	ND	ND		30	
2-Nitroaniline	mg/kg	ND	ND		30	
2-Nitrophenol	mg/kg	ND	ND		30	
3&4-Methylphenol(m&p Cresol)	mg/kg	ND	ND		30	
3,3'-Dichlorobenzidine	mg/kg	ND	ND		30	
3-Nitroaniline	mg/kg	ND	ND		30	
4,6-Dinitro-2-methylphenol	mg/kg	ND	ND		30	
4-Bromophenylphenyl ether	mg/kg	ND	ND		30	
4-Chloro-3-methylphenol	mg/kg	ND	ND		30	
4-Chloroaniline	mg/kg	ND	ND		30	
4-Chlorophenylphenyl ether	mg/kg	ND	ND		30	
4-Nitroaniline	mg/kg	ND	ND		30	
4-Nitrophenol	mg/kg	ND	ND		30	
Acenaphthene	mg/kg	ND	ND		30	
Acenaphthylene	mg/kg	ND	ND		30	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

SAMPLE DUPLICATE: 5029507

Parameter	Units	92833145004 Result	Dup Result	RPD	Max RPD	Qualifiers
Aniline	mg/kg	ND	ND		30	
Anthracene	mg/kg	ND	ND		30	
Benzo(a)anthracene	mg/kg	ND	ND		30	
Benzo(a)pyrene	mg/kg	ND	ND		30	
Benzo(b)fluoranthene	mg/kg	ND	ND		30	
Benzo(g,h,i)perylene	mg/kg	ND	ND		30	
Benzo(k)fluoranthene	mg/kg	ND	ND		30	
Benzoic Acid	mg/kg	ND	ND		30	
Benzyl alcohol	mg/kg	ND	ND		30	
bis(2-Chloroethoxy)methane	mg/kg	ND	ND		30	
bis(2-Chloroethyl) ether	mg/kg	ND	ND		30	
bis(2-Ethylhexyl)phthalate	mg/kg	ND	ND		30	
Butylbenzylphthalate	mg/kg	ND	ND		30	
Chrysene	mg/kg	ND	ND		30	
Di-n-butylphthalate	mg/kg	ND	ND		30	
Di-n-octylphthalate	mg/kg	ND	ND		30	
Dibenz(a,h)anthracene	mg/kg	ND	ND		30	
Dibenzofuran	mg/kg	ND	ND		30	
Diethylphthalate	mg/kg	ND	ND		30	
Dimethylphthalate	mg/kg	ND	ND		30	
Fluoranthene	mg/kg	ND	ND		30	
Fluorene	mg/kg	ND	ND		30	
Hexachloro-1,3-butadiene	mg/kg	ND	ND		30	
Hexachlorobenzene	mg/kg	ND	ND		30	
Hexachlorocyclopentadiene	mg/kg	ND	ND		30	
Hexachloroethane	mg/kg	ND	ND		30	
Indeno(1,2,3-cd)pyrene	mg/kg	ND	ND		30	
Isophorone	mg/kg	ND	ND		30	
N-Nitroso-di-n-propylamine	mg/kg	ND	ND		30	
N-Nitrosodimethylamine	mg/kg	ND	ND		30	
N-Nitrosodiphenylamine	mg/kg	ND	ND		30	
Naphthalene	mg/kg	ND	ND		30	
Nitrobenzene	mg/kg	ND	ND		30	
Pentachlorophenol	mg/kg	ND	ND		30	
Phenanthrene	mg/kg	ND	ND		30	
Phenol	mg/kg	ND	ND		30	
Pyrene	mg/kg	ND	ND		30	
Pyridine	mg/kg	ND	ND		30	
2,4,6-Tribromophenol (S)	%	90	84			
2-Fluorobiphenyl (S)	%	68	68			
2-Fluorophenol (S)	%	74	71			
Nitrobenzene-d5 (S)	%	73	73			
Phenol-d6 (S)	%	76	75			
Terphenyl-d14 (S)	%	66	63			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

QC Batch: 978041
QC Batch Method: SW-846
Analysis Method: SW-846
Analysis Description: Dry Weight/Percent Moisture
Laboratory: Pace Analytical Services - Charlotte
Associated Lab Samples: 92833633006, 92833633007, 92833633008, 92833633009

SAMPLE DUPLICATE: 5029123

Parameter	Units	92828435015 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	24.3	22.5	7	25	H1,N2

SAMPLE DUPLICATE: 5029124

Parameter	Units	92833666003 Result	Dup Result	RPD	Max RPD	Qualifiers
Percent Moisture	%	7.9	7.6	4	25	N2

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products II
Pace Project No.: 92833633

QC Batch: 2657239
QC Batch Method: SM 2540 G
Analysis Method: SM 2540G
Analysis Description: Total Solids 2540 G-2011
Laboratory: Pace National - Mt. Juliet
Associated Lab Samples: 92833633006, 92833633007, 92833633008, 92833633009

METHOD BLANK: R4313535-1 Matrix: Solid
Associated Lab Samples: 92833633006, 92833633007, 92833633008, 92833633009

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Total Solids	%	ND			12/12/25 06:42	

LABORATORY CONTROL SAMPLE: R4313535-2

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Total Solids	%	50.0	50.0	100	90.0-110	

SAMPLE DUPLICATE: R4313535-3

Parameter	Units	92833633009 Result	Dup Result	RPD	Max RPD	Qualifiers
Total Solids	%	79.2	78.1	1.42	10	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALIFIERS

Project: Fortress Wood Products II
Pace Project No.: 92833633

DEFINITIONS

DF - Dilution Factor, if reported, represents the factor applied to the reported data due to dilution of the sample aliquot.

ND - Not Detected at or above adjusted reporting limit.

TNTC - Too Numerous To Count

J - Estimated concentration above the adjusted method detection limit and below the adjusted reporting limit.

MDL - Adjusted Method Detection Limit.

PQL - Practical Quantitation Limit.

RL - Reporting Limit - The lowest concentration value that meets project requirements for quantitative data with known precision and bias for a specific analyte in a specific matrix.

S - Surrogate

1,2-Diphenylhydrazine decomposes to and cannot be separated from Azobenzene using Method 8270. The result for each analyte is a combined concentration.

Consistent with EPA guidelines, unrounded data are displayed and have been used to calculate % recovery and RPD values.

LCS(D) - Laboratory Control Sample (Duplicate)

MS(D) - Matrix Spike (Duplicate)

DUP - Sample Duplicate

RPD - Relative Percent Difference

NC - Not Calculable.

SG - Silica Gel - Clean-Up

U - Indicates the compound was analyzed for, but not detected.

Acid preservation may not be appropriate for 2 Chloroethylvinyl ether.

A separate vial preserved to a pH of 4-5 is recommended in SW846 Chapter 4 for the analysis of Acrolein and Acrylonitrile by EPA Method 8260.

N-Nitrosodiphenylamine decomposes and cannot be separated from Diphenylamine using Method 8270. The result reported for each analyte is a combined concentration.

Reported results are not rounded until the final step prior to reporting. Therefore, calculated parameters that are typically reported as "Total" may vary slightly from the sum of the reported component parameters.

Pace Analytical is TNI accredited. Contact your Pace PM for the current list of accredited analytes.

TNI - The NELAC Institute.

ANALYTE QUALIFIERS

1g	The reported result should be considered an estimated value due to a temporary provisional status on the laboratory's certification.
H1	Analysis conducted outside the EPA method holding time.
IH	This analyte exceeded secondary source verification criteria high for the initial calibration. The reported results should be considered an estimated value.
IK	The recalculated concentration of the calibration standard(s) did not meet method acceptance criteria; this result should be considered an estimated value.
J	Analyte detected below the reporting limit, therefore result is an estimate. This qualifier is also used for all TICs.
M1	Matrix spike recovery exceeded QC limits. Batch accepted based on laboratory control sample (LCS) recovery.
ML	Matrix spike recovery and/or matrix spike duplicate recovery was below laboratory control limits. Result may be biased low.
N2	The lab does not hold NELAC/TNI accreditation for this parameter but other accreditations/certifications may apply. A complete list of accreditations/certifications is available upon request.
P6	Matrix spike recovery was outside laboratory control limits due to a parent sample concentration notably higher than the spike level.
v1	The continuing calibration verification was above the method acceptance limit. Any detection for the analyte in the associated samples may have a high bias.
v2	The continuing calibration verification was below the method acceptance limit. The analyte was not detected in the associated samples and the sensitivity of the instrument was verified with a reporting limit check standard.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALIFIERS

Project: Fortress Wood Products II
Pace Project No.: 92833633

ANALYTE QUALIFIERS

v3	The continuing calibration verification was below the method acceptance limit. Any detection for the analyte in the associated samples may have low bias.

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA CROSS REFERENCE TABLE

Project: Fortress Wood Products II
Pace Project No.: 92833633

Lab ID	Sample ID	QC Batch Method	QC Batch	Analytical Method	Analytical Batch
92833633006	**SS-3**	EPA 7199	978181	EPA 7199	978378
92833633007	**SS-2**	EPA 7199	978181	EPA 7199	978378
92833633008	**SS-1**	EPA 7199	978181	EPA 7199	978378
92833633009	**SS-DUP**	EPA 7199	978181	EPA 7199	978378
92833633001	**SW-3**	3015	2656935	EPA 6020B	2656935
92833633002	**SW-2**	3015	2656935	EPA 6020B	2656935
92833633003	**SW-1**	3015	2656935	EPA 6020B	2656935
92833633004	**SW-DUP**	3015	2656935	EPA 6020B	2656935
92833633006	**SS-3**	3050B	2657288	EPA 6020B	2657288
92833633007	**SS-2**	3050B	2657288	EPA 6020B	2657288
92833633008	**SS-1**	3050B	2657288	EPA 6020B	2657288
92833633009	**SS-DUP**	3050B	2657288	EPA 6020B	2657288
92833633001	**SW-3**	7470A	2656855	EPA 7470A	2656855
92833633002	**SW-2**	7470A	2656855	EPA 7470A	2656855
92833633003	**SW-1**	7470A	2656855	EPA 7470A	2656855
92833633004	**SW-DUP**	7470A	2656855	EPA 7470A	2656855
92833633006	**SS-3**	7471A	2657743	EPA 7471B	2657743
92833633007	**SS-2**	7471A	2657743	EPA 7471B	2657743
92833633008	**SS-1**	7471A	2657743	EPA 7471B	2657743
92833633009	**SS-DUP**	7471A	2657743	EPA 7471B	2657743
92833633001	**SW-3**	EPA 3510C	978312	EPA 8270E	978484
92833633002	**SW-2**	EPA 3510C	978312	EPA 8270E	978484
92833633003	**SW-1**	EPA 3510C	978312	EPA 8270E	978484
92833633004	**SW-DUP**	EPA 3510C	978312	EPA 8270E	978484
92833633006	**SS-3**	EPA 3546	978136	EPA 8270E	978205
92833633007	**SS-2**	EPA 3546	978136	EPA 8270E	978205
92833633008	**SS-1**	EPA 3546	978136	EPA 8270E	978205
92833633009	**SS-DUP**	EPA 3546	978136	EPA 8270E	978205
92833633006	**SS-3**	EPA 5035A/5030B	978004	EPA 8260D	978159
92833633007	**SS-2**	EPA 5035A/5030B	978004	EPA 8260D	978159
92833633008	**SS-1**	EPA 5035A/5030B	978004	EPA 8260D	978159
92833633009	**SS-DUP**	EPA 5035A/5030B	978004	EPA 8260D	978159
92833633001	**SW-3**	EPA 8260D	978606		
92833633002	**SW-2**	EPA 8260D	978606		
92833633003	**SW-1**	EPA 8260D	978606		
92833633004	**SW-DUP**	EPA 8260D	978606		
92833633005	**TB-4**	EPA 8260D	978213		
92833633006	**SS-3**	SW-846	978041		
92833633007	**SS-2**	SW-846	978041		
92833633008	**SS-1**	SW-846	978041		
92833633009	**SS-DUP**	SW-846	978041		
92833633001	**SW-3**	SM2340B	2656935	SM2340-97	2656935
92833633002	**SW-2**	SM2340B	2656935	SM2340-97	2656935

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA CROSS REFERENCE TABLE

Project: Fortress Wood Products II
Pace Project No.: 92833633

Lab ID	Sample ID	QC Batch Method	QC Batch	Analytical Method	Analytical Batch
92833633003	**SW-1**	SM2340B	2656935	SM2340-97	2656935
92833633004	**SW-DUP**	SM2340B	2656935	SM2340-97	2656935
92833633006	**SS-3**	SM 2540 G	2657239	SM 2540G	2657239
92833633007	**SS-2**	SM 2540 G	2657239	SM 2540G	2657239
92833633008	**SS-1**	SM 2540 G	2657239	SM 2540G	2657239
92833633009	**SS-DUP**	SM 2540 G	2657239	SM 2540G	2657239

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace

Effective Date: 05/24/2024

Laboratory receiving samples:

Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☑ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☐

Sample Condition Upon Receipt

Client Name: ECS Southeast

Project #:

WO#: 92833633

92833633

Courier: ☐ Commercial ☐ Fed Ex ☑ Pace ☐ UPS ☐ USPS ☐ Other: ☐ Client

Custody Seal Present? ☐ Yes ☑ No Seals Intact? ☐ Yes ☐ No ☑ N/A

Date/Initials Person Examining Contents: mm 12/9

Packing Material: ☑ Bubble Wrap ☑ Bubble Bags ☐ None ☑ Other

Biological Tissue Frozen? ☐ Yes ☐ No ☑ N/A

Thermometer: ☐ IR Gun ID: 92T083

Type of Ice: ☑ Wet ☐ Blue ☐ None

Cooler Temp: 1.6/1.8 Correction Factor: Add/Subtract (°C) 0

Temp should be above freezing to 6°C

☐ Samples out of temp criteria. Samples on ice, cooling process has begun

Cooler Temp Corrected (°C): 1.6/1.8

USDA Regulated Soil (☑ N/A, water sample)

Did samples originate in a quarantine zone within the United States: CA, NY, or SC (check maps)? ☐ Yes ☑ No

Did samples originate from a foreign source (internationally, including Hawaii and Puerto Rico)? ☐ Yes ☑ No

				Comments/Discrepancy:
Chain of Custody Present?	☑ Yes	☐ No	☐ N/A	1.
Samples Arrived within Hold Time?	☑ Yes	☐ No	☐ N/A	2.
Short Hold Time Analysis (<72 hr.)?	☐ Yes	☑ No	☐ N/A	3.
Rush Turn Around Time Requested?	☐ Yes	☑ No	☐ N/A	4.
Sufficient Volume?	☑ Yes	☐ No	☐ N/A	5.
Correct Containers Used?	☑ Yes	☐ No	☐ N/A	6.
-Pace Containers Used?	☑ Yes	☐ No	☐ N/A	
Containers Intact?	☑ Yes	☐ No	☐ N/A	7.
Dissolved analysis: Samples Field Filtered?	☐ Yes	☑ No	☐ N/A	8.
Sample Labels Match COC?	☑ Yes	☐ No	☐ N/A	9.
-Includes Date/Time/ID/Analysis Matrix: WT/SS				
Headspace in VOA Vials (>5-6mm)?	☐ Yes	☑ No	☐ N/A	10.
Trip Blank Present?	☑ Yes	☐ No	☐ N/A	11.
Trip Blank Custody Seals Present?	☑ Yes	☐ No	☐ N/A	

COMMENTS/SAMPLE DISCREPANCY

Field Data Required? ☐ Yes ☐ No

Lot ID of split containers:

CLIENT NOTIFICATION/RESOLUTION

Person contacted: Date/Time:

Project Manager SCURF Review: Date:

Project Manager SRF Review: Date:

*Check mark top half of box if pH and/or dechlorination is verified and within the acceptance range for preservation samples.
Exceptions: VOA, Coliform, TOC, Oil and Grease, DRO/8015 (water) DOC, LLHg
**Bottom half of box is to list number of bottles
***Check all unpreserved Nitrates for chlorine

Project # **WO# : 92833633**
PM: TSM Due Date: 12/16/25
CLIENT: 92-ECS

Laboratory Receiving Location: Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☑ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☐

Client ECS-Southeast Profile (EZ) (Circle one) 3325840 Notes

Item#	BP4U-125 mL Plastic Unpreserved (N/A) (Cl-)	BP3U-250 ml Plastic Unpreserved (N/A)	BP2U-500 ml Plastic Unpreserved (N/A)	BP1U-1 liter Plastic Unpreserved (N/A)		BP4S-125 mL Plastic H2SO4 (pH < 2) (Cl-)	BP3N-250 mL plastic HNO3 (pH < 2)	BP4Z-125 mL Plastic Zn Acetate & NaOH (>9)	BP4B-125 mL Plastic NaOH (pH > 12) (Cl-)	WGFU-Wide-mouthed Glass jar Unpreserved	AG1U-1 liter Amber Unpreserved (N/A) (Cl-)	AG1H-1 liter Amber HCl (pH < 2)	AG3U-250 mL Amber Unpreserved (N/A) (Cl-)	AG1S-1 liter Amber H2SO4 (pH < 2)	AG3S-250 mL Amber H2SO4 (pH < 2)	DG9A-40 mL Amber NH4Cl (N/A)(Cl-)	DG9H-40 mL VOA HCl (N/A)	VG9T-40 mL VOA Na2S2O3 (N/A)	VG9U-40 mL VOA Unpreserved (N/A)	DG9V-40 mL VOA H3PO4 (N/A)	KP7U-50 mL Plastic Unpreserved (N/A)	V/GK (3 vials per kit)-VPH/Gas kit (N/A)	SP5T-125 mL Sterile Plastic (N/A - lab)	SP2T-250 mL Sterile Plastic (N/A - lab)		BP3R-250 mL Plastic (NH4)2SO4 (9.3-9.7)	AG0U-100 mL Amber Unpreserved (N/A) (Cl-)	VSGU-20 mL Scintillation vials (N/A)	DG9U-40 mL Amber Unpreserved vials (N/A)
CC							5i			Ch							Ch					Ch						Ch		
1							2										3											2		
2							2										3											2		
3							2										3											2		
4							2										3											2		
5																	2													
6										3													3							
7										3													3							
8										3													3							
9										3													3							
10																	TT													
11																														
12																														

pH Adjustment Log for Preserved Samples

Sample ID	Type of Preservative	pH upon receipt	Date preservation adjusted	Time preservation adjusted	Amount of Preservative added	Lot #

Note: Whenever there is a discrepancy affecting North Carolina compliance samples, a copy of this form will be sent to the North Carolina DENR Certification Office (i.e. Out of hold, incorrect preservative, out of temp, incorrect containers.

Pace® Location Requested (City/State):
Pace Analytical Charlotte
9800 Kincey Ave. Suite 100, Huntersville, NC 28078

CHAIN-OF-CUSTODY Analytical Request Document

Chain-of-Custody is a LEGAL DOCUMENT - Complete all relevant fields

LAB USE ONLY- Affix Workorder/Login Label Here

Scan QR Code for instructions

Company Name:	ECS Southeast, LLC-Charlotte	Contact/Report To:	Emery Lovekamp
Street Address:	1812 Center Park Drive Suite D Charlotte, NC 28217	Phone #:	704-525-5152
		E-Mail:	elovekamp@ecslimited.com
		Cc E-Mail:	
Customer Project #:	49: 24413-E	Invoice To:	AP-ECS Charlotte
Project Name:	Fortress Wood Products II	Invoice E-Mail:	ecs-49@ecslimited.com
Site Collection Info/Facility ID (as applicable):		Purchase Order # (if applicable):	49:24413-C
		Quote #:	

Time Zone Collected: [ ] AK [ ] PT [ ] MT [ ] CT [X] ET

County / State origin of sample(s): North Carolina

Data Deliverables: [X] Level II [ ] Level III [ ] Level IV [ ] EQUIS *REPORT MDLs [ ] Other

Regulatory Program (DW, RCRA, etc.) as applicable: Reportable [X] Yes [ ] No

Rush (Pre-approval required): [ ] Same Day [ ] 1 Day [ ] 2 Day [ ] 3 Day [ ] Other _____

DW PWSID # or WW Permit # as applicable:

Date Results Requested: STANDARD

Field Filtered (if applicable): [ ] Yes [X] No

Analysis:

* Matrix Codes (Insert in Matrix box below): Drinking Water (DW), Ground Water (GW), Waste Water (WW), Product (P), Soil/Solid (SS), Oil (OL), Wipe (WP), Tissue (TS), Bioassay (B), Vapor (V), Surface Water (SW),Sediment (SED), Sludge (SL), Caulk (CK), Leachate (LL), Biosolid (BS), Other (OT)

Specify Container Size **

Identify Container Preservative Type***

Analysis Requested

Customer Sample ID	Matrix *	Comp / Grab	Composite Start Date	Composite Start Time	Collected or Composite End Date	Collected or Composite End Time	# Cont.	Res. Chlorine Results	Res. Chlorine Units	7199 Chromium, Hexavalent	8260D MSV Low Level	8260D MSV Low Level- Trip Blank	8260D/5035A/5030B Volatiles	8270E MSSV Microwave	8270E RVE	Hardness – SM 2340	PFAS 1633	PFAS – 1633	PPL Metals – 6020/7470	Sample Comment	Preservation non-conformance identified for sample.
~~Surface Water~~ SW-3	WT	G			12/5/25	1215	7				X				X	X	[X]		X		
~~Surface Water~~ SW-2	WT	G			"	1350	7				X				X	X	[X]		X		
~~Surface Water~~ SW-1	WT	G			"	1425	7				X				X	X	[X]		X		
~~Surface Water~~ SW-DUP	WT	G			"	—	7				X				X	X	[X]		X		
~~Surface Water~~ TB-4	WT	—			11/25/25	—	2				X				[X]	[X]	[X]		[X]		
~~QA/QC~~ SS-3	~~SED~~ WT	G			12/5/25	1300	6			X			X	X			[X]		X		
~~QA/QC~~ SS-2	~~SED~~ WT	G			"	1355	6			X			X	X			[X]		X		
~~Sediment~~ SS-1	~~SED~~ SL	G			"	1435	6			X			X	X				[X]	X		
~~Sediment~~ SS-DUP	~~SED~~ SL	G			"	—	6			X			X	X				[X]	X		
~~Sediment~~	~~SL~~									[X]			[X]	[X]				[X]	[X]		

Lab Use Only

Proj. Mgr: Travis Mullis

AcctNum / Client ID:

Table #:

Profile / Template: 18978

Prelog / Bottle Ord. ID: EZ 3325840

**Container Size: (1) 1L, (2) 500mL, (3) 250mL, (4) 125mL, (5) 100mL, (6) 40mL vial, (7) EnCore, (8) TerraCore, (9) 90mL, (10) Other

*** Preservative Types: (1) None, (2) HNO3, (3) H2SO4, (4) HCl, (5) NaOH, (6) Zn Acetate, (7) NaHSO4, (8) Sod. Thiosulfate, (9) Ascorbic Acid, (10) MeOH, (11) Other

Additional Instructions from Pace®:

* 2 COOLERS

Collected By: (Printed Name) EMERY LOVEKAMP

Signature:

Customer Remarks / Special Conditions / Possible Hazards:

# Coolers:	Thermometer ID:	Correction Factor (°C):	Obs. Temp. (°C)	Corrected Temp. (°C)	On Ice:
2	92T083	0	1.6/1.8	1.6/1.8	

Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Tracking Number:
EL	12/8/25 1000	Erick Barrios/Pace	12/9/25 925	
Erick Barrios/Pace	12/9/25 1200		1219 1200	Delivered by: [ ] In- Person [ ] Courier
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	[ ] FedEX [ ] UPS [ ] Other
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Page: 1 of 2

Submitting a sample via this chain of custody constitutes acknowledgment and acceptance of the Pace® Terms and Conditions found at https://www.pacelabs.com/resource-library/resource/pace-terms-and-conditions/

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

December 31, 2025

Emery Lovekamp
ECS Southeast, LLC-Charlotte
1812 Center Park Drive
Suite D
Charlotte, NC 28217

RE: Project: Fortress Wood Products II
Pace Project No.: 92833594

Dear Emery Lovekamp:

Enclosed are the analytical results for sample(s) received by the laboratory on December 09, 2025. The results relate only to the samples included in this report. Results reported herein conform to the applicable TNI/NELAC Standards and the laboratory's Quality Manual, where applicable, unless otherwise noted in the body of the report.

The test results provided in this final report were generated by each of the following laboratories within the Pace Network:

(West Columbia, SC) - Revision 1 - This report replaces the December 19, 2025 report. This project was revised on December 31, 2025 to update the PFAS Data per lab request.

If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Travis Mullis
travis.mullis@pacelabs.com
(704)875-9092
Project Manager

Enclosures

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace

DC#_Title: ENV-FRM-HUN1-0083 v05_Sample Condition Upon Receipt

Effective Date: 05/24/2024

Laboratory receiving samples:

Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☑ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☐

Sample Condition Upon Receipt

Client Name: ECS Southeast

Project #: WO# : 92833594

92833594

Courier: ☐ Fed Ex ☐ UPS ☐ USPS ☐ Client ☐ Commercial ☑ Pace ☐ Other:

Custody Seal Present? ☐ Yes ☑ No Seals Intact? ☐ Yes ☐ No ☑ N/A

Date/Initials Person Examining Contents: mm 12/9

Packing Material: ☑ Bubble Wrap ☑ Bubble Bags ☐ None ☑ Other

Biological Tissue Frozen? ☐ Yes ☐ No ☑ N/A

Thermometer:

☐ IR Gun ID: 92T083

Type of Ice: ☑ Wet ☐ Blue ☐ None

Cooler Temp: 1.6/1.8 Correction Factor: Add/Subtract (°C) 0

Temp should be above freezing to 6°C

☐ Samples out of temp criteria. Samples on ice, cooling process has begun

Cooler Temp Corrected (°C): 1.6/1.8

USDA Regulated Soil (☑ N/A, water sample)

Did samples originate in a quarantine zone within the United States: CA, NY, or SC (check maps)? ☐ Yes ☑ No

Did samples originate from a foreign source (internationally, including Hawaii and Puerto Rico)? ☐ Yes ☑ No

				Comments/Discrepancy:
Chain of Custody Present?	☑ Yes	☐ No	☐ N/A	1.
Samples Arrived within Hold Time?	☑ Yes	☐ No	☐ N/A	2.
Short Hold Time Analysis (<72 hr.)?	☐ Yes	☑ No	☐ N/A	3.
Rush Turn Around Time Requested?	☐ Yes	☑ No	☐ N/A	4.
Sufficient Volume?	☑ Yes	☐ No	☐ N/A	5.
Correct Containers Used?	☑ Yes	☐ No	☐ N/A	6.
-Pace Containers Used?	☑ Yes	☐ No	☐ N/A	
Containers Intact?	☑ Yes	☐ No	☐ N/A	7.
Dissolved analysis: Samples Field Filtered?	☐ Yes	☑ No	☐ N/A	8.
Sample Labels Match COC?	☑ Yes	☐ No	☐ N/A	9.
-Includes Date/Time/ID/Analysis Matrix: WT/SS				
Headspace in VOA Vials (>5-6mm)?	☐ Yes	☑ No	☐ N/A	10.
Trip Blank Present?	☑ Yes	☐ No	☐ N/A	11.
Trip Blank Custody Seals Present?	☑ Yes	☐ No	☐ N/A	

COMMENTS/SAMPLE DISCREPANCY

Field Data Required? ☐ Yes ☐ No

Lot ID of split containers:

CLIENT NOTIFICATION/RESOLUTION

Person contacted: Date/Time:

Project Manager SCURF Review: Date:

Project Manager SRF Review: Date:

*Check mark top half of box if pH and/or dechlorination is verified and within the acceptance range for preservation samples.

Exceptions: VOA, Coliform, TOC, Oil and Grease, DRO/8015 (water) DOC, LLHg

**Bottom half of box is to list number of bottles

***Check all unpreserved Nitrates for chlorine

Project # **WO#: 92833594**

PM: TSM Due Date: 12/16/25

CLIENT: 92-ECS

Laboratory Receiving location: Asheville ☐ Eden ☐ Greenwood ☐ Huntersville ☑ Raleigh ☐ Mechanicsville ☐ Atlanta ☐ Kernersville ☐

Client ECS Southeast Profile # (Circle one) 3325840 Notes

Item#	BP4U-125 mL Plastic Unpreserved (N/A) (CL)	BP3U-250 mL Plastic Unpreserved (N/A)	BP2U-500 mL Plastic Unpreserved (N/A)	BP1U-1 liter Plastic Unpreserved (N/A)	NT3U	BP4S-125 mL Plastic H2SO4 (pH < 2) (CL)	BP3N-250 mL plastic HNO3 (pH < 2)	BP4Z-125 mL Plastic Zn Acetate & NaOH (>9)	BP4B-125 mL Plastic NaOH (pH > 12) (CL)	WGFU-Wide-mouthed Glass jar Unpreserved	AG1U-1 liter Amber Unpreserved (N/A) (CL)	AG1H-1 liter Amber HCl (pH < 2)	AG3U-250 mL Amber Unpreserved (N/A) (CL)	AG1S-1 liter Amber H2SO4 (pH < 2)	AG3S-250 mL Amber H2SO4 (pH < 2)	DG9A-40 mL Amber NH4Cl (N/A)(CL)	DG9H-40 mL VOA HCl (N/A)	VG9T-40 mL VOA Na2S2O3 (N/A)	VG9U-40 mL VOA Unpreserved (N/A)	DG9V-40 mL VOA H3PO4 (N/A)	KP7U-50 mL Plastic Unpreserved (N/A)	V/GK (3 vials per kit)-VPH/Gasket (N/A)	SP5T-125 mL Sterile Plastic (N/A – lab)	SP2T-250 mL Sterile Plastic (N/A – lab)		BP3R-250 mL Plastic (NH2)2SO4 (9.3-9.7)	AG0U-100 mL Amber Unpreserved (N/A) (CL)	VSGU-20 mL Scintillation vials (N/A)	DG9U-40 mL Amber Unpreserved vials (N/A)
CC	51				51																									
1					2																									
2					2																									
3					2																									
4					2																									
5					2																									
6					2																									
7	1																													
8	1																													
9	1																													
10	1																													
11																														
12																														

pH Adjustment Log for Preserved Samples

Sample ID	Type of Preservative	pH upon receipt	Date preservation adjusted	Time preservation adjusted	Amount of Preservative added	Lot #

Note: Whenever there is a discrepancy affecting North Carolina compliance samples, a copy of this form will be sent to the North Carolina DENR Certification Office (i.e. Out of hold, incorrect preservative, out of temp, incorrect containers.

Pace® Location Requested (City/State):
Pace Analytical Charlotte
9800 Kincey Ave. Suite 100, Huntersville, NC 28078

CHAIN-OF-CUSTODY Analytical Request Document

Chain-of-Custody is a LEGAL DOCUMENT - Complete all relevant fields

LAB USE ONLY- Affix Workorder/Login Label Here

Scan QR Code for instructions

Company Name:	ECS Southeast, LLC-Charlotte	Contact/Report To:	Emery Lovekamp
Street Address:	1812 Center Park Drive Suite D Charlotte, NC 28217	Phone #:	704-525-5152
		E-Mail:	elovekamp@ecslimited.com
		Cc E-Mail:	
Customer Project #:	49: 24413-E	Invoice To:	AP-ECS Charlotte
Project Name:	Fortress Wood Products II	Invoice E-Mail:	ecs-49@ecslimited.com
Site Collection Info/Facility ID (as applicable):		Purchase Order # (if applicable):	49:24413-C
		Quote #:	

Time Zone Collected: [ ] AK [ ] PT [ ] MT [ ] CT [X] ET

County / State origin of sample(s): North Carolina

Data Deliverables: [X] Level II [ ] Level III [ ] Level IV [ ] EQUIS * REPORT MDLs [ ] Other

Regulatory Program (DW, RCRA, etc.) as applicable: Reportable [X] Yes [ ] No

Rush (Pre-approval required): [ ] Same Day [ ] 1 Day [ ] 2 Day [ ] 3 Day [ ] Other _____

DW PWSID # or WW Permit # as applicable:

Date Results Requested: STANDARD

Field Filtered (if applicable): [ ] Yes [X] No

Analysis:

* Matrix Codes (Insert in Matrix box below): Drinking Water (DW), Ground Water (GW), Waste Water (WW), Product (P), Soil/Solid (SS), Oil (OL), Wipe (WP), Tissue (TS), Bioassay (B), Vapor (V), Surface Water (SW),Sediment (SED), Sludge (SL), Caulk (CK), Leachate (LL), Biosolid (BS), Other (OT)

Specify Container Size **

Identify Container Preservative Type***

Analysis Requested

Customer Sample ID	Matrix *	Comp / Grab	Composite Start Date	Composite Start Time	Collected or Composite End Date	Collected or Composite End Time	# Cont.	Res. Chlorine Results	Res. Chlorine Units	7199 Chromium, Hexavalent	8260D MSV Low Level	8260D MSV Low Level- Trip Blank	8260D/5035A/5030B Volatiles	8270E MSSV Microwave	8270E-RVE	Hardness – SM 2340	PFAS-1633	PFAS – 1633	DRL Metals – 6020/7470
~~Sediment~~ SW-3-P	~~WT~~ SL	G			12/5/25	1215	2			X			X	X				X	X
~~Trip Blanks~~ SW-2-P	WT					1350	2					X						X	
SW-1-P	WT					1425	2											X	
SW-1DUP-P	WT					—	2											X	
FB-6-P	WT					1320	2											X	
EB-3-P	WT					1325	2											X	
SS-3-P	SED					1300	1											X	
SS-2-P	SED					1355	1											X	
SS-1-P	SED					1435	1											X	
SS-DUP-P	SED	↓			↓	—	1											X	

Container Size	Container Preservative Type	Analysis Requested
1	2	3
2	2	4
3	2	5
4	2	6
5	2	7
6	2	8
7	2	9
8	2	10
9	2	11
10	2	12
11	2	13
12	2	14
13	2	15
14	2	16
15	2	17
16	2	18
17	2	19
18	2	20
19	2	21
20	2	22
21	2	23
22	2	24
23	2	25
24	2	26
25	2	27
26	2	28
27	2	29
28	2	30
29	2	31
30	2	32
31	2	33
32	2	34
33	2	35
34	2	36
35	2	37
36	2	38
37	2	39
38	2	40
39	2	41
40	2	42
41	2	43
42	2	44
43	2	45
44	2	46
45	2	47
46	2	48
47	2	49
48	2	50
49	2	51
50	2	52
51	2	53
52	2	54
53	2	55
54	2	56
55	2	57
56	2	58
57	2	59
58	2	60
59	2	61
60	2	62
61	2	63
62	2	64
63	2	65
64	2	66

**Container Size: (1) 1L, (2) 500mL, (3) 250mL, (4) 125mL, (5) 100mL, (6) 40mL vial, (7) EnCore, (8) TerraCore, (9) 90mL, (10) Other

*** Preservative Types: (1) None, (2) HNO3, (3) H2SO4, (4) HCl, (5) NaOH, (6) Zn Acetate, (7) NaHSO4, (8) Sod. Thiosulfate, (9) Ascorbic Acid, (10) MeOH, (11) Other

Lab Use Only

Proj. Mgr: Travis Mullis

AcctNum / Client ID:

Table #:

Profile / Template: 18978

Prelog / Bottle Ord. ID: EZ 3325840

Sample Comment

Preservation non-conformance identified for sample.

Additional Instructions from Pace®:

* 2 COOLERS

Collected By:
(Printed Name) EMERY LOVEKAMP
Signature:

Customer Remarks / Special Conditions / Possible Hazards:

# Coolers:	Thermometer ID:	Correction Factor °C:	Obs. Temp. (°C)	Corrected Temp. (°C)	On Ice:
1	92T083	0	1.6/1.8	1.6/1.8	

Relinquished by/Company: (Signature) EL	Date/Time: 12/8/25 1200	Received by/Company: (Signature) Erick Herrera Pace	Date/Time: 12/9/25 925	Tracking Number:
Relinquished by/Company: (Signature) Erick Herrera Pace	Date/Time: 12/9/25 1200	Received by/Company: (Signature)	Date/Time: 12/9 1200	Delivered by: [ ] In- Person [ ] Courier [ ] FedEX [ ] UPS [ ] Other
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Page: 2 of 2

Submitting a sample via this chain of custody constitutes acknowledgment and acceptance of the Pace® Terms and Conditions found at https://www.pacelabs.com/resource-library/resource/pace-terms-and-conditions/

Report of Analysis

Pace Analytical Services, Inc.
9800 Kincey Avenue
Suite 100
Huntersville, NC 28078
Attention: Travis Mullis

Project Name: Fortress Wood Products II

Project Number: 92833594

Lot Number:**AL11009**

Date Completed:12/30/2025
Revision Date: 12/23/2025

12/31/2025 3:53 PM
Approved and released by:
Project Coordinator 1: **Brooke Speers**

The electronic signature above is the equivalent of a handwritten signature.
This report shall not be reproduced, except in its entirety, without the written approval of Pace Analytical Services, LLC.

Case Narrative
Pace Analytical Services, Inc.
Lot Number: AL11009

Report revision
This report supersedes all other versions.
Report revised on December 31, 2025 to report the re-analyzed data for samples AL11009-001 and AL11009-002. All other data remains the same.

This Report of Analysis contains the analytical result(s) for the sample(s) listed on the Sample Summary following this Case Narrative. The sample receiving date is documented in the header information associated with each sample.

All results listed in this report relate only to the samples that are contained within this report. Where sampling is conducted by the client, results relate to the accuracy of the information provided, and as the samples are received.

Sample receipt, sample analysis, and data review have been performed in accordance with the most current approved The NELAC Institute (TNI) standards, the Pace Analytical Services, LLC ("Pace") Laboratory Quality Manual, standard operating procedures (SOPs), and Pace policies. Any exceptions to the TNI standards, the Laboratory Quality Manual, SOPs or policies are qualified on the results page or discussed below.

Pace is a TNI accredited laboratory; however, the following analyses are currently not listed on our TNI scope accreditation: 11-Chloroeicosafluoro-3-oxaundecane-1-sulfonic acid (11Cl-PF3OUdS), 2H,2H,3H,3H-Perfluorooctanoic acid (5:3FTCA), 3-Perfluoroheptyl propanoic acid (7:3FTCA), 3-Perfluoropropyl propanoic acid (3:3FTCA), 4,8-Dioxa-3H-perfluorononanoic acid (ADONA), 9-Chlorohexadecafluoro-3-oxanonane-1-sulfonic acid (9Cl-PF3ONS), Hexafluoropropylene oxide dimer acid (HFPO-DA), N-ethyl perfluorooctanesulfonamide (NEtFOSA), N-ethyl perfluorooctanesulfonamidoethanol (NEtFOSE), N-methyl perfluorooctanesulfonamide (NMeFOSA), N-methyl perfluorooctanesulfonamidoethanol (NMeFOSE), Nonafluoro-3,6-dioxaheptanoic acid (NFDHA), Perfluoro(2-ethoxyethane)sulfonic acid (PFEESA), Perfluoro-3-methoxypropanoic acid (PFMPA), Perfluoro-4-methoxybutanoic acid (PFMBA), Perfluorododecanesulfonic acid (PFDoS), Perfluoropropanoic acid (PFPrA), 2H-perfluoro-2-octenoic acid (FHUEA), 2H-perfluoro-2-decenoic acid (FOUEA), Lithium Bis(trifluoromethane)sulfonimide (HQ-115) by EPA Method 8327. Perfluoropropanoic acid (PFPrA) and Bis (trifluoromethylsulfonyl)amine (TFSI) by EPA Method 1633.

Manual integration summaries are provided at the end of this report when applicable.

Where applicable, all soil sample results (including LOQ and DL if requested) are corrected for dry weight unless flagged with a "W" qualifier.

PFAS
Insufficient sample volume was provided to perform matrix spike/matrix spike duplicate (MS/MSD) for prep batch 28782. An LCS/LCSD was run in lieu of an MS/MSD.

Sample Summary
Pace Analytical Services, Inc.
Lot Number: AL11009
Project Name: Fortress Wood Products II
Project Number: 92833594

Sample Number	Sample ID	Matrix	Date Sampled	Date Received
001	SW-3-P	Aqueous	12/05/2025 1215	12/11/2025
002	SW-2-P	Aqueous	12/05/2025 1350	12/11/2025
003	SW-1-P	Aqueous	12/05/2025 1425	12/11/2025
004	SW-DUP-P	Aqueous	12/05/2025	12/11/2025
005	FB-6-P	Aqueous	12/05/2025 1320	12/11/2025
006	EB-3-P	Aqueous	12/05/2025 1325	12/11/2025
007	SS-3-P	Solid	12/05/2025 1300	12/11/2025
008	SS-2-P	Solid	12/05/2025 1355	12/11/2025
009	SS-1-P	Solid	12/05/2025 1435	12/11/2025
010	SS-DUP-P	Solid	12/05/2025	12/11/2025

(10 samples)

Detection Summary

Pace Analytical Services, Inc.

Lot Number: AL11009

Project Name: Fortress Wood Products II

Project Number: 92833594

Sample	Sample ID	Matrix	Parameter	Method	Result	Q	Units	Page
001	SW-3-P	Aqueous	PFBS	1633	3.4		ng/L	7
001	SW-3-P	Aqueous	PFBA	1633	14		ng/L	7
001	SW-3-P	Aqueous	PFDA	1633	0.51	J	ng/L	7
001	SW-3-P	Aqueous	PFHpA	1633	2.0		ng/L	7
001	SW-3-P	Aqueous	PFHxS	1633	1.1	J	ng/L	7
001	SW-3-P	Aqueous	PFHxA	1633	5.7		ng/L	7
001	SW-3-P	Aqueous	PFNA	1633	1.1	J	ng/L	7
001	SW-3-P	Aqueous	PFOS	1633	5.2		ng/L	7
001	SW-3-P	Aqueous	PFOA	1633	4.1		ng/L	7
001	SW-3-P	Aqueous	PFPeA	1633	7.5		ng/L	7
002	SW-2-P	Aqueous	PFBS	1633	2.7		ng/L	9
002	SW-2-P	Aqueous	PFBA	1633	17		ng/L	9
002	SW-2-P	Aqueous	PFDA	1633	0.70	J	ng/L	9
002	SW-2-P	Aqueous	PFHpA	1633	4.0		ng/L	9
002	SW-2-P	Aqueous	PFHxS	1633	1.9		ng/L	9
002	SW-2-P	Aqueous	PFHxA	1633	9.3		ng/L	9
002	SW-2-P	Aqueous	PFNA	1633	1.6		ng/L	9
002	SW-2-P	Aqueous	PFOS	1633	11		ng/L	9
002	SW-2-P	Aqueous	PFOA	1633	13		ng/L	9
002	SW-2-P	Aqueous	PFPeA	1633	12		ng/L	9
003	SW-1-P	Aqueous	PFBS	1633	2.8		ng/L	11
003	SW-1-P	Aqueous	PFHpA	1633	1.5	J	ng/L	11
003	SW-1-P	Aqueous	PFHxS	1633	1.5	J	ng/L	11
003	SW-1-P	Aqueous	PFHxA	1633	3.2		ng/L	11
003	SW-1-P	Aqueous	PFNA	1633	0.66	J	ng/L	11
003	SW-1-P	Aqueous	PFOS	1633	6.0		ng/L	11
003	SW-1-P	Aqueous	PFOA	1633	5.6		ng/L	11
003	SW-1-P	Aqueous	PFPeA	1633	3.8		ng/L	11
004	SW-DUP-P	Aqueous	PFBS	1633	3.2		ng/L	13
004	SW-DUP-P	Aqueous	PFBA	1633	9.6		ng/L	13
004	SW-DUP-P	Aqueous	PFHpA	1633	1.9		ng/L	13
004	SW-DUP-P	Aqueous	PFHxS	1633	0.87	J	ng/L	13
004	SW-DUP-P	Aqueous	PFHxA	1633	5.8		ng/L	13
004	SW-DUP-P	Aqueous	PFNA	1633	0.86	J	ng/L	13
004	SW-DUP-P	Aqueous	PFOS	1633	5.2		ng/L	13
004	SW-DUP-P	Aqueous	PFOA	1633	3.7		ng/L	13
004	SW-DUP-P	Aqueous	PFPeA	1633	6.9		ng/L	13
007	SS-3-P	Solid	PFOS	1633	0.17	J	ng/g	19
007	SS-3-P	Solid	PFOA	1633	0.093	J	ng/g	19
010	SS-DUP-P	Solid	PFOS	1633	0.16	J	ng/g	25
010	SS-DUP-P	Solid	PFOA	1633	0.11	J	ng/g	25

Detection Summary (Continued)

Lot Number: AL11009

Sample	Sample ID	Matrix	Parameter	Method	Result	Q	Units	Page

(41 detections)

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-001**

Description: **SW-3-P** Matrix: **Aqueous**

Date Sampled: **12/05/2025 1215** Project Name: **Fortress Wood Products II**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/26/2025 1240	BWS	12/24/2025 1351	28978

Parameter	CAS Number	Analytical Method	Result	Q	LOQ	DL	Units	Run
11-chloroeicosafluoro-3-oxaundecane-1-sulfonic acid (11Cl-PF3...)	763051-92-9	1633	ND		6.4	0.94	ng/L	1
9-Chlorohexadecafluoro-3-oxanonane-1-sulfonic acid (9Cl-PF3ONS)	756426-58-1	1633	ND		6.4	1.1	ng/L	1
4,8-Dioxa-3H-perfluorononanoic acid (ADONA)	919005-14-4	1633	ND		6.4	1.0	ng/L	1
1H,1H,2H,2H-Perfluorodecane sulfonic acid (8:2FTS)	39108-34-4	1633	ND		6.4	2.5	ng/L	1
1H,1H,2H,2H-Perfluorohexane sulfonic acid (4:2FTS)	757124-72-4	1633	ND		6.4	1.7	ng/L	1
1H,1H,2H,2H-Perfluorooctane sulfonic acid (6:2FTS)	27619-97-2	1633	ND		6.4	2.1	ng/L	1
2H,2H,3H,3H-Perfluorooctanoic acid (5:3FTCA)	914637-49-3	1633	ND		40	6.6	ng/L	1
Hexafluoropropylene oxide dimer acid (HFPO-DA)	13252-13-6	1633	ND		6.4	1.1	ng/L	1
N-ethyl perfluorooctanesulfonamide (NEtFOSA)	4151-50-2	1633	ND		1.6	0.44	ng/L	1
N-ethyl perfluorooctanesulfonamidoacetic acid (NEtFOSAA)	2991-50-6	1633	ND		1.6	0.92	ng/L	1
N-ethyl perfluorooctanesulfonamidoethanol (NEtFOSE)	1691-99-2	1633	ND		16	3.0	ng/L	1
N-methyl perfluorooctanesulfonamide (NMeFOSA)	31506-32-8	1633	ND		1.6	0.29	ng/L	1
N-methyl perfluorooctanesulfonamidoacetic acid (NMeFOSAA)	2355-31-9	1633	ND		1.6	0.29	ng/L	1
N-methyl perfluorooctanesulfonamidoethanol (NMeFOSE)	24448-09-7	1633	ND		16	3.3	ng/L	1
Nonafluoro-3,6-dioxaheptanoic acid (NFDHA)	151772-58-6	1633	ND		3.2	0.79	ng/L	1
Perfluoro(2-ethoxyethane)sulfonic acid (PFEESA)	113507-82-7	1633	ND		3.2	0.30	ng/L	1
Perfluoro-3-methoxypropanoic acid (PFMPA)	377-73-1	1633	ND		3.2	0.72	ng/L	1
Perfluoro-4-methoxybutanoic acid (PFMBA)	863090-89-5	1633	ND		3.2	0.53	ng/L	1
Perfluorobutanesulfonic acid (PFBS)	**375-73-5**	**1633**	**3.4**		**1.6**	**1.2**	**ng/L**	**1**
Perfluorobutanoic acid (PFBA)	**375-22-4**	**1633**	**14**		**6.4**	**0.94**	**ng/L**	**1**
Perfluorodecanesulfonic acid (PFDS)	335-77-3	1633	ND		1.6	0.41	ng/L	1
Perfluorodecanoic acid (PFDA)	**335-76-2**	**1633**	**0.51**	**J**	**1.6**	**0.49**	**ng/L**	**1**
Perfluorododecanesulfonic acid (PFDoS)	79780-39-5	1633	ND		1.6	0.35	ng/L	1
Perfluorododecanoic acid (PFDoA)	307-55-1	1633	ND		1.6	0.19	ng/L	1
Perfluoroheptanesulfonic acid (PFHpS)	375-92-8	1633	ND		1.6	0.58	ng/L	1
Perfluoroheptanoic acid (PFHpA)	**375-85-9**	**1633**	**2.0**		**1.6**	**0.32**	**ng/L**	**1**
3-Perfluoroheptyl propanoic acid (7:3FTCA)	812-70-4	1633	ND		40	8.0	ng/L	1
Perfluorohexanesulfonic acid (PFHxS)	**355-46-4**	**1633**	**1.1**	**J**	**1.6**	**0.70**	**ng/L**	**1**
Perfluorohexanoic acid (PFHxA)	**307-24-4**	**1633**	**5.7**		**1.6**	**0.24**	**ng/L**	**1**
Perfluorononanesulfonic acid (PFNS)	68259-12-1	1633	ND		1.6	0.46	ng/L	1
Perfluorononanoic acid (PFNA)	**375-95-1**	**1633**	**1.1**	**J**	**1.6**	**0.60**	**ng/L**	**1**
Perfluorooctanesulfonamide (PFOSA)	754-91-6	1633	ND		1.6	0.28	ng/L	1
Perfluorooctanesulfonic acid (PFOS)	**1763-23-1**	**1633**	**5.2**		**1.6**	**0.54**	**ng/L**	**1**
Perfluorooctanoic acid (PFOA)	**335-67-1**	**1633**	**4.1**		**1.6**	**0.73**	**ng/L**	**1**
Perfluoropentanesulfonic acid (PFPeS)	2706-91-4	1633	ND		1.6	0.43	ng/L	1
Perfluoropentanoic acid (PFPeA)	**2706-90-3**	**1633**	**7.5**		**3.2**	**0.44**	**ng/L**	**1**
3-Perfluoropropyl propanoic acid (3:3FTCA)	356-02-5	1633	ND		7.9	1.5	ng/L	1
Perfluorotetradecanoic acid (PFTeDA)	376-06-7	1633	ND		1.6	0.43	ng/L	1
Perfluorotridecanoic acid (PFTrDA)	72629-94-8	1633	ND		1.6	0.61	ng/L	1
Perfluoroundecanoic acid (PFUnA)	2058-94-8	1633	ND		1.6	0.81	ng/L	1

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

Pace Analytical Services, LLC *(formerly Shealy Environmental Services, Inc.)*
106 Vantage Point Drive West Columbia, SC 29172 (803) 791-9700 Fax (803) 791-9111 www.pacelabs.com

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-001**

Description: **SW-3-P** Matrix: **Aqueous**

Date Sampled: **12/05/2025 1215** Project Name: **Fortress Wood Products II**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/26/2025 1240	BWS	12/24/2025 1351	28978

Surrogate	Q	Run 1 % Recovery	Acceptance Limits
13C2-4:2FTS		120	40-200
13C2-6:2FTS		119	40-200
13C2-8:2FTS		119	40-300
13C8-PFOSA		96	40-130
D5-NEtFOSA		65	10-130
D3-NMeFOSA		68	10-130
D5-NEtFOSAA		117	25-135
D3-NMeFOSAA		119	40-170
13C4-PFBA		122	5-130
13C5-PFPeA		118	40-130
13C5-PFHxA		121	40-130
13C4-PFHpA		121	40-130
13C8-PFOA		114	40-130
13C9-PFNA		127	40-130
13C6-PFDA		125	40-130
13C3-PFBS		116	40-135
13C3-PFHxS		127	40-130
13C8-PFOS		127	40-130
13C7-PFUnA		115	30-130
13C2-PFDoA		105	10-130
13C2-PFTeDA		72	10-130
13C3-HFPO-DA		121	40-130
D7-NMeFOSE		72	10-130
D9-NEtFOSE		69	10-130

LOQ = Limit of Quantitation
ND = Not detected at or above the DL
H = Out of holding time
B = Detected in the method blank
N = Recovery is out of criteria
W = Reported on wet weight basis
E = Quantitation of compound exceeded the calibration range
P = The RPD between two GC columns exceeds 40%
DL = Detection Limit
J = Estimated result < LOQ and ≥ DL
Q = Surrogate failure
L = LCS/LCSD failure
S = MS/MSD failure

Pace Analytical Services, LLC *(formerly Shealy Environmental Services, Inc.)*
106 Vantage Point Drive West Columbia, SC 29172 (803) 791-9700 Fax (803) 791-9111 www.pacelabs.com

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-002**

Description: **SW-2-P** Matrix: **Aqueous**

Date Sampled: **12/05/2025 1350** Project Name: **Fortress Wood Products II**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/26/2025 1250	BWS	12/24/2025 1351	28978

Parameter	CAS Number	Analytical Method	Result	Q	LOQ	DL	Units	Run
11-chloroeicosafluoro-3-oxaundecane-1-sulfonic acid (11Cl-PF3...)	763051-92-9	1633	ND		6.6	0.97	ng/L	1
9-Chlorohexadecafluoro-3-oxanonane-1-sulfonic acid (9Cl-PF3ONS)	756426-58-1	1633	ND		6.6	1.1	ng/L	1
4,8-Dioxa-3H-perfluorononanoic acid (ADONA)	919005-14-4	1633	ND		6.6	1.0	ng/L	1
1H,1H,2H,2H-Perfluorodecane sulfonic acid (8:2FTS)	39108-34-4	1633	ND		6.6	2.5	ng/L	1
1H,1H,2H,2H-Perfluorohexane sulfonic acid (4:2FTS)	757124-72-4	1633	ND		6.6	1.7	ng/L	1
1H,1H,2H,2H-Perfluorooctane sulfonic acid (6:2FTS)	27619-97-2	1633	ND		6.6	2.1	ng/L	1
2H,2H,3H,3H-Perfluorooctanoic acid (5:3FTCA)	914637-49-3	1633	ND		41	6.8	ng/L	1
Hexafluoropropylene oxide dimer acid (HFPO-DA)	13252-13-6	1633	ND		6.6	1.2	ng/L	1
N-ethyl perfluorooctanesulfonamide (NEtFOSA)	4151-50-2	1633	ND		1.6	0.46	ng/L	1
N-ethyl perfluorooctanesulfonamidoacetic acid (NEtFOSAA)	2991-50-6	1633	ND		1.6	0.95	ng/L	1
N-ethyl perfluorooctanesulfonamidoethanol (NEtFOSE)	1691-99-2	1633	ND		16	3.1	ng/L	1
N-methyl perfluorooctanesulfonamide (NMeFOSA)	31506-32-8	1633	ND		1.6	0.30	ng/L	1
N-methyl perfluorooctanesulfonamidoacetic acid (NMeFOSAA)	2355-31-9	1633	ND		1.6	0.30	ng/L	1
N-methyl perfluorooctanesulfonamidoethanol (NMeFOSE)	24448-09-7	1633	ND		16	3.4	ng/L	1
Nonafluoro-3,6-dioxaheptanoic acid (NFDHA)	151772-58-6	1633	ND		3.3	0.82	ng/L	1
Perfluoro(2-ethoxyethane)sulfonic acid (PFEESA)	113507-82-7	1633	ND		3.3	0.31	ng/L	1
Perfluoro-3-methoxypropanoic acid (PFMPA)	377-73-1	1633	ND		3.3	0.74	ng/L	1
Perfluoro-4-methoxybutanoic acid (PFMBA)	863090-89-5	1633	ND		3.3	0.55	ng/L	1
Perfluorobutanesulfonic acid (PFBS)	**375-73-5**	**1633**	**2.7**		**1.6**	**1.2**	**ng/L**	**1**
Perfluorobutanoic acid (PFBA)	**375-22-4**	**1633**	**17**		**6.6**	**0.98**	**ng/L**	**1**
Perfluorodecanesulfonic acid (PFDS)	335-77-3	1633	ND		1.6	0.43	ng/L	1
Perfluorodecanoic acid (PFDA)	**335-76-2**	**1633**	**0.70**	**J**	**1.6**	**0.51**	**ng/L**	**1**
Perfluorododecanesulfonic acid (PFDoS)	79780-39-5	1633	ND		1.6	0.36	ng/L	1
Perfluorododecanoic acid (PFDoA)	307-55-1	1633	ND		1.6	0.20	ng/L	1
Perfluoroheptanesulfonic acid (PFHpS)	375-92-8	1633	ND		1.6	0.60	ng/L	1
Perfluoroheptanoic acid (PFHpA)	**375-85-9**	**1633**	**4.0**		**1.6**	**0.33**	**ng/L**	**1**
3-Perfluoroheptyl propanoic acid (7:3FTCA)	812-70-4	1633	ND		41	8.3	ng/L	1
Perfluorohexanesulfonic acid (PFHxS)	**355-46-4**	**1633**	**1.9**		**1.6**	**0.73**	**ng/L**	**1**
Perfluorohexanoic acid (PFHxA)	**307-24-4**	**1633**	**9.3**		**1.6**	**0.25**	**ng/L**	**1**
Perfluorononanesulfonic acid (PFNS)	68259-12-1	1633	ND		1.6	0.48	ng/L	1
Perfluorononanoic acid (PFNA)	**375-95-1**	**1633**	**1.6**		**1.6**	**0.62**	**ng/L**	**1**
Perfluorooctanesulfonamide (PFOSA)	754-91-6	1633	ND		1.6	0.29	ng/L	1
Perfluorooctanesulfonic acid (PFOS)	**1763-23-1**	**1633**	**11**		**1.6**	**0.56**	**ng/L**	**1**
Perfluorooctanoic acid (PFOA)	**335-67-1**	**1633**	**13**		**1.6**	**0.75**	**ng/L**	**1**
Perfluoropentanesulfonic acid (PFPeS)	2706-91-4	1633	ND		1.6	0.45	ng/L	1
Perfluoropentanoic acid (PFPeA)	**2706-90-3**	**1633**	**12**		**3.3**	**0.46**	**ng/L**	**1**
3-Perfluoropropyl propanoic acid (3:3FTCA)	356-02-5	1633	ND		8.2	1.6	ng/L	1
Perfluorotetradecanoic acid (PFTeDA)	376-06-7	1633	ND		1.6	0.44	ng/L	1
Perfluorotridecanoic acid (PFTrDA)	72629-94-8	1633	ND		1.6	0.63	ng/L	1
Perfluoroundecanoic acid (PFUnA)	2058-94-8	1633	ND		1.6	0.84	ng/L	1

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

Pace Analytical Services, LLC *(formerly Shealy Environmental Services, Inc.)*
106 Vantage Point Drive West Columbia, SC 29172 (803) 791-9700 Fax (803) 791-9111 www.pacelabs.com

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-002**

Description: **SW-2-P** Matrix: **Aqueous**

Date Sampled: **12/05/2025 1350** Project Name: **Fortress Wood Products II**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/26/2025 1250	BWS	12/24/2025 1351	28978

Surrogate	Q	Run 1 % Recovery	Acceptance Limits
13C2-4:2FTS		118	40-200
13C2-6:2FTS		106	40-200
13C2-8:2FTS		103	40-300
13C8-PFOSA		96	40-130
D5-NEtFOSA		59	10-130
D3-NMeFOSA		65	10-130
D5-NEtFOSAA		107	25-135
D3-NMeFOSAA		103	40-170
13C4-PFBA		118	5-130
13C5-PFPeA		121	40-130
13C5-PFHxA		116	40-130
13C4-PFHpA		119	40-130
13C8-PFOA		106	40-130
13C9-PFNA		117	40-130
13C6-PFDA		115	40-130
13C3-PFBS		111	40-135
13C3-PFHxS		112	40-130
13C8-PFOS		118	40-130
13C7-PFUnA		117	30-130
13C2-PFDoA		111	10-130
13C2-PFTeDA		70	10-130
13C3-HFPO-DA		120	40-130
D7-NMeFOSE		74	10-130
D9-NEtFOSE		68	10-130

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-003**

Description: **SW-1-P** Matrix: **Aqueous**

Date Sampled: **12/05/2025 1425** Project Name: **Fortress Wood Products II**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/13/2025 0355	JWG	12/12/2025 0619	28782

Parameter	CAS Number	Analytical Method	Result	Q	LOQ	DL	Units	Run
11-chloroeicosafluoro-3-oxaundecane-1-sulfonic acid (11Cl-PF3...)	763051-92-9	1633	ND		6.4	0.94	ng/L	1
9-Chlorohexadecafluoro-3-oxanonane-1-sulfonic acid (9Cl-PF3ONS)	756426-58-1	1633	ND		6.4	1.1	ng/L	1
4,8-Dioxa-3H-perfluorononanoic acid (ADONA)	919005-14-4	1633	ND		6.4	1.0	ng/L	1
1H,1H,2H,2H-Perfluorodecane sulfonic acid (8:2FTS)	39108-34-4	1633	ND		6.4	2.5	ng/L	1
1H,1H,2H,2H-Perfluorohexane sulfonic acid (4:2FTS)	757124-72-4	1633	ND		6.4	1.7	ng/L	1
1H,1H,2H,2H-Perfluorooctane sulfonic acid (6:2FTS)	27619-97-2	1633	ND		6.4	2.1	ng/L	1
2H,2H,3H,3H-Perfluorooctanoic acid (5:3FTCA)	914637-49-3	1633	ND		40	6.6	ng/L	1
Hexafluoropropylene oxide dimer acid (HFPO-DA)	13252-13-6	1633	ND		6.4	1.1	ng/L	1
N-ethyl perfluorooctanesulfonamide (NEtFOSA)	4151-50-2	1633	ND		1.6	0.44	ng/L	1
N-ethyl perfluorooctanesulfonamidoacetic acid (NEtFOSAA)	2991-50-6	1633	ND		1.6	0.93	ng/L	1
N-ethyl perfluorooctanesulfonamidoethanol (NEtFOSE)	1691-99-2	1633	ND		16	3.0	ng/L	1
N-methyl perfluorooctanesulfonamide (NMeFOSA)	31506-32-8	1633	ND		1.6	0.29	ng/L	1
N-methyl perfluorooctanesulfonamidoacetic acid (NMeFOSAA)	2355-31-9	1633	ND		1.6	0.30	ng/L	1
N-methyl perfluorooctanesulfonamidoethanol (NMeFOSE)	24448-09-7	1633	ND		16	3.3	ng/L	1
Nonafluoro-3,6-dioxaheptanoic acid (NFDHA)	151772-58-6	1633	ND		3.2	0.79	ng/L	1
Perfluoro(2-ethoxyethane)sulfonic acid (PFEESA)	113507-82-7	1633	ND		3.2	0.30	ng/L	1
Perfluoro-3-methoxypropanoic acid (PFMPA)	377-73-1	1633	ND		3.2	0.72	ng/L	1
Perfluoro-4-methoxybutanoic acid (PFMBA)	863090-89-5	1633	ND		3.2	0.53	ng/L	1
Perfluorobutanesulfonic acid (PFBS)	**375-73-5**	**1633**	**2.8**		**1.6**	**1.2**	**ng/L**	**1**
Perfluorobutanoic acid (PFBA)	375-22-4	1633	ND		6.4	0.95	ng/L	1
Perfluorodecanesulfonic acid (PFDS)	335-77-3	1633	ND		1.6	0.41	ng/L	1
Perfluorodecanoic acid (PFDA)	335-76-2	1633	ND		1.6	0.49	ng/L	1
Perfluorododecanesulfonic acid (PFDoS)	79780-39-5	1633	ND		1.6	0.35	ng/L	1
Perfluorododecanoic acid (PFDoA)	307-55-1	1633	ND		1.6	0.19	ng/L	1
Perfluoroheptanesulfonic acid (PFHpS)	375-92-8	1633	ND		1.6	0.58	ng/L	1
Perfluoroheptanoic acid (PFHpA)	**375-85-9**	**1633**	**1.5**	**J**	**1.6**	**0.32**	**ng/L**	**1**
3-Perfluoroheptyl propanoic acid (7:3FTCA)	812-70-4	1633	ND		40	8.1	ng/L	1
Perfluorohexanesulfonic acid (PFHxS)	**355-46-4**	**1633**	**1.5**	**J**	**1.6**	**0.70**	**ng/L**	**1**
Perfluorohexanoic acid (PFHxA)	**307-24-4**	**1633**	**3.2**		**1.6**	**0.24**	**ng/L**	**1**
Perfluorononanesulfonic acid (PFNS)	68259-12-1	1633	ND		1.6	0.46	ng/L	1
Perfluorononanoic acid (PFNA)	**375-95-1**	**1633**	**0.66**	**J**	**1.6**	**0.60**	**ng/L**	**1**
Perfluorooctanesulfonamide (PFOSA)	754-91-6	1633	ND		1.6	0.28	ng/L	1
Perfluorooctanesulfonic acid (PFOS)	**1763-23-1**	**1633**	**6.0**		**1.6**	**0.55**	**ng/L**	**1**
Perfluorooctanoic acid (PFOA)	**335-67-1**	**1633**	**5.6**		**1.6**	**0.73**	**ng/L**	**1**
Perfluoropentanesulfonic acid (PFPeS)	2706-91-4	1633	ND		1.6	0.44	ng/L	1
Perfluoropentanoic acid (PFPeA)	**2706-90-3**	**1633**	**3.8**		**3.2**	**0.44**	**ng/L**	**1**
3-Perfluoropropyl propanoic acid (3:3FTCA)	356-02-5	1633	ND		8.0	1.5	ng/L	1
Perfluorotetradecanoic acid (PFTeDA)	376-06-7	1633	ND		1.6	0.43	ng/L	1
Perfluorotridecanoic acid (PFTrDA)	72629-94-8	1633	ND		1.6	0.61	ng/L	1
Perfluoroundecanoic acid (PFUnA)	2058-94-8	1633	ND		1.6	0.81	ng/L	1

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

Pace Analytical Services, LLC *(formerly Shealy Environmental Services, Inc.)*
106 Vantage Point Drive West Columbia, SC 29172 (803) 791-9700 Fax (803) 791-9111 www.pacelabs.com

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-003**

Description: **SW-1-P** Matrix: **Aqueous**

Date Sampled: **12/05/2025 1425** Project Name: **Fortress Wood Products II**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/13/2025 0355	JWG	12/12/2025 0619	28782

Surrogate	Q	Run 1 % Recovery	Acceptance Limits
13C2-4:2FTS		81	40-200
13C2-6:2FTS		72	40-200
13C2-8:2FTS		61	40-300
13C8-PFOSA		56	40-130
D5-NEtFOSA		38	10-130
D3-NMeFOSA		44	10-130
D5-NEtFOSAA		51	25-135
D3-NMeFOSAA		60	40-170
13C4-PFBA		87	5-130
13C5-PFPeA		81	40-130
13C5-PFHxA		81	40-130
13C4-PFHpA		87	40-130
13C8-PFOA		83	40-130
13C9-PFNA		85	40-130
13C6-PFDA		81	40-130
13C3-PFBS		70	40-135
13C3-PFHxS		68	40-130
13C8-PFOS		59	40-130
13C7-PFUnA		72	30-130
13C2-PFDoA		59	10-130
13C2-PFTeDA		35	10-130
13C3-HFPO-DA		81	40-130
D7-NMeFOSE		35	10-130
D9-NEtFOSE		28	10-130

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-004**

Description: **SW-DUP-P** Matrix: **Aqueous**

Date Sampled: **12/05/2025** Project Name: **Fortress Wood Products II**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/16/2025 0059	JWG	12/12/2025 0844	28784

Parameter	CAS Number	Analytical Method	Result	Q	LOQ	DL	Units	Run
11-chloroeicosafluoro-3-oxaundecane-1-sulfonic acid (11Cl-PF3...)	763051-92-9	1633	ND		6.4	0.95	ng/L	1
9-Chlorohexadecafluoro-3-oxanonane-1-sulfonic acid (9Cl-PF3ONS)	756426-58-1	1633	ND		6.4	1.1	ng/L	1
4,8-Dioxa-3H-perfluorononanoic acid (ADONA)	919005-14-4	1633	ND		6.4	1.0	ng/L	1
1H,1H,2H,2H-Perfluorodecane sulfonic acid (8:2FTS)	39108-34-4	1633	ND		6.4	2.5	ng/L	1
1H,1H,2H,2H-Perfluorohexane sulfonic acid (4:2FTS)	757124-72-4	1633	ND		6.4	1.7	ng/L	1
1H,1H,2H,2H-Perfluorooctane sulfonic acid (6:2FTS)	27619-97-2	1633	ND		6.4	2.1	ng/L	1
2H,2H,3H,3H-Perfluorooctanoic acid (5:3FTCA)	914637-49-3	1633	ND		40	6.7	ng/L	1
Hexafluoropropylene oxide dimer acid (HFPO-DA)	13252-13-6	1633	ND		6.4	1.2	ng/L	1
N-ethyl perfluorooctanesulfonamide (NEtFOSA)	4151-50-2	1633	ND		1.6	0.45	ng/L	1
N-ethyl perfluorooctanesulfonamidoacetic acid (NEtFOSAA)	2991-50-6	1633	ND		1.6	0.93	ng/L	1
N-ethyl perfluorooctanesulfonamidoethanol (NEtFOSE)	1691-99-2	1633	ND		16	3.0	ng/L	1
N-methyl perfluorooctanesulfonamide (NMeFOSA)	31506-32-8	1633	ND		1.6	0.30	ng/L	1
N-methyl perfluorooctanesulfonamidoacetic acid (NMeFOSAA)	2355-31-9	1633	ND		1.6	0.30	ng/L	1
N-methyl perfluorooctanesulfonamidoethanol (NMeFOSE)	24448-09-7	1633	ND		16	3.3	ng/L	1
Nonafluoro-3,6-dioxaheptanoic acid (NFDHA)	151772-58-6	1633	ND		3.2	0.80	ng/L	1
Perfluoro(2-ethoxyethane)sulfonic acid (PFEESA)	113507-82-7	1633	ND		3.2	0.30	ng/L	1
Perfluoro-3-methoxypropanoic acid (PFMPA)	377-73-1	1633	ND		3.2	0.73	ng/L	1
Perfluoro-4-methoxybutanoic acid (PFMBA)	863090-89-5	1633	ND		3.2	0.53	ng/L	1
Perfluorobutanesulfonic acid (PFBS)	**375-73-5**	**1633**	**3.2**		**1.6**	**1.2**	**ng/L**	**1**
Perfluorobutanoic acid (PFBA)	**375-22-4**	**1633**	**9.6**		**6.4**	**0.95**	**ng/L**	**1**
Perfluorodecanesulfonic acid (PFDS)	335-77-3	1633	ND		1.6	0.42	ng/L	1
Perfluorodecanoic acid (PFDA)	335-76-2	1633	ND		1.6	0.49	ng/L	1
Perfluorododecanesulfonic acid (PFDoS)	79780-39-5	1633	ND		1.6	0.36	ng/L	1
Perfluorododecanoic acid (PFDoA)	307-55-1	1633	ND		1.6	0.19	ng/L	1
Perfluoroheptanesulfonic acid (PFHpS)	375-92-8	1633	ND		1.6	0.59	ng/L	1
Perfluoroheptanoic acid (PFHpA)	**375-85-9**	**1633**	**1.9**		**1.6**	**0.32**	**ng/L**	**1**
3-Perfluoroheptyl propanoic acid (7:3FTCA)	812-70-4	1633	ND		40	8.1	ng/L	1
Perfluorohexanesulfonic acid (PFHxS)	**355-46-4**	**1633**	**0.87**	**J**	**1.6**	**0.71**	**ng/L**	**1**
Perfluorohexanoic acid (PFHxA)	**307-24-4**	**1633**	**5.8**		**1.6**	**0.24**	**ng/L**	**1**
Perfluorononanesulfonic acid (PFNS)	68259-12-1	1633	ND		1.6	0.47	ng/L	1
Perfluorononanoic acid (PFNA)	**375-95-1**	**1633**	**0.86**	**J**	**1.6**	**0.61**	**ng/L**	**1**
Perfluorooctanesulfonamide (PFOSA)	754-91-6	1633	ND		1.6	0.29	ng/L	1
Perfluorooctanesulfonic acid (PFOS)	**1763-23-1**	**1633**	**5.2**		**1.6**	**0.55**	**ng/L**	**1**
Perfluorooctanoic acid (PFOA)	**335-67-1**	**1633**	**3.7**		**1.6**	**0.74**	**ng/L**	**1**
Perfluoropentanesulfonic acid (PFPeS)	2706-91-4	1633	ND		1.6	0.44	ng/L	1
Perfluoropentanoic acid (PFPeA)	**2706-90-3**	**1633**	**6.9**		**3.2**	**0.44**	**ng/L**	**1**
3-Perfluoropropyl propanoic acid (3:3FTCA)	356-02-5	1633	ND		8.0	1.5	ng/L	1
Perfluorotetradecanoic acid (PFTeDA)	376-06-7	1633	ND		1.6	0.43	ng/L	1
Perfluorotridecanoic acid (PFTrDA)	72629-94-8	1633	ND		1.6	0.61	ng/L	1
Perfluoroundecanoic acid (PFUnA)	2058-94-8	1633	ND		1.6	0.82	ng/L	1

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

Pace Analytical Services, LLC *(formerly Shealy Environmental Services, Inc.)*
106 Vantage Point Drive West Columbia, SC 29172 (803) 791-9700 Fax (803) 791-9111 www.pacelabs.com

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-004**

Description: **SW-DUP-P** Matrix: **Aqueous**

Date Sampled: **12/05/2025** Project Name: **Fortress Wood Products II**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/16/2025 0059	JWG	12/12/2025 0844	28784

Surrogate	Q	Run 1 % Recovery	Acceptance Limits
13C2-4:2FTS		95	40-200
13C2-6:2FTS		83	40-200
13C2-8:2FTS		77	40-300
13C8-PFOSA		80	40-130
D5-NEtFOSA		51	10-130
D3-NMeFOSA		56	10-130
D5-NEtFOSAA		82	25-135
D3-NMeFOSAA		94	40-170
13C4-PFBA		111	5-130
13C5-PFPeA		99	40-130
13C5-PFHxA		107	40-130
13C4-PFHpA		112	40-130
13C8-PFOA		101	40-130
13C9-PFNA		114	40-130
13C6-PFDA		111	40-130
13C3-PFBS		92	40-135
13C3-PFHxS		96	40-130
13C8-PFOS		98	40-130
13C7-PFUnA		110	30-130
13C2-PFDoA		92	10-130
13C2-PFTeDA		50	10-130
13C3-HFPO-DA		104	40-130
D7-NMeFOSE		55	10-130
D9-NEtFOSE		37	10-130

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-005**

Description: **FB-6-P** Matrix: **Aqueous**

Date Sampled: **12/05/2025 1320** Project Name: **Fortress Wood Products II**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/16/2025 0109	JWG	12/12/2025 0844	28784

Parameter	CAS Number	Analytical Method	Result	Q	LOQ	DL	Units	Run
11-chloroeicosafluoro-3-oxaundecane-1-sulfonic acid (11Cl-PF3...)	763051-92-9	1633	ND		6.2	0.92	ng/L	1
9-Chlorohexadecafluoro-3-oxanonane-1-sulfonic acid (9Cl-PF3ONS)	756426-58-1	1633	ND		6.2	1.0	ng/L	1
4,8-Dioxa-3H-perfluorononanoic acid (ADONA)	919005-14-4	1633	ND		6.2	0.99	ng/L	1
1H,1H,2H,2H-Perfluorodecane sulfonic acid (8:2FTS)	39108-34-4	1633	ND		6.2	2.4	ng/L	1
1H,1H,2H,2H-Perfluorohexane sulfonic acid (4:2FTS)	757124-72-4	1633	ND		6.2	1.6	ng/L	1
1H,1H,2H,2H-Perfluorooctane sulfonic acid (6:2FTS)	27619-97-2	1633	ND		6.2	2.0	ng/L	1
2H,2H,3H,3H-Perfluorooctanoic acid (5:3FTCA)	914637-49-3	1633	ND		39	6.5	ng/L	1
Hexafluoropropylene oxide dimer acid (HFPO-DA)	13252-13-6	1633	ND		6.2	1.1	ng/L	1
N-ethyl perfluorooctanesulfonamide (NEtFOSA)	4151-50-2	1633	ND		1.6	0.43	ng/L	1
N-ethyl perfluorooctanesulfonamidoacetic acid (NEtFOSAA)	2991-50-6	1633	ND		1.6	0.91	ng/L	1
N-ethyl perfluorooctanesulfonamidoethanol (NEtFOSE)	1691-99-2	1633	ND		16	2.9	ng/L	1
N-methyl perfluorooctanesulfonamide (NMeFOSA)	31506-32-8	1633	ND		1.6	0.29	ng/L	1
N-methyl perfluorooctanesulfonamidoacetic acid (NMeFOSAA)	2355-31-9	1633	ND		1.6	0.29	ng/L	1
N-methyl perfluorooctanesulfonamidoethanol (NMeFOSE)	24448-09-7	1633	ND		16	3.2	ng/L	1
Nonafluoro-3,6-dioxaheptanoic acid (NFDHA)	151772-58-6	1633	ND		3.1	0.77	ng/L	1
Perfluoro(2-ethoxyethane)sulfonic acid (PFEESA)	113507-82-7	1633	ND		3.1	0.30	ng/L	1
Perfluoro-3-methoxypropanoic acid (PFMPA)	377-73-1	1633	ND		3.1	0.70	ng/L	1
Perfluoro-4-methoxybutanoic acid (PFMBA)	863090-89-5	1633	ND		3.1	0.52	ng/L	1
Perfluorobutanesulfonic acid (PFBS)	375-73-5	1633	ND		1.6	1.2	ng/L	1
Perfluorobutanoic acid (PFBA)	375-22-4	1633	ND		6.2	0.93	ng/L	1
Perfluorodecanesulfonic acid (PFDS)	335-77-3	1633	ND		1.6	0.40	ng/L	1
Perfluorodecanoic acid (PFDA)	335-76-2	1633	ND		1.6	0.48	ng/L	1
Perfluorododecanesulfonic acid (PFDoS)	79780-39-5	1633	ND		1.6	0.35	ng/L	1
Perfluorododecanoic acid (PFDoA)	307-55-1	1633	ND		1.6	0.19	ng/L	1
Perfluoroheptanesulfonic acid (PFHpS)	375-92-8	1633	ND		1.6	0.57	ng/L	1
Perfluoroheptanoic acid (PFHpA)	375-85-9	1633	ND		1.6	0.31	ng/L	1
3-Perfluoroheptyl propanoic acid (7:3FTCA)	812-70-4	1633	ND		39	7.9	ng/L	1
Perfluorohexanesulfonic acid (PFHxS)	355-46-4	1633	ND		1.6	0.69	ng/L	1
Perfluorohexanoic acid (PFHxA)	307-24-4	1633	ND		1.6	0.23	ng/L	1
Perfluorononanesulfonic acid (PFNS)	68259-12-1	1633	ND		1.6	0.45	ng/L	1
Perfluorononanoic acid (PFNA)	375-95-1	1633	ND		1.6	0.59	ng/L	1
Perfluorooctanesulfonamide (PFOSA)	754-91-6	1633	ND		1.6	0.28	ng/L	1
Perfluorooctanesulfonic acid (PFOS)	1763-23-1	1633	ND		1.6	0.53	ng/L	1
Perfluorooctanoic acid (PFOA)	335-67-1	1633	ND		1.6	0.71	ng/L	1
Perfluoropentanesulfonic acid (PFPeS)	2706-91-4	1633	ND		1.6	0.43	ng/L	1
Perfluoropentanoic acid (PFPeA)	2706-90-3	1633	ND		3.1	0.43	ng/L	1
3-Perfluoropropyl propanoic acid (3:3FTCA)	356-02-5	1633	ND		7.8	1.5	ng/L	1
Perfluorotetradecanoic acid (PFTeDA)	376-06-7	1633	ND		1.6	0.42	ng/L	1
Perfluorotridecanoic acid (PFTrDA)	72629-94-8	1633	ND		1.6	0.59	ng/L	1
Perfluoroundecanoic acid (PFUnA)	2058-94-8	1633	ND		1.6	0.80	ng/L	1

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

Pace Analytical Services, LLC *(formerly Shealy Environmental Services, Inc.)*
106 Vantage Point Drive West Columbia, SC 29172 (803) 791-9700 Fax (803) 791-9111 www.pacelabs.com

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-005**

Description: **FB-6-P** Matrix: **Aqueous**

Date Sampled: **12/05/2025 1320** Project Name: **Fortress Wood Products II**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/16/2025 0109	JWG	12/12/2025 0844	28784

Surrogate	Q	Run 1 % Recovery	Acceptance Limits
13C2-4:2FTS		93	40-200
13C2-6:2FTS		102	40-200
13C2-8:2FTS		95	40-300
13C8-PFOSA		79	40-130
D5-NEtFOSA		43	10-130
D3-NMeFOSA		45	10-130
D5-NEtFOSAA		82	25-135
D3-NMeFOSAA		89	40-170
13C4-PFBA		108	5-130
13C5-PFPeA		102	40-130
13C5-PFHxA		109	40-130
13C4-PFHpA		113	40-130
13C8-PFOA		104	40-130
13C9-PFNA		112	40-130
13C6-PFDA		117	40-130
13C3-PFBS		95	40-135
13C3-PFHxS		107	40-130
13C8-PFOS		104	40-130
13C7-PFUnA		112	30-130
13C2-PFDoA		82	10-130
13C2-PFTeDA		81	10-130
13C3-HFPO-DA		109	40-130
D7-NMeFOSE		57	10-130
D9-NEtFOSE		55	10-130

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

Pace Analytical Services, LLC *(formerly Shealy Environmental Services, Inc.)*
106 Vantage Point Drive West Columbia, SC 29172 (803) 791-9700 Fax (803) 791-9111 www.pacelabs.com

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-006**

Description: **EB-3-P** Matrix: **Aqueous**

Date Sampled: **12/05/2025 1325** Project Name: **Fortress Wood Products II**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/16/2025 0119	JWG	12/12/2025 0844	28784

Parameter	CAS Number	Analytical Method	Result	Q	LOQ	DL	Units	Run
11-chloroeicosafluoro-3-oxaundecane-1-sulfonic acid (11Cl-PF3...)	763051-92-9	1633	ND		6.3	0.94	ng/L	1
9-Chlorohexadecafluoro-3-oxanonane-1-sulfonic acid (9Cl-PF3ONS)	756426-58-1	1633	ND		6.3	1.0	ng/L	1
4,8-Dioxa-3H-perfluorononanoic acid (ADONA)	919005-14-4	1633	ND		6.3	1.0	ng/L	1
1H,1H,2H,2H-Perfluorodecane sulfonic acid (8:2FTS)	39108-34-4	1633	ND		6.3	2.4	ng/L	1
1H,1H,2H,2H-Perfluorohexane sulfonic acid (4:2FTS)	757124-72-4	1633	ND		6.3	1.7	ng/L	1
1H,1H,2H,2H-Perfluorooctane sulfonic acid (6:2FTS)	27619-97-2	1633	ND		6.3	2.0	ng/L	1
2H,2H,3H,3H-Perfluorooctanoic acid (5:3FTCA)	914637-49-3	1633	ND		40	6.6	ng/L	1
Hexafluoropropylene oxide dimer acid (HFPO-DA)	13252-13-6	1633	ND		6.3	1.1	ng/L	1
N-ethyl perfluorooctanesulfonamide (NEtFOSA)	4151-50-2	1633	ND		1.6	0.44	ng/L	1
N-ethyl perfluorooctanesulfonamidoacetic acid (NEtFOSAA)	2991-50-6	1633	ND		1.6	0.92	ng/L	1
N-ethyl perfluorooctanesulfonamidoethanol (NEtFOSE)	1691-99-2	1633	ND		16	3.0	ng/L	1
N-methyl perfluorooctanesulfonamide (NMeFOSA)	31506-32-8	1633	ND		1.6	0.29	ng/L	1
N-methyl perfluorooctanesulfonamidoacetic acid (NMeFOSAA)	2355-31-9	1633	ND		1.6	0.29	ng/L	1
N-methyl perfluorooctanesulfonamidoethanol (NMeFOSE)	24448-09-7	1633	ND		16	3.3	ng/L	1
Nonafluoro-3,6-dioxaheptanoic acid (NFDHA)	151772-58-6	1633	ND		3.2	0.79	ng/L	1
Perfluoro(2-ethoxyethane)sulfonic acid (PFEESA)	113507-82-7	1633	ND		3.2	0.30	ng/L	1
Perfluoro-3-methoxypropanoic acid (PFMPA)	377-73-1	1633	ND		3.2	0.72	ng/L	1
Perfluoro-4-methoxybutanoic acid (PFMBA)	863090-89-5	1633	ND		3.2	0.53	ng/L	1
Perfluorobutanesulfonic acid (PFBS)	375-73-5	1633	ND		1.6	1.2	ng/L	1
Perfluorobutanoic acid (PFBA)	375-22-4	1633	ND		6.3	0.94	ng/L	1
Perfluorodecanesulfonic acid (PFDS)	335-77-3	1633	ND		1.6	0.41	ng/L	1
Perfluorodecanoic acid (PFDA)	335-76-2	1633	ND		1.6	0.49	ng/L	1
Perfluorododecanesulfonic acid (PFDoS)	79780-39-5	1633	ND		1.6	0.35	ng/L	1
Perfluorododecanoic acid (PFDoA)	307-55-1	1633	ND		1.6	0.19	ng/L	1
Perfluoroheptanesulfonic acid (PFHpS)	375-92-8	1633	ND		1.6	0.58	ng/L	1
Perfluoroheptanoic acid (PFHpA)	375-85-9	1633	ND		1.6	0.32	ng/L	1
3-Perfluoroheptyl propanoic acid (7:3FTCA)	812-70-4	1633	ND		40	8.0	ng/L	1
Perfluorohexanesulfonic acid (PFHxS)	355-46-4	1633	ND		1.6	0.70	ng/L	1
Perfluorohexanoic acid (PFHxA)	307-24-4	1633	ND		1.6	0.24	ng/L	1
Perfluorononanesulfonic acid (PFNS)	68259-12-1	1633	ND		1.6	0.46	ng/L	1
Perfluorononanoic acid (PFNA)	375-95-1	1633	ND		1.6	0.60	ng/L	1
Perfluorooctanesulfonamide (PFOSA)	754-91-6	1633	ND		1.6	0.28	ng/L	1
Perfluorooctanesulfonic acid (PFOS)	1763-23-1	1633	ND		1.6	0.54	ng/L	1
Perfluorooctanoic acid (PFOA)	335-67-1	1633	ND		1.6	0.73	ng/L	1
Perfluoropentanesulfonic acid (PFPeS)	2706-91-4	1633	ND		1.6	0.43	ng/L	1
Perfluoropentanoic acid (PFPeA)	2706-90-3	1633	ND		3.2	0.44	ng/L	1
3-Perfluoropropyl propanoic acid (3:3FTCA)	356-02-5	1633	ND		7.9	1.5	ng/L	1
Perfluorotetradecanoic acid (PFTeDA)	376-06-7	1633	ND		1.6	0.43	ng/L	1
Perfluorotridecanoic acid (PFTrDA)	72629-94-8	1633	ND		1.6	0.60	ng/L	1
Perfluoroundecanoic acid (PFUnA)	2058-94-8	1633	ND		1.6	0.81	ng/L	1

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

Pace Analytical Services, LLC *(formerly Shealy Environmental Services, Inc.)*
106 Vantage Point Drive West Columbia, SC 29172 (803) 791-9700 Fax (803) 791-9111 www.pacelabs.com

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-006**

Description: **EB-3-P** Matrix: **Aqueous**

Date Sampled: **12/05/2025 1325** Project Name: **Fortress Wood Products II**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/16/2025 0119	JWG	12/12/2025 0844	28784

Surrogate	Q	Run 1 % Recovery	Acceptance Limits
13C2-4:2FTS		85	40-200
13C2-6:2FTS		97	40-200
13C2-8:2FTS		84	40-300
13C8-PFOSA		75	40-130
D5-NEtFOSA		44	10-130
D3-NMeFOSA		46	10-130
D5-NEtFOSAA		78	25-135
D3-NMeFOSAA		82	40-170
13C4-PFBA		107	5-130
13C5-PFPeA		100	40-130
13C5-PFHxA		106	40-130
13C4-PFHpA		114	40-130
13C8-PFOA		98	40-130
13C9-PFNA		112	40-130
13C6-PFDA		110	40-130
13C3-PFBS		94	40-135
13C3-PFHxS		104	40-130
13C8-PFOS		98	40-130
13C7-PFUnA		106	30-130
13C2-PFDoA		79	10-130
13C2-PFTeDA		71	10-130
13C3-HFPO-DA		110	40-130
D7-NMeFOSE		57	10-130
D9-NEtFOSE		54	10-130

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-007**

Description: **SS-3-P** Matrix: **Solid**

Date Sampled: **12/05/2025 1300** Project Name: **Fortress Wood Products II** % Solids: **82.0** **12/11/2025 1801**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/15/2025 1414	BWS	12/13/2025 1254	28808

Parameter	CAS Number	Analytical Method	Result	Q	LOQ	DL	Units	Run
11-chloroeicosafluoro-3-oxaundecane-1-sulfonic acid (11Cl-PF3...)	763051-92-9	1633	ND		0.79	0.045	ng/g	1
9-Chlorohexadecafluoro-3-oxanonane-1-sulfonic acid (9Cl-PF3ONS)	756426-58-1	1633	ND		0.79	0.030	ng/g	1
4,8-Dioxa-3H-perfluorononanoic acid (ADONA)	919005-14-4	1633	ND		0.79	0.063	ng/g	1
1H,1H,2H,2H-Perfluorodecane sulfonic acid (8:2FTS)	39108-34-4	1633	ND		0.79	0.17	ng/g	1
1H,1H,2H,2H-Perfluorohexane sulfonic acid (4:2FTS)	757124-72-4	1633	ND		0.79	0.087	ng/g	1
1H,1H,2H,2H-Perfluorooctane sulfonic acid (6:2FTS)	27619-97-2	1633	ND		0.79	0.13	ng/g	1
2H,2H,3H,3H-Perfluorooctanoic acid (5:3FTCA)	914637-49-3	1633	ND		4.9	0.47	ng/g	1
Hexafluoropropylene oxide dimer acid (HFPO-DA)	13252-13-6	1633	ND		0.79	0.16	ng/g	1
N-ethyl perfluorooctanesulfonamide (NEtFOSA)	4151-50-2	1633	ND		0.20	0.016	ng/g	1
N-ethyl perfluorooctanesulfonamidoacetic acid (NEtFOSAA)	2991-50-6	1633	ND		0.20	0.074	ng/g	1
N-ethyl perfluorooctanesulfonamidoethanol (NEtFOSE)	1691-99-2	1633	ND		2.0	0.077	ng/g	1
N-methyl perfluorooctanesulfonamide (NMeFOSA)	31506-32-8	1633	ND		0.20	0.017	ng/g	1
N-methyl perfluorooctanesulfonamidoacetic acid (NMeFOSAA)	2355-31-9	1633	ND		0.20	0.055	ng/g	1
N-methyl perfluorooctanesulfonamidoethanol (NMeFOSE)	24448-09-7	1633	ND		2.0	0.13	ng/g	1
Nonafluoro-3,6-dioxaheptanoic acid (NFDHA)	151772-58-6	1633	ND		0.40	0.046	ng/g	1
Perfluoro(2-ethoxyethane)sulfonic acid (PFEESA)	113507-82-7	1633	ND		0.40	0.041	ng/g	1
Perfluoro-3-methoxypropanoic acid (PFMPA)	377-73-1	1633	ND		0.40	0.034	ng/g	1
Perfluoro-4-methoxybutanoic acid (PFMBA)	863090-89-5	1633	ND		0.40	0.029	ng/g	1
Perfluorobutanesulfonic acid (PFBS)	375-73-5	1633	ND		0.20	0.042	ng/g	1
Perfluorobutanoic acid (PFBA)	375-22-4	1633	ND		0.79	0.085	ng/g	1
Perfluorodecanesulfonic acid (PFDS)	335-77-3	1633	ND		0.20	0.022	ng/g	1
Perfluorodecanoic acid (PFDA)	335-76-2	1633	ND		0.20	0.060	ng/g	1
Perfluorododecanesulfonic acid (PFDoS)	79780-39-5	1633	ND		0.20	0.026	ng/g	1
Perfluorododecanoic acid (PFDoA)	307-55-1	1633	ND		0.20	0.037	ng/g	1
Perfluoroheptanesulfonic acid (PFHpS)	375-92-8	1633	ND		0.20	0.025	ng/g	1
Perfluoroheptanoic acid (PFHpA)	375-85-9	1633	ND		0.20	0.032	ng/g	1
3-Perfluoroheptyl propanoic acid (7:3FTCA)	812-70-4	1633	ND		4.9	0.97	ng/g	1
Perfluorohexanesulfonic acid (PFHxS)	355-46-4	1633	ND		0.20	0.062	ng/g	1
Perfluorohexanoic acid (PFHxA)	307-24-4	1633	ND		0.20	0.032	ng/g	1
Perfluorononanesulfonic acid (PFNS)	68259-12-1	1633	ND		0.20	0.016	ng/g	1
Perfluorononanoic acid (PFNA)	375-95-1	1633	ND		0.20	0.066	ng/g	1
Perfluorooctanesulfonamide (PFOSA)	754-91-6	1633	ND		0.20	0.014	ng/g	1
Perfluorooctanesulfonic acid (PFOS)	**1763-23-1**	**1633**	**0.17**	**J**	**0.20**	**0.041**	**ng/g**	**1**
Perfluorooctanoic acid (PFOA)	**335-67-1**	**1633**	**0.093**	**J**	**0.20**	**0.036**	**ng/g**	**1**
Perfluoropentanesulfonic acid (PFPeS)	2706-91-4	1633	ND		0.20	0.020	ng/g	1
Perfluoropentanoic acid (PFPeA)	2706-90-3	1633	ND		0.40	0.050	ng/g	1
3-Perfluoropropyl propanoic acid (3:3FTCA)	356-02-5	1633	ND		0.99	0.12	ng/g	1
Perfluorotetradecanoic acid (PFTeDA)	376-06-7	1633	ND		0.20	0.044	ng/g	1
Perfluorotridecanoic acid (PFTrDA)	72629-94-8	1633	ND		0.20	0.031	ng/g	1
Perfluoroundecanoic acid (PFUnA)	2058-94-8	1633	ND		0.20	0.056	ng/g	1

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

Pace Analytical Services, LLC *(formerly Shealy Environmental Services, Inc.)*
106 Vantage Point Drive West Columbia, SC 29172 (803) 791-9700 Fax (803) 791-9111 www.pacelabs.com

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-007**

Description: **SS-3-P** Matrix: **Solid**

Date Sampled: **12/05/2025 1300** Project Name: **Fortress Wood Products II** % Solids: **82.0** **12/11/2025 1801**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/15/2025 1414	BWS	12/13/2025 1254	28808

Surrogate	Q	Run 1 % Recovery	Acceptance Limits
13C2-4:2FTS		88	40-165
13C2-6:2FTS		75	40-215
13C2-8:2FTS		81	40-275
13C2-PFDoA		93	40-130
13C2-PFTeDA		94	20-130
13C3-HFPO-DA		90	40-130
13C3-PFBS		93	40-135
13C3-PFHxS		88	40-130
13C4-PFBA		50	8-130
13C4-PFHpA		87	40-130
13C5-PFHxA		87	40-130
13C5-PFPeA		87	35-130
13C6-PFDA		95	40-130
13C7-PFUnA		80	40-130
13C8-PFOA		87	40-130
13C8-PFOS		94	40-130
13C8-PFOSA		99	40-130
13C9-PFNA		91	40-130
D3-NMeFOSA		95	10-130
D3-NMeFOSAA		93	40-135
D5-NEtFOSA		97	10-130
D5-NEtFOSAA		75	40-150
D7-NMeFOSE		98	20-130
D9-NEtFOSE		99	15-130

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-008**

Description: **SS-2-P** Matrix: **Solid**

Date Sampled: **12/05/2025 1355** Project Name: **Fortress Wood Products II** % Solids: **82.9** **12/11/2025 1801**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/15/2025 1424	BWS	12/13/2025 1254	28808

Parameter	CAS Number	Analytical Method	Result	Q	LOQ	DL	Units	Run
11-chloroeicosafluoro-3-oxaundecane-1-sulfonic acid (11Cl-PF3...)	763051-92-9	1633	ND		0.79	0.045	ng/g	1
9-Chlorohexadecafluoro-3-oxanonane-1-sulfonic acid (9Cl-PF3ONS)	756426-58-1	1633	ND		0.79	0.030	ng/g	1
4,8-Dioxa-3H-perfluorononanoic acid (ADONA)	919005-14-4	1633	ND		0.79	0.064	ng/g	1
1H,1H,2H,2H-Perfluorodecane sulfonic acid (8:2FTS)	39108-34-4	1633	ND		0.79	0.17	ng/g	1
1H,1H,2H,2H-Perfluorohexane sulfonic acid (4:2FTS)	757124-72-4	1633	ND		0.79	0.087	ng/g	1
1H,1H,2H,2H-Perfluorooctane sulfonic acid (6:2FTS)	27619-97-2	1633	ND		0.79	0.13	ng/g	1
2H,2H,3H,3H-Perfluorooctanoic acid (5:3FTCA)	914637-49-3	1633	ND		5.0	0.48	ng/g	1
Hexafluoropropylene oxide dimer acid (HFPO-DA)	13252-13-6	1633	ND		0.79	0.16	ng/g	1
N-ethyl perfluorooctanesulfonamide (NEtFOSA)	4151-50-2	1633	ND		0.20	0.016	ng/g	1
N-ethyl perfluorooctanesulfonamidoacetic acid (NEtFOSAA)	2991-50-6	1633	ND		0.20	0.074	ng/g	1
N-ethyl perfluorooctanesulfonamidoethanol (NEtFOSE)	1691-99-2	1633	ND		2.0	0.077	ng/g	1
N-methyl perfluorooctanesulfonamide (NMeFOSA)	31506-32-8	1633	ND		0.20	0.017	ng/g	1
N-methyl perfluorooctanesulfonamidoacetic acid (NMeFOSAA)	2355-31-9	1633	ND		0.20	0.056	ng/g	1
N-methyl perfluorooctanesulfonamidoethanol (NMeFOSE)	24448-09-7	1633	ND		2.0	0.13	ng/g	1
Nonafluoro-3,6-dioxaheptanoic acid (NFDHA)	151772-58-6	1633	ND		0.40	0.046	ng/g	1
Perfluoro(2-ethoxyethane)sulfonic acid (PFEESA)	113507-82-7	1633	ND		0.40	0.041	ng/g	1
Perfluoro-3-methoxypropanoic acid (PFMPA)	377-73-1	1633	ND		0.40	0.034	ng/g	1
Perfluoro-4-methoxybutanoic acid (PFMBA)	863090-89-5	1633	ND		0.40	0.029	ng/g	1
Perfluorobutanesulfonic acid (PFBS)	375-73-5	1633	ND		0.20	0.042	ng/g	1
Perfluorobutanoic acid (PFBA)	375-22-4	1633	ND		0.79	0.085	ng/g	1
Perfluorodecanesulfonic acid (PFDS)	335-77-3	1633	ND		0.20	0.022	ng/g	1
Perfluorodecanoic acid (PFDA)	335-76-2	1633	ND		0.20	0.061	ng/g	1
Perfluorododecanesulfonic acid (PFDoS)	79780-39-5	1633	ND		0.20	0.026	ng/g	1
Perfluorododecanoic acid (PFDoA)	307-55-1	1633	ND		0.20	0.037	ng/g	1
Perfluoroheptanesulfonic acid (PFHpS)	375-92-8	1633	ND		0.20	0.025	ng/g	1
Perfluoroheptanoic acid (PFHpA)	375-85-9	1633	ND		0.20	0.032	ng/g	1
3-Perfluoroheptyl propanoic acid (7:3FTCA)	812-70-4	1633	ND		5.0	0.97	ng/g	1
Perfluorohexanesulfonic acid (PFHxS)	355-46-4	1633	ND		0.20	0.063	ng/g	1
Perfluorohexanoic acid (PFHxA)	307-24-4	1633	ND		0.20	0.032	ng/g	1
Perfluorononanesulfonic acid (PFNS)	68259-12-1	1633	ND		0.20	0.016	ng/g	1
Perfluorononanoic acid (PFNA)	375-95-1	1633	ND		0.20	0.067	ng/g	1
Perfluorooctanesulfonamide (PFOSA)	754-91-6	1633	ND		0.20	0.014	ng/g	1
Perfluorooctanesulfonic acid (PFOS)	1763-23-1	1633	ND		0.20	0.041	ng/g	1
Perfluorooctanoic acid (PFOA)	335-67-1	1633	ND		0.20	0.036	ng/g	1
Perfluoropentanesulfonic acid (PFPeS)	2706-91-4	1633	ND		0.20	0.020	ng/g	1
Perfluoropentanoic acid (PFPeA)	2706-90-3	1633	ND		0.40	0.051	ng/g	1
3-Perfluoropropyl propanoic acid (3:3FTCA)	356-02-5	1633	ND		0.99	0.12	ng/g	1
Perfluorotetradecanoic acid (PFTeDA)	376-06-7	1633	ND		0.20	0.044	ng/g	1
Perfluorotridecanoic acid (PFTrDA)	72629-94-8	1633	ND		0.20	0.031	ng/g	1
Perfluoroundecanoic acid (PFUnA)	2058-94-8	1633	ND		0.20	0.057	ng/g	1

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

Pace Analytical Services, LLC *(formerly Shealy Environmental Services, Inc.)*
106 Vantage Point Drive West Columbia, SC 29172 (803) 791-9700 Fax (803) 791-9111 www.pacelabs.com

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-008**

Description: **SS-2-P** Matrix: **Solid**

Date Sampled: **12/05/2025 1355** Project Name: **Fortress Wood Products II** % Solids: **82.9** **12/11/2025 1801**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/15/2025 1424	BWS	12/13/2025 1254	28808

Surrogate	Q	Run 1 % Recovery	Acceptance Limits
13C2-4:2FTS		81	40-165
13C2-6:2FTS		71	40-215
13C2-8:2FTS		77	40-275
13C2-PFDoA		96	40-130
13C2-PFTeDA		87	20-130
13C3-HFPO-DA		91	40-130
13C3-PFBS		89	40-135
13C3-PFHxS		88	40-130
13C4-PFBA		61	8-130
13C4-PFHpA		90	40-130
13C5-PFHxA		88	40-130
13C5-PFPeA		91	35-130
13C6-PFDA		94	40-130
13C7-PFUnA		97	40-130
13C8-PFOA		92	40-130
13C8-PFOS		95	40-130
13C8-PFOSA		85	40-130
13C9-PFNA		101	40-130
D3-NMeFOSA		80	10-130
D3-NMeFOSAA		84	40-135
D5-NEtFOSA		89	10-130
D5-NEtFOSAA		73	40-150
D7-NMeFOSE		62	20-130
D9-NEtFOSE		61	15-130

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-009**

Description: **SS-1-P** Matrix: **Solid**

Date Sampled: **12/05/2025 1435** Project Name: **Fortress Wood Products II** % Solids: **79.7** **12/11/2025 1801**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/15/2025 1453	BWS	12/13/2025 1254	28808

Parameter	CAS Number	Analytical Method	Result	Q	LOQ	DL	Units	Run
11-chloroeicosafluoro-3-oxaundecane-1-sulfonic acid (11Cl-PF3...)	763051-92-9	1633	ND		0.79	0.045	ng/g	1
9-Chlorohexadecafluoro-3-oxanonane-1-sulfonic acid (9Cl-PF3ONS)	756426-58-1	1633	ND		0.79	0.030	ng/g	1
4,8-Dioxa-3H-perfluorononanoic acid (ADONA)	919005-14-4	1633	ND		0.79	0.063	ng/g	1
1H,1H,2H,2H-Perfluorodecane sulfonic acid (8:2FTS)	39108-34-4	1633	ND		0.79	0.17	ng/g	1
1H,1H,2H,2H-Perfluorohexane sulfonic acid (4:2FTS)	757124-72-4	1633	ND		0.79	0.087	ng/g	1
1H,1H,2H,2H-Perfluorooctane sulfonic acid (6:2FTS)	27619-97-2	1633	ND		0.79	0.13	ng/g	1
2H,2H,3H,3H-Perfluorooctanoic acid (5:3FTCA)	914637-49-3	1633	ND		5.0	0.48	ng/g	1
Hexafluoropropylene oxide dimer acid (HFPO-DA)	13252-13-6	1633	ND		0.79	0.16	ng/g	1
N-ethyl perfluorooctanesulfonamide (NEtFOSA)	4151-50-2	1633	ND		0.20	0.016	ng/g	1
N-ethyl perfluorooctanesulfonamidoacetic acid (NEtFOSAA)	2991-50-6	1633	ND		0.20	0.074	ng/g	1
N-ethyl perfluorooctanesulfonamidoethanol (NEtFOSE)	1691-99-2	1633	ND		2.0	0.077	ng/g	1
N-methyl perfluorooctanesulfonamide (NMeFOSA)	31506-32-8	1633	ND		0.20	0.017	ng/g	1
N-methyl perfluorooctanesulfonamidoacetic acid (NMeFOSAA)	2355-31-9	1633	ND		0.20	0.055	ng/g	1
N-methyl perfluorooctanesulfonamidoethanol (NMeFOSE)	24448-09-7	1633	ND		2.0	0.13	ng/g	1
Nonafluoro-3,6-dioxaheptanoic acid (NFDHA)	151772-58-6	1633	ND		0.40	0.046	ng/g	1
Perfluoro(2-ethoxyethane)sulfonic acid (PFEESA)	113507-82-7	1633	ND		0.40	0.041	ng/g	1
Perfluoro-3-methoxypropanoic acid (PFMPA)	377-73-1	1633	ND		0.40	0.034	ng/g	1
Perfluoro-4-methoxybutanoic acid (PFMBA)	863090-89-5	1633	ND		0.40	0.029	ng/g	1
Perfluorobutanesulfonic acid (PFBS)	375-73-5	1633	ND		0.20	0.042	ng/g	1
Perfluorobutanoic acid (PFBA)	375-22-4	1633	ND		0.79	0.085	ng/g	1
Perfluorodecanesulfonic acid (PFDS)	335-77-3	1633	ND		0.20	0.022	ng/g	1
Perfluorodecanoic acid (PFDA)	335-76-2	1633	ND		0.20	0.060	ng/g	1
Perfluorododecanesulfonic acid (PFDoS)	79780-39-5	1633	ND		0.20	0.026	ng/g	1
Perfluorododecanoic acid (PFDoA)	307-55-1	1633	ND		0.20	0.037	ng/g	1
Perfluoroheptanesulfonic acid (PFHpS)	375-92-8	1633	ND		0.20	0.025	ng/g	1
Perfluoroheptanoic acid (PFHpA)	375-85-9	1633	ND		0.20	0.032	ng/g	1
3-Perfluoroheptyl propanoic acid (7:3FTCA)	812-70-4	1633	ND		5.0	0.97	ng/g	1
Perfluorohexanesulfonic acid (PFHxS)	355-46-4	1633	ND		0.20	0.062	ng/g	1
Perfluorohexanoic acid (PFHxA)	307-24-4	1633	ND		0.20	0.032	ng/g	1
Perfluorononanesulfonic acid (PFNS)	68259-12-1	1633	ND		0.20	0.016	ng/g	1
Perfluorononanoic acid (PFNA)	375-95-1	1633	ND		0.20	0.066	ng/g	1
Perfluorooctanesulfonamide (PFOSA)	754-91-6	1633	ND		0.20	0.014	ng/g	1
Perfluorooctanesulfonic acid (PFOS)	1763-23-1	1633	ND		0.20	0.041	ng/g	1
Perfluorooctanoic acid (PFOA)	335-67-1	1633	ND		0.20	0.036	ng/g	1
Perfluoropentanesulfonic acid (PFPeS)	2706-91-4	1633	ND		0.20	0.020	ng/g	1
Perfluoropentanoic acid (PFPeA)	2706-90-3	1633	ND		0.40	0.050	ng/g	1
3-Perfluoropropyl propanoic acid (3:3FTCA)	356-02-5	1633	ND		0.99	0.12	ng/g	1
Perfluorotetradecanoic acid (PFTeDA)	376-06-7	1633	ND		0.20	0.044	ng/g	1
Perfluorotridecanoic acid (PFTrDA)	72629-94-8	1633	ND		0.20	0.031	ng/g	1
Perfluoroundecanoic acid (PFUnA)	2058-94-8	1633	ND		0.20	0.056	ng/g	1

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

Pace Analytical Services, LLC *(formerly Shealy Environmental Services, Inc.)*
106 Vantage Point Drive West Columbia, SC 29172 (803) 791-9700 Fax (803) 791-9111 www.pacelabs.com

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-009**

Description: **SS-1-P** Matrix: **Solid**

Date Sampled: **12/05/2025 1435** Project Name: **Fortress Wood Products II** % Solids: **79.7** **12/11/2025 1801**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/15/2025 1453	BWS	12/13/2025 1254	28808

Surrogate	Q	Run 1 % Recovery	Acceptance Limits
13C2-4:2FTS		81	40-165
13C2-6:2FTS		72	40-215
13C2-8:2FTS		80	40-275
13C2-PFDoA		101	40-130
13C2-PFTeDA		80	20-130
13C3-HFPO-DA		93	40-130
13C3-PFBS		91	40-135
13C3-PFHxS		89	40-130
13C4-PFBA		57	8-130
13C4-PFHpA		94	40-130
13C5-PFHxA		95	40-130
13C5-PFPeA		93	35-130
13C6-PFDA		86	40-130
13C7-PFUnA		92	40-130
13C8-PFOA		106	40-130
13C8-PFOS		87	40-130
13C8-PFOSA		92	40-130
13C9-PFNA		87	40-130
D3-NMeFOSA		96	10-130
D3-NMeFOSAA		88	40-135
D5-NEtFOSA		92	10-130
D5-NEtFOSAA		75	40-150
D7-NMeFOSE		76	20-130
D9-NEtFOSE		76	15-130

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-010**

Description: **SS-DUP-P** Matrix: **Solid**

Date Sampled: **12/05/2025** Project Name: **Fortress Wood Products II** % Solids: **81.6** **12/11/2025 1801**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/15/2025 1503	BWS	12/13/2025 1254	28808

Parameter	CAS Number	Analytical Method	Result	Q	LOQ	DL	Units	Run
11-chloroeicosafluoro-3-oxaundecane-1-sulfonic acid (11Cl-PF3...)	763051-92-9	1633	ND		0.80	0.045	ng/g	1
9-Chlorohexadecafluoro-3-oxanonane-1-sulfonic acid (9Cl-PF3ONS)	756426-58-1	1633	ND		0.80	0.030	ng/g	1
4,8-Dioxa-3H-perfluorononanoic acid (ADONA)	919005-14-4	1633	ND		0.80	0.064	ng/g	1
1H,1H,2H,2H-Perfluorodecane sulfonic acid (8:2FTS)	39108-34-4	1633	ND		0.80	0.17	ng/g	1
1H,1H,2H,2H-Perfluorohexane sulfonic acid (4:2FTS)	757124-72-4	1633	ND		0.80	0.088	ng/g	1
1H,1H,2H,2H-Perfluorooctane sulfonic acid (6:2FTS)	27619-97-2	1633	ND		0.80	0.13	ng/g	1
2H,2H,3H,3H-Perfluorooctanoic acid (5:3FTCA)	914637-49-3	1633	ND		5.0	0.48	ng/g	1
Hexafluoropropylene oxide dimer acid (HFPO-DA)	13252-13-6	1633	ND		0.80	0.16	ng/g	1
N-ethyl perfluorooctanesulfonamide (NEtFOSA)	4151-50-2	1633	ND		0.20	0.016	ng/g	1
N-ethyl perfluorooctanesulfonamidoacetic acid (NEtFOSAA)	2991-50-6	1633	ND		0.20	0.075	ng/g	1
N-ethyl perfluorooctanesulfonamidoethanol (NEtFOSE)	1691-99-2	1633	ND		2.0	0.078	ng/g	1
N-methyl perfluorooctanesulfonamide (NMeFOSA)	31506-32-8	1633	ND		0.20	0.017	ng/g	1
N-methyl perfluorooctanesulfonamidoacetic acid (NMeFOSAA)	2355-31-9	1633	ND		0.20	0.056	ng/g	1
N-methyl perfluorooctanesulfonamidoethanol (NMeFOSE)	24448-09-7	1633	ND		2.0	0.13	ng/g	1
Nonafluoro-3,6-dioxaheptanoic acid (NFDHA)	151772-58-6	1633	ND		0.40	0.046	ng/g	1
Perfluoro(2-ethoxyethane)sulfonic acid (PFEESA)	113507-82-7	1633	ND		0.40	0.041	ng/g	1
Perfluoro-3-methoxypropanoic acid (PFMPA)	377-73-1	1633	ND		0.40	0.034	ng/g	1
Perfluoro-4-methoxybutanoic acid (PFMBA)	863090-89-5	1633	ND		0.40	0.029	ng/g	1
Perfluorobutanesulfonic acid (PFBS)	375-73-5	1633	ND		0.20	0.042	ng/g	1
Perfluorobutanoic acid (PFBA)	375-22-4	1633	ND		0.80	0.086	ng/g	1
Perfluorodecanesulfonic acid (PFDS)	335-77-3	1633	ND		0.20	0.022	ng/g	1
Perfluorodecanoic acid (PFDA)	335-76-2	1633	ND		0.20	0.061	ng/g	1
Perfluorododecanesulfonic acid (PFDoS)	79780-39-5	1633	ND		0.20	0.026	ng/g	1
Perfluorododecanoic acid (PFDoA)	307-55-1	1633	ND		0.20	0.037	ng/g	1
Perfluoroheptanesulfonic acid (PFHpS)	375-92-8	1633	ND		0.20	0.025	ng/g	1
Perfluoroheptanoic acid (PFHpA)	375-85-9	1633	ND		0.20	0.032	ng/g	1
3-Perfluoroheptyl propanoic acid (7:3FTCA)	812-70-4	1633	ND		5.0	0.98	ng/g	1
Perfluorohexanesulfonic acid (PFHxS)	355-46-4	1633	ND		0.20	0.063	ng/g	1
Perfluorohexanoic acid (PFHxA)	307-24-4	1633	ND		0.20	0.032	ng/g	1
Perfluorononanesulfonic acid (PFNS)	68259-12-1	1633	ND		0.20	0.016	ng/g	1
Perfluorononanoic acid (PFNA)	375-95-1	1633	ND		0.20	0.067	ng/g	1
Perfluorooctanesulfonamide (PFOSA)	754-91-6	1633	ND		0.20	0.014	ng/g	1
Perfluorooctanesulfonic acid (PFOS)	**1763-23-1**	**1633**	**0.16**	**J**	**0.20**	**0.041**	**ng/g**	**1**
Perfluorooctanoic acid (PFOA)	**335-67-1**	**1633**	**0.11**	**J**	**0.20**	**0.036**	**ng/g**	**1**
Perfluoropentanesulfonic acid (PFPeS)	2706-91-4	1633	ND		0.20	0.020	ng/g	1
Perfluoropentanoic acid (PFPeA)	2706-90-3	1633	ND		0.40	0.051	ng/g	1
3-Perfluoropropyl propanoic acid (3:3FTCA)	356-02-5	1633	ND		1.0	0.12	ng/g	1
Perfluorotetradecanoic acid (PFTeDA)	376-06-7	1633	ND		0.20	0.044	ng/g	1
Perfluorotridecanoic acid (PFTrDA)	72629-94-8	1633	ND		0.20	0.031	ng/g	1
Perfluoroundecanoic acid (PFUnA)	2058-94-8	1633	ND		0.20	0.057	ng/g	1

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

Pace Analytical Services, LLC *(formerly Shealy Environmental Services, Inc.)*
106 Vantage Point Drive West Columbia, SC 29172 (803) 791-9700 Fax (803) 791-9111 www.pacelabs.com

PFAS by LC/MS/MS

Client: **Pace Analytical Services, Inc.** Laboratory ID: **AL11009-010**

Description: **SS-DUP-P** Matrix: **Solid**

Date Sampled: **12/05/2025** Project Name: **Fortress Wood Products II** % Solids: **81.6** **12/11/2025 1801**

Date Received: **12/11/2025** Project Number: **92833594**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	1633	1633	1	12/15/2025 1503	BWS	12/13/2025 1254	28808

Surrogate	Q	Run 1 % Recovery	Acceptance Limits
13C2-4:2FTS		73	40-165
13C2-6:2FTS		69	40-215
13C2-8:2FTS		74	40-275
13C2-PFDoA		87	40-130
13C2-PFTeDA		79	20-130
13C3-HFPO-DA		86	40-130
13C3-PFBS		81	40-135
13C3-PFHxS		79	40-130
13C4-PFBA		65	8-130
13C4-PFHpA		92	40-130
13C5-PFHxA		87	40-130
13C5-PFPeA		88	35-130
13C6-PFDA		91	40-130
13C7-PFUnA		91	40-130
13C8-PFOA		94	40-130
13C8-PFOS		98	40-130
13C8-PFOSA		94	40-130
13C9-PFNA		83	40-130
D3-NMeFOSA		96	10-130
D3-NMeFOSAA		87	40-135
D5-NEtFOSA		97	10-130
D5-NEtFOSAA		74	40-150
D7-NMeFOSE		87	20-130
D9-NEtFOSE		87	15-130

LOQ = Limit of Quantitation
B = Detected in the method blank
E = Quantitation of compound exceeded the calibration range
DL = Detection Limit
Q = Surrogate failure
ND = Not detected at or above the DL
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
J = Estimated result < LOQ and ≥ DL
L = LCS/LCSD failure
H = Out of holding time
W = Reported on wet weight basis
S = MS/MSD failure

QC Summary

PFAS by LC/MS/MS - MB

Sample ID: AQ28782-001
Batch: 28782
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/12/2025 0619

Parameter	Result	Q	Dil	LOQ	DL	Units	Analysis Date
11Cl-PF3OUdS	ND		1	6.4	0.95	ng/L	12/13/2025 0148
9Cl-PF3ONS	ND		1	6.4	1.1	ng/L	12/13/2025 0148
ADONA	ND		1	6.4	1.0	ng/L	12/13/2025 0148
8:2FTS	ND		1	6.4	2.5	ng/L	12/13/2025 0148
4:2FTS	ND		1	6.4	1.7	ng/L	12/13/2025 0148
6:2FTS	ND		1	6.4	2.1	ng/L	12/13/2025 0148
5:3FTCA	ND		1	40	6.6	ng/L	12/13/2025 0148
HFPO-DA	ND		1	6.4	1.1	ng/L	12/13/2025 0148
NEtFOSA	ND		1	1.6	0.44	ng/L	12/13/2025 0148
NEtFOSAA	ND		1	1.6	0.93	ng/L	12/13/2025 0148
NEtFOSE	ND		1	16	3.0	ng/L	12/13/2025 0148
NMeFOSA	ND		1	1.6	0.30	ng/L	12/13/2025 0148
NMeFOSAA	ND		1	1.6	0.30	ng/L	12/13/2025 0148
NMeFOSE	ND		1	16	3.3	ng/L	12/13/2025 0148
NFDHA	ND		1	3.2	0.79	ng/L	12/13/2025 0148
PFEESA	ND		1	3.2	0.30	ng/L	12/13/2025 0148
PFMPA	ND		1	3.2	0.72	ng/L	12/13/2025 0148
PFMBA	ND		1	3.2	0.53	ng/L	12/13/2025 0148
PFBS	ND		1	1.6	1.2	ng/L	12/13/2025 0148
PFBA	ND		1	6.4	0.95	ng/L	12/13/2025 0148
PFDS	ND		1	1.6	0.41	ng/L	12/13/2025 0148
PFDA	ND		1	1.6	0.49	ng/L	12/13/2025 0148
PFDoS	ND		1	1.6	0.36	ng/L	12/13/2025 0148
PFDoA	ND		1	1.6	0.19	ng/L	12/13/2025 0148
PFHpS	ND		1	1.6	0.58	ng/L	12/13/2025 0148
PFHpA	ND		1	1.6	0.32	ng/L	12/13/2025 0148
7:3FTCA	ND		1	40	8.1	ng/L	12/13/2025 0148
PFHxS	ND		1	1.6	0.71	ng/L	12/13/2025 0148
PFHxA	ND		1	1.6	0.24	ng/L	12/13/2025 0148
PFNS	ND		1	1.6	0.47	ng/L	12/13/2025 0148
PFNA	ND		1	1.6	0.61	ng/L	12/13/2025 0148
PFOSA	ND		1	1.6	0.29	ng/L	12/13/2025 0148
PFOS	ND		1	1.6	0.55	ng/L	12/13/2025 0148
PFOA	ND		1	1.6	0.73	ng/L	12/13/2025 0148
PFPeS	ND		1	1.6	0.44	ng/L	12/13/2025 0148
PFPeA	ND		1	3.2	0.44	ng/L	12/13/2025 0148
3:3FTCA	ND		1	8.0	1.5	ng/L	12/13/2025 0148
PFTeDA	ND		1	1.6	0.43	ng/L	12/13/2025 0148
PFTrDA	ND		1	1.6	0.61	ng/L	12/13/2025 0148
PFUnA	ND		1	1.6	0.82	ng/L	12/13/2025 0148

Surrogate	Q	% Rec	Acceptance Limit
13C2-4:2FTS		79	40-200
13C2-6:2FTS		80	40-200

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - MB

Sample ID: AQ28782-001
Batch: 28782
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/12/2025 0619

Surrogate	Q	% Rec	Acceptance Limit
13C2-8:2FTS		74	40-300
13C8-PFOSA		72	40-130
D5-NEtFOSA		47	10-130
D3-NMeFOSA		48	10-130
D5-NEtFOSAA		79	25-135
D3-NMeFOSAA		83	40-170
13C4-PFBA		90	5-130
13C5-PFPeA		88	40-130
13C5-PFHxA		93	40-130
13C4-PFHpA		96	40-130
13C8-PFOA		90	40-130
13C9-PFNA		90	40-130
13C6-PFDA		93	40-130
13C3-PFBS		77	40-135
13C3-PFHxS		90	40-130
13C8-PFOS		86	40-130
13C7-PFUnA		90	30-130
13C2-PFDoA		82	10-130
13C2-PFTeDA		74	10-130
13C3-HFPO-DA		92	40-130
D7-NMeFOSE		64	10-130
D9-NEtFOSE		61	10-130

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCS

Sample ID: AQ28782-002
Batch: 28782
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/12/2025 0619

Parameter	Spike Amount (ng/L)	Result (ng/L)	Q	Dil	% Rec	%Rec Limit	Analysis Date
11Cl-PF3OUdS	150	170		1	110	55-160	12/13/2025 0157
9Cl-PF3ONS	150	160		1	110	70-155	12/13/2025 0157
ADONA	150	160		1	107	65-145	12/13/2025 0157
8:2FTS	150	170		1	109	60-150	12/13/2025 0157
4:2FTS	150	160		1	107	70-145	12/13/2025 0157
6:2FTS	150	160		1	105	65-155	12/13/2025 0157
5:3FTCA	1000	990		1	99	70-135	12/13/2025 0157
HFPO-DA	160	180		1	109	70-140	12/13/2025 0157
NEtFOSA	40	42		1	106	65-145	12/13/2025 0157
NEtFOSAA	40	43		1	107	70-145	12/13/2025 0157
NEtFOSE	400	430		1	106	70-135	12/13/2025 0157
NMeFOSA	40	44		1	109	60-150	12/13/2025 0157
NMeFOSAA	40	43		1	107	50-140	12/13/2025 0157
NMeFOSE	400	410		1	103	70-145	12/13/2025 0157
NFDHA	80	82		1	102	50-150	12/13/2025 0157
PFEESA	71	76		1	107	70-140	12/13/2025 0157
PFMPA	80	82		1	103	55-140	12/13/2025 0157
PFMBA	80	86		1	108	60-150	12/13/2025 0157
PFBS	36	37		1	105	60-145	12/13/2025 0157
PFBA	160	170		1	109	70-140	12/13/2025 0157
PFDS	39	41		1	107	60-145	12/13/2025 0157
PFDA	40	39		1	98	70-140	12/13/2025 0157
PFDoS	39	39		1	100	50-145	12/13/2025 0157
PFDoA	40	44		1	110	70-140	12/13/2025 0157
PFHpS	38	42		1	111	70-150	12/13/2025 0157
PFHpA	40	41		1	103	70-150	12/13/2025 0157
7:3FTCA	1000	850		1	85	50-145	12/13/2025 0157
PFHxS	36	37		1	102	65-145	12/13/2025 0157
PFHxA	40	42		1	106	70-145	12/13/2025 0157
PFNS	38	41		1	107	65-145	12/13/2025 0157
PFNA	40	41		1	102	70-150	12/13/2025 0157
PFOSA	40	41		1	104	70-145	12/13/2025 0157
PFOS	37	38		1	102	55-150	12/13/2025 0157
PFOA	40	41		1	102	70-150	12/13/2025 0157
PFPeS	38	39		1	104	65-140	12/13/2025 0157
PFPeA	80	86		1	108	65-135	12/13/2025 0157
3:3FTCA	200	200		1	101	65-130	12/13/2025 0157
PFTeDA	40	43		1	109	60-140	12/13/2025 0157
PFTrDA	40	45		1	113	65-140	12/13/2025 0157
PFUnA	40	42		1	104	70-145	12/13/2025 0157

Surrogate	Q	% Rec	Acceptance Limit
13C2-4:2FTS		76	40-200
13C2-6:2FTS		81	40-200

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCS

Sample ID: AQ28782-002
Batch: 28782
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/12/2025 0619

Surrogate	Q	% Rec	Acceptance Limit
13C2-8:2FTS		77	40-300
13C8-PFOSA		67	40-130
D5-NEtFOSA		47	10-130
D3-NMeFOSA		48	10-130
D5-NEtFOSAA		76	25-135
D3-NMeFOSAA		76	40-170
13C4-PFBA		83	5-130
13C5-PFPeA		84	40-130
13C5-PFHxA		85	40-130
13C4-PFHpA		92	40-130
13C8-PFOA		85	40-130
13C9-PFNA		88	40-130
13C6-PFDA		88	40-130
13C3-PFBS		74	40-135
13C3-PFHxS		84	40-130
13C8-PFOS		78	40-130
13C7-PFUnA		88	30-130
13C2-PFDoA		78	10-130
13C2-PFTeDA		73	10-130
13C3-HFPO-DA		83	40-130
D7-NMeFOSE		61	10-130
D9-NEtFOSE		60	10-130

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCS

Sample ID: AQ28782-102
Batch: 28782
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/12/2025 0619

Parameter	Spike Amount (ng/L)	Result (ng/L)	Q	Dil	% Rec	%Rec Limit	Analysis Date
11Cl-PF3OUdS	12	12		1	103	55-160	12/13/2025 0217
9Cl-PF3ONS	12	13		1	106	70-155	12/13/2025 0217
ADONA	12	12		1	98	65-145	12/13/2025 0217
8:2FTS	12	13		1	102	60-150	12/13/2025 0217
4:2FTS	12	12		1	103	70-145	12/13/2025 0217
6:2FTS	12	12		1	98	65-155	12/13/2025 0217
5:3FTCA	80	72		1	90	70-135	12/13/2025 0217
HFPO-DA	13	13		1	99	70-140	12/13/2025 0217
NEtFOSA	3.2	3.1		1	98	65-145	12/13/2025 0217
NEtFOSAA	3.2	3.7		1	116	70-145	12/13/2025 0217
NEtFOSE	32	31		1	98	70-135	12/13/2025 0217
NMeFOSA	3.2	3.2		1	99	60-150	12/13/2025 0217
NMeFOSAA	3.2	3.0		1	93	50-140	12/13/2025 0217
NMeFOSE	32	31		1	98	70-145	12/13/2025 0217
NFDHA	6.4	6.4		1	100	50-150	12/13/2025 0217
PFEESA	5.7	5.8		1	101	70-140	12/13/2025 0217
PFMPA	6.4	6.0		1	93	55-140	12/13/2025 0217
PFMBA	6.4	6.2		1	97	60-150	12/13/2025 0217
PFBS	2.8	3.0		1	106	60-145	12/13/2025 0217
PFBA	13	13		1	103	70-140	12/13/2025 0217
PFDS	3.1	2.8		1	92	60-145	12/13/2025 0217
PFDA	3.2	3.0		1	93	70-140	12/13/2025 0217
PFDoS	3.1	3.0		1	96	50-145	12/13/2025 0217
PFDoA	3.2	3.3		1	104	70-140	12/13/2025 0217
PFHpS	3.0	3.3		1	107	70-150	12/13/2025 0217
PFHpA	3.2	3.1		1	97	70-150	12/13/2025 0217
7:3FTCA	80	62		1	78	50-145	12/13/2025 0217
PFHxS	2.9	2.8		1	97	65-145	12/13/2025 0217
PFHxA	3.2	3.3		1	104	70-145	12/13/2025 0217
PFNS	3.1	2.9		1	96	65-145	12/13/2025 0217
PFNA	3.2	2.8		1	89	70-150	12/13/2025 0217
PFOSA	3.2	3.2		1	101	70-145	12/13/2025 0217
PFOS	3.0	2.7		1	90	55-150	12/13/2025 0217
PFOA	3.2	3.5		1	108	70-150	12/13/2025 0217
PFPeS	3.0	2.9		1	96	65-140	12/13/2025 0217
PFPeA	6.4	6.5		1	101	65-135	12/13/2025 0217
3:3FTCA	16	14		1	87	65-130	12/13/2025 0217
PFTeDA	3.2	3.3		1	103	60-140	12/13/2025 0217
PFTrDA	3.2	3.3		1	104	65-140	12/13/2025 0217
PFUnA	3.2	3.0		1	94	70-145	12/13/2025 0217

Surrogate	Q	% Rec	Acceptance Limit
13C2-4:2FTS		71	40-200
13C2-6:2FTS		77	40-200

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCS

Sample ID: AQ28782-102
Batch: 28782
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/12/2025 0619

Surrogate	Q	% Rec	Acceptance Limit
13C2-8:2FTS		76	40-300
13C8-PFOSA		73	40-130
D5-NEtFOSA		54	10-130
D3-NMeFOSA		54	10-130
D5-NEtFOSAA		80	25-135
D3-NMeFOSAA		87	40-170
13C4-PFBA		88	5-130
13C5-PFPeA		82	40-130
13C5-PFHxA		85	40-130
13C4-PFHpA		90	40-130
13C8-PFOA		80	40-130
13C9-PFNA		94	40-130
13C6-PFDA		84	40-130
13C3-PFBS		71	40-135
13C3-PFHxS		83	40-130
13C8-PFOS		84	40-130
13C7-PFUnA		88	30-130
13C2-PFDoA		77	10-130
13C2-PFTeDA		75	10-130
13C3-HFPO-DA		84	40-130
D7-NMeFOSE		66	10-130
D9-NEtFOSE		66	10-130

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCSD

Sample ID: AQ28782-003
Batch: 28782
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/12/2025 0619

Parameter	Spike Amount (ng/L)	Result (ng/L)	Q	Dil	% Rec	% RPD	%Rec Limit	% RPD Limit	Analysis Date
11Cl-PF3OUdS	150	150		1	100	9.8	55-160	30	12/13/2025 0207
9Cl-PF3ONS	150	150		1	100	9.6	70-155	30	12/13/2025 0207
ADONA	150	150		1	98	8.8	65-145	30	12/13/2025 0207
8:2FTS	150	150		1	100	8.8	60-150	30	12/13/2025 0207
4:2FTS	150	150		1	103	3.9	70-145	30	12/13/2025 0207
6:2FTS	150	150		1	98	7.1	65-155	30	12/13/2025 0207
5:3FTCA	1000	880		1	88	11	70-135	30	12/13/2025 0207
HFPO-DA	160	160		1	100	9.0	70-140	30	12/13/2025 0207
NEtFOSA	40	38		1	96	9.8	65-145	30	12/13/2025 0207
NEtFOSAA	40	40		1	101	6.6	70-145	30	12/13/2025 0207
NEtFOSE	400	390		1	98	8.3	70-135	30	12/13/2025 0207
NMeFOSA	40	40		1	101	7.7	60-150	30	12/13/2025 0207
NMeFOSAA	40	42		1	105	1.9	50-140	30	12/13/2025 0207
NMeFOSE	400	390		1	97	5.7	70-145	30	12/13/2025 0207
NFDHA	80	74		1	92	9.7	50-150	30	12/13/2025 0207
PFEESA	71	72		1	100	6.3	70-140	30	12/13/2025 0207
PFMPA	80	74		1	93	10	55-140	30	12/13/2025 0207
PFMBA	80	77		1	96	12	60-150	30	12/13/2025 0207
PFBS	36	35		1	99	5.6	60-145	30	12/13/2025 0207
PFBA	160	160		1	100	8.2	70-140	30	12/13/2025 0207
PFDS	39	36		1	94	13	60-145	30	12/13/2025 0207
PFDA	40	38		1	95	3.7	70-140	30	12/13/2025 0207
PFDoS	39	34		1	89	11	50-145	30	12/13/2025 0207
PFDoA	40	39		1	96	13	70-140	30	12/13/2025 0207
PFHpS	38	39		1	102	8.8	70-150	30	12/13/2025 0207
PFHpA	40	39		1	96	6.6	70-150	30	12/13/2025 0207
7:3FTCA	1000	820		1	82	4.0	50-145	30	12/13/2025 0207
PFHxS	36	37		1	102	0.0086	65-145	30	12/13/2025 0207
PFHxA	40	39		1	97	9.2	70-145	30	12/13/2025 0207
PFNS	38	37		1	96	10	65-145	30	12/13/2025 0207
PFNA	40	39		1	97	5.0	70-150	30	12/13/2025 0207
PFOSA	40	38		1	94	9.8	70-145	30	12/13/2025 0207
PFOS	37	33		1	88	14	55-150	30	12/13/2025 0207
PFOA	40	40		1	99	3.0	70-150	30	12/13/2025 0207
PFPeS	38	36		1	96	8.3	65-140	30	12/13/2025 0207
PFPeA	80	79		1	99	8.6	65-135	30	12/13/2025 0207
3:3FTCA	200	180		1	89	13	65-130	30	12/13/2025 0207
PFTeDA	40	39		1	98	9.7	60-140	30	12/13/2025 0207
PFTrDA	40	37		1	93	19	65-140	30	12/13/2025 0207
PFUnA	40	39		1	98	5.3	70-145	30	12/13/2025 0207

Surrogate	Q	% Rec	Acceptance Limit
13C2-4:2FTS		84	40-200
13C2-6:2FTS		83	40-200

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCSD

Sample ID: AQ28782-003
Batch: 28782
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/12/2025 0619

Surrogate	Q	% Rec	Acceptance Limit
13C2-8:2FTS		76	40-300
13C8-PFOSA		77	40-130
D5-NEtFOSA		58	10-130
D3-NMeFOSA		58	10-130
D5-NEtFOSAA		84	25-135
D3-NMeFOSAA		90	40-170
13C4-PFBA		91	5-130
13C5-PFPeA		90	40-130
13C5-PFHxA		92	40-130
13C4-PFHpA		99	40-130
13C8-PFOA		90	40-130
13C9-PFNA		90	40-130
13C6-PFDA		92	40-130
13C3-PFBS		80	40-135
13C3-PFHxS		91	40-130
13C8-PFOS		90	40-130
13C7-PFUnA		93	30-130
13C2-PFDoA		88	10-130
13C2-PFTeDA		76	10-130
13C3-HFPO-DA		92	40-130
D7-NMeFOSE		70	10-130
D9-NEtFOSE		69	10-130

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - MB

Sample ID: AQ28784-001
Batch: 28784
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/12/2025 0844

Parameter	Result	Q	Dil	LOQ	DL	Units	Analysis Date
11Cl-PF3OUdS	ND		1	6.4	0.95	ng/L	12/16/2025 0020
9Cl-PF3ONS	ND		1	6.4	1.1	ng/L	12/16/2025 0020
ADONA	ND		1	6.4	1.0	ng/L	12/16/2025 0020
8:2FTS	ND		1	6.4	2.5	ng/L	12/16/2025 0020
4:2FTS	ND		1	6.4	1.7	ng/L	12/16/2025 0020
6:2FTS	ND		1	6.4	2.1	ng/L	12/16/2025 0020
5:3FTCA	ND		1	40	6.6	ng/L	12/16/2025 0020
HFPO-DA	ND		1	6.4	1.1	ng/L	12/16/2025 0020
NEtFOSA	ND		1	1.6	0.44	ng/L	12/16/2025 0020
NEtFOSAA	ND		1	1.6	0.93	ng/L	12/16/2025 0020
NEtFOSE	ND		1	16	3.0	ng/L	12/16/2025 0020
NMeFOSA	ND		1	1.6	0.30	ng/L	12/16/2025 0020
NMeFOSAA	ND		1	1.6	0.30	ng/L	12/16/2025 0020
NMeFOSE	ND		1	16	3.3	ng/L	12/16/2025 0020
NFDHA	ND		1	3.2	0.79	ng/L	12/16/2025 0020
PFEESA	ND		1	3.2	0.30	ng/L	12/16/2025 0020
PFMPA	ND		1	3.2	0.72	ng/L	12/16/2025 0020
PFMBA	ND		1	3.2	0.53	ng/L	12/16/2025 0020
PFBS	ND		1	1.6	1.2	ng/L	12/16/2025 0020
PFBA	ND		1	6.4	0.95	ng/L	12/16/2025 0020
PFDS	ND		1	1.6	0.41	ng/L	12/16/2025 0020
PFDA	ND		1	1.6	0.49	ng/L	12/16/2025 0020
PFDoS	ND		1	1.6	0.36	ng/L	12/16/2025 0020
PFDoA	ND		1	1.6	0.19	ng/L	12/16/2025 0020
PFHpS	ND		1	1.6	0.58	ng/L	12/16/2025 0020
PFHpA	ND		1	1.6	0.32	ng/L	12/16/2025 0020
7:3FTCA	ND		1	40	8.1	ng/L	12/16/2025 0020
PFHxS	ND		1	1.6	0.71	ng/L	12/16/2025 0020
PFHxA	ND		1	1.6	0.24	ng/L	12/16/2025 0020
PFNS	ND		1	1.6	0.47	ng/L	12/16/2025 0020
PFNA	ND		1	1.6	0.61	ng/L	12/16/2025 0020
PFOSA	ND		1	1.6	0.29	ng/L	12/16/2025 0020
PFOS	ND		1	1.6	0.55	ng/L	12/16/2025 0020
PFOA	ND		1	1.6	0.73	ng/L	12/16/2025 0020
PFPeS	ND		1	1.6	0.44	ng/L	12/16/2025 0020
PFPeA	ND		1	3.2	0.44	ng/L	12/16/2025 0020
3:3FTCA	ND		1	8.0	1.5	ng/L	12/16/2025 0020
PFTeDA	ND		1	1.6	0.43	ng/L	12/16/2025 0020
PFTrDA	ND		1	1.6	0.61	ng/L	12/16/2025 0020
PFUnA	ND		1	1.6	0.82	ng/L	12/16/2025 0020

Surrogate	Q	% Rec	Acceptance Limit
13C2-4:2FTS		93	40-200
13C2-6:2FTS		98	40-200

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - MB

Sample ID: AQ28784-001
Batch: 28784
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/12/2025 0844

Surrogate	Q	% Rec	Acceptance Limit
13C2-8:2FTS		100	40-300
13C8-PFOSA		90	40-130
D5-NEtFOSA		54	10-130
D3-NMeFOSA		57	10-130
D5-NEtFOSAA		98	25-135
D3-NMeFOSAA		103	40-170
13C4-PFBA		109	5-130
13C5-PFPeA		105	40-130
13C5-PFHxA		113	40-130
13C4-PFHpA		115	40-130
13C8-PFOA		104	40-130
13C9-PFNA		114	40-130
13C6-PFDA		122	40-130
13C3-PFBS		97	40-135
13C3-PFHxS		106	40-130
13C8-PFOS		105	40-130
13C7-PFUnA		128	30-130
13C2-PFDoA		98	10-130
13C2-PFTeDA		78	10-130
13C3-HFPO-DA		115	40-130
D7-NMeFOSE		67	10-130
D9-NEtFOSE		63	10-130

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCS

Sample ID: AQ28784-002
Batch: 28784
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/12/2025 0844

Parameter	Spike Amount (ng/L)	Result (ng/L)	Q	Dil	% Rec	%Rec Limit	Analysis Date
11Cl-PF3OUdS	150	140		1	94	55-160	12/16/2025 0030
9Cl-PF3ONS	150	140		1	97	70-155	12/16/2025 0030
ADONA	150	150		1	99	65-145	12/16/2025 0030
8:2FTS	150	150		1	98	60-150	12/16/2025 0030
4:2FTS	150	140		1	97	70-145	12/16/2025 0030
6:2FTS	150	150		1	96	65-155	12/16/2025 0030
5:3FTCA	1000	880		1	88	70-135	12/16/2025 0030
HFPO-DA	160	160		1	98	70-140	12/16/2025 0030
NEtFOSA	40	41		1	102	65-145	12/16/2025 0030
NEtFOSAA	40	39		1	98	70-145	12/16/2025 0030
NEtFOSE	400	400		1	100	70-135	12/16/2025 0030
NMeFOSA	40	43		1	108	60-150	12/16/2025 0030
NMeFOSAA	40	37		1	93	50-140	12/16/2025 0030
NMeFOSE	400	390		1	96	70-145	12/16/2025 0030
NFDHA	80	74		1	92	50-150	12/16/2025 0030
PFEESA	71	70		1	98	70-140	12/16/2025 0030
PFMPA	80	71		1	88	55-140	12/16/2025 0030
PFMBA	80	76		1	95	60-150	12/16/2025 0030
PFBS	36	33		1	94	60-145	12/16/2025 0030
PFBA	160	160		1	97	70-140	12/16/2025 0030
PFDS	39	34		1	89	60-145	12/16/2025 0030
PFDA	40	33		1	84	70-140	12/16/2025 0030
PFDoS	39	29		1	75	50-145	12/16/2025 0030
PFDoA	40	40		1	99	70-140	12/16/2025 0030
PFHpS	38	36		1	94	70-150	12/16/2025 0030
PFHpA	40	38		1	95	70-150	12/16/2025 0030
7:3FTCA	1000	740		1	74	50-145	12/16/2025 0030
PFHxS	36	34		1	93	65-145	12/16/2025 0030
PFHxA	40	39		1	97	70-145	12/16/2025 0030
PFNS	38	38		1	99	65-145	12/16/2025 0030
PFNA	40	35		1	88	70-150	12/16/2025 0030
PFOSA	40	38		1	95	70-145	12/16/2025 0030
PFOS	37	33		1	88	55-150	12/16/2025 0030
PFOA	40	40		1	101	70-150	12/16/2025 0030
PFPeS	38	35		1	92	65-140	12/16/2025 0030
PFPeA	80	80		1	100	65-135	12/16/2025 0030
3:3FTCA	200	180		1	92	65-130	12/16/2025 0030
PFTeDA	40	38		1	94	60-140	12/16/2025 0030
PFTrDA	40	35		1	86	65-140	12/16/2025 0030
PFUnA	40	36		1	89	70-145	12/16/2025 0030

Surrogate	Q	% Rec	Acceptance Limit
13C2-4:2FTS		90	40-200
13C2-6:2FTS		100	40-200

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCS

Sample ID: AQ28784-002
Batch: 28784
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/12/2025 0844

Surrogate	Q	% Rec	Acceptance Limit
13C2-8:2FTS		92	40-300
13C8-PFOSA		86	40-130
D5-NEtFOSA		54	10-130
D3-NMeFOSA		55	10-130
D5-NEtFOSAA		95	25-135
D3-NMeFOSAA		104	40-170
13C4-PFBA		106	5-130
13C5-PFPeA		104	40-130
13C5-PFHxA		113	40-130
13C4-PFHpA		118	40-130
13C8-PFOA		98	40-130
13C9-PFNA		115	40-130
13C6-PFDA		120	40-130
13C3-PFBS		91	40-135
13C3-PFHxS		107	40-130
13C8-PFOS		106	40-130
13C7-PFUnA		125	30-130
13C2-PFDoA		99	10-130
13C2-PFTeDA		86	10-130
13C3-HFPO-DA		118	40-130
D7-NMeFOSE		65	10-130
D9-NEtFOSE		62	10-130

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCS

Sample ID: AQ28784-102
Batch: 28784
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/12/2025 0844

Parameter	Spike Amount (ng/L)	Result (ng/L)	Q	Dil	% Rec	%Rec Limit	Analysis Date
11Cl-PF3OUdS	12	12		1	101	55-160	12/16/2025 0049
9Cl-PF3ONS	12	12		1	104	70-155	12/16/2025 0049
ADONA	12	13		1	105	65-145	12/16/2025 0049
8:2FTS	12	12		1	95	60-150	12/16/2025 0049
4:2FTS	12	11		1	94	70-145	12/16/2025 0049
6:2FTS	12	11		1	94	65-155	12/16/2025 0049
5:3FTCA	80	69		1	87	70-135	12/16/2025 0049
HFPO-DA	13	13		1	100	70-140	12/16/2025 0049
NEtFOSA	3.2	3.3		1	103	65-145	12/16/2025 0049
NEtFOSAA	3.2	3.0		1	93	70-145	12/16/2025 0049
NEtFOSE	32	30		1	95	70-135	12/16/2025 0049
NMeFOSA	3.2	3.3		1	103	60-150	12/16/2025 0049
NMeFOSAA	3.2	3.3		1	104	50-140	12/16/2025 0049
NMeFOSE	32	31		1	96	70-145	12/16/2025 0049
NFDHA	6.4	5.9		1	93	50-150	12/16/2025 0049
PFEESA	5.7	5.4		1	95	70-140	12/16/2025 0049
PFMPA	6.4	5.6		1	88	55-140	12/16/2025 0049
PFMBA	6.4	6.2		1	96	60-150	12/16/2025 0049
PFBS	2.8	2.7		1	94	60-145	12/16/2025 0049
PFBA	13	12		1	96	70-140	12/16/2025 0049
PFDS	3.1	2.8		1	90	60-145	12/16/2025 0049
PFDA	3.2	2.7		1	84	70-140	12/16/2025 0049
PFDoS	3.1	2.3		1	74	50-145	12/16/2025 0049
PFDoA	3.2	3.2		1	100	70-140	12/16/2025 0049
PFHpS	3.0	3.0		1	100	70-150	12/16/2025 0049
PFHpA	3.2	3.2		1	99	70-150	12/16/2025 0049
7:3FTCA	80	63		1	79	50-145	12/16/2025 0049
PFHxS	2.9	2.9		1	98	65-145	12/16/2025 0049
PFHxA	3.2	3.1		1	97	70-145	12/16/2025 0049
PFNS	3.1	3.0		1	99	65-145	12/16/2025 0049
PFNA	3.2	2.9		1	90	70-150	12/16/2025 0049
PFOSA	3.2	3.3		1	103	70-145	12/16/2025 0049
PFOS	3.0	2.9		1	96	55-150	12/16/2025 0049
PFOA	3.2	3.1		1	97	70-150	12/16/2025 0049
PFPeS	3.0	2.6		1	86	65-140	12/16/2025 0049
PFPeA	6.4	6.4		1	101	65-135	12/16/2025 0049
3:3FTCA	16	15		1	93	65-130	12/16/2025 0049
PFTeDA	3.2	3.4		1	107	60-140	12/16/2025 0049
PFTrDA	3.2	2.8		1	87	65-140	12/16/2025 0049
PFUnA	3.2	3.0		1	95	70-145	12/16/2025 0049

Surrogate	Q	% Rec	Acceptance Limit
13C2-4:2FTS		93	40-200
13C2-6:2FTS		100	40-200

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCS

Sample ID: AQ28784-102
Batch: 28784
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/12/2025 0844

Surrogate	Q	% Rec	Acceptance Limit
13C2-8:2FTS		98	40-300
13C8-PFOSA		87	40-130
D5-NEtFOSA		57	10-130
D3-NMeFOSA		58	10-130
D5-NEtFOSAA		99	25-135
D3-NMeFOSAA		107	40-170
13C4-PFBA		108	5-130
13C5-PFPeA		101	40-130
13C5-PFHxA		110	40-130
13C4-PFHpA		112	40-130
13C8-PFOA		97	40-130
13C9-PFNA		106	40-130
13C6-PFDA		121	40-130
13C3-PFBS		94	40-135
13C3-PFHxS		112	40-130
13C8-PFOS		101	40-130
13C7-PFUnA		120	30-130
13C2-PFDoA		97	10-130
13C2-PFTeDA		84	10-130
13C3-HFPO-DA		112	40-130
D7-NMeFOSE		69	10-130
D9-NEtFOSE		69	10-130

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCSD

Sample ID: AQ28784-003
Batch: 28784
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/12/2025 0844

Parameter	Spike Amount (ng/L)	Result (ng/L)	Q	Dil	% Rec	% RPD	%Rec Limit	% RPD Limit	Analysis Date
11Cl-PF3OUdS	150	140		1	94	0.26	55-160	30	12/16/2025 0040
9Cl-PF3ONS	150	140		1	97	0.071	70-155	30	12/16/2025 0040
ADONA	150	150		1	100	0.85	65-145	30	12/16/2025 0040
8:2FTS	150	140		1	93	4.4	60-150	30	12/16/2025 0040
4:2FTS	150	150		1	102	5.1	70-145	30	12/16/2025 0040
6:2FTS	150	140		1	92	4.4	65-155	30	12/16/2025 0040
5:3FTCA	1000	890		1	89	1.5	70-135	30	12/16/2025 0040
HFPO-DA	160	160		1	99	1.7	70-140	30	12/16/2025 0040
NEtFOSA	40	43		1	107	5.4	65-145	30	12/16/2025 0040
NEtFOSAA	40	38		1	95	2.6	70-145	30	12/16/2025 0040
NEtFOSE	400	400		1	100	0.19	70-135	30	12/16/2025 0040
NMeFOSA	40	43		1	107	0.81	60-150	30	12/16/2025 0040
NMeFOSAA	40	39		1	98	4.9	50-140	30	12/16/2025 0040
NMeFOSE	400	400		1	100	4.1	70-145	30	12/16/2025 0040
NFDHA	80	74		1	92	0.13	50-150	30	12/16/2025 0040
PFEESA	71	70		1	99	0.59	70-140	30	12/16/2025 0040
PFMPA	80	70		1	88	0.15	55-140	30	12/16/2025 0040
PFMBA	80	75		1	94	1.6	60-150	30	12/16/2025 0040
PFBS	36	34		1	95	1.7	60-145	30	12/16/2025 0040
PFBA	160	160		1	99	2.4	70-140	30	12/16/2025 0040
PFDS	39	36		1	92	4.1	60-145	30	12/16/2025 0040
PFDA	40	34		1	85	1.9	70-140	30	12/16/2025 0040
PFDoS	39	28		1	72	4.5	50-145	30	12/16/2025 0040
PFDoA	40	40		1	99	0.050	70-140	30	12/16/2025 0040
PFHpS	38	36		1	95	0.99	70-150	30	12/16/2025 0040
PFHpA	40	38		1	95	0.50	70-150	30	12/16/2025 0040
7:3FTCA	1000	760		1	76	3.0	50-145	30	12/16/2025 0040
PFHxS	36	33		1	90	4.1	65-145	30	12/16/2025 0040
PFHxA	40	38		1	95	1.9	70-145	30	12/16/2025 0040
PFNS	38	37		1	96	2.3	65-145	30	12/16/2025 0040
PFNA	40	37		1	93	6.4	70-150	30	12/16/2025 0040
PFOSA	40	38		1	95	0.90	70-145	30	12/16/2025 0040
PFOS	37	31		1	84	4.6	55-150	30	12/16/2025 0040
PFOA	40	39		1	97	3.1	70-150	30	12/16/2025 0040
PFPeS	38	35		1	92	0.21	65-140	30	12/16/2025 0040
PFPeA	80	80		1	100	0.21	65-135	30	12/16/2025 0040
3:3FTCA	200	170		1	87	5.5	65-130	30	12/16/2025 0040
PFTeDA	40	40		1	99	5.2	60-140	30	12/16/2025 0040
PFTrDA	40	36		1	90	3.7	65-140	30	12/16/2025 0040
PFUnA	40	36		1	89	0.22	70-145	30	12/16/2025 0040

Surrogate	Q	% Rec	Acceptance Limit
13C2-4:2FTS		92	40-200
13C2-6:2FTS		105	40-200

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCSD

Sample ID: AQ28784-003
Batch: 28784
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/12/2025 0844

Surrogate	Q	% Rec	Acceptance Limit
13C2-8:2FTS		98	40-300
13C8-PFOSA		87	40-130
D5-NEtFOSA		52	10-130
D3-NMeFOSA		55	10-130
D5-NEtFOSAA		97	25-135
D3-NMeFOSAA		102	40-170
13C4-PFBA		106	5-130
13C5-PFPeA		105	40-130
13C5-PFHxA		113	40-130
13C4-PFHpA		119	40-130
13C8-PFOA		103	40-130
13C9-PFNA		111	40-130
13C6-PFDA		121	40-130
13C3-PFBS		94	40-135
13C3-PFHxS		112	40-130
13C8-PFOS		108	40-130
13C7-PFUnA		124	30-130
13C2-PFDoA		100	10-130
13C2-PFTeDA		84	10-130
13C3-HFPO-DA		114	40-130
D7-NMeFOSE		64	10-130
D9-NEtFOSE		63	10-130

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - MB

Sample ID: AQ28808-001
Batch: 28808
Analytical Method: 1633
Matrix: Solid
Prep Method: 1633
Prep Date: 12/13/2025 1254

Parameter	Result	Q	Dil	LOQ	DL	Units	Analysis Date
11Cl-PF3OUdS	ND		1	0.80	0.045	ng/g	12/15/2025 1335
9Cl-PF3ONS	ND		1	0.80	0.030	ng/g	12/15/2025 1335
ADONA	ND		1	0.80	0.064	ng/g	12/15/2025 1335
8:2FTS	ND		1	0.80	0.17	ng/g	12/15/2025 1335
4:2FTS	ND		1	0.80	0.088	ng/g	12/15/2025 1335
6:2FTS	ND		1	0.80	0.13	ng/g	12/15/2025 1335
5:3FTCA	ND		1	5.0	0.48	ng/g	12/15/2025 1335
HFPO-DA	ND		1	0.80	0.16	ng/g	12/15/2025 1335
NEtFOSA	ND		1	0.20	0.016	ng/g	12/15/2025 1335
NEtFOSAA	ND		1	0.20	0.075	ng/g	12/15/2025 1335
NEtFOSE	ND		1	2.0	0.078	ng/g	12/15/2025 1335
NMeFOSA	ND		1	0.20	0.017	ng/g	12/15/2025 1335
NMeFOSAA	ND		1	0.20	0.056	ng/g	12/15/2025 1335
NMeFOSE	ND		1	2.0	0.13	ng/g	12/15/2025 1335
NFDHA	ND		1	0.40	0.046	ng/g	12/15/2025 1335
PFEESA	ND		1	0.40	0.041	ng/g	12/15/2025 1335
PFMPA	ND		1	0.40	0.034	ng/g	12/15/2025 1335
PFMBA	ND		1	0.40	0.029	ng/g	12/15/2025 1335
PFBS	ND		1	0.20	0.042	ng/g	12/15/2025 1335
PFBA	ND		1	0.80	0.086	ng/g	12/15/2025 1335
PFDS	ND		1	0.20	0.022	ng/g	12/15/2025 1335
PFDA	ND		1	0.20	0.061	ng/g	12/15/2025 1335
PFDoS	ND		1	0.20	0.026	ng/g	12/15/2025 1335
PFDoA	ND		1	0.20	0.037	ng/g	12/15/2025 1335
PFHpS	ND		1	0.20	0.025	ng/g	12/15/2025 1335
PFHpA	ND		1	0.20	0.032	ng/g	12/15/2025 1335
7:3FTCA	ND		1	5.0	0.98	ng/g	12/15/2025 1335
PFHxS	ND		1	0.20	0.063	ng/g	12/15/2025 1335
PFHxA	ND		1	0.20	0.032	ng/g	12/15/2025 1335
PFNS	ND		1	0.20	0.016	ng/g	12/15/2025 1335
PFNA	ND		1	0.20	0.067	ng/g	12/15/2025 1335
PFOSA	ND		1	0.20	0.014	ng/g	12/15/2025 1335
PFOS	ND		1	0.20	0.041	ng/g	12/15/2025 1335
PFOA	ND		1	0.20	0.036	ng/g	12/15/2025 1335
PFPeS	ND		1	0.20	0.020	ng/g	12/15/2025 1335
PFPeA	ND		1	0.40	0.051	ng/g	12/15/2025 1335
3:3FTCA	ND		1	1.0	0.12	ng/g	12/15/2025 1335
PFTeDA	ND		1	0.20	0.044	ng/g	12/15/2025 1335
PFTrDA	ND		1	0.20	0.031	ng/g	12/15/2025 1335
PFUnA	ND		1	0.20	0.057	ng/g	12/15/2025 1335

Surrogate	Q	% Rec	Acceptance Limit
13C2-4:2FTS		80	40-165
13C2-6:2FTS		83	40-215

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - MB

Sample ID: AQ28808-001
Batch: 28808
Analytical Method: 1633
Matrix: Solid
Prep Method: 1633
Prep Date: 12/13/2025 1254

Surrogate	Q	% Rec	Acceptance Limit
13C2-8:2FTS		86	40-275
13C2-PFDoA		103	40-130
13C2-PFTeDA		89	20-130
13C3-HFPO-DA		100	40-130
13C3-PFBS		90	40-135
13C3-PFHxS		88	40-130
13C4-PFBA		54	8-130
13C4-PFHpA		96	40-130
13C5-PFHxA		99	40-130
13C5-PFPeA		97	35-130
13C6-PFDA		100	40-130
13C7-PFUnA		97	40-130
13C8-PFOA		96	40-130
13C8-PFOS		95	40-130
13C8-PFOSA		99	40-130
13C9-PFNA		99	40-130
D3-NMeFOSA		98	10-130
D3-NMeFOSAA		100	40-135
D5-NEtFOSA		98	10-130
D5-NEtFOSAA		84	40-150
D7-NMeFOSE		103	20-130
D9-NEtFOSE		103	15-130

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCS

Sample ID: AQ28808-002
Batch: 28808
Analytical Method: 1633
Matrix: Solid
Prep Method: 1633
Prep Date: 12/13/2025 1254

Parameter	Spike Amount (ng/g)	Result (ng/g)	Q	Dil	% Rec	%Rec Limit	Analysis Date
11Cl-PF3OUdS	7.5	8.8		1	117	45-160	12/15/2025 1345
9Cl-PF3ONS	7.5	7.6		1	101	70-150	12/15/2025 1345
ADONA	7.6	7.2		1	95	70-160	12/15/2025 1345
8:2FTS	7.7	6.9		1	90	70-150	12/15/2025 1345
4:2FTS	7.5	7.1		1	95	60-150	12/15/2025 1345
6:2FTS	7.6	8.1		1	107	55-200	12/15/2025 1345
5:3FTCA	50	48		1	95	60-130	12/15/2025 1345
HFPO-DA	8.0	7.5		1	94	70-145	12/15/2025 1345
NEtFOSA	2.0	1.8		1	91	70-140	12/15/2025 1345
NEtFOSAA	2.0	2.0		1	100	65-165	12/15/2025 1345
NEtFOSE	20	18		1	92	70-135	12/15/2025 1345
NMeFOSA	2.0	2.0		1	98	70-155	12/15/2025 1345
NMeFOSAA	2.0	2.0		1	98	65-155	12/15/2025 1345
NMeFOSE	20	19		1	93	70-140	12/15/2025 1345
NFDHA	4.0	3.6		1	91	60-155	12/15/2025 1345
PFEESA	3.6	3.6		1	100	70-140	12/15/2025 1345
PFMPA	4.0	4.9		1	122	30-140	12/15/2025 1345
PFMBA	4.0	3.7		1	94	60-150	12/15/2025 1345
PFBS	1.8	1.6		1	90	65-145	12/15/2025 1345
PFBA	8.0	7.6		1	95	70-140	12/15/2025 1345
PFDS	1.9	1.9		1	99	40-155	12/15/2025 1345
PFDA	2.0	1.8		1	88	70-155	12/15/2025 1345
PFDoS	1.9	1.9		1	97	25-160	12/15/2025 1345
PFDoA	2.0	1.8		1	90	70-150	12/15/2025 1345
PFHpS	1.9	2.2		1	115	65-155	12/15/2025 1345
PFHpA	2.0	2.0		1	98	65-145	12/15/2025 1345
7:3FTCA	50	51		1	101	60-150	12/15/2025 1345
PFHxS	1.8	1.7		1	93	60-150	12/15/2025 1345
PFHxA	2.0	1.8		1	92	65-140	12/15/2025 1345
PFNS	1.9	1.9		1	101	55-140	12/15/2025 1345
PFNA	2.0	1.6		1	80	70-155	12/15/2025 1345
PFOSA	2.0	1.8		1	90	70-140	12/15/2025 1345
PFOS	1.9	1.8		1	98	65-160	12/15/2025 1345
PFOA	2.0	1.6		1	81	70-150	12/15/2025 1345
PFPeS	1.9	1.8		1	94	55-160	12/15/2025 1345
PFPeA	4.0	3.8		1	94	60-150	12/15/2025 1345
3:3FTCA	10	7.8		1	78	45-130	12/15/2025 1345
PFTeDA	2.0	2.0		1	99	65-150	12/15/2025 1345
PFTrDA	2.0	1.7		1	85	65-150	12/15/2025 1345
PFUnA	2.0	2.0		1	101	70-155	12/15/2025 1345

Surrogate	Q	% Rec	Acceptance Limit
13C2-4:2FTS		93	40-165
13C2-6:2FTS		86	40-215

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCS

Sample ID: AQ28808-002
Batch: 28808
Analytical Method: 1633
Matrix: Solid
Prep Method: 1633
Prep Date: 12/13/2025 1254

Surrogate	Q	% Rec	Acceptance Limit
13C2-8:2FTS		92	40-275
13C2-PFDoA		100	40-130
13C2-PFTeDA		81	20-130
13C3-HFPO-DA		95	40-130
13C3-PFBS		104	40-135
13C3-PFHxS		94	40-130
13C4-PFBA		52	8-130
13C4-PFHpA		95	40-130
13C5-PFHxA		97	40-130
13C5-PFPeA		93	35-130
13C6-PFDA		97	40-130
13C7-PFUnA		92	40-130
13C8-PFOA		111	40-130
13C8-PFOS		96	40-130
13C8-PFOSA		101	40-130
13C9-PFNA		96	40-130
D3-NMeFOSA		97	10-130
D3-NMeFOSAA		101	40-135
D5-NEtFOSA		102	10-130
D5-NEtFOSAA		75	40-150
D7-NMeFOSE		108	20-130
D9-NEtFOSE		108	15-130

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCS

Sample ID: AQ28808-102
Batch: 28808
Analytical Method: 1633
Matrix: Solid
Prep Method: 1633
Prep Date: 12/13/2025 1254

Parameter	Spike Amount (ng/g)	Result (ng/g)	Q	Dil	% Rec	%Rec Limit	Analysis Date
11Cl-PF3OUdS	1.5	1.8		1	122	45-160	12/15/2025 1355
9Cl-PF3ONS	1.5	1.7		1	115	70-150	12/15/2025 1355
ADONA	1.5	1.6		1	105	70-160	12/15/2025 1355
8:2FTS	1.5	1.5		1	98	70-150	12/15/2025 1355
4:2FTS	1.5	1.6		1	104	60-150	12/15/2025 1355
6:2FTS	1.5	1.8		1	119	55-200	12/15/2025 1355
5:3FTCA	10	10		1	103	60-130	12/15/2025 1355
HFPO-DA	1.6	1.6		1	98	70-145	12/15/2025 1355
NEtFOSA	0.40	0.43		1	107	70-140	12/15/2025 1355
NEtFOSAA	0.40	0.42		1	106	65-165	12/15/2025 1355
NEtFOSE	4.0	4.0		1	101	70-135	12/15/2025 1355
NMeFOSA	0.40	0.39		1	98	70-155	12/15/2025 1355
NMeFOSAA	0.40	0.39		1	97	65-155	12/15/2025 1355
NMeFOSE	4.0	4.1		1	102	70-140	12/15/2025 1355
NFDHA	0.80	0.79		1	99	60-155	12/15/2025 1355
PFEESA	0.71	0.74		1	104	70-140	12/15/2025 1355
PFMPA	0.80	1.0		1	126	30-140	12/15/2025 1355
PFMBA	0.80	0.78		1	98	60-150	12/15/2025 1355
PFBS	0.35	0.36		1	102	65-145	12/15/2025 1355
PFBA	1.6	1.6		1	100	70-140	12/15/2025 1355
PFDS	0.38	0.43		1	113	40-155	12/15/2025 1355
PFDA	0.40	0.41		1	102	70-155	12/15/2025 1355
PFDoS	0.38	0.38		1	100	25-160	12/15/2025 1355
PFDoA	0.40	0.42		1	106	70-150	12/15/2025 1355
PFHpS	0.38	0.48		1	127	65-155	12/15/2025 1355
PFHpA	0.40	0.38		1	94	65-145	12/15/2025 1355
7:3FTCA	10	11		1	109	60-150	12/15/2025 1355
PFHxS	0.36	0.35		1	98	60-150	12/15/2025 1355
PFHxA	0.40	0.44		1	110	65-140	12/15/2025 1355
PFNS	0.38	0.38		1	101	55-140	12/15/2025 1355
PFNA	0.40	0.35		1	87	70-155	12/15/2025 1355
PFOSA	0.40	0.40		1	99	70-140	12/15/2025 1355
PFOS	0.37	0.39		1	105	65-160	12/15/2025 1355
PFOA	0.40	0.40		1	100	70-150	12/15/2025 1355
PFPeS	0.37	0.40		1	107	55-160	12/15/2025 1355
PFPeA	0.80	0.84		1	105	60-150	12/15/2025 1355
3:3FTCA	2.0	1.8		1	88	45-130	12/15/2025 1355
PFTeDA	0.40	0.43		1	107	65-150	12/15/2025 1355
PFTrDA	0.40	0.42		1	105	65-150	12/15/2025 1355
PFUnA	0.40	0.36		1	90	70-155	12/15/2025 1355

Surrogate	Q	% Rec	Acceptance Limit
13C2-4:2FTS		90	40-165
13C2-6:2FTS		79	40-215

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCS

Sample ID: AQ28808-102
Batch: 28808
Analytical Method: 1633
Matrix: Solid
Prep Method: 1633
Prep Date: 12/13/2025 1254

Surrogate	Q	% Rec	Acceptance Limit
13C2-8:2FTS		90	40-275
13C2-PFDoA		87	40-130
13C2-PFTeDA		78	20-130
13C3-HFPO-DA		92	40-130
13C3-PFBS		98	40-135
13C3-PFHxS		98	40-130
13C4-PFBA		58	8-130
13C4-PFHpA		86	40-130
13C5-PFHxA		88	40-130
13C5-PFPeA		88	35-130
13C6-PFDA		96	40-130
13C7-PFUnA		96	40-130
13C8-PFOA		91	40-130
13C8-PFOS		93	40-130
13C8-PFOSA		98	40-130
13C9-PFNA		94	40-130
D3-NMeFOSA		92	10-130
D3-NMeFOSAA		93	40-135
D5-NEtFOSA		90	10-130
D5-NEtFOSAA		79	40-150
D7-NMeFOSE		99	20-130
D9-NEtFOSE		102	15-130

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - MS

Sample ID: AL11009-008MS
Batch: 28808
Analytical Method: 1633
Matrix: Solid
Prep Method: 1633
Prep Date: 12/13/2025 1254

Parameter	Sample Amount (ng/g)	Spike Amount (ng/g)	Result (ng/g)	Q	Dil	% Rec	%Rec Limit	Analysis Date
11Cl-PF3OUdS	ND	7.5	8.1		1	108	45-160	12/15/2025 1434
9Cl-PF3ONS	ND	7.5	7.3		1	98	70-150	12/15/2025 1434
ADONA	ND	7.5	6.9		1	92	70-160	12/15/2025 1434
8:2FTS	ND	7.7	7.1		1	92	70-150	12/15/2025 1434
4:2FTS	ND	7.5	7.3		1	98	60-150	12/15/2025 1434
6:2FTS	ND	7.6	6.9		1	91	55-200	12/15/2025 1434
5:3FTCA	ND	50	47		1	93	60-130	12/15/2025 1434
HFPO-DA	ND	8.0	6.9		1	86	70-145	12/15/2025 1434
NEtFOSA	ND	2.0	1.8		1	92	70-140	12/15/2025 1434
NEtFOSAA	ND	2.0	1.8		1	89	65-165	12/15/2025 1434
NEtFOSE	ND	20	19		1	94	70-135	12/15/2025 1434
NMeFOSA	ND	2.0	1.9		1	96	70-155	12/15/2025 1434
NMeFOSAA	ND	2.0	1.7		1	86	65-155	12/15/2025 1434
NMeFOSE	ND	20	18		1	91	70-140	12/15/2025 1434
NFDHA	ND	4.0	3.5		1	87	60-155	12/15/2025 1434
PFEESA	ND	3.6	3.5		1	99	70-140	12/15/2025 1434
PFMPA	ND	4.0	4.2		1	106	30-140	12/15/2025 1434
PFMBA	ND	4.0	3.5		1	87	60-150	12/15/2025 1434
PFBS	ND	1.8	1.5		1	87	65-145	12/15/2025 1434
PFBA	ND	8.0	7.1		1	88	70-140	12/15/2025 1434
PFDS	ND	1.9	1.9		1	97	40-155	12/15/2025 1434
PFDA	ND	2.0	1.7		1	83	70-155	12/15/2025 1434
PFDoS	ND	1.9	1.7		1	90	25-160	12/15/2025 1434
PFDoA	ND	2.0	1.7		1	86	70-150	12/15/2025 1434
PFHpS	ND	1.9	1.8		1	93	65-155	12/15/2025 1434
PFHpA	ND	2.0	1.8		1	89	65-145	12/15/2025 1434
7:3FTCA	ND	50	49		1	97	60-150	12/15/2025 1434
PFHxS	ND	1.8	1.7		1	91	60-150	12/15/2025 1434
PFHxA	ND	2.0	1.8		1	93	65-140	12/15/2025 1434
PFNS	ND	1.9	1.9		1	98	55-140	12/15/2025 1434
PFNA	ND	2.0	1.6		1	82	70-155	12/15/2025 1434
PFOSA	ND	2.0	1.8		1	88	70-140	12/15/2025 1434
PFOS	ND	1.8	1.6		1	86	65-160	12/15/2025 1434
PFOA	ND	2.0	1.6		1	79	70-150	12/15/2025 1434
PFPeS	ND	1.9	1.5		1	83	55-160	12/15/2025 1434
PFPeA	ND	4.0	3.5		1	88	60-150	12/15/2025 1434
3:3FTCA	ND	10	7.8		1	78	45-130	12/15/2025 1434
PFTeDA	ND	2.0	1.8		1	92	65-150	12/15/2025 1434
PFTrDA	ND	2.0	1.6		1	83	65-150	12/15/2025 1434
PFUnA	ND	2.0	1.7		1	85	70-155	12/15/2025 1434

Surrogate	Q	% Rec	Acceptance Limit
13C2-4:2FTS		85	40-165
13C2-6:2FTS		90	40-215

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - MS

Sample ID: AL11009-008MS
Batch: 28808
Analytical Method: 1633
Matrix: Solid
Prep Method: 1633
Prep Date: 12/13/2025 1254

Surrogate	Q	% Rec	Acceptance Limit
13C2-8:2FTS		86	40-275
13C2-PFDoA		97	40-130
13C2-PFTeDA		86	20-130
13C3-HFPO-DA		98	40-130
13C3-PFBS		96	40-135
13C3-PFHxS		95	40-130
13C4-PFBA		69	8-130
13C4-PFHpA		93	40-130
13C5-PFHxA		93	40-130
13C5-PFPeA		97	35-130
13C6-PFDA		99	40-130
13C7-PFUnA		97	40-130
13C8-PFOA		96	40-130
13C8-PFOS		104	40-130
13C8-PFOSA		95	40-130
13C9-PFNA		89	40-130
D3-NMeFOSA		89	10-130
D3-NMeFOSAA		101	40-135
D5-NEtFOSA		92	10-130
D5-NEtFOSAA		79	40-150
D7-NMeFOSE		74	20-130
D9-NEtFOSE		72	15-130

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - MSD

Sample ID: AL11009-008MD
Batch: 28808
Analytical Method: 1633
Matrix: Solid
Prep Method: 1633
Prep Date: 12/13/2025 1254

Parameter	Sample Amount (ng/g)	Spike Amount (ng/g)	Result (ng/g)	Q	Dil	% Rec	% RPD	%Rec Limit	% RPD Limit	Analysis Date
11Cl-PF3OUdS	ND	7.6	8.9		1	117	8.5	45-160	30	12/15/2025 1444
9Cl-PF3ONS	ND	7.5	8.0		1	107	8.9	70-150	30	12/15/2025 1444
ADONA	ND	7.6	7.3		1	97	5.4	70-160	30	12/15/2025 1444
8:2FTS	ND	7.7	7.4		1	96	4.7	70-150	30	12/15/2025 1444
4:2FTS	ND	7.5	7.1		1	94	2.8	60-150	30	12/15/2025 1444
6:2FTS	ND	7.6	7.5		1	99	8.7	55-200	30	12/15/2025 1444
5:3FTCA	ND	50	45		1	90	2.7	60-130	30	12/15/2025 1444
HFPO-DA	ND	8.0	7.1		1	88	3.0	70-145	30	12/15/2025 1444
NEtFOSA	ND	2.0	1.9		1	93	1.2	70-140	30	12/15/2025 1444
NEtFOSAA	ND	2.0	2.0		1	102	14	65-165	30	12/15/2025 1444
NEtFOSE	ND	20	19		1	93	0.076	70-135	30	12/15/2025 1444
NMeFOSA	ND	2.0	1.8		1	90	5.8	70-155	30	12/15/2025 1444
NMeFOSAA	ND	2.0	1.8		1	91	6.5	65-155	30	12/15/2025 1444
NMeFOSE	ND	20	18		1	92	1.6	70-140	30	12/15/2025 1444
NFDHA	ND	4.0	3.4		1	86	0.44	60-155	30	12/15/2025 1444
PFEESA	ND	3.6	3.5		1	98	0.10	70-140	30	12/15/2025 1444
PFMPA	ND	4.0	4.6		1	114	6.9	30-140	30	12/15/2025 1444
PFMBA	ND	4.0	3.6		1	91	4.4	60-150	30	12/15/2025 1444
PFBS	ND	1.8	1.6		1	90	2.9	65-145	30	12/15/2025 1444
PFBA	ND	8.0	7.5		1	93	5.5	70-140	30	12/15/2025 1444
PFDS	ND	1.9	2.0		1	105	8.3	40-155	30	12/15/2025 1444
PFDA	ND	2.0	1.7		1	84	0.92	70-155	30	12/15/2025 1444
PFDoS	ND	1.9	2.1		1	106	17	25-160	30	12/15/2025 1444
PFDoA	ND	2.0	1.8		1	90	5.4	70-150	30	12/15/2025 1444
PFHpS	ND	1.9	2.1		1	112	20	65-155	30	12/15/2025 1444
PFHpA	ND	2.0	1.7		1	87	1.5	65-145	30	12/15/2025 1444
7:3FTCA	ND	50	49		1	97	0.24	60-150	30	12/15/2025 1444
PFHxS	ND	1.8	1.8		1	96	5.7	60-150	30	12/15/2025 1444
PFHxA	ND	2.0	1.8		1	91	1.6	65-140	30	12/15/2025 1444
PFNS	ND	1.9	2.0		1	105	7.0	55-140	30	12/15/2025 1444
PFNA	ND	2.0	1.5		1	77	6.0	70-155	30	12/15/2025 1444
PFOSA	ND	2.0	1.8		1	89	2.2	70-140	30	12/15/2025 1444
PFOS	ND	1.9	1.9		1	100	16	65-160	30	12/15/2025 1444
PFOA	ND	2.0	1.7		1	83	5.4	70-150	30	12/15/2025 1444
PFPeS	ND	1.9	1.7		1	90	8.8	55-160	30	12/15/2025 1444
PFPeA	ND	4.0	3.7		1	92	4.6	60-150	30	12/15/2025 1444
3:3FTCA	ND	10	7.7		1	77	2.2	45-130	30	12/15/2025 1444
PFTeDA	ND	2.0	1.9		1	95	3.4	65-150	30	12/15/2025 1444
PFTrDA	ND	2.0	1.8		1	88	7.0	65-150	30	12/15/2025 1444
PFUnA	ND	2.0	1.8		1	88	3.1	70-155	30	12/15/2025 1444

Surrogate	Q	% Rec	Acceptance Limit
13C2-4:2FTS		89	40-165
13C2-6:2FTS		92	40-215

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - MSD

Sample ID: AL11009-008MD
Batch: 28808
Analytical Method: 1633
Matrix: Solid
Prep Method: 1633
Prep Date: 12/13/2025 1254

Surrogate	Q	% Rec	Acceptance Limit
13C2-8:2FTS		85	40-275
13C2-PFDoA		90	40-130
13C2-PFTeDA		87	20-130
13C3-HFPO-DA		91	40-130
13C3-PFBS		102	40-135
13C3-PFHxS		100	40-130
13C4-PFBA		59	8-130
13C4-PFHpA		90	40-130
13C5-PFHxA		94	40-130
13C5-PFPeA		92	35-130
13C6-PFDA		91	40-130
13C7-PFUnA		91	40-130
13C8-PFOA		101	40-130
13C8-PFOS		93	40-130
13C8-PFOSA		94	40-130
13C9-PFNA		92	40-130
D3-NMeFOSA		93	10-130
D3-NMeFOSAA		99	40-135
D5-NEtFOSA		93	10-130
D5-NEtFOSAA		76	40-150
D7-NMeFOSE		75	20-130
D9-NEtFOSE		74	15-130

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - MB

Sample ID: AQ28978-001
Batch: 28978
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/24/2025 1351

Parameter	Result	Q	Dil	LOQ	DL	Units	Analysis Date
11Cl-PF3OUdS	ND		1	6.4	0.95	ng/L	12/26/2025 1210
9Cl-PF3ONS	ND		1	6.4	1.1	ng/L	12/26/2025 1210
ADONA	ND		1	6.4	1.0	ng/L	12/26/2025 1210
8:2FTS	ND		1	6.4	2.5	ng/L	12/26/2025 1210
4:2FTS	ND		1	6.4	1.7	ng/L	12/26/2025 1210
6:2FTS	ND		1	6.4	2.1	ng/L	12/26/2025 1210
5:3FTCA	ND		1	40	6.6	ng/L	12/26/2025 1210
HFPO-DA	ND		1	6.4	1.1	ng/L	12/26/2025 1210
NEtFOSA	ND		1	1.6	0.44	ng/L	12/26/2025 1210
NEtFOSAA	ND		1	1.6	0.93	ng/L	12/26/2025 1210
NEtFOSE	ND		1	16	3.0	ng/L	12/26/2025 1210
NMeFOSA	ND		1	1.6	0.30	ng/L	12/26/2025 1210
NMeFOSAA	ND		1	1.6	0.30	ng/L	12/26/2025 1210
NMeFOSE	ND		1	16	3.3	ng/L	12/26/2025 1210
NFDHA	ND		1	3.2	0.79	ng/L	12/26/2025 1210
PFEESA	ND		1	3.2	0.30	ng/L	12/26/2025 1210
PFMPA	ND		1	3.2	0.72	ng/L	12/26/2025 1210
PFMBA	ND		1	3.2	0.53	ng/L	12/26/2025 1210
PFBS	ND		1	1.6	1.2	ng/L	12/26/2025 1210
PFBA	ND		1	6.4	0.95	ng/L	12/26/2025 1210
PFDS	ND		1	1.6	0.41	ng/L	12/26/2025 1210
PFDA	ND		1	1.6	0.49	ng/L	12/26/2025 1210
PFDoS	ND		1	1.6	0.36	ng/L	12/26/2025 1210
PFDoA	ND		1	1.6	0.19	ng/L	12/26/2025 1210
PFHpS	ND		1	1.6	0.58	ng/L	12/26/2025 1210
PFHpA	ND		1	1.6	0.32	ng/L	12/26/2025 1210
7:3FTCA	ND		1	40	8.1	ng/L	12/26/2025 1210
PFHxS	ND		1	1.6	0.71	ng/L	12/26/2025 1210
PFHxA	ND		1	1.6	0.24	ng/L	12/26/2025 1210
PFNS	ND		1	1.6	0.47	ng/L	12/26/2025 1210
PFNA	ND		1	1.6	0.61	ng/L	12/26/2025 1210
PFOSA	ND		1	1.6	0.29	ng/L	12/26/2025 1210
PFOS	ND		1	1.6	0.55	ng/L	12/26/2025 1210
PFOA	ND		1	1.6	0.73	ng/L	12/26/2025 1210
PFPeS	ND		1	1.6	0.44	ng/L	12/26/2025 1210
PFPeA	ND		1	3.2	0.44	ng/L	12/26/2025 1210
3:3FTCA	ND		1	8.0	1.5	ng/L	12/26/2025 1210
PFTeDA	ND		1	1.6	0.43	ng/L	12/26/2025 1210
PFTrDA	ND		1	1.6	0.61	ng/L	12/26/2025 1210
PFUnA	ND		1	1.6	0.82	ng/L	12/26/2025 1210

Surrogate	Q	% Rec	Acceptance Limit
13C2-4:2FTS		133	40-200
13C2-6:2FTS		137	40-200

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - MB

Sample ID: AQ28978-001
Batch: 28978
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/24/2025 1351

Surrogate	Q	% Rec	Acceptance Limit
13C2-8:2FTS		126	40-300
13C8-PFOSA		105	40-130
D5-NEtFOSA		73	10-130
D3-NMeFOSA		75	10-130
D5-NEtFOSAA		130	25-135
D3-NMeFOSAA		139	40-170
13C4-PFBA		127	5-130
13C5-PFPeA		118	40-130
13C5-PFHxA		127	40-130
13C4-PFHpA		124	40-130
13C8-PFOA		130	40-130
13C9-PFNA	N	134	40-130
13C6-PFDA	N	133	40-130
13C3-PFBS	N	136	40-135
13C3-PFHxS		128	40-130
13C8-PFOS		128	40-130
13C7-PFUnA		127	30-130
13C2-PFDoA		128	10-130
13C2-PFTeDA		110	10-130
13C3-HFPO-DA		128	40-130
D7-NMeFOSE		92	10-130
D9-NEtFOSE		88	10-130

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCS

Sample ID: AQ28978-002
Batch: 28978
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/24/2025 1351

Parameter	Spike Amount (ng/L)	Result (ng/L)	Q	Dil	% Rec	%Rec Limit	Analysis Date
11Cl-PF3OUdS	150	140		1	91	55-160	12/26/2025 1220
9Cl-PF3ONS	150	140		1	95	70-155	12/26/2025 1220
ADONA	150	150		1	97	65-145	12/26/2025 1220
8:2FTS	150	140		1	92	60-150	12/26/2025 1220
4:2FTS	150	130		1	90	70-145	12/26/2025 1220
6:2FTS	150	150		1	98	65-155	12/26/2025 1220
5:3FTCA	1000	880		1	88	70-135	12/26/2025 1220
HFPO-DA	160	160		1	98	70-140	12/26/2025 1220
NEtFOSA	40	39		1	98	65-145	12/26/2025 1220
NEtFOSAA	40	36		1	89	70-145	12/26/2025 1220
NEtFOSE	400	380		1	94	70-135	12/26/2025 1220
NMeFOSA	40	38		1	96	60-150	12/26/2025 1220
NMeFOSAA	40	32		1	80	50-140	12/26/2025 1220
NMeFOSE	400	370		1	94	70-145	12/26/2025 1220
NFDHA	80	75		1	93	50-150	12/26/2025 1220
PFEESA	71	68		1	95	70-140	12/26/2025 1220
PFMPA	80	82		1	102	55-140	12/26/2025 1220
PFMBA	80	77		1	96	60-150	12/26/2025 1220
PFBS	36	32		1	91	60-145	12/26/2025 1220
PFBA	160	160		1	100	70-140	12/26/2025 1220
PFDS	39	38		1	97	60-145	12/26/2025 1220
PFDA	40	38		1	94	70-140	12/26/2025 1220
PFDoS	39	33		1	84	50-145	12/26/2025 1220
PFDoA	40	39		1	97	70-140	12/26/2025 1220
PFHpS	38	34		1	88	70-150	12/26/2025 1220
PFHpA	40	37		1	93	70-150	12/26/2025 1220
7:3FTCA	1000	900		1	90	50-145	12/26/2025 1220
PFHxS	36	32		1	89	65-145	12/26/2025 1220
PFHxA	40	37		1	91	70-145	12/26/2025 1220
PFNS	38	36		1	94	65-145	12/26/2025 1220
PFNA	40	36		1	89	70-150	12/26/2025 1220
PFOSA	40	37		1	93	70-145	12/26/2025 1220
PFOS	37	33		1	90	55-150	12/26/2025 1220
PFOA	40	39		1	97	70-150	12/26/2025 1220
PFPeS	38	32		1	85	65-140	12/26/2025 1220
PFPeA	80	75		1	94	65-135	12/26/2025 1220
3:3FTCA	200	170		1	87	65-130	12/26/2025 1220
PFTeDA	40	36		1	91	60-140	12/26/2025 1220
PFTrDA	40	34		1	85	65-140	12/26/2025 1220
PFUnA	40	34		1	85	70-145	12/26/2025 1220

Surrogate	Q	% Rec	Acceptance Limit
13C2-4:2FTS		113	40-200
13C2-6:2FTS		117	40-200

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCS

Sample ID: AQ28978-002
Batch: 28978
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/24/2025 1351

Surrogate	Q	% Rec	Acceptance Limit
13C2-8:2FTS		120	40-300
13C8-PFOSA		84	40-130
D5-NEtFOSA		56	10-130
D3-NMeFOSA		56	10-130
D5-NEtFOSAA		112	25-135
D3-NMeFOSAA		118	40-170
13C4-PFBA		119	5-130
13C5-PFPeA		112	40-130
13C5-PFHxA		119	40-130
13C4-PFHpA		110	40-130
13C8-PFOA		115	40-130
13C9-PFNA		118	40-130
13C6-PFDA		126	40-130
13C3-PFBS		118	40-135
13C3-PFHxS		124	40-130
13C8-PFOS		115	40-130
13C7-PFUnA	N	133	30-130
13C2-PFDoA		115	10-130
13C2-PFTeDA		104	10-130
13C3-HFPO-DA		117	40-130
D7-NMeFOSE		67	10-130
D9-NEtFOSE		68	10-130

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCS

Sample ID: AQ28978-102
Batch: 28978
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/24/2025 1351

Parameter	Spike Amount (ng/L)	Result (ng/L)	Q	Dil	% Rec	%Rec Limit	Analysis Date
11Cl-PF3OUdS	12	11		1	91	55-160	12/26/2025 1230
9Cl-PF3ONS	12	11		1	89	70-155	12/26/2025 1230
ADONA	12	11		1	90	65-145	12/26/2025 1230
8:2FTS	12	10		1	81	60-150	12/26/2025 1230
4:2FTS	12	11		1	94	70-145	12/26/2025 1230
6:2FTS	12	11		1	87	65-155	12/26/2025 1230
5:3FTCA	80	66		1	82	70-135	12/26/2025 1230
HFPO-DA	13	11		1	84	70-140	12/26/2025 1230
NEtFOSA	3.2	2.6		1	82	65-145	12/26/2025 1230
NEtFOSAA	3.2	3.0		1	93	70-145	12/26/2025 1230
NEtFOSE	32	30		1	93	70-135	12/26/2025 1230
NMeFOSA	3.2	3.0		1	92	60-150	12/26/2025 1230
NMeFOSAA	3.2	3.4		1	107	50-140	12/26/2025 1230
NMeFOSE	32	27		1	85	70-145	12/26/2025 1230
NFDHA	6.4	5.3		1	82	50-150	12/26/2025 1230
PFEESA	5.7	5.1		1	90	70-140	12/26/2025 1230
PFMPA	6.4	5.9		1	92	55-140	12/26/2025 1230
PFMBA	6.4	6.1		1	96	60-150	12/26/2025 1230
PFBS	2.8	2.5		1	89	60-145	12/26/2025 1230
PFBA	13	13		1	98	70-140	12/26/2025 1230
PFDS	3.1	2.7		1	87	60-145	12/26/2025 1230
PFDA	3.2	2.6		1	82	70-140	12/26/2025 1230
PFDoS	3.1	2.5		1	79	50-145	12/26/2025 1230
PFDoA	3.2	3.4		1	106	70-140	12/26/2025 1230
PFHpS	3.0	2.4		1	79	70-150	12/26/2025 1230
PFHpA	3.2	2.8		1	88	70-150	12/26/2025 1230
7:3FTCA	80	73		1	92	50-145	12/26/2025 1230
PFHxS	2.9	2.8		1	95	65-145	12/26/2025 1230
PFHxA	3.2	2.9		1	91	70-145	12/26/2025 1230
PFNS	3.1	2.9		1	94	65-145	12/26/2025 1230
PFNA	3.2	3.0		1	95	70-150	12/26/2025 1230
PFOSA	3.2	3.0		1	93	70-145	12/26/2025 1230
PFOS	3.0	2.7		1	92	55-150	12/26/2025 1230
PFOA	3.2	2.8		1	88	70-150	12/26/2025 1230
PFPeS	3.0	2.4		1	81	65-140	12/26/2025 1230
PFPeA	6.4	5.6		1	87	65-135	12/26/2025 1230
3:3FTCA	16	14		1	86	65-130	12/26/2025 1230
PFTeDA	3.2	2.9		1	92	60-140	12/26/2025 1230
PFTrDA	3.2	3.0		1	93	65-140	12/26/2025 1230
PFUnA	3.2	3.3		1	104	70-145	12/26/2025 1230

Surrogate	Q	% Rec	Acceptance Limit
13C2-4:2FTS		109	40-200
13C2-6:2FTS		115	40-200

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

PFAS by LC/MS/MS - LCS

Sample ID: AQ28978-102
Batch: 28978
Analytical Method: 1633
Matrix: Aqueous
Prep Method: 1633
Prep Date: 12/24/2025 1351

Surrogate	Q	% Rec	Acceptance Limit
13C2-8:2FTS		118	40-300
13C8-PFOSA		85	40-130
D5-NEtFOSA		52	10-130
D3-NMeFOSA		49	10-130
D5-NEtFOSAA		112	25-135
D3-NMeFOSAA		120	40-170
13C4-PFBA		114	5-130
13C5-PFPeA		111	40-130
13C5-PFHxA		119	40-130
13C4-PFHpA		114	40-130
13C8-PFOA		108	40-130
13C9-PFNA		111	40-130
13C6-PFDA		121	40-130
13C3-PFBS		117	40-135
13C3-PFHxS		119	40-130
13C8-PFOS		121	40-130
13C7-PFUnA		122	30-130
13C2-PFDoA		108	10-130
13C2-PFTeDA		106	10-130
13C3-HFPO-DA		116	40-130
D7-NMeFOSE		66	10-130
D9-NEtFOSE		64	10-130

LOQ = Limit of Quantitation
DL = Detection Limit
ND = Not detected at or above the DL
J = Estimated result < LOQ and ≥ DL
* = RSD is out of criteria
N = Recovery is out of criteria
P = The RPD between two GC columns exceeds 40%
+ = RPD is out of criteria

Note: Calculations are performed before rounding to avoid round-off errors in calculated results

Chain of Custody
and
Miscellaneous Documents

Internal Transfer Chain of Custody

Pace

☐ Rush Multiplier____X
☐ Samples Pre-Logged into eCOC

State Of Origin: NC
Cert. Needed: [X] Yes ☐ No
Owner Received Date: 12/9/2025 Results Requested By: 12/16/2025

Workorder: 92833594 Workorder Name: Fortress Wood Products II

Report To	Subcontract To
Travis Mullis Pace Analytical Charlotte 9800 Kincey Ave. Suite 100 Huntersville, NC 28078 Phone (704)875-9092	Pace Analytical West Columbia 106 Vantage Point Drive West Columbia, SC 29172 Phone (803)791-9700

AL11009
BR92

Item	Sample ID	Sample Type	Collect Date/Time	Lab ID	Matrix	Preserved Containers	1633 PFAS	LAB USE ONLY
1	SW-3-P	PS	12/5/2025 12:15	92833594001	Water	2	X	
2	SW-2-P	PS	12/5/2025 13:50	92833594002	Water	2	X	
3	SW-1-P	PS	12/5/2025 14:25	92833594003	Water	2	X	
4	SW-DUP-P	PS	12/5/2025 00:00	92833594004	Water	2	X	
5	FB-6-P	PS	12/5/2025 13:20	92833594005	Water	2	X	
6	EB-3-P	PS	12/5/2025 13:25	92833594006	Water	2	X	
7	SS-3-P	PS	12/5/2025 13:00	92833594007	Solid	1	X	
8	SS-2-P	PS	12/5/2025 13:55	92833594008	Solid	1	X	
9	SS-1-P	PS	12/5/2025 14:35	92833594009	Solid	1	X	
10	SS-DUP-P	PS	12/5/2025 00:00	92833594010	Solid	1	X	

Transfers	Released By	Date/Time	Received By	Date/Time
1	[illegible]	12/10	[illegible] PACE	12/10/25 0800
2				
3				

Comments

Cooler Temperature on Receipt 1.1 °C | Custody Seal Y or (N) | Received on Ice (Y) or N | Samples Intact (Y) or N

***In order to maintain client confidentiality, location/name of the sampling site, sampler's name and signature may not be provided on this COC document. This chain of custody is considered complete as is since this information is available in the owner laboratory.

PACE ANALYTICAL SERVICES, LLC

Pace Analytical Services, LLC (formerly Shealy Environmental Services, Inc.)
106 Vantage Point Drive West Columbia, SC 29172 (803) 791-9700 Fax (803) 791-9111 www.pacelabs.com

Pace

Ship To:
Pace Analytical West Columbia
106 Vantage Point Drive
West Columbia, SC 29172
Phone (803)791-9700

INTER_LABORATORY WORK ORDER # 92833594
(To be completed by sending lab)

Sending Project No:	92833594
Receiving Project No:	
Check Box for Consolidated Invoice:	☐
Date Prepared:	12/10/25
REQUESTED COMPLETION DATE:	**12/16/2025**

Sending Region	IR92-Charlotte	Sending Project Mgr.	Travis Mullis
Receiving Region	IR77-West Columbia	External Client	ECS Southeast, LLC-Charlotte
State of Sample Origin	NC	QC Deliverable	STD REPORT

All questions should be addressed to sending project manager.

Requested Reportable Units: _____ Report Wet or Dry Weight? Dry Weight ☐ IRWO Lab Need to run? Cert. Needed X

WORK REQUESTED

Method Description	Container Type	Quantity of containers	Preservative	Quantity of Samples	Acode	Acode Desc
1633 PFAS	RP4U	12	Unpreserved	4	SI-36PFAS	SUB PASI PFAS
1633 PFAS	NT3U		Unpreserved	8	SI-36PFAS	SUB PASI PFAS

Special Requirements: Report B, Standard Report. (B),FR Only no EDD (0)

FOR ANALYTICAL WORK COMPLETED THIS SECTION ALSO

Return Samples to Sending Region: ☐ Yes ☒ No

DISPOSITION of FORM

Original sent to the receiving lab - Copy kept at the sending lab.
When work completed: Original sent to the ABM at the receiving laboratory. Copies are made to corporate as needed.

Wednesday, December 10, 2025 10:07:49 AM FMT-ALL-C-001 rev.00 24March2009 Page 1 of 1

DC#_Title: ENV-FRM-WCOL-0286 v02_Samples Receipt Checklist (SRC)
Effective Date: 8/2/2022

Sample Receipt Checklist (SRC)

Client: Pace Cooler Inspected by/date: ace / 12/11/25 Lot #: AL11009

Means of receipt: ☑ Pace ☐ Client ☐ UPS ☐ FedEx ☐ Other:

☐ Yes	☑ No		1. Were custody seals present on the cooler?
☐ Yes	☐ No	☑ NA	2. If custody seals were present, were they intact and unbroken?

pH Strip ID: NA Chlorine Strip ID: NA Tested by: NA

Original temperature upon receipt / Derived (Corrected) temperature upon receipt %Solid Snap-Cup ID: 337205

1.1 / 1.1 °C NA / NA °C NA / NA °C NA / NA °C

Method: ☐ Temperature Blank ☑ Against Bottles IR Gun ID: 8 IR Gun Correction Factor: 0 °C

Method of coolant: ☑ Wet Ice ☐ Ice Packs ☐ Dry Ice ☐ None

☑ Yes	☐ No	☐ NA	3. Were all coolers received at or below 6.0°C? If no, was Project Manager notified? PM was Notified by: phone / email / face-to-face (circle one).
☐ Yes	☐ No	☑ NA	4. Is the commercial courier's packing slip attached to this form?
☑ Yes	☐ No		5. Were proper custody procedures (relinquished/received) followed?
☑ Yes	☐ No		6. Were sample IDs listed on the COC and all sample containers?
☑ Yes	☐ No		7. Was collection date & time listed on the COC and all sample containers?
☑ Yes	☐ No		8. Did all container label information (ID, date, time) agree with the COC?
☑ Yes	☐ No		9. Were tests to be performed listed on the COC?
☑ Yes	☐ No		10. Did all samples arrive in the proper containers for each test and/or in good condition (unbroken, lids on, etc.)?
☑ Yes	☐ No		11. Was adequate sample volume available?
☐ Yes	☑ No		12. Were all samples received within ½ the holding time or 48 hours, whichever comes first?
☑ Yes	☐ No		13. Were all samples containers accounted for? (No missing/excess)
☐ Yes	☐ No	☑ NA	14. Were VOA, 8015C and RSK-175 samples free of bubbles >"pea-size" (¼"or 6mm in diameter) in any of the VOA vials?
☐ Yes	☐ No	☑ NA	15. Were all DRO/metals/nutrient samples received at a pH of < 2?
☐ Yes	☐ No	☑ NA	16. Were all cyanide samples received at a pH > 12 and sulfide samples received at a pH > 9?
☐ Yes	☐ No	☑ NA	17. Were all applicable NH_3/TKN/cyanide/phenol/625.1/608.3 (< 0.5mg/L) samples free of residual chlorine?
☐ Yes	☐ No	☑ NA	18. Was the quote number listed on the container label? If yes, Quote #

Sample Preservation (Must be completed for any sample(s) incorrectly preserved or with headspace.)

Sample(s) NA were received incorrectly preserved and were adjusted accordingly in sample receiving with NA mL of circle one: H2SO4, HNO3, HCl, NaOH using SR # NA. ☐
Time of preservation NA. If more than one preservative is needed, please note in the comments below.

Sample(s) NA were received with bubbles >6 mm in diameter.

Samples(s) NA were received with TRC > 0.5 mg/L (If #19 is *no*) and were adjusted accordingly in sample receiving with sodium thiosulfate ($Na_2S_2O_3$) with Unique ID: NA.

Comments:

Qualtrax ID: 56360

Pace® Analytical Services, LLC

Page 1 of 1

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

December 23, 2025

Emery Lovekamp
ECS Southeast, LLC-Charlotte
1812 Center Park Drive
Suite D
Charlotte, NC 28217

RE: Project: Fortress Wood Products-Revised Report
Pace Project No.: 92834642

Dear Emery Lovekamp:

Enclosed are the analytical results for sample(s) received by the laboratory on December 11, 2025. The results relate only to the samples included in this report. Results reported herein conform to the applicable TNI/NELAC Standards and the laboratory's Quality Manual, where applicable, unless otherwise noted in the body of the report.

The test results provided in this final report were generated by each of the following laboratories within the Pace Network:

- Pace National - Mt. Juliet

This revision was issued on ____ to turn on j-flags and report to the MDL per client request.

If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Matthew Brainard for
Travis Mullis
travis.mullis@pacelabs.com
(704)875-9092
Project Manager

Enclosures

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

CERTIFICATIONS

Project: Fortress Wood Products-Revised Report
Pace Project No.: 92834642

Pace Analytical Services National
12065 Lebanon Road, Mt. Juliet, TN 37122
Alabama Certification #: 40660
Alaska Certification 17-026
Arizona Certification #: AZ0612
Arkansas Certification #: 88-0469
California Certification #: 2932
Canada Certification #: 1461.01
Colorado Certification #: TN00003
Connecticut Certification #: PH-0197
DOD Certification: #1461.01
EPA# TN00003
Florida Certification #: E87487
Georgia DW Certification #: 923
Georgia Certification: NELAP
Idaho Certification #: TN00003
Illinois Certification #: 200008
Indiana Certification #: C-TN-01
Iowa Certification #: 364
Kansas Certification #: E-10277
Kentucky UST Certification #: 16
Kentucky Certification #: 90010
Louisiana Certification #: AI30792
Louisiana DW Certification #: LA180010
Maine Certification #: TN0002
Maryland Certification #: 324
Massachusetts Certification #: M-TN003
Michigan Certification #: 9958
Minnesota Certification #: 047-999-395
Mississippi Certification #: TN00003
Missouri Certification #: 340
Montana Certification #: CERT0086
Nebraska Certification #: NE-OS-15-05
Nevada Certification #: TN-03-2002-34
New Hampshire Certification #: 2975
New Jersey Certification #: TN002
New Mexico DW Certification
New York Certification #: 11742
North Carolina Aquatic Toxicity Certification #: 41
North Carolina Drinking Water Certification #: 21704
North Carolina Environmental Certificate #: 375
North Dakota Certification #: R-140
Ohio VAP Certification #: CL0069
Oklahoma Certification #: 9915
Oregon Certification #: TN200002
Pennsylvania Certification #: 68-02979
Rhode Island Certification #: LAO00356
South Carolina Certification #: 84004
South Dakota Certification
Tennessee DW/Chem/Micro Certification #: 2006
Texas Mold Certification #: LAB0152
Texas Certification #: T 104704245-17-14
USDA Soil Permit #: P330-15-00234
Utah Certification #: TN00003
Virginia Certification #: VT2006
Vermont Dept. of Health: ID# VT-2006
Virginia Certification #: 460132
Washington Certification #: C847
West Virginia Certification #: 233
Wisconsin Certification #: 998093910
Wyoming UST Certification #: via A2LA 2926.01
A2LA-ISO 17025 Certification #: 1461.01
A2LA-ISO 17025 Certification #: 1461.02
AIHA-LAP/LLC EMLAP Certification #:100789

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE SUMMARY

Project: Fortress Wood Products-Revised Report
Pace Project No.: 92834642

Lab ID	Sample ID	Matrix	Date Collected	Date Received
92834642001	**SV-1**	Air	12/05/25 11:41	12/11/25 09:00
92834642002	**SV-2**	Air	12/05/25 10:42	12/11/25 09:00
92834642003	**SV-3**	Air	12/05/25 09:58	12/11/25 09:00
92834642004	**SV-DUP**	Air	12/05/25 00:00	12/11/25 09:00

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

SAMPLE ANALYTE COUNT

Project: Fortress Wood Products-Revised Report
Pace Project No.: 92834642

Lab ID	Sample ID	Method	Analysts	Analytes Reported	Laboratory
92834642001	**SV-1**	TO-15	JKB	44	PAN
92834642002	**SV-2**	TO-15	CAM, JKB	44	PAN
92834642003	**SV-3**	TO-15	JKB, VJC	44	PAN
92834642004	**SV-DUP**	TO-15	JKB	44	PAN

PAN = Pace National - Mt. Juliet

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products-Revised Report
Pace Project No.: 92834642

Sample: SV-1 **Lab ID: 92834642001** Collected: 12/05/25 11:41 Received: 12/11/25 09:00 Matrix: Air

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
VOA (MS) TO-15	Analytical Method: TO-15 Preparation Method: TO-15 Pace National - Mt. Juliet								
1,1,1-Trichloroethane	ND	ug/m3	1.09	0.391	1	12/12/25 20:17	12/12/25 20:17	71-55-6	
1,1,2-Trichloroethane	ND	ug/m3	1.09	0.372	1	12/12/25 20:17	12/12/25 20:17	79-00-5	
1,1,2-Trichlorotrifluoroethane	**1.46J**	ug/m3	1.53	0.576	1	12/12/25 20:17	12/12/25 20:17	76-13-1	J
1,1-Dichloroethane	ND	ug/m3	0.802	0.285	1	12/12/25 20:17	12/12/25 20:17	75-34-3	
1,1-Dichloroethene	ND	ug/m3	0.793	0.296	1	12/12/25 20:17	12/12/25 20:17	75-35-4	
1,2,4-Trimethylbenzene	**1.27**	ug/m3	0.982	0.455	1	12/12/25 20:17	12/12/25 20:17	95-63-6	
1,3,5-Trimethylbenzene	**0.510J**	ug/m3	0.982	0.419	1	12/12/25 20:17	12/12/25 20:17	108-67-8	J
1,3-Dichlorobenzene	ND	ug/m3	1.20	0.453	1	12/12/25 20:17	12/12/25 20:17	541-73-1	
1,4-Dioxane (p-Dioxane)	ND	ug/m3	2.27	0.591	1	12/12/25 20:17	12/12/25 20:17	123-91-1	
2,2,4-Trimethylpentane	**4.67**	ug/m3	0.934	0.420	1	12/12/25 20:17	12/12/25 20:17	540-84-1	
2-Butanone (MEK)	**1.21J**	ug/m3	3.69	0.342	1	12/12/25 20:17	12/12/25 20:17	78-93-3	J
2-Hexanone	ND	ug/m3	5.11	0.544	1	12/12/25 20:17	12/12/25 20:17	591-78-6	
2-Propanol	ND	ug/m3	3.07	1.67	1	12/12/25 20:17	12/12/25 20:17	67-63-0	
4-Ethyltoluene	ND	ug/m3	0.982	0.435	1	12/12/25 20:17	12/12/25 20:17	622-96-8	
4-Methyl-2-pentanone (MIBK)	ND	ug/m3	5.12	0.434	1	12/12/25 20:17	12/12/25 20:17	108-10-1	
Acetone	**9.43**	ug/m3	2.97	1.24	1	12/12/25 20:17	12/12/25 20:17	67-64-1	
Allyl chloride	ND	ug/m3	0.626	0.582	1	12/12/25 20:17	12/12/25 20:17	107-05-1	
Benzene	**4.09**	ug/m3	0.639	0.351	1	12/12/25 20:17	12/12/25 20:17	71-43-2	
Carbon disulfide	**5.82**	ug/m3	1.24	0.498	1	12/12/25 20:17	12/12/25 20:17	75-15-0	
Carbon tetrachloride	**0.693J**	ug/m3	1.26	0.470	1	12/12/25 20:17	12/12/25 20:17	56-23-5	J
Chloroform	**3.52**	ug/m3	0.973	0.506	1	12/12/25 20:17	12/12/25 20:17	67-66-3	
Chloromethane	**0.494**	ug/m3	0.413	0.227	1	12/12/25 20:17	12/12/25 20:17	74-87-3	
cis-1,2-Dichloroethene	ND	ug/m3	0.793	0.315	1	12/12/25 20:17	12/12/25 20:17	156-59-2	
Cyclohexane	**1.79**	ug/m3	0.689	0.585	1	12/12/25 20:17	12/12/25 20:17	110-82-7	
Dichlorodifluoromethane	**2.94**	ug/m3	0.989	0.399	1	12/12/25 20:17	12/12/25 20:17	75-71-8	
Ethanol	ND	ug/m3	4.71	4.47	1	12/12/25 20:17	12/12/25 20:17	64-17-5	
Ethyl acetate	ND	ug/m3	2.27	0.594	1	12/12/25 20:17	12/12/25 20:17	141-78-6	
Ethylbenzene	**1.47**	ug/m3	0.867	0.337	1	12/12/25 20:17	12/12/25 20:17	100-41-4	
Isopropylbenzene (Cumene)	ND	ug/m3	0.983	0.355	1	12/12/25 20:17	12/12/25 20:17	98-82-8	
Methyl methacrylate	ND	ug/m3	0.819	0.692	1	12/12/25 20:17	12/12/25 20:17	80-62-6	
Methyl-tert-butyl ether	ND	ug/m3	0.721	0.293	1	12/12/25 20:17	12/12/25 20:17	1634-04-4	
Methylene Chloride	**1.16**	ug/m3	0.694	0.587	1	12/12/25 20:17	12/12/25 20:17	75-09-2	
n-Heptane	**15.3**	ug/m3	0.818	0.466	1	12/12/25 20:17	12/12/25 20:17	142-82-5	
n-Hexane	**24.5**	ug/m3	2.22	0.504	1	12/12/25 20:17	12/12/25 20:17	110-54-3	
Styrene	ND	ug/m3	1.70	0.341	1	12/12/25 20:17	12/12/25 20:17	100-42-5	
Tetrachloroethene	**11.3**	ug/m3	1.36	0.754	1	12/12/25 20:17	12/12/25 20:17	127-18-4	
Tetrahydrofuran	ND	ug/m3	0.590	0.484	1	12/12/25 20:17	12/12/25 20:17	109-99-9	
Toluene	**8.59**	ug/m3	1.88	0.490	1	12/12/25 20:17	12/12/25 20:17	108-88-3	
trans-1,2-Dichloroethene	ND	ug/m3	0.793	0.291	1	12/12/25 20:17	12/12/25 20:17	156-60-5	
Trichloroethene	**0.424J**	ug/m3	1.07	0.364	1	12/12/25 20:17	12/12/25 20:17	79-01-6	J
Trichlorofluoromethane	**87.7**	ug/m3	1.12	0.433	1	12/12/25 20:17	12/12/25 20:17	75-69-4	
Vinyl chloride	ND	ug/m3	0.511	0.211	1	12/12/25 20:17	12/12/25 20:17	75-01-4	
Xylene (Total)	**5.25**	ug/m3	2.61	0.385	1	12/12/25 20:17	12/12/25 20:17	1330-20-7	
Surrogates									
4-Bromofluorobenzene (S)	97.8	%	60.0-140		1	12/12/25 20:17	12/12/25 20:17	460-00-4	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products-Revised Report
Pace Project No.: 92834642

Sample: SV-2 **Lab ID: 92834642002** Collected: 12/05/25 10:42 Received: 12/11/25 09:00 Matrix: Air

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
VOA (MS) TO-15	Analytical Method: TO-15 Preparation Method: TO-15 Pace National - Mt. Juliet								
1,1,1-Trichloroethane	ND	ug/m3	1.09	0.391	1	12/12/25 20:48	12/12/25 20:48	71-55-6	
1,1,2-Trichloroethane	ND	ug/m3	1.09	0.372	1	12/12/25 20:48	12/12/25 20:48	79-00-5	
1,1,2-Trichlorotrifluoroethane	**11.2**	ug/m3	1.53	0.576	1	12/12/25 20:48	12/12/25 20:48	76-13-1	
1,1-Dichloroethane	**1.31**	ug/m3	0.802	0.285	1	12/12/25 20:48	12/12/25 20:48	75-34-3	
1,1-Dichloroethene	**11.6**	ug/m3	0.793	0.296	1	12/12/25 20:48	12/12/25 20:48	75-35-4	
1,2,4-Trimethylbenzene	**25.7**	ug/m3	0.982	0.455	1	12/12/25 20:48	12/12/25 20:48	95-63-6	
1,3,5-Trimethylbenzene	**10.8**	ug/m3	0.982	0.419	1	12/12/25 20:48	12/12/25 20:48	108-67-8	
1,3-Dichlorobenzene	ND	ug/m3	1.20	0.453	1	12/12/25 20:48	12/12/25 20:48	541-73-1	
1,4-Dioxane (p-Dioxane)	ND	ug/m3	2.27	0.591	1	12/12/25 20:48	12/12/25 20:48	123-91-1	
2,2,4-Trimethylpentane	**234**	ug/m3	0.934	0.420	1	12/12/25 20:48	12/12/25 20:48	540-84-1	
2-Butanone (MEK)	**3.72**	ug/m3	3.69	0.342	1	12/12/25 20:48	12/12/25 20:48	78-93-3	
2-Hexanone	ND	ug/m3	5.11	0.544	1	12/12/25 20:48	12/12/25 20:48	591-78-6	
2-Propanol	ND	ug/m3	3.07	1.67	1	12/12/25 20:48	12/12/25 20:48	67-63-0	
4-Ethyltoluene	**7.21**	ug/m3	0.982	0.435	1	12/12/25 20:48	12/12/25 20:48	622-96-8	
4-Methyl-2-pentanone (MIBK)	ND	ug/m3	5.12	0.434	1	12/12/25 20:48	12/12/25 20:48	108-10-1	
Acetone	**32.6**	ug/m3	2.97	1.24	1	12/12/25 20:48	12/12/25 20:48	67-64-1	
Allyl chloride	ND	ug/m3	0.626	0.582	1	12/12/25 20:48	12/12/25 20:48	107-05-1	
Benzene	**85.6**	ug/m3	0.639	0.351	1	12/12/25 20:48	12/12/25 20:48	71-43-2	
Carbon disulfide	**21.5**	ug/m3	1.24	0.498	1	12/12/25 20:48	12/12/25 20:48	75-15-0	
Carbon tetrachloride	ND	ug/m3	1.26	0.470	1	12/12/25 20:48	12/12/25 20:48	56-23-5	
Chloroform	ND	ug/m3	0.973	0.506	1	12/12/25 20:48	12/12/25 20:48	67-66-3	
Chloromethane	ND	ug/m3	0.413	0.227	1	12/12/25 20:48	12/12/25 20:48	74-87-3	
cis-1,2-Dichloroethene	**106**	ug/m3	0.793	0.315	1	12/12/25 20:48	12/12/25 20:48	156-59-2	
Cyclohexane	**43.0**	ug/m3	0.689	0.585	1	12/12/25 20:48	12/12/25 20:48	110-82-7	
Dichlorodifluoromethane	**25.6**	ug/m3	0.989	0.399	1	12/12/25 20:48	12/12/25 20:48	75-71-8	
Ethanol	**5.56**	ug/m3	4.71	4.47	1	12/12/25 20:48	12/12/25 20:48	64-17-5	
Ethyl acetate	ND	ug/m3	2.27	0.594	1	12/12/25 20:48	12/12/25 20:48	141-78-6	
Ethylbenzene	**9.15**	ug/m3	0.867	0.337	1	12/12/25 20:48	12/12/25 20:48	100-41-4	
Isopropylbenzene (Cumene)	**4.92**	ug/m3	0.983	0.355	1	12/12/25 20:48	12/12/25 20:48	98-82-8	
Methyl methacrylate	ND	ug/m3	0.819	0.692	1	12/12/25 20:48	12/12/25 20:48	80-62-6	
Methyl-tert-butyl ether	ND	ug/m3	0.721	0.293	1	12/12/25 20:48	12/12/25 20:48	1634-04-4	
Methylene Chloride	ND	ug/m3	0.694	0.587	1	12/12/25 20:48	12/12/25 20:48	75-09-2	
n-Heptane	**105**	ug/m3	0.818	0.466	1	12/12/25 20:48	12/12/25 20:48	142-82-5	
n-Hexane	**150**	ug/m3	2.22	0.504	1	12/12/25 20:48	12/12/25 20:48	110-54-3	
Styrene	ND	ug/m3	1.70	0.341	1	12/12/25 20:48	12/12/25 20:48	100-42-5	
Tetrachloroethene	**208**	ug/m3	1.36	0.754	1	12/12/25 20:48	12/12/25 20:48	127-18-4	
Tetrahydrofuran	ND	ug/m3	0.590	0.484	1	12/12/25 20:48	12/12/25 20:48	109-99-9	
Toluene	**20.7**	ug/m3	1.88	0.490	1	12/12/25 20:48	12/12/25 20:48	108-88-3	
trans-1,2-Dichloroethene	**3.62**	ug/m3	0.793	0.291	1	12/12/25 20:48	12/12/25 20:48	156-60-5	
Trichloroethene	**37.1**	ug/m3	1.07	0.364	1	12/12/25 20:48	12/12/25 20:48	79-01-6	
Trichlorofluoromethane	**5.31**	ug/m3	1.12	0.433	1	12/12/25 20:48	12/12/25 20:48	75-69-4	
Vinyl chloride	**1010**	ug/m3	5.11	2.11	10	12/17/25 16:27	12/17/25 16:27	75-01-4	
Xylene (Total)	**34.0**	ug/m3	2.61	0.385	1	12/12/25 20:48	12/12/25 20:48	1330-20-7	
Surrogates									
4-Bromofluorobenzene (S)	112	%	60.0-140		1	12/12/25 20:48	12/12/25 20:48	460-00-4	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products-Revised Report
Pace Project No.: 92834642

Sample: SV-2 **Lab ID: 92834642002** Collected: 12/05/25 10:42 Received: 12/11/25 09:00 Matrix: Air

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
VOA (MS) TO-15	Analytical Method: TO-15 Preparation Method: TO-15 Pace National - Mt. Juliet								
Surrogates									
4-Bromofluorobenzene (S)	105	%	60.0-140		10	12/17/25 16:27	12/17/25 16:27	460-00-4	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products-Revised Report
Pace Project No.: 92834642

Sample: SV-3 **Lab ID: 92834642003** Collected: 12/05/25 09:58 Received: 12/11/25 09:00 Matrix: Air

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
VOA (MS) TO-15	Analytical Method: TO-15 Preparation Method: TO-15 Pace National - Mt. Juliet								
1,1,1-Trichloroethane	**0.908J**	ug/m3	1.09	0.391	1	12/12/25 21:19	12/12/25 21:19	71-55-6	J
1,1,2-Trichloroethane	ND	ug/m3	1.09	0.372	1	12/12/25 21:19	12/12/25 21:19	79-00-5	
1,1,2-Trichlorotrifluoroethane	**4.28**	ug/m3	1.53	0.576	1	12/12/25 21:19	12/12/25 21:19	76-13-1	
1,1-Dichloroethane	ND	ug/m3	0.802	0.285	1	12/12/25 21:19	12/12/25 21:19	75-34-3	
1,1-Dichloroethene	ND	ug/m3	0.793	0.296	1	12/12/25 21:19	12/12/25 21:19	75-35-4	
1,2,4-Trimethylbenzene	ND	ug/m3	0.982	0.455	1	12/12/25 21:19	12/12/25 21:19	95-63-6	
1,3,5-Trimethylbenzene	ND	ug/m3	0.982	0.419	1	12/12/25 21:19	12/12/25 21:19	108-67-8	
1,3-Dichlorobenzene	ND	ug/m3	1.20	0.453	1	12/12/25 21:19	12/12/25 21:19	541-73-1	
1,4-Dioxane (p-Dioxane)	ND	ug/m3	2.27	0.591	1	12/12/25 21:19	12/12/25 21:19	123-91-1	
2,2,4-Trimethylpentane	**1.44**	ug/m3	0.934	0.420	1	12/12/25 21:19	12/12/25 21:19	540-84-1	
2-Butanone (MEK)	**1.25J**	ug/m3	3.69	0.342	1	12/12/25 21:19	12/12/25 21:19	78-93-3	J
2-Hexanone	ND	ug/m3	5.11	0.544	1	12/12/25 21:19	12/12/25 21:19	591-78-6	
2-Propanol	ND	ug/m3	3.07	1.67	1	12/12/25 21:19	12/12/25 21:19	67-63-0	
4-Ethyltoluene	ND	ug/m3	0.982	0.435	1	12/12/25 21:19	12/12/25 21:19	622-96-8	
4-Methyl-2-pentanone (MIBK)	**0.446J**	ug/m3	5.12	0.434	1	12/12/25 21:19	12/12/25 21:19	108-10-1	J
Acetone	**8.39**	ug/m3	2.97	1.24	1	12/12/25 21:19	12/12/25 21:19	67-64-1	
Allyl chloride	ND	ug/m3	0.626	0.582	1	12/12/25 21:19	12/12/25 21:19	107-05-1	
Benzene	**0.757**	ug/m3	0.639	0.351	1	12/12/25 21:19	12/12/25 21:19	71-43-2	
Carbon disulfide	**2.77**	ug/m3	1.24	0.498	1	12/12/25 21:19	12/12/25 21:19	75-15-0	
Carbon tetrachloride	ND	ug/m3	1.26	0.470	1	12/12/25 21:19	12/12/25 21:19	56-23-5	
Chloroform	ND	ug/m3	0.973	0.506	1	12/12/25 21:19	12/12/25 21:19	67-66-3	
Chloromethane	ND	ug/m3	0.413	0.227	1	12/12/25 21:19	12/12/25 21:19	74-87-3	
cis-1,2-Dichloroethene	ND	ug/m3	0.793	0.315	1	12/12/25 21:19	12/12/25 21:19	156-59-2	
Cyclohexane	ND	ug/m3	0.689	0.585	1	12/12/25 21:19	12/12/25 21:19	110-82-7	
Dichlorodifluoromethane	**851**	ug/m3	9.89	3.99	10	12/16/25 17:07	12/16/25 17:07	75-71-8	
Ethanol	**8.20**	ug/m3	4.71	4.47	1	12/12/25 21:19	12/12/25 21:19	64-17-5	
Ethyl acetate	ND	ug/m3	2.27	0.594	1	12/12/25 21:19	12/12/25 21:19	141-78-6	
Ethylbenzene	**0.416J**	ug/m3	0.867	0.337	1	12/12/25 21:19	12/12/25 21:19	100-41-4	J
Isopropylbenzene (Cumene)	ND	ug/m3	0.983	0.355	1	12/12/25 21:19	12/12/25 21:19	98-82-8	
Methyl methacrylate	ND	ug/m3	0.819	0.692	1	12/12/25 21:19	12/12/25 21:19	80-62-6	
Methyl-tert-butyl ether	ND	ug/m3	0.721	0.293	1	12/12/25 21:19	12/12/25 21:19	1634-04-4	
Methylene Chloride	**0.642J**	ug/m3	0.694	0.587	1	12/12/25 21:19	12/12/25 21:19	75-09-2	J
n-Heptane	**2.49**	ug/m3	0.818	0.466	1	12/12/25 21:19	12/12/25 21:19	142-82-5	
n-Hexane	**3.56**	ug/m3	2.22	0.504	1	12/12/25 21:19	12/12/25 21:19	110-54-3	
Styrene	**0.434J**	ug/m3	1.70	0.341	1	12/12/25 21:19	12/12/25 21:19	100-42-5	J
Tetrachloroethene	**228**	ug/m3	1.36	0.754	1	12/12/25 21:19	12/12/25 21:19	127-18-4	
Tetrahydrofuran	ND	ug/m3	0.590	0.484	1	12/12/25 21:19	12/12/25 21:19	109-99-9	
Toluene	**5.57**	ug/m3	1.88	0.490	1	12/12/25 21:19	12/12/25 21:19	108-88-3	
trans-1,2-Dichloroethene	ND	ug/m3	0.793	0.291	1	12/12/25 21:19	12/12/25 21:19	156-60-5	
Trichloroethene	**0.438J**	ug/m3	1.07	0.364	1	12/12/25 21:19	12/12/25 21:19	79-01-6	J
Trichlorofluoromethane	**40.2**	ug/m3	1.12	0.433	1	12/12/25 21:19	12/12/25 21:19	75-69-4	
Vinyl chloride	ND	ug/m3	0.511	0.211	1	12/12/25 21:19	12/12/25 21:19	75-01-4	
Xylene (Total)	**1.09J**	ug/m3	2.61	0.385	1	12/12/25 21:19	12/12/25 21:19	1330-20-7	J
Surrogates									
4-Bromofluorobenzene (S)	96.3	%	60.0-140		1	12/12/25 21:19	12/12/25 21:19	460-00-4	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products-Revised Report
Pace Project No.: 92834642

Sample: SV-3 **Lab ID: 92834642003** Collected: 12/05/25 09:58 Received: 12/11/25 09:00 Matrix: Air

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
VOA (MS) TO-15	Analytical Method: TO-15 Preparation Method: TO-15 Pace National - Mt. Juliet								
Surrogates									
4-Bromofluorobenzene (S)	94.8	%	60.0-140		10	12/16/25 17:07	12/16/25 17:07	460-00-4	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

ANALYTICAL RESULTS

Project: Fortress Wood Products-Revised Report
Pace Project No.: 92834642

Sample: SV-DUP **Lab ID: 92834642004** Collected: 12/05/25 00:00 Received: 12/11/25 09:00 Matrix: Air

Parameters	Results	Units	Report Limit	MDL	DF	Prepared	Analyzed	CAS No.	Qual
VOA (MS) TO-15	Analytical Method: TO-15 Preparation Method: TO-15 Pace National - Mt. Juliet								
1,1,1-Trichloroethane	ND	ug/m3	1.09	0.391	1	12/12/25 21:50	12/12/25 21:50	71-55-6	
1,1,2-Trichloroethane	ND	ug/m3	1.09	0.372	1	12/12/25 21:50	12/12/25 21:50	79-00-5	
1,1,2-Trichlorotrifluoroethane	**1.26J**	ug/m3	1.53	0.576	1	12/12/25 21:50	12/12/25 21:50	76-13-1	J
1,1-Dichloroethane	ND	ug/m3	0.802	0.285	1	12/12/25 21:50	12/12/25 21:50	75-34-3	
1,1-Dichloroethene	ND	ug/m3	0.793	0.296	1	12/12/25 21:50	12/12/25 21:50	75-35-4	
1,2,4-Trimethylbenzene	**1.16**	ug/m3	0.982	0.455	1	12/12/25 21:50	12/12/25 21:50	95-63-6	
1,3,5-Trimethylbenzene	**0.452J**	ug/m3	0.982	0.419	1	12/12/25 21:50	12/12/25 21:50	108-67-8	J
1,3-Dichlorobenzene	ND	ug/m3	1.20	0.453	1	12/12/25 21:50	12/12/25 21:50	541-73-1	
1,4-Dioxane (p-Dioxane)	ND	ug/m3	2.27	0.591	1	12/12/25 21:50	12/12/25 21:50	123-91-1	
2,2,4-Trimethylpentane	**4.23**	ug/m3	0.934	0.420	1	12/12/25 21:50	12/12/25 21:50	540-84-1	
2-Butanone (MEK)	**1.18J**	ug/m3	3.69	0.342	1	12/12/25 21:50	12/12/25 21:50	78-93-3	J
2-Hexanone	**1.10J**	ug/m3	5.11	0.544	1	12/12/25 21:50	12/12/25 21:50	591-78-6	J
2-Propanol	ND	ug/m3	3.07	1.67	1	12/12/25 21:50	12/12/25 21:50	67-63-0	
4-Ethyltoluene	ND	ug/m3	0.982	0.435	1	12/12/25 21:50	12/12/25 21:50	622-96-8	
4-Methyl-2-pentanone (MIBK)	ND	ug/m3	5.12	0.434	1	12/12/25 21:50	12/12/25 21:50	108-10-1	
Acetone	**9.36**	ug/m3	2.97	1.24	1	12/12/25 21:50	12/12/25 21:50	67-64-1	
Allyl chloride	ND	ug/m3	0.626	0.582	1	12/12/25 21:50	12/12/25 21:50	107-05-1	
Benzene	**3.64**	ug/m3	0.639	0.351	1	12/12/25 21:50	12/12/25 21:50	71-43-2	
Carbon disulfide	**2.59**	ug/m3	1.24	0.498	1	12/12/25 21:50	12/12/25 21:50	75-15-0	
Carbon tetrachloride	**0.549J**	ug/m3	1.26	0.470	1	12/12/25 21:50	12/12/25 21:50	56-23-5	J
Chloroform	**2.88**	ug/m3	0.973	0.506	1	12/12/25 21:50	12/12/25 21:50	67-66-3	
Chloromethane	**0.601**	ug/m3	0.413	0.227	1	12/12/25 21:50	12/12/25 21:50	74-87-3	
cis-1,2-Dichloroethene	ND	ug/m3	0.793	0.315	1	12/12/25 21:50	12/12/25 21:50	156-59-2	
Cyclohexane	**1.62**	ug/m3	0.689	0.585	1	12/12/25 21:50	12/12/25 21:50	110-82-7	
Dichlorodifluoromethane	**2.97**	ug/m3	0.989	0.399	1	12/12/25 21:50	12/12/25 21:50	75-71-8	
Ethanol	**4.90**	ug/m3	4.71	4.47	1	12/12/25 21:50	12/12/25 21:50	64-17-5	
Ethyl acetate	ND	ug/m3	2.27	0.594	1	12/12/25 21:50	12/12/25 21:50	141-78-6	
Ethylbenzene	**1.26**	ug/m3	0.867	0.337	1	12/12/25 21:50	12/12/25 21:50	100-41-4	
Isopropylbenzene (Cumene)	ND	ug/m3	0.983	0.355	1	12/12/25 21:50	12/12/25 21:50	98-82-8	
Methyl methacrylate	ND	ug/m3	0.819	0.692	1	12/12/25 21:50	12/12/25 21:50	80-62-6	
Methyl-tert-butyl ether	ND	ug/m3	0.721	0.293	1	12/12/25 21:50	12/12/25 21:50	1634-04-4	
Methylene Chloride	**1.23**	ug/m3	0.694	0.587	1	12/12/25 21:50	12/12/25 21:50	75-09-2	
n-Heptane	**13.5**	ug/m3	0.818	0.466	1	12/12/25 21:50	12/12/25 21:50	142-82-5	
n-Hexane	**21.7**	ug/m3	2.22	0.504	1	12/12/25 21:50	12/12/25 21:50	110-54-3	
Styrene	ND	ug/m3	1.70	0.341	1	12/12/25 21:50	12/12/25 21:50	100-42-5	
Tetrachloroethene	**10.8**	ug/m3	1.36	0.754	1	12/12/25 21:50	12/12/25 21:50	127-18-4	
Tetrahydrofuran	ND	ug/m3	0.590	0.484	1	12/12/25 21:50	12/12/25 21:50	109-99-9	
Toluene	**7.61**	ug/m3	1.88	0.490	1	12/12/25 21:50	12/12/25 21:50	108-88-3	
trans-1,2-Dichloroethene	ND	ug/m3	0.793	0.291	1	12/12/25 21:50	12/12/25 21:50	156-60-5	
Trichloroethene	**0.430J**	ug/m3	1.07	0.364	1	12/12/25 21:50	12/12/25 21:50	79-01-6	J
Trichlorofluoromethane	**67.4**	ug/m3	1.12	0.433	1	12/12/25 21:50	12/12/25 21:50	75-69-4	
Vinyl chloride	ND	ug/m3	0.511	0.211	1	12/12/25 21:50	12/12/25 21:50	75-01-4	
Xylene (Total)	**4.32**	ug/m3	2.61	0.385	1	12/12/25 21:50	12/12/25 21:50	1330-20-7	
Surrogates									
4-Bromofluorobenzene (S)	96.5	%	60.0-140		1	12/12/25 21:50	12/12/25 21:50	460-00-4	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products-Revised Report
Pace Project No.: 92834642

QC Batch: 2657586
QC Batch Method: TO-15
Analysis Method: TO-15
Analysis Description: VOA (MS) TO-15
Laboratory: Pace National - Mt. Juliet
Associated Lab Samples: 92834642001, 92834642002, 92834642003, 92834642004

METHOD BLANK: R4314730-3 Matrix: Air
Associated Lab Samples: 92834642001, 92834642002, 92834642003, 92834642004

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
1,1,1-Trichloroethane	ug/m3	ND	1.09	0.391	12/12/25 09:59	
1,1,2-Trichloroethane	ug/m3	ND	1.09	0.372	12/12/25 09:59	
1,1,2-Trichlorotrifluoroethane	ug/m3	ND	1.53	0.576	12/12/25 09:59	
1,1-Dichloroethane	ug/m3	ND	0.802	0.285	12/12/25 09:59	
1,1-Dichloroethene	ug/m3	ND	0.793	0.296	12/12/25 09:59	
1,2,4-Trimethylbenzene	ug/m3	ND	0.982	0.455	12/12/25 09:59	
1,3,5-Trimethylbenzene	ug/m3	ND	0.982	0.419	12/12/25 09:59	
1,3-Dichlorobenzene	ug/m3	ND	1.20	0.453	12/12/25 09:59	
1,4-Dioxane (p-Dioxane)	ug/m3	ND	2.27	0.591	12/12/25 09:59	
2,2,4-Trimethylpentane	ug/m3	ND	0.934	0.420	12/12/25 09:59	
2-Butanone (MEK)	ug/m3	ND	3.69	0.342	12/12/25 09:59	
2-Hexanone	ug/m3	ND	5.11	0.544	12/12/25 09:59	
2-Propanol	ug/m3	ND	3.07	1.67	12/12/25 09:59	
4-Ethyltoluene	ug/m3	ND	0.982	0.435	12/12/25 09:59	
4-Methyl-2-pentanone (MIBK)	ug/m3	ND	5.12	0.434	12/12/25 09:59	
Acetone	ug/m3	ND	2.97	1.24	12/12/25 09:59	
Allyl chloride	ug/m3	ND	0.626	0.582	12/12/25 09:59	
Benzene	ug/m3	ND	0.639	0.351	12/12/25 09:59	
Carbon disulfide	ug/m3	ND	1.24	0.498	12/12/25 09:59	
Carbon tetrachloride	ug/m3	ND	1.26	0.470	12/12/25 09:59	
Chloroform	ug/m3	ND	0.973	0.506	12/12/25 09:59	
Chloromethane	ug/m3	ND	0.413	0.227	12/12/25 09:59	
cis-1,2-Dichloroethene	ug/m3	ND	0.793	0.315	12/12/25 09:59	
Cyclohexane	ug/m3	ND	0.689	0.585	12/12/25 09:59	
Dichlorodifluoromethane	ug/m3	ND	0.989	0.399	12/12/25 09:59	
Ethanol	ug/m3	ND	4.71	4.47	12/12/25 09:59	
Ethyl acetate	ug/m3	ND	2.27	0.594	12/12/25 09:59	
Ethylbenzene	ug/m3	ND	0.867	0.337	12/12/25 09:59	
Isopropylbenzene (Cumene)	ug/m3	ND	0.983	0.355	12/12/25 09:59	
Methyl methacrylate	ug/m3	ND	0.819	0.692	12/12/25 09:59	
Methyl-tert-butyl ether	ug/m3	ND	0.721	0.293	12/12/25 09:59	
Methylene Chloride	ug/m3	ND	0.694	0.587	12/12/25 09:59	
n-Heptane	ug/m3	ND	0.818	0.466	12/12/25 09:59	
n-Hexane	ug/m3	ND	2.22	0.504	12/12/25 09:59	
Styrene	ug/m3	ND	1.70	0.341	12/12/25 09:59	
Tetrachloroethene	ug/m3	ND	1.36	0.754	12/12/25 09:59	
Tetrahydrofuran	ug/m3	ND	0.590	0.484	12/12/25 09:59	
Toluene	ug/m3	ND	1.88	0.490	12/12/25 09:59	
trans-1,2-Dichloroethene	ug/m3	ND	0.793	0.291	12/12/25 09:59	
Trichloroethene	ug/m3	ND	1.07	0.364	12/12/25 09:59	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products-Revised Report
Pace Project No.: 92834642

METHOD BLANK: R4314730-3 Matrix: Air
Associated Lab Samples: 92834642001, 92834642002, 92834642003, 92834642004

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Trichlorofluoromethane	ug/m3	ND	1.12	0.433	12/12/25 09:59	
Vinyl chloride	ug/m3	ND	0.511	0.211	12/12/25 09:59	
Xylene (Total)	ug/m3	ND	2.61	0.385	12/12/25 09:59	
4-Bromofluorobenzene (S)	%	97.1	60.0-140		12/12/25 09:59	

LABORATORY CONTROL SAMPLE & LCSD: R4314730-1 R4314730-2

Parameter	Units	Spike Conc.	LCS Result	LCSD Result	LCS % Rec	LCSD % Rec	% Rec Limits	RPD	Max RPD	Qualifiers
1,1,1-Trichloroethane	ug/m3	20.4	19.3	19.1	94.4	93.9	70.0-130	0.567	25	
1,1,2-Trichloroethane	ug/m3	20.4	19.4	19.2	94.9	94.1	70.0-130	0.846	25	
1,1,2-Trichlorotrifluoroethane	ug/m3	28.7	29.7	29.9	103	104	70.0-130	0.514	25	
1,1-Dichloroethane	ug/m3	15.0	14.7	14.5	97.9	96.5	70.0-130	1.37	25	
1,1-Dichloroethene	ug/m3	14.9	16.1	15.9	108	107	70.0-130	1.24	25	
1,2,4-Trimethylbenzene	ug/m3	18.4	17.6	17.4	95.7	94.7	70.0-130	1.12	25	
1,3,5-Trimethylbenzene	ug/m3	18.4	17.6	17.6	95.5	95.7	70.0-130	0.279	25	
1,3-Dichlorobenzene	ug/m3	22.5	21.2	21.1	94.1	93.6	70.0-130	0.568	25	
1,4-Dioxane (p-Dioxane)	ug/m3	13.5	13.2	13.0	97.6	96.5	70.0-140	1.10	25	
2,2,4-Trimethylpentane	ug/m3	17.5	17.2	17.1	98.4	97.9	70.0-130	0.543	25	
2-Butanone (MEK)	ug/m3	11.1	10.6	10.7	96.3	96.5	70.0-130	0.277	25	
2-Hexanone	ug/m3	15.3	15.4	15.3	101	100	70.0-149	0.532	25	
2-Propanol	ug/m3	9.22	9.61	9.39	104	102	70.0-139	2.33	25	
4-Ethyltoluene	ug/m3	18.4	17.6	17.6	95.7	95.7	70.0-130	0.00	25	
4-Methyl-2-pentanone (MIBK)	ug/m3	15.4	15.1	15.4	98.7	101	70.0-139	1.87	25	
Acetone	ug/m3	8.91	9.60	9.72	108	109	70.0-130	1.23	25	
Allyl chloride	ug/m3	11.7	13.0	12.6	110	107	70.0-130	2.69	25	
Benzene	ug/m3	12.0	11.6	11.5	96.8	96.0	70.0-130	0.830	25	
Carbon disulfide	ug/m3	23.3	24.8	24.5	106	105	70.0-130	1.26	25	
Carbon tetrachloride	ug/m3	23.6	21.9	21.8	92.5	92.3	70.0-130	0.289	25	
Chloroform	ug/m3	18.3	17.7	17.8	96.8	97.6	70.0-130	0.823	25	
Chloromethane	ug/m3	7.75	8.72	8.72	113	113	70.0-130	0.00	25	
cis-1,2-Dichloroethene	ug/m3	14.9	14.5	14.4	97.9	96.8	70.0-130	1.10	25	
Cyclohexane	ug/m3	12.9	12.1	11.9	93.3	92.0	70.0-130	1.44	25	
Dichlorodifluoromethane	ug/m3	18.5	20.0	20.0	108	108	64.0-139	0.247	25	
Ethanol	ug/m3	7.07	7.45	7.26	105	103	55.0-148	2.56	25	
Ethyl acetate	ug/m3	13.5	12.8	13.6	95.2	101	70.0-130	5.98	25	
Ethylbenzene	ug/m3	16.3	15.3	15.0	93.9	92.3	70.0-130	1.72	25	
Isopropylbenzene (Cumene)	ug/m3	18.4	17.3	17.3	93.9	93.6	70.0-130	0.284	25	
Methyl methacrylate	ug/m3	15.4	14.9	14.9	96.8	96.8	70.0-130	0.00	25	
Methyl-tert-butyl ether	ug/m3	13.5	12.6	12.6	93.3	93.3	70.0-130	0.00	25	
Methylene Chloride	ug/m3	13.0	14.3	14.3	110	110	70.0-130	0.243	25	
n-Heptane	ug/m3	15.3	15.1	14.9	98.4	97.3	70.0-130	1.09	25	
n-Hexane	ug/m3	13.2	12.8	12.9	96.8	97.6	70.0-130	0.823	25	
Styrene	ug/m3	31.9	30.7	30.4	96.1	95.3	70.0-130	0.836	25	
Tetrachloroethene	ug/m3	25.5	21.9	22.5	85.9	88.3	70.0-130	2.76	25	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products-Revised Report
Pace Project No.: 92834642

LABORATORY CONTROL SAMPLE & LCSD: R4314730-1 R4314730-2

Parameter	Units	Spike Conc.	LCS Result	LCSD Result	LCS % Rec	LCSD % Rec	% Rec Limits	RPD	Max RPD	Qualifiers
Tetrahydrofuran	ug/m3	11.1	11.2	10.9	102	98.9	70.0-137	2.66	25	
Toluene	ug/m3	14.1	12.9	12.9	91.5	91.2	70.0-130	0.292	25	
trans-1,2-Dichloroethene	ug/m3	14.9	14.5	14.3	97.6	96.3	70.0-130	1.38	25	
Trichloroethene	ug/m3	20.1	19.0	18.8	94.4	93.6	70.0-130	0.851	25	
Trichlorofluoromethane	ug/m3	21.1	21.9	21.7	104	103	70.0-130	0.515	25	
Vinyl chloride	ug/m3	9.59	10.7	10.5	111	110	70.0-130	1.21	25	
Xylene (Total)	ug/m3	49.1	46.0	45.6	93.8	92.9	70.0-130	0.948	25	
4-Bromofluorobenzene (S)	%				102	102	60.0-140			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products-Revised Report
Pace Project No.: 92834642

QC Batch: 2659707
QC Batch Method: TO-15
Analysis Method: TO-15
Analysis Description: VOA (MS) TO-15
Laboratory: Pace National - Mt. Juliet
Associated Lab Samples: 92834642003

METHOD BLANK: R4315237-3 Matrix: Air
Associated Lab Samples: 92834642003

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Dichlorodifluoromethane	ug/m3	ND	0.989	0.399	12/16/25 09:48	
4-Bromofluorobenzene (S)	%	96.6	60.0-140		12/16/25 09:48	

LABORATORY CONTROL SAMPLE & LCSD: R4315237-1 R4315237-2

Parameter	Units	Spike Conc.	LCS Result	LCSD Result	LCS % Rec	LCSD % Rec	% Rec Limits	RPD	Max RPD	Qualifiers
Dichlorodifluoromethane	ug/m3	18.5	17.0	17.0	91.7	91.7	64.0-139	0.00	25	
4-Bromofluorobenzene (S)	%				98.8	98.7	60.0-140			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA

Project: Fortress Wood Products-Revised Report
Pace Project No.: 92834642

QC Batch: 2660407
QC Batch Method: TO-15
Analysis Method: TO-15
Analysis Description: VOA (MS) TO-15
Laboratory: Pace National - Mt. Juliet
Associated Lab Samples: 92834642002

METHOD BLANK: R4315926-3 Matrix: Air
Associated Lab Samples: 92834642002

Parameter	Units	Blank Result	Reporting Limit	MDL	Analyzed	Qualifiers
Vinyl chloride	ug/m3	ND	0.511	0.211	12/17/25 10:13	
4-Bromofluorobenzene (S)	%	95.5	60.0-140		12/17/25 10:13	

LABORATORY CONTROL SAMPLE & LCSD: R4315926-1 R4315926-2

Parameter	Units	Spike Conc.	LCS Result	LCSD Result	LCS % Rec	LCSD % Rec	% Rec Limits	RPD	Max RPD	Qualifiers
Vinyl chloride	ug/m3	9.59	10.2	10.8	106	113	70.0-130	5.85	25	
4-Bromofluorobenzene (S)	%				99.5	102	60.0-140			

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALIFIERS

Project: Fortress Wood Products-Revised Report
Pace Project No.: 92834642

DEFINITIONS

DF - Dilution Factor, if reported, represents the factor applied to the reported data due to dilution of the sample aliquot.

ND - Not Detected at or above adjusted reporting limit.

TNTC - Too Numerous To Count

J - Estimated concentration above the adjusted method detection limit and below the adjusted reporting limit.

MDL - Adjusted Method Detection Limit.

PQL - Practical Quantitation Limit.

RL - Reporting Limit - The lowest concentration value that meets project requirements for quantitative data with known precision and bias for a specific analyte in a specific matrix.

S - Surrogate

1,2-Diphenylhydrazine decomposes to and cannot be separated from Azobenzene using Method 8270. The result for each analyte is a combined concentration.

Consistent with EPA guidelines, unrounded data are displayed and have been used to calculate % recovery and RPD values.

LCS(D) - Laboratory Control Sample (Duplicate)

MS(D) - Matrix Spike (Duplicate)

DUP - Sample Duplicate

RPD - Relative Percent Difference

NC - Not Calculable.

SG - Silica Gel - Clean-Up

U - Indicates the compound was analyzed for, but not detected.

Acid preservation may not be appropriate for 2 Chloroethylvinyl ether.

A separate vial preserved to a pH of 4-5 is recommended in SW846 Chapter 4 for the analysis of Acrolein and Acrylonitrile by EPA Method 8260.

N-Nitrosodiphenylamine decomposes and cannot be separated from Diphenylamine using Method 8270. The result reported for each analyte is a combined concentration.

Reported results are not rounded until the final step prior to reporting. Therefore, calculated parameters that are typically reported as "Total" may vary slightly from the sum of the reported component parameters.

Pace Analytical is TNI accredited. Contact your Pace PM for the current list of accredited analytes.

TNI - The NELAC Institute.

ANALYTE QUALIFIERS

J	Analyte detected below the reporting limit, therefore result is an estimate. This qualifier is also used for all TICs.

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace Analytical Services, LLC
9800 Kincey Ave. Suite 100
Huntersville, NC 28078
(704)875-9092

QUALITY CONTROL DATA CROSS REFERENCE TABLE

Project: Fortress Wood Products-Revised Report
Pace Project No.: 92834642

Lab ID	Sample ID	QC Batch Method	QC Batch	Analytical Method	Analytical Batch
92834642001	**SV-1**	TO-15	2657586	TO-15	2657586
92834642002	**SV-2**	TO-15	2657586	TO-15	2657586
92834642002	**SV-2**	TO-15	2660407	TO-15	2660407
92834642003	**SV-3**	TO-15	2657586	TO-15	2657586
92834642003	**SV-3**	TO-15	2659707	TO-15	2659707
92834642004	**SV-DUP**	TO-15	2657586	TO-15	2657586

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

Pace® Location Requested (City/State):

Air CHAIN-OF-CUSTODY Analytical Request Document

Chain-of-Custody is a LEGAL DOCUMENT - Complete all relevant fields

LAB USE ONLY- Affix Workorder/Login Label Here

7920 5028 2342

Sample Receipt Checklist

COC Seal Present/Intact: Y N NP
COC Signed/Accurate: Y N
Bottles arrive intact: Y N
Correct bottles used: Y N
Unused: 1L 6L 1.4L
Size: 4 1L 6L 1.4L Airs
Tage Color: G W P B
Condition: OK NCF

Company Name: **Pace Analytical - Huntersville, NC**

Street Address: **9800 Kincey Avenue, Suite 100 Huntersville, NC 28078**

City, State Zip:

Customer Project #: 49:24413-E

Project Name: **Fortress Wood Products II 49:24413-C**

Site Collection Info/Facility ID (as applicable): **PACE-ECSSOUTHESTAIR2**

Time Zone Collected: [ ] AK [ ] PT [ ] MT [ ] CT [X] ET

Contact/Report To: **Angela Baioni**

Phone #: **704-875-9092**

E-Mail: **angela.baioni@pacelabs.com;carolinas_pc@pacelabs.com**

Cc E-Mail:

Invoice to: E LOVEKAMP

Invoice E-Mail: ELOVEKAMP@ECSLIMITED.com

Purchase Order # (if applicable):

Quote #:

State origin of sample(s): NC

Data Deliverables:

[X] Level II [ ] Level III [ ] Level IV

[ ] EQUIS REPORT MINS

[ ] Other

Regulatory Program (CAA, RCRA, etc.) as applicable: BROWNFIELDS

Rush (Pre-approval required): 2 Day 3 day 5 day Other

Date Results Requested: STANDARD

Permit # as applicable:

Units for Reporting: (ug/m³) PPBV mg/m³ PPMV

AN 11/24/25

Proj. Manager: 464 - Nancy McLain

AcctNum / Client ID: PACE

M008

Template: T284812

Prelog / Bottle Ord. ID: P1192113

* Matrix Codes (Insert in Matrix box below): Ambient (A), Indoor (I), Soil Vapor (SV), Other (O)

Customer Sample ID	Matrix *	Summa Canister ID	Flow Controller ID	Begin Collection Date	Begin Collection Time	End Collection Date	End Collection Time	Canister Pressure / Vacuum: Start Pressure / Vacuum (in Hg)	Canister Pressure / Vacuum: End Pressure / Vacuum (in Hg)	PUF / FILTER: Duration (minutes)	PUF / FILTER: Flow Rate m³/min or L/min	PUF / FILTER: Total Volume Sampled m³ or L	Analyses Requested: TO-15 Summa	Sample Comment
SV-1	SV	28701	15110	12/5	1135	12/5	1141	-24	-5	6	200	1L	X	-01
SV-2		13740	20115		1037		1042	-25	-5	5			X	-02
SV-3		24540	22333		0953		0958	-25	-5	5			X	-03
SV-DUP		29422	22475		—		—	-27	-5	5			X	-04

4926848

Sample Comment

Customer Remarks / Special Conditions / Possible Hazards: **Fortress Wood Products II 49:24413-C**

Collected By:

Printed Name: EMERY LOVEKAMP

Signature:

Additional Instructions from Pace®:

Coolers: Thermometer ID: Correction Factor (°C): Obs. Temp. (°C): Corrected Temp. (°C):

Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Tracking Number:
ECS	12/8/25 1015		12-11-25 0900	
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Delivered by: In- Person Courier FedEX UPS Other
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	
Relinquished by/Company: (Signature)	Date/Time:	Received by/Company: (Signature)	Date/Time:	Page: of:

Submitting a sample via this chain of custody constitutes acknowledgment and acceptance of the Pace® Terms and Conditions found at https://www.pacelabs.com/resource-library/resource/pace-terms-and-conditions/

APPENDIX G

NCDEQ Risk Calculator Output & Input

Risk for Individual Pathways **Output Form 1A**

Version Date: January 2025

Basis: November 2024 EPA RSL Table

Site ID: Fortress Wood Products II

Exposure Unit ID: Worst Case Situation

DIRECT CONTACT SOIL AND WATER CALCULATORS

Receptor	Pathway	Carcinogenic Risk	Hazard Index	Risk exceeded?
Resident	Soil	NC	NC	NC
	Groundwater Use*	NC	NC	NC
Non-Residential Worker	Soil	3.6E-05	5.5E-01	NO
	Groundwater Use*	3.1E-03	1.5E+01	YES
Construction Worker	Soil	6.0E-06	4.6E+00	YES
Recreator/Trespasser	Soil	6.9E-05	3.0E+00	YES
	Surface Water*	2.1E-04	3.6E+00	YES

VAPOR INTRUSION CALCULATORS

Receptor	Pathway	Carcinogenic Risk	Hazard Index	Risk exceeded?
Resident	Groundwater to Indoor Air	NC	NC	NC
	Soil Gas to Indoor Air	NC	NC	NC
	Indoor Air	NC	NC	NC
Non-Residential Worker	Groundwater to Indoor Air	6.9E-07	1.2E-01	NO
	Soil Gas to Indoor Air	4.4E-06	1.5E-01	NO
	Indoor Air	NC	NC	NC

CONTAMINANT MIGRATION CALCULATORS

Pathway	Source	Target Receptor Concentrations Exceeded?	
Groundwater	Source Soil	Exceedence of 2L at Receptor?	NC
	Source Groundwater	Exceedence of 2L at Receptor?	NC
Surface Water	Source Soil	Exceedence of 2B at Receptor?	NC
	Source Groundwater	Exceedence of 2B at Receptor?	NC

Notes:

1. If lead concentrations were entered in the exposure point concentration tables, see the individual calculator sheets for lead concentrations in comparison to screening levels. Note that lead is not included in cumulative risk calculations.

2. * = If concentrations in groundwater exceed the NC 2L Standards or IMAC, or concentrations in surface water exceed the NC 2B Standards, appropriate remediation and/or institutional control measures will be necessary to be eligible for a risk-based closure.
3. NM = Not modeled, required contaminant migration parameters were not entered.
4. NC = Pathway not calculated, user did not check this pathway as complete.

Exposure Point Concentrations **Input Form 2A**

Version Date: January 2025

Basis: November 2024 EPA RSL Table

Site ID:

Exposure Unit ID:

Soil Exposure Point Concentration Table

Description of Exposure Point Concentration Selection:

NOTE: If the chemical list is changed from a prior calculator run, remember to select "See All Chemicals" on the data output sheet or newly added chemicals will not be included in risk calculations

Exposure Point Concentration (mg/kg)	Notes:	CAS Number	Chemical **For the chemicals highlighted in blue, data entry notes are provided in the PSRG Table link on the Main Menu**	Minimum Concentration (Qualifier)	Maximum Concentration (Qualifier)	Units	Location of Maximum Concentration	Detection Frequency	Range of Detection Limits	Concentration Used for Screening	Background Value	Screening Toxicity Value (Screening Level) (n/c)	Potential ARAR/TBC Value	Potential ARAR/TBC Source	COPC Flag (Y/N)	Rationale for Selection or Deletion
25.4		7440-36-0	Antimony (metallic)			mg/kg										
93.8		7440-38-2	Arsenic, Inorganic			mg/kg										
0.011		71-43-2	Benzene			mg/kg										
0.82		7440-41-7	Beryllium and compounds			mg/kg										
0.0055		104-51-8	Butylbenzene, n-			mg/kg										
13.2		7440-43-9	Cadmium (Diet)			mg/kg										
0.0056		74-87-3	Chloromethane			mg/kg										
262.5		16065-83-1b	Chromium(III) (Soluble Compounds)			mg/kg										
3.9		18540-29-9	Chromium(VI)			mg/kg										
826		7440-50-8	Copper			mg/kg										
0.006		98-82-8	Cumene			mg/kg										
0.0077		75-00-3	Ethyl Chloride (Chloroethane)			mg/kg										
0.021		100-41-4	Ethylbenzene			mg/kg										
0.0038		99-87-6	Isopropyltoluene, p-			mg/kg										
2070		7439-92-1	~Lead and Compounds			mg/kg										
1.4		7439-97-6	~Mercury (elemental)			mg/kg										
0.13		78-93-3	Methyl Ethyl Ketone (2-Butanone)			mg/kg										
91		7440-02-0	Nickel Soluble Salts			mg/kg										
0.000079		335-76-2	~Perfluorodecanoic acid (PFDA)			mg/kg										
0.000079		307-55-1	~Perfluorododecanoic acid (PFDoDA)			mg/kg										
0.0000073		375-95-1	~Perfluorononanoic acid (PFNA)			mg/kg										
0.0013		1763-23-1	~Perfluorooctanesulfonic acid (PFOS)			mg/kg										
0.00034		335-67-1	~Perfluorooctanoic acid (PFOA)			mg/kg										
0.17		205-99-2	~Benzo[b]fluoranthene			mg/kg										
0.2		206-44-0	~Fluoranthene			mg/kg										
0.039		91-20-3	~Naphthalene			mg/kg										
0.25		129-00-0	~Pyrene			mg/kg										
7.6		7782-49-2	Selenium			mg/kg										
5.1		7440-22-4	Silver			mg/kg										
0.025		127-18-4	Tetrachloroethylene			mg/kg										
0.142		7440-28-0	Thallium (Soluble Salts)			mg/kg										
0.049		108-88-3	Toluene			mg/kg										
0.05		95-63-6	Trimethylbenzene, 1,2,4-			mg/kg										
0.029		108-67-8	Trimethylbenzene, 1,3,5-			mg/kg										
0.018		1330-20-7	Xylenes			mg/kg										
2790		7440-66-6	Zinc and Compounds			mg/kg										

Exposure Point Concentrations **Input Form 2B**

Version Date: January 2025

Basis: November 2024 EPA RSL Table

Site ID:

Exposure Unit ID:

Groundwater Exposure Point Concentration Table

Description of Exposure Point Concentration Selection:

NOTE: If the chemical list is changed from a prior calculator run, remember to select "See All Chemicals" on the data output sheet or newly added chemicals will not be included in risk calculations

Exposure Point Concentration (ug/L)	Notes:	CAS Number	Chemical	Minimum Concentration (Qualifier)	Maximum Concentration (Qualifier)	Units	Location of Maximum Concentration	Detection Frequency	Range of Detection Limits	Concentration Used for Screening	Background Value	Screening Toxicity Value (Screening Level) (n/c)	Potential ARAR/TBC Value	Potential ARAR/TBC Source	COPC Flag (Y/N)	Rationale for Selection or Deletion
1.1		7440-38-2	Arsenic, Inorganic			ug/L										
0.58		7440-41-7	Beryllium and compounds			ug/L										
1.9		74-83-9	Bromomethane			ug/L										
2.4		7440-43-9	Cadmium (Diet)			ug/L										
2		67-66-3	Chloroform			ug/L										
19.5		16065-83-1b	Chromium(III) (Soluble Compounds)			ug/L										
16.2		7440-50-8	Copper			ug/L										
0.64		75-71-8	Dichlorodifluoromethane			ug/L										
1.4		156-59-2	Dichloroethylene, cis-1,2-			ug/L										
2.6		7439-92-1	~Lead and Compounds			ug/L										
1.8		1634-04-4	Methyl tert-Butyl Ether (MTBE)			ug/L										
32.2		7440-02-0	Nickel Soluble Salts			ug/L										
0.005		375-73-5	~Perfluorobutanesulfonic acid (PFBS)			ug/L										
0.0233		375-22-4	~Perfluorobutanoic acid (PFBA)			ug/L										
0.0109		355-46-4	~Perfluorohexanesulfonic acid (PFHxS)			ug/L										
0.0287		307-24-4	~Perfluorohexanoic acid (PFHxA)			ug/L										
0.0012		375-95-1	~Perfluorononanoic acid (PFNA)			ug/L										
0.0621		1763-23-1	~Perfluorooctanesulfonic acid (PFOS)			ug/L										
0.0416		335-67-1	~Perfluorooctanoic acid (PFOA)			ug/L										
2.4		84-74-2	~Dibutyl Phthalate			ug/L										
0.69		7782-49-2	Selenium			ug/L										
8.4		127-18-4	Tetrachloroethylene			ug/L										
565		7440-66-6	Zinc and Compounds			ug/L										

Exposure Point Concentrations **Input Form 2C**

Version Date: January 2025

Basis: November 2024 EPA RSL Table

Site ID: Fortress Wood Products II

Exposure Unit ID: Worst Case Situation

Surface Water Exposure Point Concentration Table

Description of Exposure Point Concentration Selection:

NOTE: If the chemical list is changed from a prior calculator run, remember to select "See All Chemicals" on the data output sheet or newly added chemicals will not be included in risk calculations

Exposure Point Concentration (ug/L)	Notes:	CAS Number	Chemical	Minimum Concentration (Qualifier)	Maximum Concentration (Qualifier)	Units	Location of Maximum Concentration	Detection Frequency	Range of Detection Limits	Concentration Used for Screening	Background Value	Screening Toxicity Value (Screening Level) (n/c)	Potential ARAR/TBC Value	Potential ARAR/TBC Source	COPC Flag (Y/N)	Rationale for Selection or Deletion
0.364		7440-36-0	Antimony (metallic)			ug/L										
0.557		7440-38-2	Arsenic, Inorganic			ug/L										
1.42		16065-83-1b	Chromium(III) (Soluble Compounds)			ug/L										
8.3		7440-50-8	Copper			ug/L										
1.13		7439-92-1	~Lead and Compounds			ug/L										
0.0034		375-73-5	~Perfluorobutanesulfonic acid (PFBS)			ug/L										
0.017		375-22-4	~Perfluorobutanoic acid (PFBA)			ug/L										
0.0007		335-76-2	~Perfluorodecanoic acid (PFDA)			ug/L										
0.0019		355-46-4	~Perfluorohexanesulfonic acid (PFHxS)			ug/L										
0.0093		307-24-4	~Perfluorohexanoic acid (PFHxA)			ug/L										
0.0016		375-95-1	~Perfluorononanoic acid (PFNA)			ug/L										
0.011		1763-23-1	~Perfluorooctanesulfonic acid (PFOS)			ug/L										
0.013		335-67-1	~Perfluorooctanoic acid (PFOA)			ug/L										
29.4		7440-66-6	Zinc and Compounds			ug/L										

Exposure Point Concentrations **Input Form 2D**

Version Date: January 2025

Basis: November 2024 EPA RSL Table

Site ID: Fortress Wood Products II

Exposure Unit ID: Worst Case Situation

Soil Gas Exposure Point Concentration Table

Description of Exposure Point Concentration Selection:

Note: Chemicals highlighted in orange are non-volatile chemicals. Since these chemicals do not pose a vapor intrusion risk, no risk values are calculated for these chemicals.

Exposure Point Concentration (ug/m^3)	Notes:	CAS Number	Chemical	Minimum Concentration (Qualifier)	Maximum Concentration (Qualifier)	Units	Location of Maximum Concentration	Detection Frequency	Range of Detection Limits	Concentration Used for Screening	Background Value	Screening Toxicity Value (Screening Level) (n/c)	Potential ARAR/TBC Value	Potential ARAR/TBC Source	COPC Flag (Y/N)	Rationale for Selection or Deletion
32.6		67-64-1	Acetone			ug/m^3										
85.6		71-43-2	Benzene			ug/m^3										
21.5		75-15-0	Carbon Disulfide			ug/m^3										
0.693		56-23-5	Carbon Tetrachloride			ug/m^3										
3.52		67-66-3	Chloroform			ug/m^3										
0.601		74-87-3	Chloromethane			ug/m^3										
4.92		98-82-8	Cumene			ug/m^3										
43		110-82-7	Cyclohexane			ug/m^3										
851		75-71-8	Dichlorodifluoromethane			ug/m^3										
1.31		75-34-3	Dichloroethane, 1,1-			ug/m^3										
11.6		75-35-4	Dichloroethylene, 1,1-			ug/m^3										
106		156-59-2	Dichloroethylene, cis-1,2-			ug/m^3										
3.62		156-60-5	Dichloroethylene, trans-1,2-			ug/m^3										
9.15		100-41-4	Ethylbenzene			ug/m^3										
105		142-82-5	Heptane, N-			ug/m^3										
150		110-54-3	Hexane, N-			ug/m^3										
1.1		591-78-6	Hexanone, 2-			ug/m^3										
3.72		78-93-3	Methyl Ethyl Ketone (2-Butanone)			ug/m^3										
0.446		108-10-1	Methyl Isobutyl Ketone (4-methyl-2-pentanone)			ug/m^3										
1.23		75-09-2	Methylene Chloride			ug/m^3										
0.434		100-42-5	Styrene			ug/m^3										
228		127-18-4	Tetrachloroethylene			ug/m^3										
20.7		108-88-3	Toluene			ug/m^3										
11.2		76-13-1	Trichloro-1,2,2-trifluoroethane, 1,1,2-			ug/m^3										
0.908		71-55-6	Trichloroethane, 1,1,1-			ug/m^3										
37.1		79-01-6	Trichloroethylene			ug/m^3										
87.7		75-69-4	Trichlorofluoromethane			ug/m^3										
25.7		95-63-6	Trimethylbenzene, 1,2,4-			ug/m^3										
10.8		108-67-8	Trimethylbenzene, 1,3,5-			ug/m^3										
1010		75-01-4	Vinyl Chloride			ug/m^3										
34		1330-20-7	Xylenes			ug/m^3										

APPENDIX H

Brownfields Receptor Survey Form & Figures

North Carolina Department of Environmental Quality
Division of Waste Management
Brownfields Program

BROWNFIELDS PROPERTY RECEPTOR SURVEY

This form was created to clarify and simplify preparing a receptor survey for a brownfield site. Please provide the information requested below. Distances are measured from the site property boundary unless otherwise indicated by the DEQ Brownfield's Project Manager (PM).

Site:	Fortress Wood Products II
Address:	1 Metals Drive, 5818 West Gate City Boulevard, & 5820 West Gate City Boulevard
City:	Greensboro
County:	Guilford
Brownfields PN:	28063-24-041
Date	6/26/2025 - Revised 3/12/2026

Property and Building Characteristics

Surface Conditions	*Current Usage*	*Proposed Usage*
Size of Property (acres)	18.71	Rail Transload Facility & Concrete Plant
% of property that is wooded/brush	40%	
% of property that is grassed areas	50%	
% of property that is agricultural crops	0%	
% of property that is paved	5%	
% of property that is covered by buildings	5%	

If an existing building is on-site, please respond to the following. Information can be provided on additional sheets as needed. If numerous buildings are on-site, consult with your PM as only information on specific buildings may be needed.

a. Provide occupancy and use information.

One standing building - vacant (1 Metals Dr)

Former domolished building - building slab remains (1 Metals Dr)

Three standing buildings - vacant (5818 West Gate City Blvd)

b. Describe the construction of the builidng including materials (e.g. wood frame, block), type and size of openings (e.g. windows, bay doors), and height (number of stories).

1 Metals Dr - single story, wood framed, brick building with typical windows and doors. Bay doors not observed.

5818 West Gate City Blvd - Building 1 - two stories, wood framed with garage doors and typical windows/doors

5818 West Gate City Blvd - Building 2 - single story, wood framed with garage door and typical windows/doors

5818 West Gate City Blvd - Building 3 - single story, wood framed with garage door and typical windows/doors

c. Describe the foundation construction. Include details on type, floor construction, and depth below grade.

Slab on-grade for each building

d. Describe the HVAC system in the building. Include available details on type, equipment location, source of air return, and design considerations (e.g. positive pressure?).

N/A - not observed

e. Are any subslab ventilation systems or moisture barriers in place? If so, please provide details.

N/A - not observed

Surrounding Property Land Use

Please provide information on the following land uses in the vicinity of the subject site, including a map of the surrounding areas. If specific receptors are present, please provide addresses of the facilities.

Zoning/Land Use	*Current Use/Occupant*	*Proposed Usage*
North	Commercial - Vacant Bank Building, Smoke House, Ace Cleaners-Alterations & Adams Farm Shopping Mall	NA
South	Cemetery & Commercial - Avery Body & Trim Shop	
East	Commercial - Devon Self Storage Facility, Owensby Trailer Hitch Center, Black Dog Carwash & Office Space	
West	Railroad/American Flag Self Storage Beyond	

Specific Land Uses of Interest	*Y/N **	*Distance (ft)*	*Direction*	*Address*
Is a school or daycare center within 1,000 ft of the Property?	Y x 2	600/900	West	5113/5121 Mackay Rd
Is there a residence within 1,000 ft of the Property?	Y	Numerous	East/West	See Map
Is there a basement within 1,000 ft of the Property	Unknown			

* If numerous facilities of interest are present, their locations can be placed on a map in lieu of providing specific addresses.

Utilities

For the subject property, please provide a map of known buried utilites. If available, include depth to top, construction material, and diameter of the utilities. In addition, please provide the following information on utilty providers. If additional assessment is required, the public utility locators should be contacted. This information can then be added to a site map.

Is there a septic system on-site? (Y or N) Unknown

Please provide the utility providers for the subject property

a. Natural Gas Piedmont Natural Gas
b. Sewer City of Greensboro (water only)
c. Electricity Duke Energy
Lumos Fiber
d. Other Communications

For surrounding properties, please complete the following table with available information.

Utility/Potential Receptor	*Y/N **	*Distance (ft)*	*Direction*
Is a storm water pipe within 100 ft of the Property boundary?	Y	10	E
Is a sanitary sewer within 100 ft of the Property boundary?	Y*	on-site	SE
Is a septic system leach field within 500 ft of the Property boundary?	Unknown	NA	NA
Is a water line main within 100 ft of Property boundary?	Y	10	SE
Is a natural gas line main within 100 ft of the Property boundary?	Y	along property boundary	SE
Is a buried telephone/ cable main within 100 ft of the Property boundary?	Y	along property boundary	SE
Is a buried electrical cable main within 100 ft of Property boundary?	N	Overhead	SE

* Information about the utility (Manhole near SE gate entrance. Size, depth, direction is unknown - See Figure 1)
The storm water pipe, water line, natural gas line, and telephone/cable main are located directly east of 5818 and 5820 West Gate City Blvd

Water Supply

The purpose of this section is to provide information on the water supply for the site and surrounding areas.

What is the potable water supply for the property? Public X Private ____

If Private, please provide details of the water supply source (i.e. well location, well construction, etc). If public, please include the water providers name.

City of Greensboro

Please provide the following information regarding water supply wells in the vicinity of the Property. At a minimum, a windshield survey within 1,500 ft of the property boundaries should be completed to determine if water supply or irrigation wells may be present. Information from applicable databases can and should be utilized; however, should not be utilized in lieu of the windshield survey. If multiple wells are present within the requested radius, please provide a map of the well locations. If needed, please attach a separate table to list all wells. Please note, the PM may opt for a more extensive water supply well survey if needed.

Water Supply Wells	*Y/N*	*Distance (ft)*	*Direction*	*Address*
Is a public water supply well within 1 mile of the Property boundary?	N	NA	NA	NA
Is a private water supply well within 1,500 ft of the Property	Y	Multiple	Onsite, E, & SE	See Map
Is an irrigation well within 1,500 ft of the Property boundary?	Y	Multiple	E	See Map

Surface Water & Wetlands

The purpose of this section is to provide information on the presence of surface waters and/or wetlands on, or in the vicinity of the Property.

Provide Information regarding Surface Water and Wetlands	*Response/Comments*
Are there surface water features on the property? (If yes, please complete a. to d.)	Yes - an ephemeral stream exists on the site
a. Is the water body naturally developed or man-made?	Naturally
b. List the uses of the water body.	None
c. What is the source of the water for the water body?	Drainage
d. What is the nature of the bottom of the water body (e.g., rocky or concrete bottom, drainage ways or impoundments)	Rocky
If no on-site surface water features, what is the nearest surface water body?	-
Are there any wetlands present on the property? If no wetlands on-site, are wetlands suspected on adjoining properties?	Yes - potential wetlands exist on the site

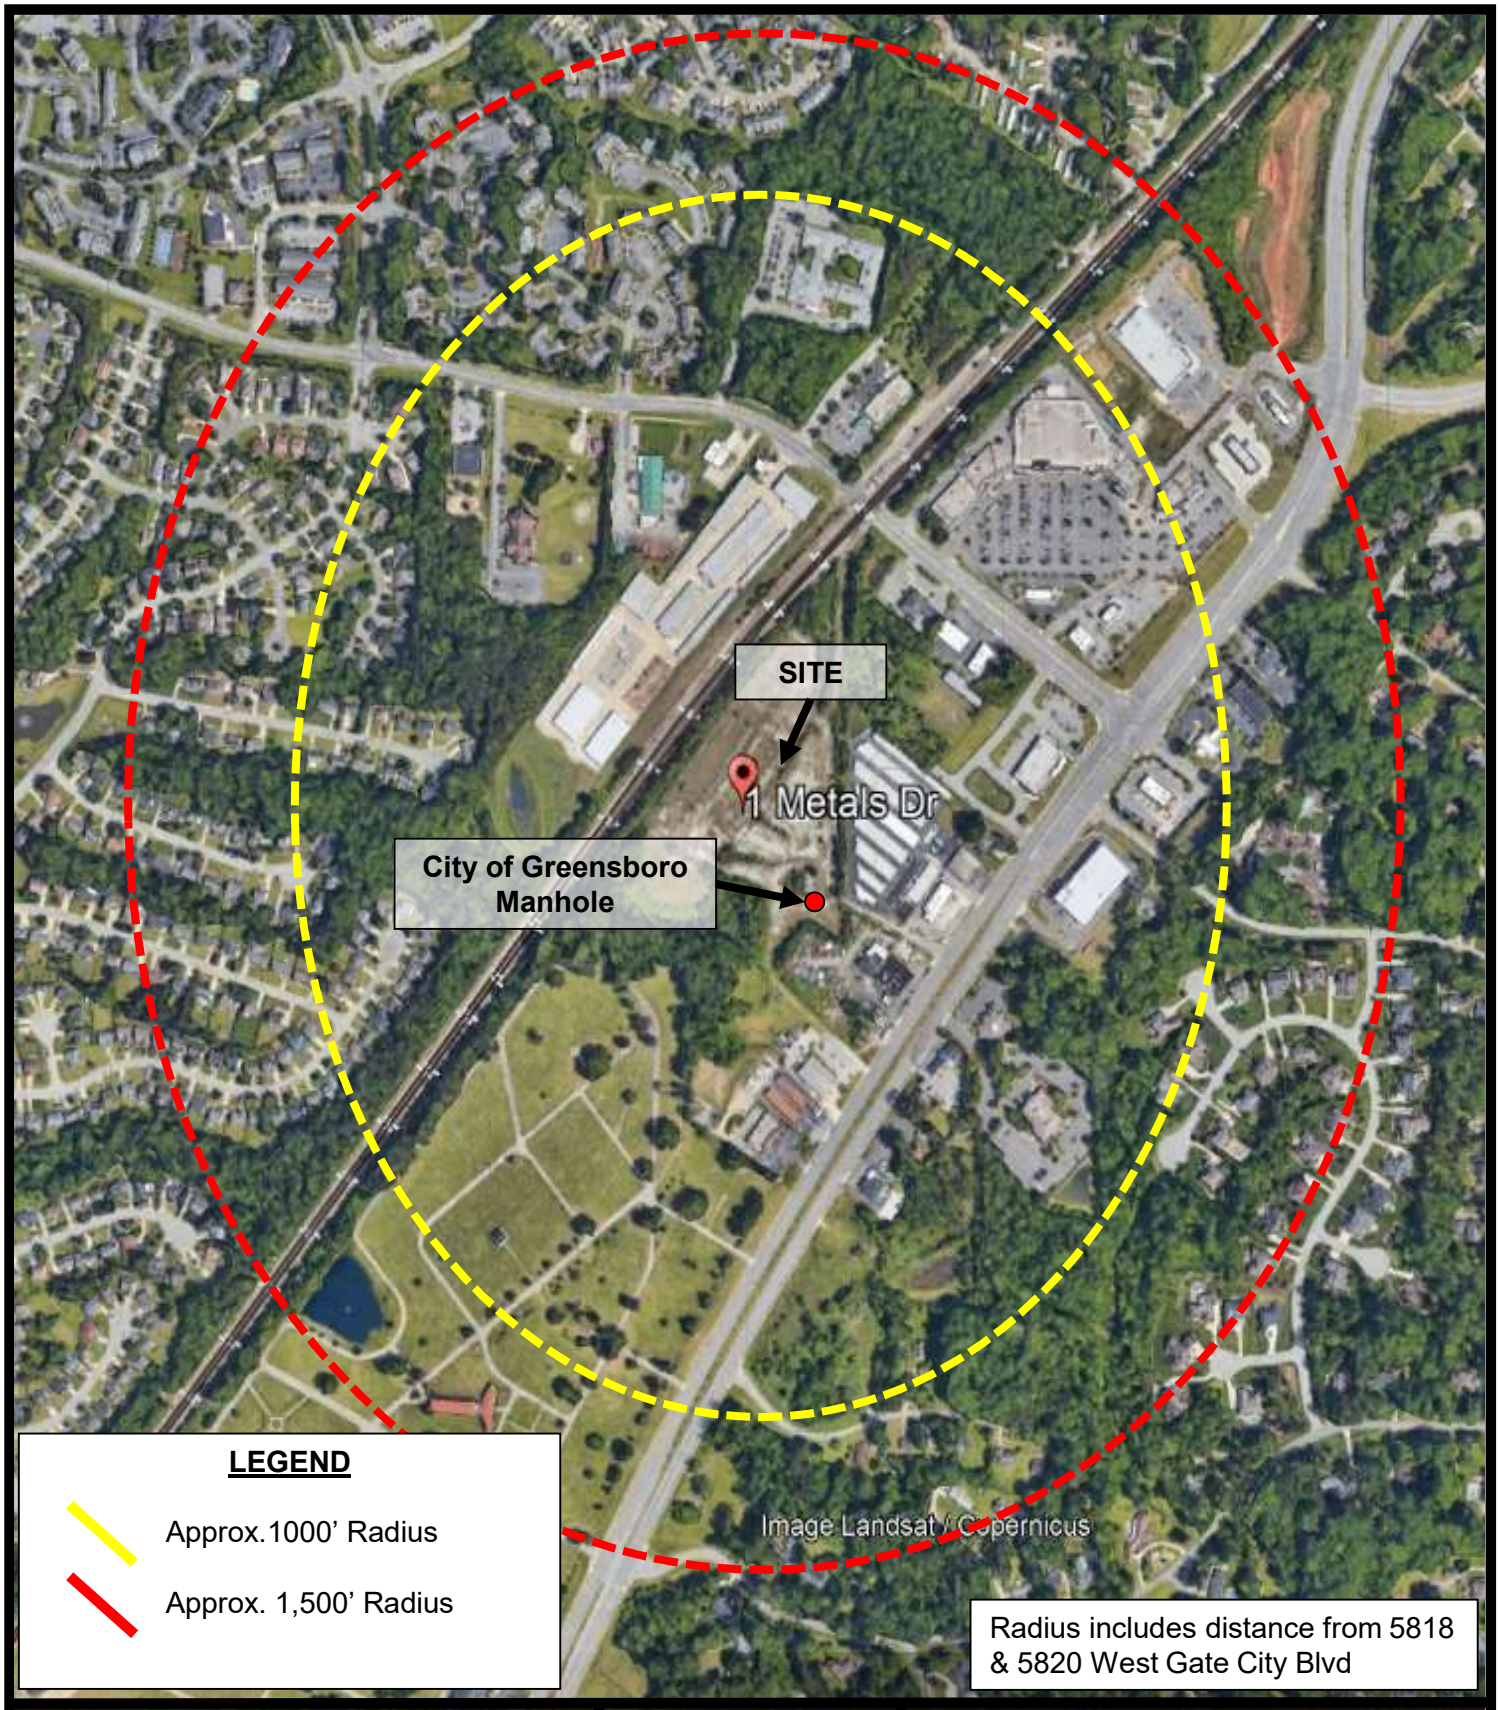

SOURCE
Google Earth
Imagery Dated 2022

APPROXIMATE SCALE
675 ft

RECEPTOR SURVEY - FIGURE 1
1,000'/1,500' Radius Map

Fortress Wood Products II
1 Metals Drive
Greensboro, Guilford County, NC

ECS Project No. 49:24413-C

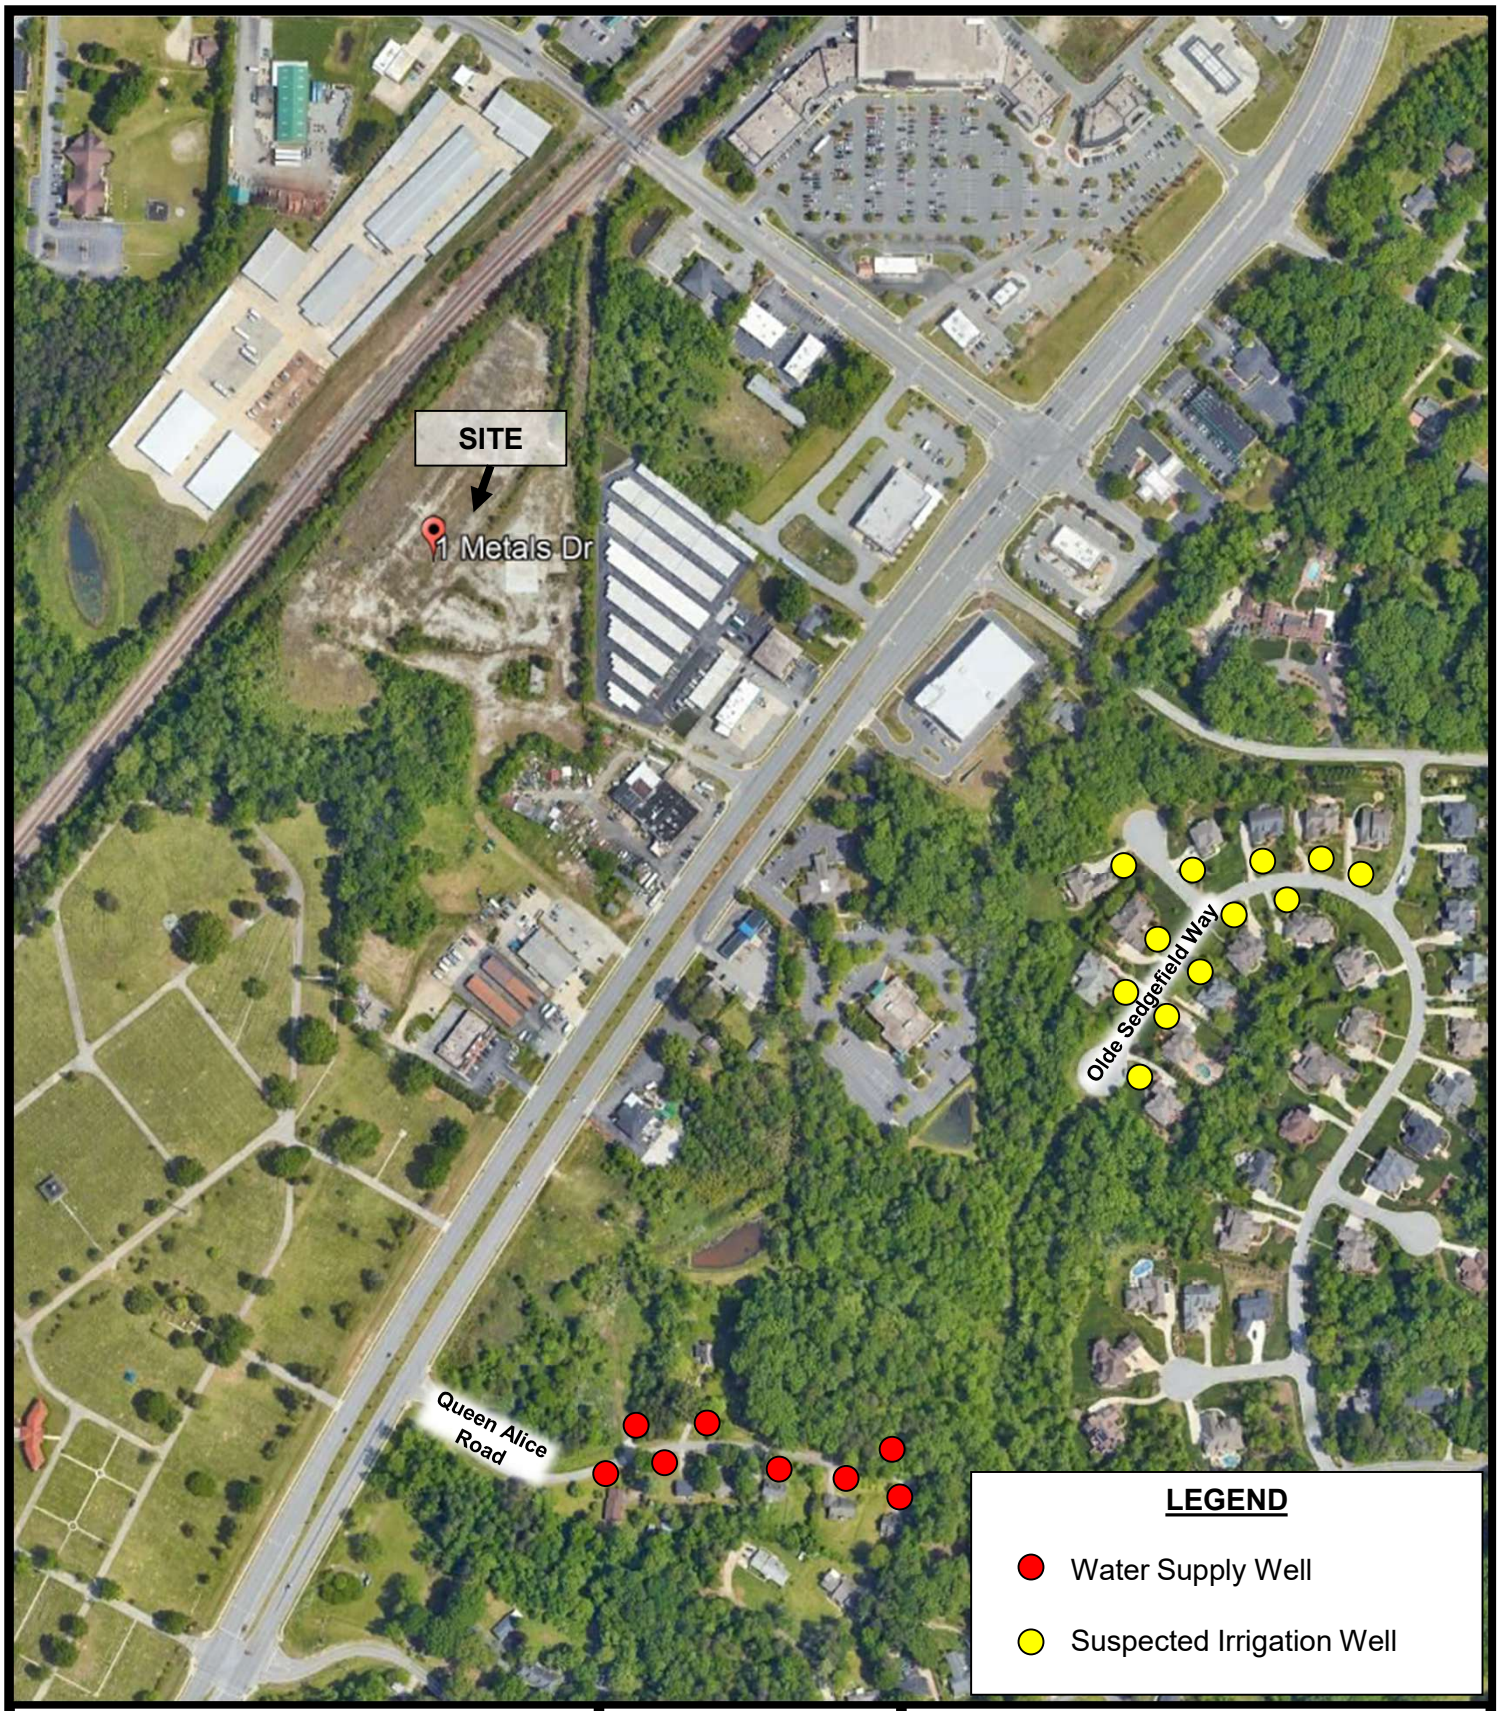

SOURCE
Google Earth
Imagery Dated 2022

APPROXIMATE SCALE

675 ft

RECEPTOR SURVEY - FIGURE 2
Water Supply /Irrigation Well Location Map
Fortress Wood Products II
1 Metals Drive
Greensboro, Guilford County, NC

ECS Project No. 49:24413-C